


MULTIPLES OF CURRENT RATING (In)

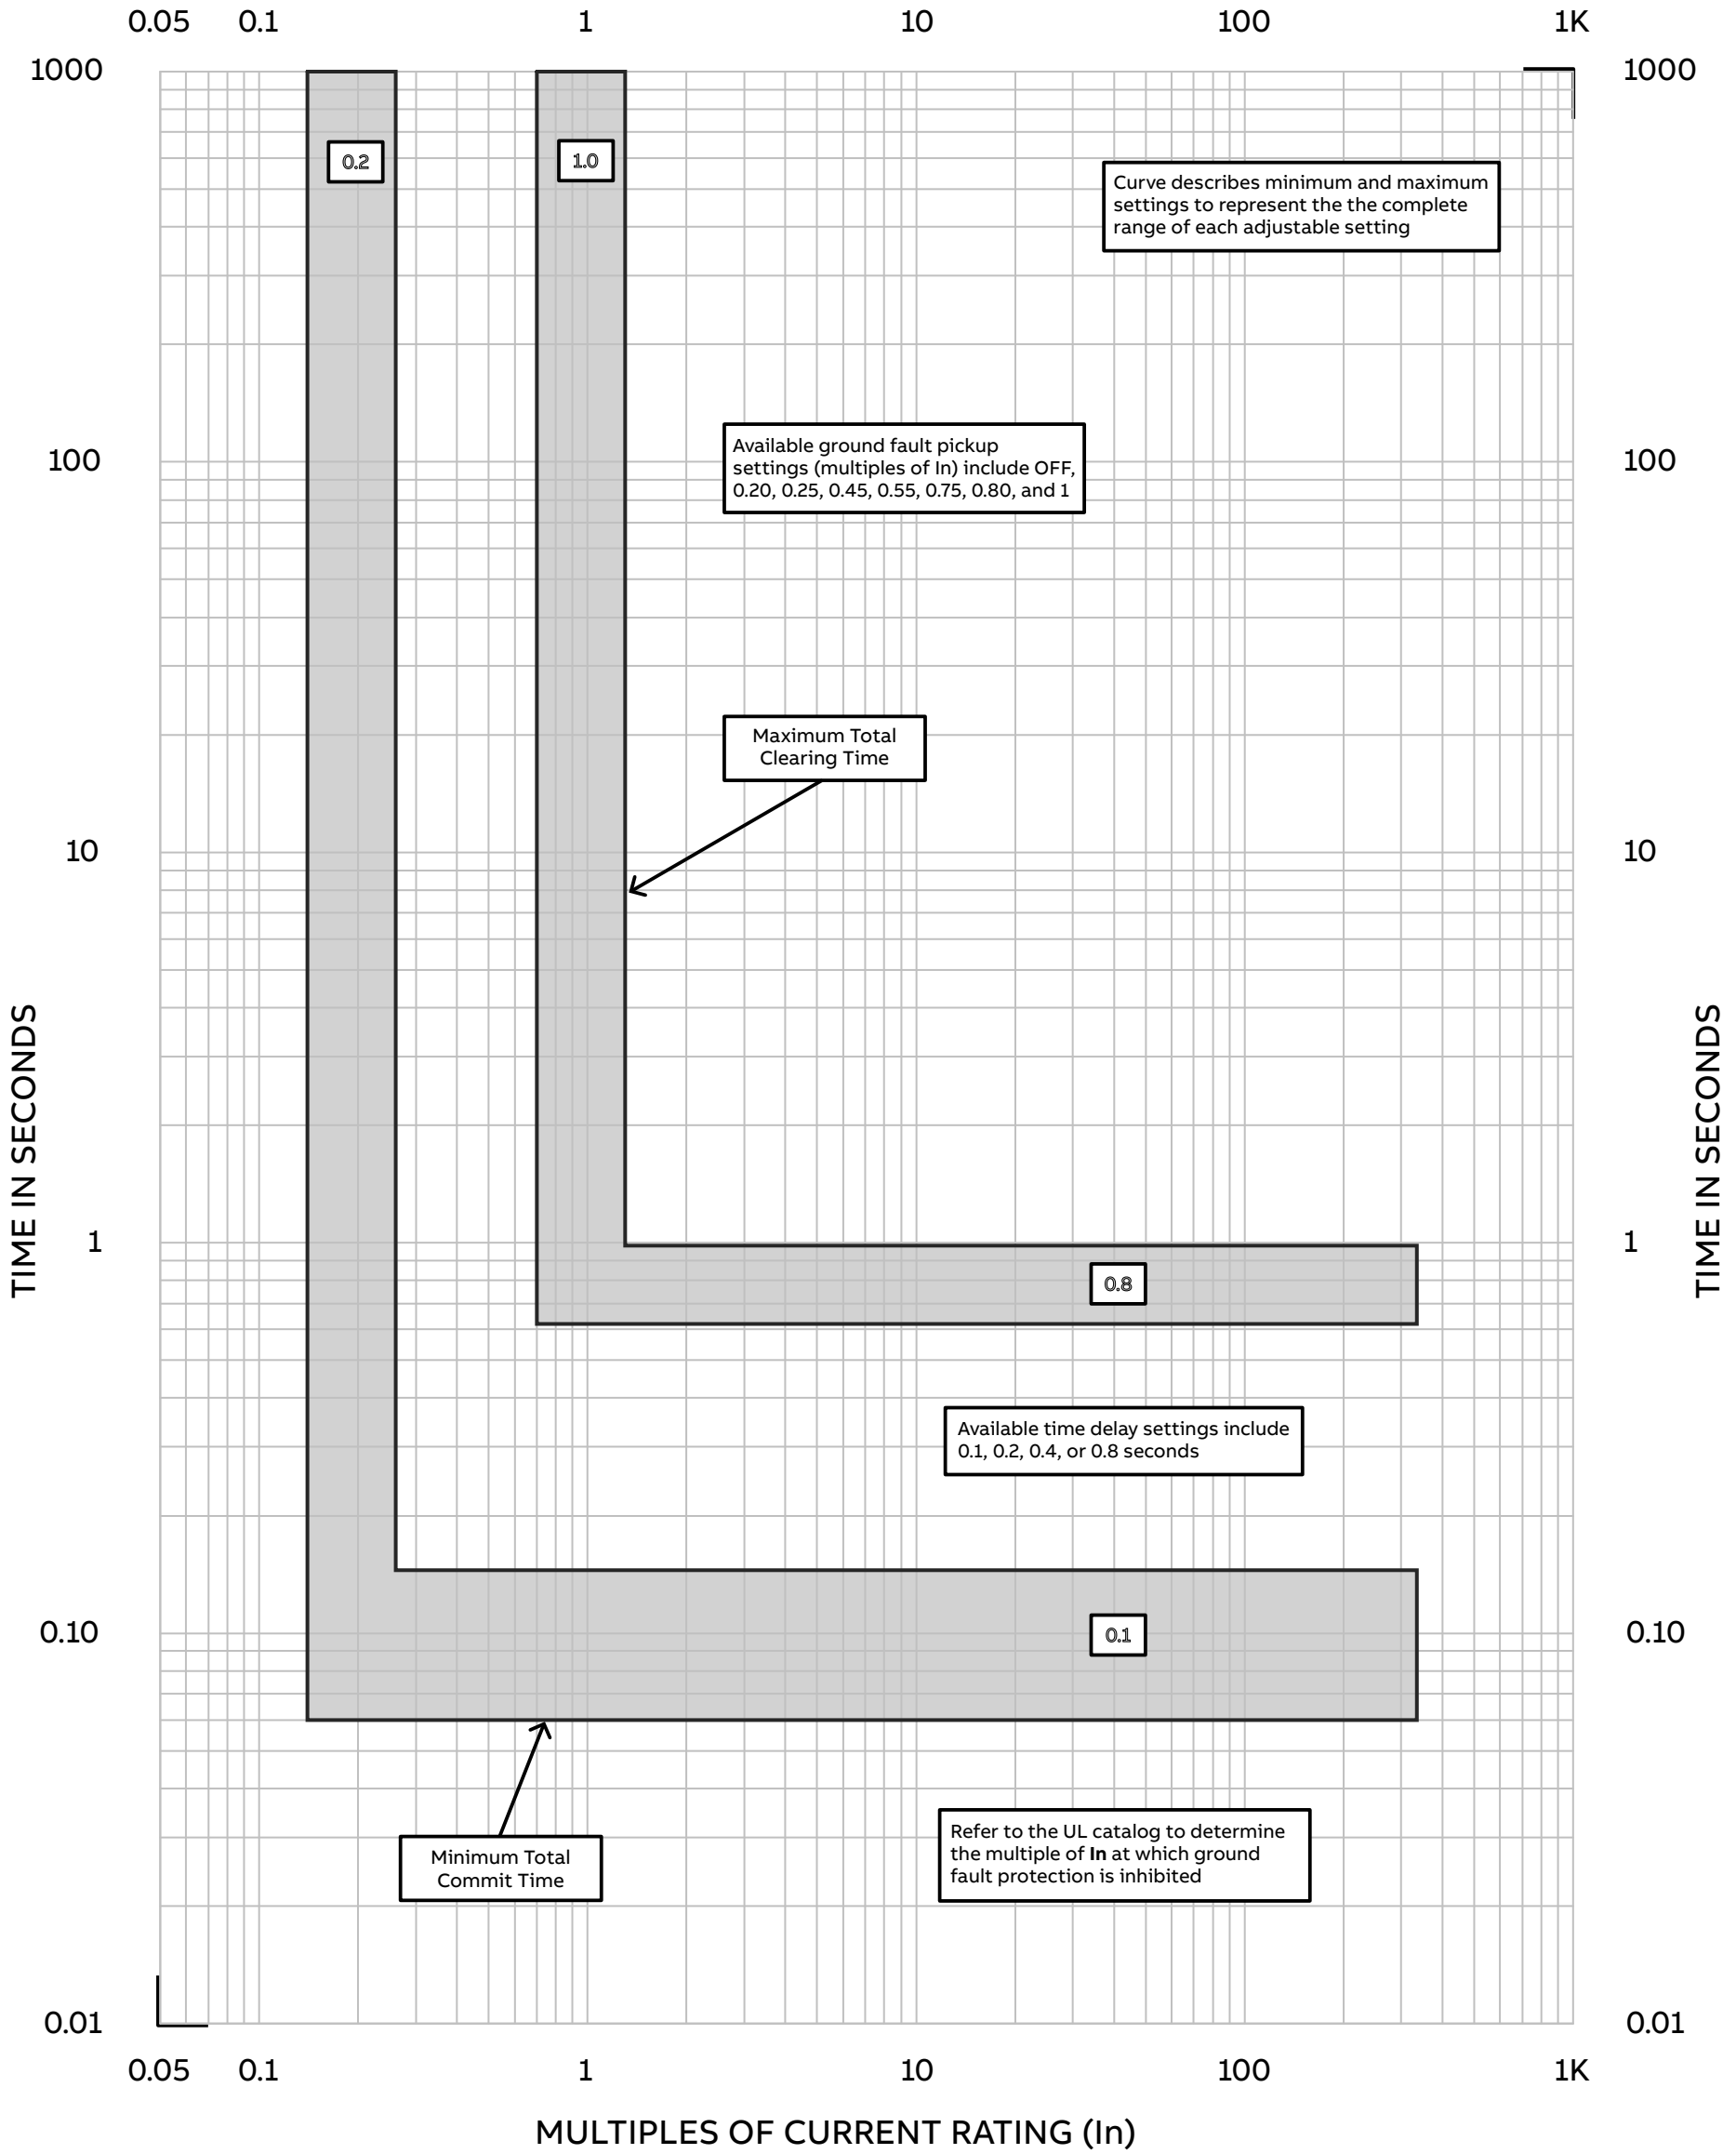

**Time Current Curve**

Available Ratings (Amperes)

| Type | Model | Trip Unit | Frame Amps | Current Rating (In) |
|------|-------|-----------|------------|---------------------|
| MCCB | XT5   | Ekip DIP  | 400/600    | 250 400<br>300 600  |

Voltage Rating: 600Vac, 50 to 60 hz systems

electrification.us.abb.com

**Molded Case Circuit Breaker**

**Type Tmax XT5 with Ekip DIP LSI Ground**

**Operating Conditions:** Curve represents trip with no prior load. Curves apply at 50 to 60 Hertz with reference ambient temperature of 40°C at 2000m altitude with three phase fault applied. Refer to technical guide from the UL catalog for more information regarding thermal application.

**Instantaneous Override:** When instantaneous protection is turned off, the breaker will immediately trip for any current that is equal to or greater than **8,000A** plus 25.0% or minus 15.62%.