

PRODUCTS FAMILY DECLARATION FOR MCB HOME SERIES OF ABB

PEP ecopassport®
Environmental Product Declaration



Document in compliance with ISO 14025: 2006 "Environmental labels and declarations. Type III environmental declarations"

ORGANIZATION		CONTACT INFORMATION			
ABB LV Installation Materials Co., Ltd. Beijing		Leon-Lixiong Huang, leon-lixiong.huang@cn.abb.com			
ADDRESS		WEBSITE			
No.17 Kangding Street, Beijing Economic-Technological Development Area, Beijing, China		https://new.abb.com/cn			
STATUS	SECURITY LEVEL	REGISTRATION NUMBER	REV.	LANG.	PAGE
Approved	Public	PEP ecopassport® ABBG-00339-V01.01-EN	1	en	1/13
© Copyright 2023 ABB. All rights reserved.					



ABB Purpose & Embedding Sustainability

ABB is committed to continually promoting and embedding sustainability across its operations and value chain, aspiring to become a role model for others to follow. With its ABB Purpose, ABB is focusing on reducing harmful emissions, preserving natural resources and championing ethical and humane behavior.

More information on the topic about Sustainability strategy 2030 — ABB Group see the website: ["https://global.abb/group/en/sustainability/sustainability-strategy-2030"](https://global.abb/group/en/sustainability/sustainability-strategy-2030)




General Information

Reference product	The reference product is one unit of Miniature Circuit Breaker (MCB)- produced by ABB, the representative product is SH201-C16.
Description of the product	The representative product is SH201-C16, 1 Pole, 16A, C Curve, 6kA. Products are Miniature Circuit Breaker (MCB) products which are terminal distribution protection product with overload and short circuit protection. Different models of products and better electrical performance, comply with IEC/EN 60898-1 allowing their use in residential applications.
Functional unit of the representative product	Protect the installation from overloads and short circuits in a circuit with rated voltage U_e (230/400 V), rated current I_n (16A), with N_p poles (1p), a rated breaking capacity I_{cn} (6kA) and the tripping curve C_d (C), in the Household application area, according to the use scenario of 15% load rate and 30% use rate during the reference service life of the product of 20 years.
Products concerned	The products covered by this PEP are: SH200, SH200L, SH200T, SF200, SF200M, SF200MDC, SF200DC, SE200, SE200L, SE200MDC, SJ200, SJ200T, SJ200L

STATUS	SECURITY LEVEL	REGISTRATION NUMBER	REV.	LANG.	PAGE
Approved	Public	PEP ecopassport® ABBG-00339-V01.01-EN	1	en	2/13



Constituent materials

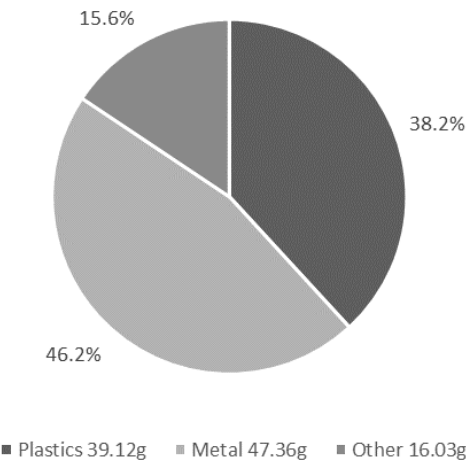

Total weight of Reference product	Net weight of the product is 87.03 g. Gross weight of packaged product is 102.51 g (including product packaging and transportation packaging).		
-----------------------------------	--	--	--

Components	Mass (g)	Product weight, incl. product pack (g)	Product weight, incl. product pack and transportation pack (g)
Product	87.03		
Product packaging	8.37	95.4	102.51
Transportation packaging	7.11		

Plastics as % of weight		Metals as % of weight		Other as % of weight	
Name and CAS number	Weight-%	Name and CAS number	Weight-%	Name and CAS number	Weight-%
PA6	35.9	Steel	40.4	Paper	11.5
Other plastic	2.3	Copper	4.2	Wood	3.4
		Al	1.6	Others	0.7



Additional Environmental Information

Manufacturing	ISO 14001 compliant plant, green energy usage
Distribution	/
Installation	For the installation of the product, only standard tools (electric screw) are needed.
Use	This product requires no servicing, no maintenance or additional products.
End of life	The reference product is assumed to be partly recovery, incineration and landfilled.
Benefits and loads beyond the system boundaries	/




Environmental impacts

Reference lifetime	20 years.
Product category	Circuit Breakers, PSR-0005-ed3-EN-2023 06 06 3.2 Specific rules for the “Circuit-breakers” family
Installation elements	Electric screw is used for installation, not other material is needed.
Use scenario	At loading rate 15% of rated current & use time rate 30% of reference lifetime total energy consumption is 2.75 kWh
Geographical representativeness	The representative product is produced in China and 46.2% used in Chinese and other districts including Singapore (30.9%), Australia (19.8%), other countries outside Europe (3.1%) in year 2022.
Technological representativeness	In the manufacturing stage, specific data was collected to calculate the environmental impact caused by the manufacturing process. For the production of raw materials and parts, datasets from Ecoinvent 3.8 were used. During the dataset selection, the technological representation was considered carefully. Datasets with the same production processes were preferred. If not available, datasets with similar production processes were chosen.
Time representativeness	The generic data were extracted from databases (mainly Ecoinvent). Furthermore, there reference years of these data are between 2011 – 2021 and is valid until 2022 meaning that no data used in the model are older than 10 years.
Software and database used	SimaPro version 9.4.0.4 & databases ecoinvent 3.8 & EF3.0

Energy model used

Manufacturing	Materials and parts production: Global electricity mix Product assembly: Photovoltaic power and hydropower of China
Installation	Global electricity mix
Use	Average electricity mix of China, Singapore, Australia, other countries outside Europe
End of life	Global electricity mix

Common base of mandatory indicators

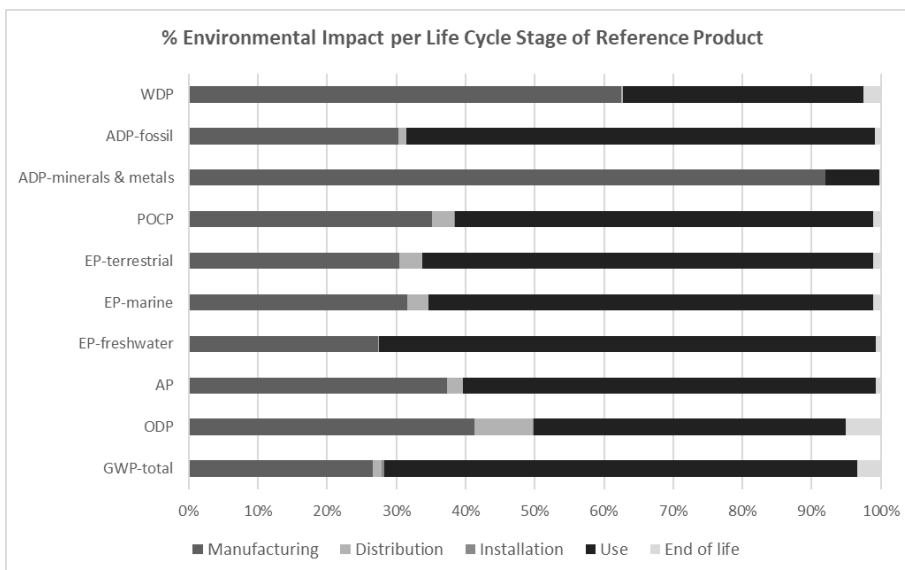

Environmental impact indicators

Indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of life	Benefits
GWP-total	kg CO ₂ eq	3.50E+00	9.32E-01	4.26E-02	1.37E-02	2.39E+00	1.21E-01	/
GWP-fossil	kg CO ₂ eq	3.46E+00	9.35E-01	3.21E-02	4.56E-04	2.37E+00	1.21E-01	/
GWP-biogenic	kg CO ₂ eq	3.39E-02	-4.48E-03	1.06E-02	1.32E-02	1.45E-02	8.11E-05	/
GWP-luluc	kg CO ₂ eq	1.28E-03	8.68E-04	1.62E-05	2.21E-07	3.77E-04	1.73E-05	/
GWP-fossil = Global Warming Potential fossil fuels GWP-biogenic = Global Warming Potential biogenic GWP-luluc = Global Warming Potential land use and land use change								
ODP	kg CFC11 eq	8.07E-08	3.33E-08	6.83E-09	5.61E-11	3.64E-08	4.09E-09	/
ODP = Depletion potential of the stratospheric ozone layer								
AP	mol H ⁺ eq	1.78E-02	6.64E-03	4.13E-04	3.10E-06	1.06E-02	1.34E-04	/
AP = Acidification potential, Accumulated Exceedance								
EP-freshwater	kg P eq	1.61E-03	4.39E-04	2.02E-06	5.92E-08	1.15E-03	1.08E-05	/
EP-marine	kg N eq	3.59E-03	1.13E-03	1.06E-04	1.40E-06	2.31E-03	3.99E-05	/
EP-terrestrial	mol N eq	3.53E-02	1.08E-02	1.18E-03	1.27E-05	2.30E-02	4.02E-04	/
EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment EP-terrestrial = Eutrophication potential, Accumulated Exceedance								
POCP	kg NMVOC eq	9.98E-03	3.51E-03	3.18E-04	3.24E-06	6.03E-03	1.16E-04	/
POCP = Formation potential of tropospheric ozone								
ADP-minerals & metals	kg Sb eq	1.18E-04	1.09E-04	8.90E-08	1.39E-09	9.08E-06	3.01E-07	/
ADP-fossil	MJ	3.72E+01	1.13E+01	4.52E-01	4.46E-03	2.52E+01	3.36E-01	/
ADP-minerals & metals = Abiotic depletion potential for non-fossil resources ADP-fossil = Abiotic depletion potential for fossil resources potential								
WDP	m ³ world eq. depr.	6.42E-01	4.01E-01	1.43E-03	3.23E-04	2.23E-01	1.58E-02	/
WDP = Water Deprivation potential								

Common base of mandatory indicators

Inventory flows indicator - Resource use indicators

Indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of life	Benefits
PERE	MJ	3.00E+00	1.05E+00	4.64E-03	1.55E-04	1.93E+00	1.17E-02	/
PERM	MJ	1.99E-01	1.99E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	/
PERT	MJ	3.20E+00	1.25E+00	4.64E-03	1.55E-04	1.93E+00	1.17E-02	/
PENRE	MJ	3.60E+01	1.01E+01	4.52E-01	4.46E-03	2.52E+01	3.36E-01	/
PENRM	MJ	1.20E+00	1.20E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	/
PENRT	MJ	3.72E+01	1.13E+01	4.52E-01	4.46E-03	2.52E+01	3.36E-01	/

PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials

PERM = Use of renewable primary energy resources used as raw materials

PERT = Total Use of renewable primary energy resources

PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials

PENRM = Use of non-renewable primary energy resources used as raw materials

PENRT = Total Use of non-renewable primary energy resources

Inventory flows indicator - Indicators describing the use of secondary materials, water, and energy resources

Indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of life	Benefits
SM	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	/
RSF	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	/
NRSF	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	/
FW	M³	1.67E-02	1.03E-02	4.72E-05	1.09E-05	5.87E-03	4.24E-04	/

SM = Use of secondary material

RSF = Use of renewable secondary fuels

NRSF = Use of non-renewable secondary fuels

FW = Use of net fresh water

Inventory flows indicator – Waste category indicators

Indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of life	Benefits
Hazardous waste disposed	kg	1.36E-04	1.11E-04	9.66E-07	9.94E-09	1.33E-05	1.08E-05	/
Non-hazardous waste disposed	kg	4.38E-01	1.56E-01	1.69E-02	3.04E-04	1.49E-01	1.16E-01	/
Radioactive waste disposed	kg	3.20E-05	1.59E-05	2.99E-06	1.97E-08	1.12E-05	1.85E-06	/

Common base of mandatory indicators

Inventory flows indicator – Output flow indicators

Indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of life	Benefits
Components for reuse	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	/
Materials for recycling	Kg	3.69E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.69E-02	/
Materials for energy recovery	Kg	1.95E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.95E+01	/
Exported energy	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	/

Note: In manufacturing stage, the recycled content of raw materials is 0, and scrap value is 30% according to PSR. In EoL stage, recovery rate and disposal rate is based on PCR.

Inventory flow indicator – other indicators

Indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of life	Benefits
Biogenic carbon content of the product	kg of C	0.00E+00	/	/	/	/	/	/
Biogenic carbon content of the associated packaging	kg of C	7.37E-03	/	/	/	/	/	/

Note: As no biogenic carbon in the product, thus, only the biogenic carbon in the packaging was calculated. Of the product packaging and packaging for transportation, the materials containing biogenic carbon are wood pallet and paper board.

Family of Products Extrapolation Rules

For other products than the Reference product covered by this PEP, the environmental impacts for each phase of the lifecycle are obtained by multiplying the values of the Reference product by the following coefficients:

The impact for Manufacturing, Distribution, Installation and End of life phases of a product covered by the PEP other than the representative product is proportional to weight of the product, thus, the impacts should be calculated by multiple the coefficients factor_1 by the environmental impact for this phase of the representative product.

The environmental impact for Use phase of a product covered by the PEP other than the representative product is proportional to the amount of the electricity used in use stage, thus, the impacts should be calculated by multiple the coefficients factor_2 by the environmental impact for this phase of the representative product.

STATUS	SECURITY LEVEL	REGISTRATION NUMBER	REV.	LANG.	PAGE
Approved	Public	PEP ecopassport® ABBG-00339-V01.01-EN	1	en	9/13
© Copyright 2023 ABB. All rights reserved.					

Extrapolation rules for Manufacturing, Distribution, Installation and End of life phases (factor_1)

Pole	Rated Current (A)	SH200, SH200L, SH200T	SF200, SF200M	SF200MDC	SF200DC	SE200, SE200L	SE200MDC	SJ200	SJ200T, SJ200L
1P	0.5 1 1.6 2 3 4 6 8 10 13	1.01	1.05	1.05	1.06	1.01	1.04	0.97	1.01
	16 20 25 32	1.00	1.03	1.04	1.04	1.00	1.03	1.00	1.00
	40 50 63	1.17	1.20	1.21	1.21	1.17	NA	1.17	1.17
1P+N	0.5 1 1.6 2 3 4 6 8 10 13	1.96	2.02	NA	NA	1.95	NA	1.87	1.95
	16 20 25 32	1.93	1.99	NA	NA	1.92	NA	1.93	1.92
	40 50 63	2.26	2.32	NA	NA	2.26	NA	2.25	2.26
2p	0.5 1 1.6 2 3 4 6 8 10 13	2.02	2.09	2.10	2.11	2.01	2.08	1.94	2.01
	16 20 25 32	1.99	2.02	2.03	2.07	1.99	2.06	1.99	1.99
	40 50 63	2.33	2.37	2.38	2.41	2.34	NA	2.32	2.34
3p	0.5 1 1.6 2 3 4 6 8 10 13	3.02	3.10	3.12	3.14	3.01	3.13	2.89	3.00
	16 20 25 32	2.97	3.07	3.09	3.09	2.96	3.07	2.97	2.96
	40 50 63	3.49	3.58	3.60	3.60	3.49	NA	3.47	3.49
3P+N	0.5 1 1.6 2 3 4 6 8 10 13	3.98	4.10	NA	NA	3.96	NA	3.81	3.96
	16 20 25 32	3.92	4.04	NA	NA	3.91	NA	3.91	3.91
	40 50 63	4.60	4.72	NA	NA	4.59	NA	4.57	4.59
4P	0.5 1 1.6 2 3 4 6 8 10 13	4.07	4.20	4.23	4.24	4.05	4.19	3.90	4.05
	16 20 25 32	3.98	4.11	4.14	4.14	3.97	4.11	3.98	3.97
	40 50 63	4.67	4.79	4.81	4.81	4.66	NA	4.64	4.66

Extrapolation rules for Use phases (factor_2)

Pole	Rated Current (A)	Tripping Curve B,C,D	Pole	Rated Current (A)	Tripping Curve B,C,D	Pole	Rated Current (A)	Tripping Curve B,C,D
1P	0.5	0.66	1P+N	0.5	0.66	2P	0.5	1.31
	1	0.65		1	0.65		1	1.30
	1.6	0.72		1.6	0.72		1.6	1.44
	2	0.57		2	0.58		2	1.15
	3	0.60		3	0.61		3	1.20
	4	0.68		4	0.70		4	1.35
	6	0.44		6	0.49		6	0.88
	8	0.68		8	0.76		8	1.36
	10	0.74		10	0.87		10	1.48
	13	0.97		13	1.19		13	1.94
	16	1.00		16	1.33		16	2.00
	20	1.09		20	1.60		20	2.18
	25	1.28		25	2.09		25	2.57
	32	1.57		32	2.67		32	3.14
	40	1.74		40	3.46		40	3.48
3P	50	2.10	3P+N	50	3.07	4P	50	4.20
	63	2.55		63	4.09		63	5.10
	0.5	1.97		0.5	1.97		0.5	2.63
	1	1.94		1	1.94		1	2.59
	1.6	2.16		1.6	2.17		1.6	2.89
	2	1.72		2	1.73		2	2.29
	3	1.80		3	1.81		3	2.40
	4	2.03		4	2.05		4	2.71
	6	1.32		6	1.37		6	1.77
	8	2.04		8	2.12		8	2.72
	10	2.23		10	2.35		10	2.97
	13	2.91		13	3.13		13	3.88
	16	3.00		16	3.33		16	4.00
	20	3.26		20	3.78		20	4.35
	25	3.85		25	4.65		25	5.13
	32	4.71		32	5.81		32	6.28
	40	5.22		40	6.94		40	6.96
	50	6.30		50	7.27		50	8.41
	63	7.65		63	9.19		63	10.21

Note: NA indicates no product in this combination.

Environmental Impact Indicator Glossary

Impact indicators

Indicator	Description	Distribution
Global warming potential (GWP) - total	Indicator of potential global warming caused by emissions to air contributing to the greenhouse effect. The total global warming potential (GWP-total) is the sum of three sub-categories of climate change. GWP-total = GWP-fossil + GWP-biogenic + GWP- land use and land use change	kg CO ₂ eq.
Ozone depletion (ODP)	Emissions to air that contribute to the destruction of the stratospheric ozone layer	kg CFC-11 eq.
Acidification of soil and water (A)	Acidification of soils and water caused by the release of certain gases to the atmosphere, such as nitrogen oxides and sulphur oxides	H ⁺ eq.
Eutrophication (E)	Indicator of the contribution to eutrophication of water by the enrichment of the aquatic ecosystem with nutritional elements, e.g. industrial or domestic effluents, agriculture, etc. This indicator is divided to three: freshwater, marine and terrestrial.	kg P eq., kg N eq., mole N eq.
Photochemical ozone creation (POCP)	Indicator of emissions of gases that affect the creation of photochemical ozone in the lower atmosphere (smog) because of the rays of the sun.	kg NMVOC eq.
Depletion of abiotic resources – elements (ADPe)	Indicator of the depletion of natural non-fossil resources	kg Sb eq.
Depletion of abiotic resources – fossil fuels (ADPf)	The use of non-renewable fossil resources in an unsustainable way (e.g. from material to waste)	MJ (lower heating value)
Water Deprivation potential (WDP)	Deprivation-weighted water consumption. Assesses the potential of water deprivation, to either humans or ecosystems, building on the assumption that the less water remaining available per area, the more likely another user will be deprived.	m ³ world eq. depr.

Resource use indicators

Indicator	Description	Distribution
Total use of primary energy	Total use of non-renewable primary energy resources (primary energy and primary energy resources used as raw materials) + Total use of renewable primary energy re-sources (primary energy and primary energy resources used as raw materials)	MJ (lower heating value)

STATUS	SECURITY LEVEL	DOCUMENT ID.	REV.	LANG.	PAGE
Approved	Public	PEP ecopassport® ABBG-00339-V01.01-EN	1	en	11/13

References

-
- PEP Ecopassport PROGRAM PCR-Product Category Rules for Electrical, Electronic and HVAC-R Products (PCR-ed4-EN-2021 09 06).
 - PEP Ecopassport PROGRAM PSR-SPECIFIC RULES FOR Electrical switchgear and control gear Solutions (PSR-0005-ed3-EN-2023 06 06).
 - ISO (2006a). ISO 14025:2006, Environmental labels and declarations – Type III environmental declarations – Principles and procedures.
 - ISO (2006b). ISO 14040:2006/Amd 1:2020, Environmental management – Life cycle assessment – Principles and framework— Amendment 1.
 - ISO 14044:2006/Amd 1:2017/Amd 2:2020 Environmental management – Life cycle assessment – Requirements and guidelines.
 - ISO 14020:2000, Environmental labels and declarations — General principles.
 - ISO 14025:2006 “Environmental labels and declarations. Type III environmental declarations.
 - EN 50693:2019, Product category rules for life cycle assessments of electronic and electrical products and systems.
 - EN 15804 +A2:2019, Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction products.
 - LCA report –MCB Series of Miniature Circuit Breaker Products, 23-10-2023.
-

STATUS	SECURITY LEVEL	DOCUMENT ID.	REV.	LANG.	PAGE
Approved	Public	PEP ecopassport® ABBG-00339-V01.01-EN	1	en	12/13

Registration number:	Drafting Rules: <i>PCR-ed4-EN-2021 09 06</i>
ABBG-00339-V01.01-EN	Supplemented by: <i>PSR-0005-ed3-EN-2023 06 06</i>
Verifier accreditation number: VH50	Information and reference documents: www.pep-ecopassport.org
Date of issue: 10-2023	Validity period: 5 years
Internal: ☐	External: ☒
Independent verification of the declaration and data, in compliance with ISO 14025: 2006	
The PCR review was conducted by a panel of experts chaired by Julie ORGELET (DDemain)	
PEP are compliant with XP C08-100-1: 2016 or EN 50693:2019 The components of the present PEP may not be compared with components from any other program.	
Document in compliance with ISO 14025: 2006, Environmental labels and declarations. Type III environmental declarations	

STATUS	SECURITY LEVEL	DOCUMENT ID.	REV.	LANG.	PAGE
Approved	Public	PEP ecopassport® ABBG-00339-V01.01-EN	1	en	13/13