


On-load tap-changer type UCGL./C, VUCGL./C, 5 tap positions, linear switching.
 Min. effective No. of turns in pos. 1.
 The tap-changer is delivered set in pos. 3, the preceding pos. was 2.

Lindningskopplare typ UCGL./C, VUCGL./C, 5 lägen, linjär koppling.
 Min antal effektiva varv i läge 1.
 Lindningskopplaren levereras inställd i läge 3, föregående läge var 2.

Pos. Läge	Tap selector and diverter switch connect	30
1	1-V-x	
2	2-H-v	
3	3-V-x	
4	4-H-v	
5	5-V-x	

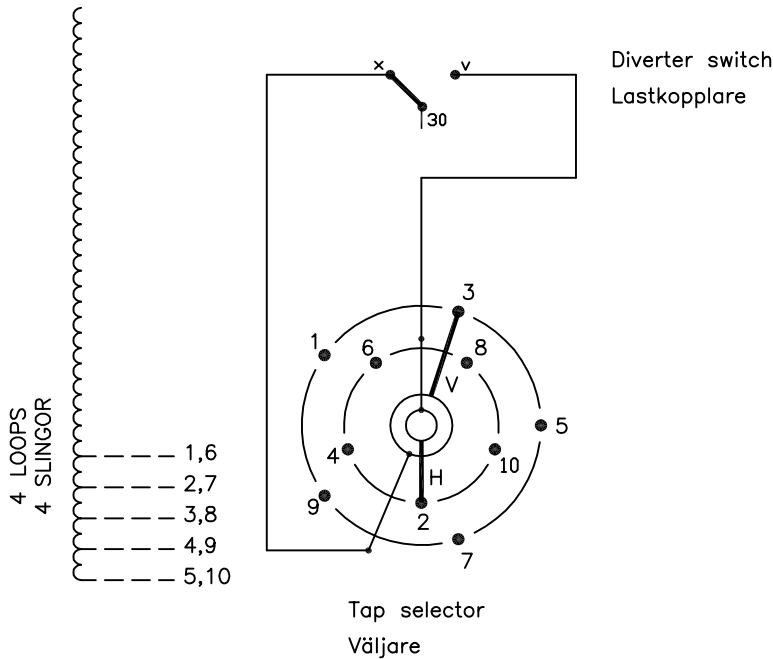

The tap-changer is shown in pos. 3, the preceding pos. was 2.
 The tap selector is seen from above.
 Contact arm V is located above contact arm H.

Lindningskopplaren visad i läge 3, föregående läge var 2.
 Väljaren sedd uppifrån.
 Kontaktarm V ligger över kontaktarm H.

Continuous lines show leads included in the tap-changer. Dashed lines show leads belonging to the cleats and leads.

Heldragna linjer visar ledare som ingår i lindningskopplaren. Streckade linjer visar ledare som tillhör anslutningsdonet.

We reserve all rights in this document and in the information contained therein. Reproduction, use or disclosure to third parties without express authority is strictly forbidden.
© ABB 19

Sheet	Cont	Year	Week	Dept	1	VUCG Added.	SUKN	07	47		
Rev Ind	Revision	Appd	Year	Week	Accepted by qual control	Accepted for prod by	Description (English)			DATAORIGINAL	
RevInd	Revision	Appd	Year	Week	R.Yngvesson		CONNECTION DIAGRAM			File name	
Design checked by	Design checked by	Drawn by	Issued by	Dept	Year	Week	Description (own language)			0376-1	
B-O.Stenestam	L.Bergman	COM/TKO	97	22				Lang			Sheet
M.Hedlund								1			
							Asea Brown Boveri			RevInd	Cont
							5492 0376-1			-	-