



Environmental Product Declaration for AC 800M Communication interfaces

EPD type III in accordance with ISO 14025:2006 and EN 50693:2020

Program	The International EPD® System, www.environdec.com
Program operator	EPD International AB
EPD registration number	EPD-IES-0025870:001
Publication date	2025-10-07
Valid until	2030-10-07
Product Category Rules (PCR)	Electronic and electrical equipment, and electronic components (non-construction), 2024:06, version 1.0.1
The EPD covers multiple products	CI854B, CI874, CI873A, CI871A, CI868A, CI867A, CI853, CI855, CI856, CI857, CI858, CI860, CI865, SM812

An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication on www.environdec.com.

Company information

ABB is a global technology leader in electrification and automation, enabling a more sustainable and resource-efficient future. By connecting its engineering and digitalization expertise, ABB helps industries run at high performance, while becoming more efficient, productive and sustainable so they outperform. At ABB, we call this 'Engineered to Outrun'. The company has over 140 years of history and around 110,000 employees worldwide.

Our Process Automation business offers a range of solutions for process and hybrid industries, including control technologies. Based on its deep domain knowledge, experience and expertise in delivering world-class automation products, systems and solutions, a wide area of complimenting digital and collaborative solutions across applications and sectors, the Process Automation business helps customers remain competitive, improving their ROI and running safe and productive operations.

Owner of the EPD	ABB Process Automation
Name and location of production site	Vaesteras, Sweden
Contact	ch-papcp.communications@abb.com



INTRO



PRODUCT
INFORMATION



LCA
INFORMATION



CONTENT
DECLARATION



ENVIRONMENTAL
PERFORMANCE



END

ABB Sustainability

ABB is at the core of accelerating the energy transition. Every day, we empower customers across the globe to optimize, electrify and decarbonize their operations.

Our Sustainability Agenda is fully in line with this mission. Guided by recognized best-practice standards and guidance, and embedded across our business, it aims to enable a low-carbon society, preserve resources and promote social progress for a net-zero future. Our actions are underpinned by our culture of integrity and transparency, extending across our value chain.

We believe in an inclusive energy transition to a net-zero future, with lifted-up communities, workers and societies. We respect and promote human rights and dignity, and strive to create safe, fair, and inclusive working environments where our people can thrive.

To preserve the earth's resources for future generations, we are moving to circular business models that eliminate waste and keep products and materials in use. Our Circularity Approach covers all stages of the product life cycle, from design and sourcing, through production and use, all the way to responsible end-of-life services.

To enable a low-carbon society, we are taking action across our value chain. With our technologies, we empower customers to avoid emissions and ramp up renewables. To cut our own greenhouse gas emissions, we follow targets that are aligned with the Net-Zero Standard of the Science Based Targets initiative (SBTi).





Product information

AC 800M Communication interfaces

The product group covered in this EPD is a selection of AC 800M communications modules that make it possible to access a wide range of field devices and third-party systems. The interfaces include:

- Ethernet-based interfaces/protocols
- Serial communications
- Interfaces to ABB equipment
- Communication interfaces to heritage systems

The safety module SM812, designed for use with AC 800M controllers, is also included in this group due to its high hardware similarity to communication interfaces. It provides intelligent supervision for standard and SIL-rated applications, supports redundancy with hot-insert and online upgrade features, and offers limited safety-related digital I/O.

Product identification:	CI854B
Other products covered in this EPD	CI874, CI873A, CI871A, CI868A, CI867A, CI853, CI855, CI856, CI857, CI858, CI860, CI865, SM812
UN CPC code	UN CPC 482
Geographical cope	Europe is considered for the use phase
Energy mix	Low voltage electricity mix for Europe (from ecoinvent 3.11; emission factor is 0.34 kg CO ₂ -eq/kWh.)
Standards	G3 compliant to ISA 71.04, IP20 according to IEC/EN 61131-2, EMC, Marine certified, RoHS, REACH and WEEE compliant.

LCA information

Data quality, allocation rules and cut-off criteria

Data quality, allocation rules and cut-off criteria


The data used comprises both primary and secondary sources. Primary data related to the production of AC 800M communication interface, CI854B are obtained from EMS facilities, reflecting production conditions and practices in Vaesteras, Sweden, in 2023.

Secondary data for manufacturing component processes represent regional and global averages from the Ecoinvent v3.11 database, available in the Simapro 10.2.0.1 software. Background data for product components is sourced from the bill of materials and data sheets for AC 800M CI854B available in ABB's data management system in 2025. Special attention is given to accurately modeling processes such as electronic component manufacturing and printed circuit board (PCB) assembly to reflect current industrial practices.

An allocation method is used to determine the resource/ material consumption and waste management associated with manufacturing stage at the production site. Since the EMS facilities produce a range of different electronic products, only a proportional share of the environmental impact is assigned to the specific production line under consideration. In this study, the allocation of resources, materials, as well as waste, is based on a quantitative calculation using the physical mass of the product.

Allocation rules have been applied to calculate the share of resources and waste attributed to the ABB warehouse based on the quantity of the product.

A 1% cut-off threshold has been applied in this study. This means that the included inventory data collectively account for at least 99% of the results across all environmental impact categories, 99% of the total product mass, and 99% of the energy use throughout the product life cycle. Additionally, as mandated by the PCR, certain materials, electronic components, and processes such as PCBA (Printed Circuit Board Assembly) are excluded from any cut-off criteria, regardless of their contribution.



INTRO



PRODUCT
INFORMATION



LCA
INFORMATION



CONTENT
DECLARATION



ENVIRONMENTAL
PERFORMANCE



END

EPD®

THE INTERNATIONAL EPD® SYSTEM

LCA information

Functional unit, Use stage and System boundaries

Functional unit

The functional unit of this study is defined as the delivery of industrial communication functions within process control and automation by one AC 800M communication interface module over a 25-year product lifespan. This functional unit serves as a standardized measure for assessing the environmental impacts of the product. Since no complementary PCR (c-PCR), or Product Specific Rule (PSR) exists for industrial process controllers, a Reference Service Life (RSL) could not be established from standardized guidelines. Instead, the product lifespan has been used to define the functional unit, ensuring consistency with the goal and scope of the study.

Use stage

AC 800M communication interfaces are employed across a wide range of facilities and industries, with their power consumption varying based on the specific applications they support. These modules are designed for continuous operation, running 24 hours a day. For this study, the power consumption is based on data provided in ABB's product manuals available on ABB's website. The average electricity consumption of CI854B, the representative product of the group is 4.56 W.

System boundaries


This EPD adopts a cradle-to-grave approach, covering the following life cycle stages:

Manufacturing - This stage includes the extraction and processing of raw materials such as metals and plastics, as well as manufacturing PCBs and all the components mounted on them. It covers the energy and resources consumed in raw material extraction, intermediate product production, and transportation to the assembly facilities. Specific data covers the assembly, testing, and packaging of controllers, including energy and material consumption per unit and waste generation. The electricity mix for production processes is based on Sweden's residual mix, using the ecoinvent dataset "Electricity, medium voltage [SE] | electricity, medium voltage, residual mix | Cut-off, U."

Distribution - This stage addresses the environmental impacts associated with transporting the final product from manufacturing facilities to distributors and end users. This includes fuel consumption, emissions, and packaging waste during transit. The products are transported within Europe using generic data from EN50693, which assumes an average intracontinental transport distance of 3,500 km by a EURO6 diesel lorry with a 16–32 metric ton capacity.

Use and Maintenance - This stage focuses on the electricity consumption of a communication interface during its operational life and any maintenance requirements. Low voltage electricity mix for Europe as an ecoinvent process is chosen for this stage. No maintenance is required during the product's lifetime. Installation and de-installation are not considered relevant for this product system, as these processes are negligible in terms of environmental impacts. Therefore, they are excluded from the LCA.

End-of-Life - The end-of-life scenario follows IEC/TR 62635 recyclability rates for electronics. Non-recyclable materials are assumed to be treated as a mix of incineration and landfill. No potential benefits from material or energy recovery are declared in this study. Accordingly, the rules of EN 50693 Annex G, Section G.2 have been applied.



INTRO



PRODUCT
INFORMATION



LCA
INFORMATION



CONTENT
DECLARATION




ENVIRONMENTAL
PERFORMANCE



END

LCA information

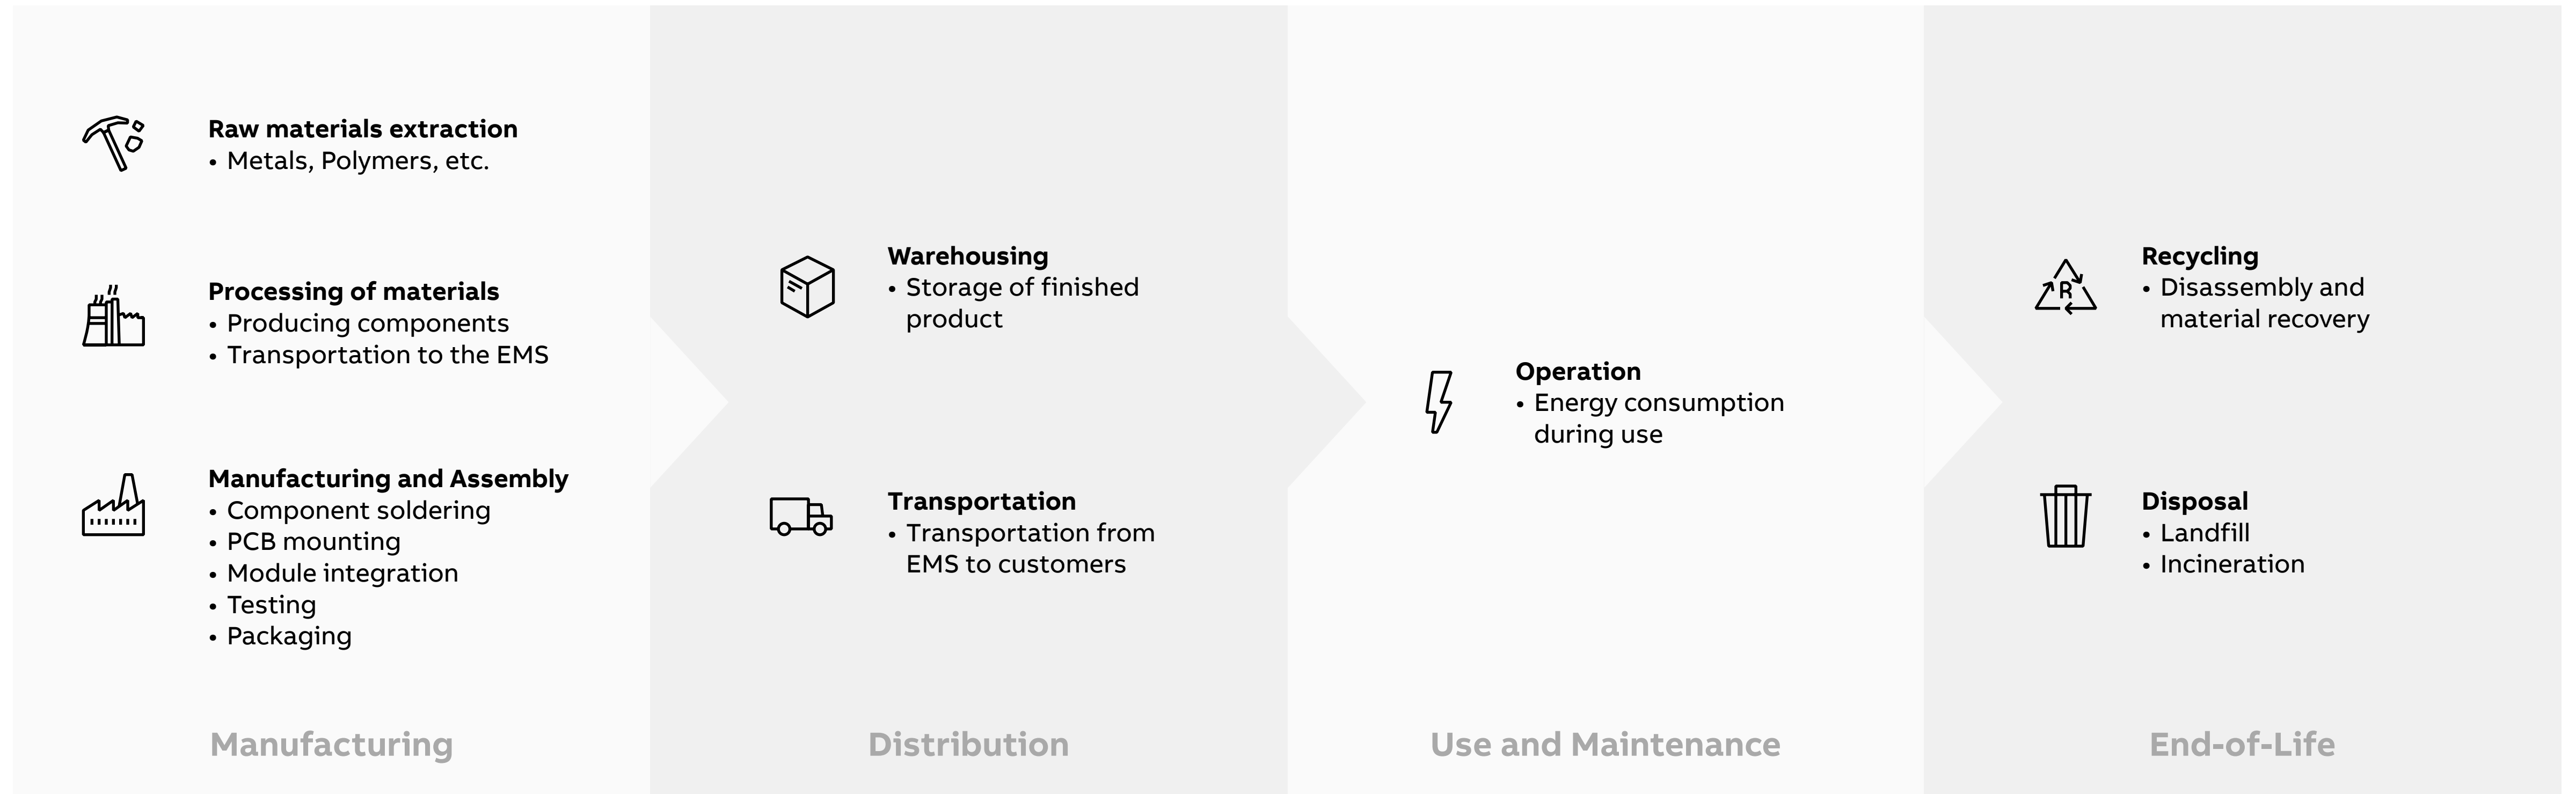

Content declaration


Product with packaging

Based on content of the representative product in this EPD

Materials	CI854B	Percentage
Mechanical metal	138.67 g	23.59%
Mechanical plastic	181.45 g	30.86%
Connectors	60.67 g	10.32%
Electronic components	75.21 g	12.79%
Corrugated board box*	131.90 g	22.44%
Total weight	588 g	

The product contains substances from the SVHC list. For the latest updated details please check the SCIP database.

CI854B Id: 4d7be8be-d331-4f8b-97ca-678239a09f69

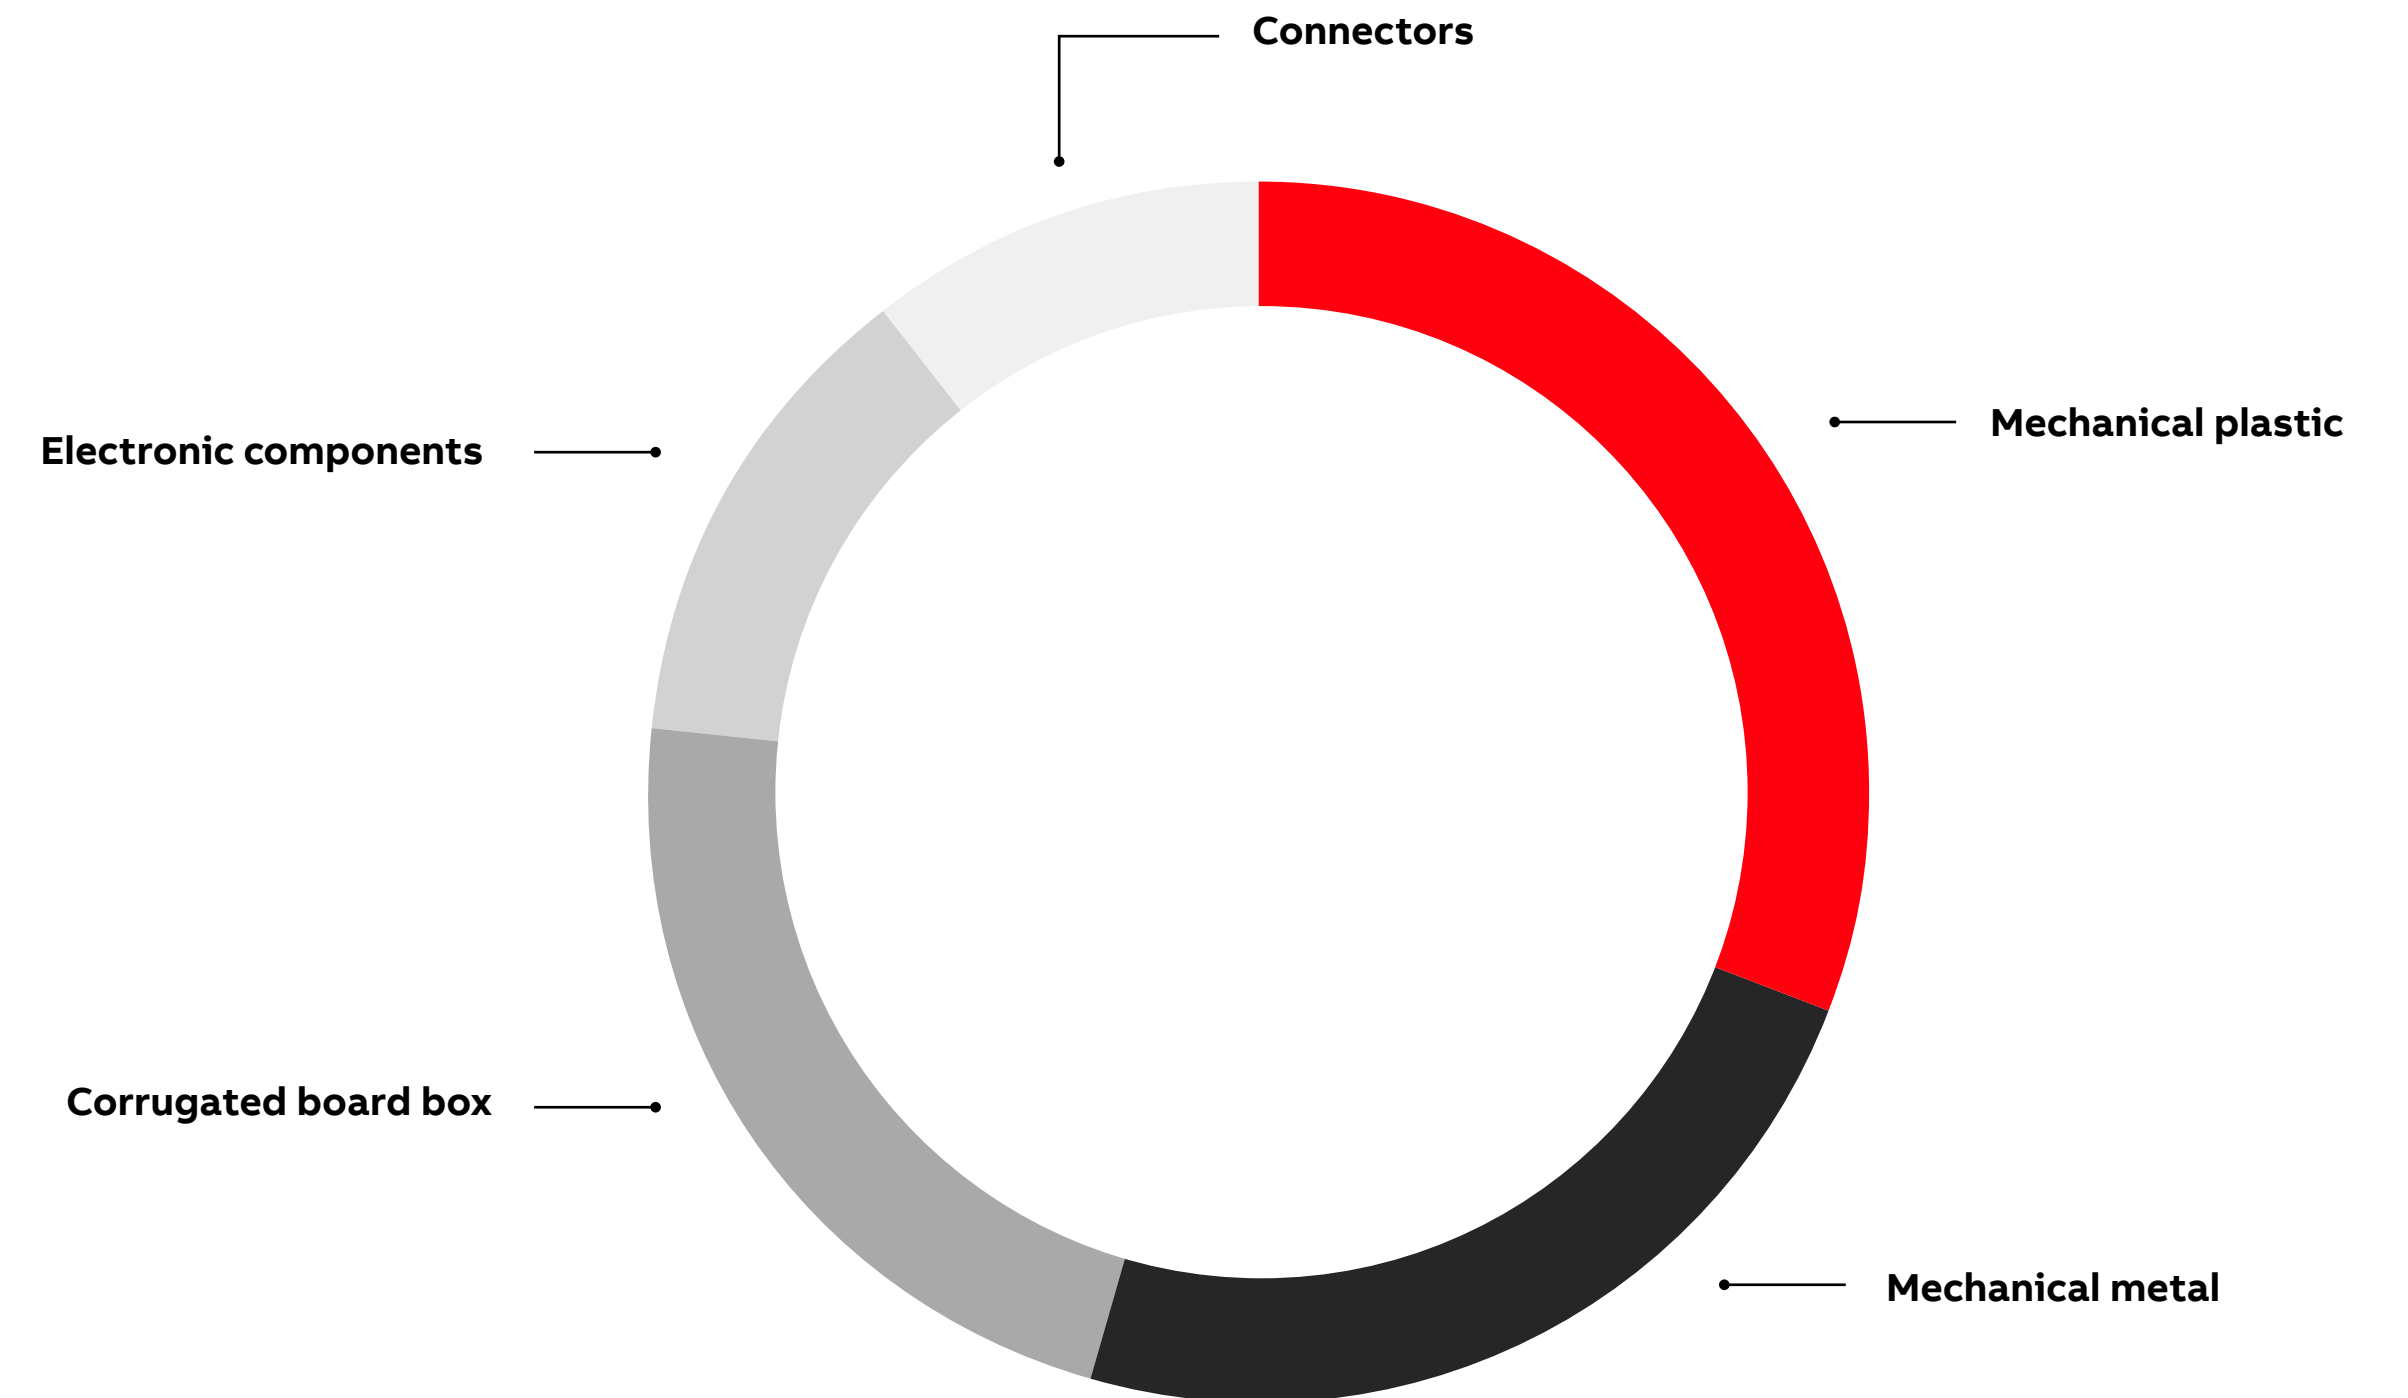

* ≈99% biogenic content

Environmental performance

Potential environmental impact

The environmental performance indicators follow Version 3.0, based on EN 15804:2012+A2:2019/AC:2021, including mandatory indicators and GWP-GHG. The assessment method used is EN 15804+A2.

Impact Category	Unit	Manufacturing	Distribution	Use and Maintenance	End of Life	Total	
Global Warming Potential (GWP)	Biogenic	kg CO2 eq	1,39E-01	3,23E-02	1,07E+01	1,04E-01	1,09E+01
	Fossil	kg CO2 eq	2,04E+01	5,47E-01	3,29E+02	3,97E-01	3,50E+02
	Land use and land use change	kg CO2 eq	4,76E-02	4,28E-04	9,69E-01	1,15E-04	1,02E+00
	TOTAL	kg CO2 eq	2,06E+01	5,79E-01	3,40E+02	5,01E-01	3,62E+02
Acidification potential (AP)	mol H+ eq	1,81E-01	1,43E-03	1,89E+00	5,92E-04	2,07E+00	
Eutrophication potential (EP)	Aquatic marine	kg N eq	2,73E-02	3,07E-04	3,01E-01	2,77E-04	3,29E-01
	Aquatic freshwater	kg P eq	2,30E-02	5,73E-05	3,15E-01	1,17E-04	3,39E-01
	Aquatic terrestrial	mol N eq	2,93E-01	3,32E-03	2,67E+00	1,45E-03	2,97E+00
Ozone depletion potential (ODP)	kg CFC11 eq	9,51E-07	1,21E-08	6,17E-06	6,07E-09	7,13E-06	
Photochemical oxidant creation potential (POCP)	kg NMVOC eq	8,79E-02	1,80E-03	8,54E-01	5,68E-04	9,44E-01	
Abiotic depletion potential (ADP)	Fossil resources	MJ	2,92E+02	8,35E+00	7,57E+03	2,02E+00	7,88E+03
	Minerals and Metals (non-fossil resources)	kg Sb eq	5,26E-03	2,85E-06	4,43E-03	5,52E-07	9,70E-03
Water deprivation potential (WDP)	m3 depriv.	4,56E+00	6,68E-02	7,97E+01	6,90E-03	8,43E+01	



INTRO




PRODUCT INFORMATION




LCA INFORMATION



CONTENT DECLARATION



ENVIRONMENTAL PERFORMANCE



END

Environmental performance

GWP-GHG

Indicator	Unit	Manufacturing	Distribution	Use an Maintenance	End of Life	TOTAL
GWP - GHG	kg CO2 eq	2,05E+01	5,48E-01	3,30E+02	4,79E-01	3,52E+02
Share of specific data		21.00%				

- The GWP-GHG indicator accounts for all greenhouse gases included in GWP-total, except for biogenic carbon dioxide uptake, biogenic CO₂ emissions, and biogenic carbon stored in the product.
- The share of specific data is calculated based on GWP-GHG results. It is a simplified indicator for data quality that supports the use of more specific data, to increase the representativeness of and comparability between EPDs. Note that the indicator does not capture all relevant aspects of data quality and is not comparable across product categories

Environmental performance

Use of resources in functional unit [MJ], net calorific value]

Parameter		Manufacturing	Distribution	Use and Maintenance	End of Life	Total
Primary energy resources – Renewable	Use as energy carrier	3,82E+01	7,82E-01	2,04E+03	8,00E-02	2,08E+03
	Use as raw material	2,83E+00	0,00E+00	0,00E+00	0,00E+00	2,83E+00
	TOTAL	4,10E+01	7,82E-01	2,04E+03	8,00E-02	2,09E+03
Primary energy resources – Non-renewable	Use as energy carrier	3,03E+02	8,82E+00	7,88E+03	2,15E+00	8,20E+03
	Use as raw material	7,38E+00	0,00E+00	0,00E+00	0,00E+00	7,38E+00
	TOTAL	3,10E+02	8,82E+00	7,88E+03	2,15E+00	8,21E+03

Environmental performance

Extrapolation factors for other modules in the group

According to the PCR for electronics and EN 50693, the thirteen AC 800M communication interfaces and one AC 800M safety module are treated as a homogeneous product family. They share similar hardware design, materials, and manufacturing processes, differing mainly in protocol or application-specific functions. An extrapolation method has been applied to extend the results to the entire group.

To ensure the validity of this approach, an analysis is performed for each life cycle stage of the representative product (CI854B). This analysis identified the most influential parameters impacting the environmental categories.


Using these parameters, extrapolation factors have been defined, with the CI854B serving as the reference product.

For information regarding SVHCs please check the product entry in the SCIP database.

CI854B ID: 4d7be8be-d331-4f8b-97ca-678239a09f69
 CI874 ID: d47ec9de-f723-4197-92c0-808fd7ec351d
 CI873A ID: c054070c-3d84-44f8-b77c-c42b6c4ca9a3
 CI871A ID: 8a24ccef-b78d-4b10-8219-411650906498
 CI868A ID: 7056e8d8-0e68-455e-a9df-5dc7c067ecbf
 CI867A ID: d5507541-ca7e-45a9-9360-c89fb442b980
 CI853 ID: 43539db2-d4af-4b85-97ac-565db43a2c4a
 CI855 ID: cfd4ce17-7e4b-45a2-81e0-8cdafde7f954
 CI856 ID: 35ee07fc-c0d2-40bb-ad41-2d6468e93f27
 CI857 ID: 5b26e2ec-a559-4bb5-9de6-577956347f5b
 CI858 ID: fb44e363-e6e0-482b-91e1-4fd8bf6c10e8
 CI860 ID: 4cb0b958-71d8-46e7-bed2-9518416c9b60
 CI865 ID: 5530c608-1c84-4e66-ab31-c144c32a7264
 SM812 ID: c3fb1fc7-a887-4836-9613-3c020ae781ef

LCA stages	Manufacturing	Distribution	Use	End of Life
Influential parameters	Total weight	Yearly Average Inventory	Power consumption	Total weight

Controller	Manufacturing	Distribution	Use	End of Life
CI854B	1.00	1.00	1.00	1.00
CI874	1.06	0.19	0.84	1.06
CI873A	1.07	0.13	0.84	1.07
CI871A	1.07	0.88	0.84	1.07
CI868A	1.07	0.23	0.84	1.07
CI867A	1.07	0.99	0.84	1.07
CI853	1.10	1.68	0.53	1.10
CI855	1.11	0.16	0.79	1.11
CI856	1.06	0.12	0.63	1.06
CI857	1.11	0.70	0.79	1.11
CI858	0.98	0.13	1.05	0.98
CI860	0.94	0.06	0.53	0.94
CI865	0.97	0.91	0.63	0.97
SM812	1.07	1.05	0.84	1.07



INTRO



PRODUCT INFORMATION




LCA INFORMATION



CONTENT DECLARATION



ENVIRONMENTAL PERFORMANCE



END

Environmental performance

Variation of results for other modules comparing to CI854B

Potential environmental impact

		CI874		CI873A		CI871A		CI868A		CI867A		CI853		CI855		
Impact Category	Unit	Total	Variation	Total	Variation	Total	Variation	Total	Variation	Total	Variation	Total	Variation	Total	Variation	
Global Warming Potential (GWP)	Biogenic	kg CO2 eq	9,25E+00	-15,49%	9,25E+00	-15,49%	9,28E+00	-15,27%	9,26E+00	-15,45%	9,26E+00	-15,44%	5,94E+00	-45,76%	8,70E+00	-20,52%
	Fossil	kg CO2 eq	2,99E+02	-14,58%	2,99E+02	-14,54%	2,99E+02	-14,42%	2,99E+02	-14,51%	2,99E+02	-14,60%	1,97E+02	-43,81%	2,83E+02	-19,23%
	Land use and land transformation	kg CO2 eq	8,66E-01	-14,78%	8,67E-01	-14,74%	8,67E-01	-14,71%	8,67E-01	-14,72%	8,65E-01	-14,90%	5,63E-01	-44,65%	8,18E-01	-19,56%
	TOTAL	kg CO2 eq	3,09E+02	-14,61%	3,09E+02	-14,57%	3,10E+02	-14,45%	3,09E+02	-14,54%	3,09E+02	-14,62%	2,03E+02	-43,87%	2,92E+02	-19,27%
Acidification potential (AP)	mol H+ eq	1,79E+00	-13,90%	1,79E+00	-13,83%	1,79E+00	-13,78%	1,79E+00	-13,80%	1,78E+00	-13,95%	1,20E+00	-42,31%	1,70E+00	-18,27%	
Eutrophication potential (EP)	Aquatic marine	kg N eq	2,83E-01	-14,00%	2,83E-01	-13,93%	2,84E-01	-13,86%	2,84E-01	-13,90%	2,83E-01	-14,04%	1,89E-01	-42,49%	2,69E-01	-18,40%
	Aquatic freshwater	kg P eq	2,90E-01	-14,29%	2,90E-01	-14,23%	2,90E-01	-14,22%	2,90E-01	-14,21%	2,90E-01	-14,41%	1,91E-01	-43,47%	2,75E-01	-18,86%
	Aquatic terrestrial	mol N eq	2,56E+00	-13,67%	2,56E+00	-13,59%	2,57E+00	-13,51%	2,56E+00	-13,55%	2,56E+00	-13,68%	1,73E+00	-41,60%	2,44E+00	-17,92%
Ozone layer depletion (ODP)	kg CFC11 eq	6,22E-06	-12,82%	6,22E-06	-12,71%	6,23E-06	-12,59%	6,23E-06	-12,66%	6,22E-06	-12,74%	4,32E-06	-39,46%	5,94E-06	-16,72%	
Photochemical oxidant creation potential (POCP)	kg NMVOC eq	8,13E-01	-13,85%	8,14E-01	-13,77%	8,15E-01	-13,63%	8,14E-01	-13,73%	8,14E-01	-13,80%	5,49E-01	-41,82%	7,73E-01	-18,15%	
Abiotic depletion potential (ADP)	Fossil resources	MJ	6,69E+03	-15,03%	6,70E+03	-15,01%	6,70E+03	-14,93%	6,70E+03	-14,99%	6,69E+03	-15,12%	4,32E+03	-45,12%	6,31E+03	-19,91%
	Metals and minerals	kg Sb eq	9,32E-03	-3,83%	9,37E-03	-3,35%	9,37E-03	-3,34%	9,38E-03	-3,21%	9,37E-03	-3,39%	8,10E-03	-16,48%	9,35E-03	-3,55%
Water deprivation potential (WDP)	m3 depriv.	7,20E+01	-14,64%	7,20E+01	-14,60%	7,20E+01	-14,54%	7,20E+01	-14,58%	7,19E+01	-14,73%	4,70E+01	-44,19%	6,80E+01	-19,35%	



INTRO



PRODUCT INFORMATION




LCA INFORMATION



CONTENT DECLARATION



ENVIRONMENTAL PERFORMANCE




END

Environmental performance

Variation of results for other modules comparing to CI854B

Potential environmental impact

		CI856		CI857		CI858		CI860		CI865		SM812		
Impact Category	Unit	Total	Variation	Total	Variation	Total	Variation	Total	Variation	Total	Variation	Total	Variation	
Global Warming Potential (GWP)	Biogenic	kg CO2 eq	7,00E+00	-36,04%	8,72E+00	-20,37%	1,15E+01	4,83%	5,85E+00	-46,59%	7,00E+00	-36,01%	9,26E+00	-15,43%
	Fossil	kg CO2 eq	2,30E+02	-34,38%	2,83E+02	-19,16%	3,66E+02	4,70%	1,92E+02	-44,99%	2,28E+02	-34,80%	2,99E+02	-14,60%
	Land use and land transformation	kg CO2 eq	6,62E-01	-34,85%	8,18E-01	-19,55%	1,07E+00	4,89%	5,55E-01	-45,45%	6,58E-01	-35,25%	8,65E-01	-14,91%
	TOTAL	kg CO2 eq	2,37E+02	-34,43%	2,92E+02	-19,20%	3,79E+02	4,70%	1,99E+02	-45,04%	2,36E+02	-34,83%	3,09E+02	-14,62%
Acidification potential (AP)	mol H+ eq	1,39E+00	-33,13%	1,70E+00	-18,25%	2,17E+00	4,57%	1,17E+00	-43,78%	1,37E+00	-33,87%	1,78E+00	-13,96%	
Eutrophication potential (EP)	Aquatic marine	kg N eq	2,20E-01	-33,30%	2,69E-01	-18,37%	3,44E-01	4,58%	1,85E-01	-43,95%	2,17E-01	-33,99%	2,83E-01	-14,05%
	Aquatic freshwater	kg P eq	2,24E-01	-33,93%	2,75E-01	-18,87%	3,55E-01	4,76%	1,88E-01	-44,56%	2,22E-01	-34,53%	2,90E-01	-14,42%
	Aquatic terrestrial	mol N eq	2,00E+00	-32,65%	2,44E+00	-17,88%	3,10E+00	4,45%	1,68E+00	-43,32%	1,97E+00	-33,46%	2,56E+00	-13,69%
Ozone layer depletion (ODP)	kg CFC11 eq	4,91E-06	-31,09%	5,94E-06	-16,66%	7,44E-06	4,29%	4,15E-06	-41,83%	4,84E-06	-32,18%	6,22E-06	-12,75%	
Photochemical oxidant creation potential (POCP)	kg NMVOC eq	6,33E-01	-32,93%	7,73E-01	-18,07%	9,86E-01	4,42%	5,33E-01	-43,59%	6,27E-01	-33,63%	8,14E-01	-13,80%	
Abiotic depletion potential (ADP)	Fossil resources	MJ	5,10E+03	-35,30%	6,31E+03	-19,86%	8,26E+03	4,90%	4,26E+03	-45,87%	5,08E+03	-35,55%	6,69E+03	-15,12%
	Metals and minerals	kg Sb eq	8,37E-03	-13,62%	9,34E-03	-3,67%	9,83E-03	1,36%	7,27E-03	-24,96%	7,90E-03	-18,53%	9,36E-03	-3,47%
Water deprivation potential (WDP)	m3 depriv.	5,52E+01	-34,56%	6,80E+01	-19,32%	8,83E+01	4,80%	4,62E+01	-45,17%	5,48E+01	-34,99%	7,19E+01	-14,73%	



INTRO



PRODUCT INFORMATION




LCA INFORMATION



CONTENT DECLARATION



ENVIRONMENTAL PERFORMANCE



END

Environmental performance


Variation of results for other modules comparing to CI854B

Use of resources in functional unit [MJ, net calorific value]

		CI874		CI873A		CI871A		CI868A		CI867A		CI853		CI855	
Parameters		Total	Variation	Total	Variation	Total	Variation	Total	Variation	Total	Variation	Total	Variation	Total	Variation
Primary energy resources – Renewable	Use as energy carrier	1,76E+03	-15,41%	1,76E+03	-15,39%	1,76E+03	-15,37%	1,76E+03	-15,39%	1,76E+03	-15,57%	1,12E+03	-46,28%	1,66E+03	-20,48%
	Used as raw materials	3,01E+00	6,29%	3,04E+00	7,19%	3,04E+00	7,17%	3,04E+00	7,43%	3,04E+00	7,24%	3,10E+00	9,52%	3,15E+00	11,25%
	TOTAL	1,77E+03	-15,38%	1,77E+03	-15,36%	1,77E+03	-15,34%	1,77E+03	-15,35%	1,76E+03	-15,54%	1,12E+03	-46,20%	1,66E+03	-20,44%
Primary energy resources – Non-renewable	Use as energy carrier	6,96E+03	-15,04%	6,97E+03	-15,01%	6,97E+03	-14,93%	6,97E+03	-14,99%	6,96E+03	-15,12%	4,50E+03	-45,13%	6,56E+03	-19,92%
	Used as raw materials	7,84E+00	6,29%	7,91E+00	7,19%	7,91E+00	7,17%	7,93E+00	7,43%	7,91E+00	7,24%	8,08E+00	9,52%	8,21E+00	11,25%
	TOTAL	6,97E+03	-15,02%	6,98E+03	-14,99%	6,98E+03	-14,91%	6,98E+03	-14,97%	6,97E+03	-15,10%	4,51E+03	-45,08%	6,57E+03	-19,89%

Indicator describing GWP- GHG per functional unit

		CI874		CI873A		CI871A		CI868A		CI867A		CI853		CI855	
Indicator	Unit	Total	Variation	Total	Variation	Total	Variation	Total	Variation	Total	Variation	Total	Variation	Total	Variation
GWP - GHG	kg CO2 eq	3,00E+02	-14,58%	3,01E+02	-14,53%	3,01E+02	-14,42%	3,01E+02	-14,50%	3,00E+02	-14,59%	1,98E+02	-43,80%	2,84E+02	-19,23%



INTRO




PRODUCT INFORMATION




LCA INFORMATION



CONTENT DECLARATION



ENVIRONMENTAL PERFORMANCE



END

Environmental performance

Variation of results for other modules comparing to CI854B

Use of resources in functional unit [MJ, net calorific value]

		CI856		CI857		CI858		CI860		CI865		SM812	
Parameters		Total	Variation	Total	Variation	Total	Variation	Total	Variation	Total	Variation	Total	Variation
Primary energy resources – Renewable	Use as energy carrier	1,33E+03	-36,07%	1,66E+03	-20,47%	2,19E+03	5,10%	1,11E+03	-46,63%	1,33E+03	-36,21%	1,76E+03	-15,57%
	Used as raw materials	3,00E+00	6,01%	3,15E+00	11,01%	2,78E+00	-1,89%	2,66E+00	-6,03%	2,75E+00	-3,09%	3,03E+00	7,08%
	TOTAL	1,34E+03	-36,02%	1,66E+03	-20,42%	2,19E+03	5,09%	1,11E+03	-46,57%	1,33E+03	-36,17%	1,76E+03	-15,54%
Primary energy resources – Non-renewable	Use as energy carrier	5,30E+03	-35,30%	6,57E+03	-19,87%	8,60E+03	4,90%	4,44E+03	-45,88%	5,28E+03	-35,56%	6,96E+03	-15,12%
	Used as raw materials	7,82E+00	6,01%	8,19E+00	11,01%	7,24E+00	-1,89%	6,93E+00	-6,03%	7,15E+00	-3,09%	7,90E+00	7,08%
	TOTAL	5,31E+03	-35,27%	6,58E+03	-19,84%	8,61E+03	4,89%	4,44E+03	-45,85%	5,29E+03	-35,53%	6,97E+03	-15,10%

Indicator describing GWP- GHG per functional unit

		CI856		CI857		CI858		CI860		CI865		SM812	
Indicator	Unit	Total	Variation	Total	Variation	Total	Variation	Total	Variation	Total	Variation	Total	Variation
GWP - GHG	kg CO2 eq	2,31E+02	-34,37%	2,84E+02	-19,16%	3,68E+02	4,69%	1,94E+02	-44,98%	2,29E+02	-34,79%	3,00E+02	-14,59%



INTRO



PRODUCT INFORMATION



LCA INFORMATION



CONTENT DECLARATION



ENVIRONMENTAL PERFORMANCE



END

Program information and references

The International EPD® System

EPD International AB
Box 210 60
SE-100 31 Stockholm
Sweden

www.environdec.com
info@environdec.com

Accountabilities for PCR, LCA and independent, third-party verification

Product Category Rules (PCR)

- PCR: Electronic and electrical equipment, and electronic components (non-construction), 2024:06, VERSION 1.0.1, 2024-12-09.
- PCR review was conducted by The technical committee of the International EPD® System. A full list of members available on www.environdec.com. The review panel may be contacted via support@environdec.com.
- The product category corresponds to UN CPC divisions 43-48 and 84, and HS code 85 Electrical machinery and equipment and parts thereof.

Third-party verification

- External and independent (“third-party”) verification of the declaration and data, according to ISO 14025:2006, via:
 - EPD verification through an individual EPD verification
- Third-party verifier: Pär Lindman, Miljögiraff.
- Approved by: The International EPD® System

Procedure for follow-up of data during EPD validity involves third-party verifier:


- No

Life Cycle Assessment (LCA)

- LCA accountability: R&D department, ABB Process Automation, Mostafa Ghaffarian and Elena Puertas

References

- General Programme Instructions of the International EPD System, version 4.0
- General Programme Instructions of the International EPD System, version 5.0
- Electronic and electrical equipment, and electronic components (non-construction), 2024:06, version 1.0.1
- ISO 14040:2006 Environmental management – Life cycle assessment - Principles and Framework
- ISO 14044:2006 Environmental management – Life cycle assessment – Requirements and Guidelines
- EN 50693:2020 Product category rules for life cycle assessments of electronic and electrical products and systems
- Ecoinvent version 3.11
- Simapro 10.2.0.1
- LCA Internal Report AC 800M Communication interfaces carried out by ABB Process Automation (PCP), Sweden, 2025



INTRO



PRODUCT
INFORMATION



LCA
INFORMATION



CONTENT
DECLARATION



ENVIRONMENTAL
PERFORMANCE



END

Notes

- An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication on www.environdec.com.
- EPDs within the same product category but from different programmes may not be comparable. For two EPDs to be comparable, they must be based on the same PCR (including the same version number) or be based on fully aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have equivalent system boundaries and descriptions of data; apply equivalent data quality requirements, methods of data collection, and allocation methods; apply identical cut-off rules and impact assessment methods (including the same version of characterisation factors); have equivalent content declarations; and be valid at the time of comparison.
- Further information regarding products or EPD to be addressed to EPD owner:
 - ABB Process Automation
 - ch-papcp.communications@abb.com
- ABB Process Automation has the sole ownership, liability, and responsibility of this EPD.

