Interface Relays R600, R500
Product group picture

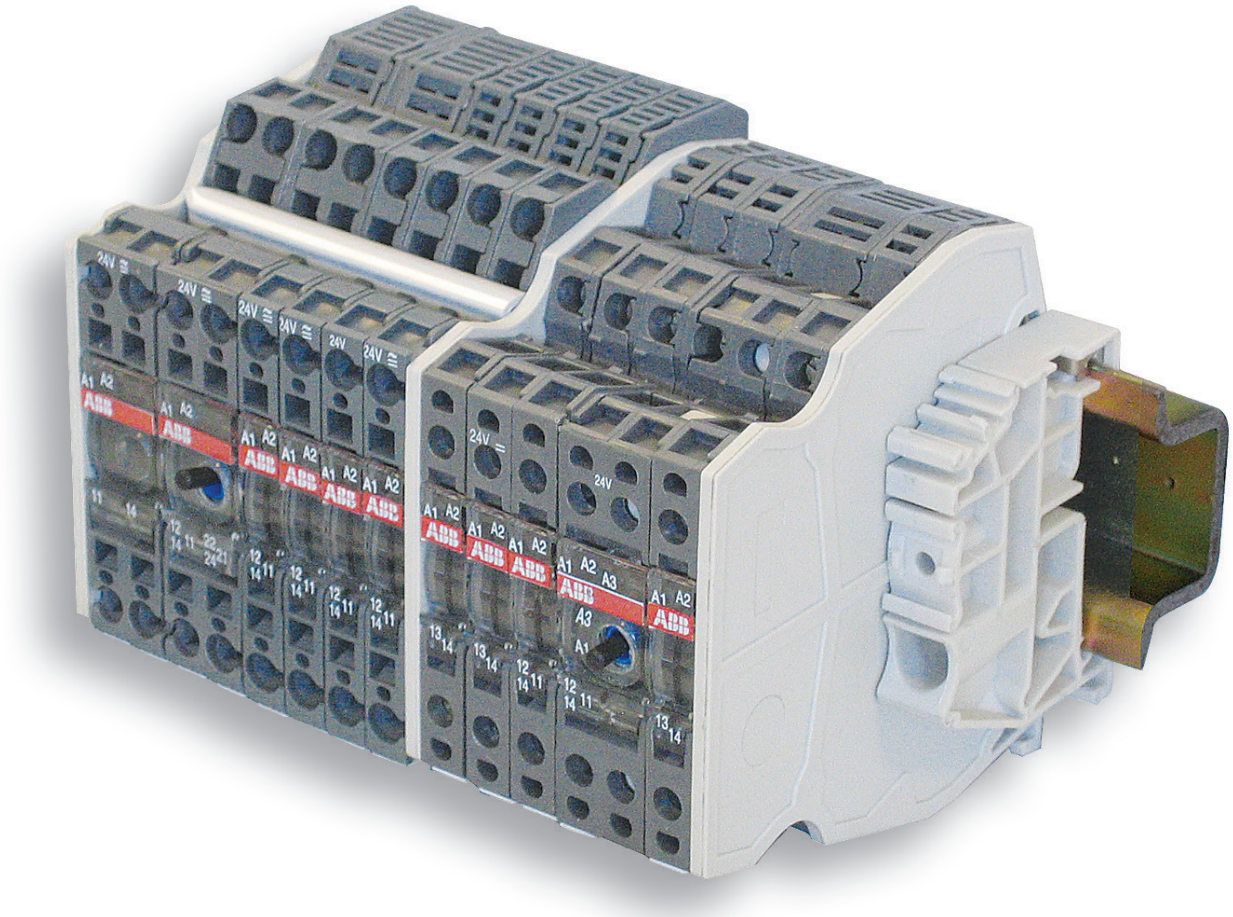

Interface Relays R600, R500
Table of contents

Interface Relays R600, R500	
Product group picture	5/21
Table of contents	5/22
Benefits and advantages	5/23
Type designators	5/24
Interface Relays R600	5/25
Selection	5/25
Benefits and advantages	5/27
Ordering details	5/28
Connection diagrams	5/30
Technical information	5/31
Interface Relays R500	5/36
Selection	5/36
Ordering details	5/37
Technical information	5/38

Interface Relays R600, R500
Benefits and advantages

R600 series

5

Standard range in screw clamp or spring clamp versions

- Spacing : 6 mm
- Wire size : 2.5 mm² (4 mm² solid wire)
- Contact type : 1 NO, 1 NC, 1 SPDT, 1 DPDT from 1 mA to 8 A / 250 V
- Transistor : 100 mA
  MOS : 1 A to 5 A
  Triac : 1 A to 2 A

R500 series

It is our range offering pluggable functions

- Spacing : 5.08 mm (the smallest in the market)
- Wire size : 2.5 mm² (4 mm² solid)
- Contact type : 1 SPDT from 10 mA to 6 A / 250 V
- Transistor : 30 mA to 100 mA
  MOS : 1 A to 2 A
  Triac : 1 A

In today's automation systems, PLCs are the core of industry. They link sensors and actuators to the process, which are connected to the PLC via conventional wires.
However these PLCs are not completely isolated from the industrial environment, hence over voltage picks and transient currents can affect their operating functions. And additionally, their application field is often limited to 24 VDC / 100 mA.
So, with the aim to adapt application voltage and/or current and provide as well the right galvanic isolation to the PLC, it is recommended to install per I/O the right interface providing both voltage-current level adaptation and isolation protection.
This interfacing is possible thanks to ABB's relays and optocouplers ranges, which offer wide adaptation in both voltage (from 5 to 400 V) and current (from 10-7 to 16 A) as well as high isolation between input and output from 2 to 4 KV.

Interface Relays R600, R500
Type designators

SERIES	CODE	NB OF RELAYS	CONTACT TYPE	NB OF CONTACTS PER RELAY	PARTICULARITIES
R 600	R B				
R 600	R B R				
R 500	D 2,5/5 R	1 2	0 1 2 3	1 2	None A B C N P R V I

Description of contact types

0  1 Normally Closed 1 NC

1  1 Normally Open 1 NO

2  1 Change Over or Single Pole Double Through

3  1 Normally Closed + 1 Normally Open 1 NC + 1 NO

Features

None	Input voltage	DC
A	Input voltage	AC/DC
B	Input voltage	AC
C	2 wire sensor compatibility	

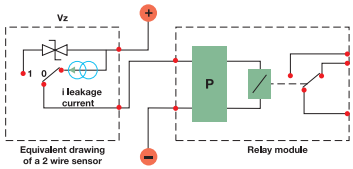

N 

Commons of coils connected to negative

P 

Commons of coils connected to positive

R 
RC circuit protection :
- Input protection against leakage current
- Increases relay contacts life

V 
Relay protection against overvoltage peaks

I Switch to force the coil for maintenance and/or installation purposes



Color coding for relays

Color	Current level in contacts	Switching current	Switching voltage	Switching load power
green	Very low level	10^{-7} to 5 A	10^{-3} to 250 V	10^{-10} to 2000 VA 10^{-10} to 200 W
grey	Low level	1 mA to 8 A	5 to 250 V	0,05 to 1500 VA 0,05 to 192 W
blue	High level	10 mA to 16 A	12 to 380 V	0,6 to 4000 VA 0,6 to 240 W

Interface Relays R600
Selection

5

Order number	1SNA 645 034 R2300	1SNA 645 036 R2500	1SNA 645 534 R2500	1SNA 645 536 R2700	1SNA 645 069 R0000	1SNA 645 037 R2600	1SNA 645 569 R0000	1SNA 645 537 R2000	1SNA 645 019 R0400	1SNA 645 519 R0600	1SNA 645 014 R2700	1SNA 645 063 R0000	1SNA 645 018 R0300	1SNA 645 514 R2100	1SNA 645 563 R0200	1SNA 645 518 R0500	1SNA 645 064 R0100	1SNA 645 065 R0200	1SNA 645 001 R0300	1SNA 645 005 R0700	1SNA 645 032 R2100	1SNA 645 009 R1300	1SNA 645 033 R2200	1SNA 645 010 R0700	1SNA 645 564 R0300	1SNA 645 565 R0400	1SNA 645 501 R0500	1SNA 645 505 R0100	1SNA 645 532 R2300	1SNA 645 509 R1500	1SNA 645 533 R2400	1SNA 645 510 R0100	1SNA 645 012 R2500	1SNA 645 512 R2700
Type	RB 121-5VDC	RB 121-5VDC	RBR 121-5VDC	RBR 121-5VDC	RB 121-12VDC	RB 121-12VDC	RBR 121-12VDC	RBR 121-12VDC	RB 101AR-24VAC/DC	RBR 101AR-24VAC/DC	RB 111A-24VAC/DC	RB 111AI-24VAC/DC	RB 111AR-24VAC/DC	RBR 111A-24VAC/DC	RBR 111AI-24VAC/DC	RBR 111AR-24VAC/DC	RB 121-24VDC	RB 121-24VDC	RB 121A-24VAC/DC	RB 121A-24VAC/DC	RB 121AI-24VAC/DC	RB 121AI-24VAC/DC	RB 121AI-24VAC/DC	RB 121AI-24VAC/DC	RBR 121-24VDC	RBR 121-24VDC	RBR 121A-24VAC/DC	RBR 121A-24VAC/DC	RBR 121AI-24VAC/DC	RBR 121AI-24VAC/DC	RBR 121AI-24VAC/DC	RBR 121AI-24VAC/DC	RB 122A-24VAC/DC	RBR 122A-24VAC/DC
Input voltage																																		
5 V DC	■	■	■	■																														
12 V DC					■	■	■	■																										
24 V DC									■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
48 - 60 V DC																																		
110 - 115 V DC																																		
230 V DC																																		
60 - 230 V DC																																		
24 V AC									■	■	■	■	■	■	■	■			■	■	■	■	■	■			■	■	■	■	■	■	■	■
48 - 60 V AC																																		
115 V AC																																		
230 V AC																																		
60 - 230 V AC																																		
Output rating																																		
10 mA - 6 A	■		■		■		■		■	■	■	■	■	■	■	■	■		■		■	■			■		■		■	■				
1 mA - 6 A		■		■		■		■										■		■			■	■		■		■			■	■		
1 mA - 8 A																																	■	■
Output contacts																																		
c/o	1	1	1	1	1	1	1	1									1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	2	2
n/o											1	1	1	1	1	1																		
n/c									1	1																								
Terminal type																																		
Screw	■	■			■	■			■		■	■	■				■	■	■	■	■	■	■	■									■	
Spring			■	■			■	■		■				■	■	■									■	■	■	■	■	■	■	■		■

Interface Relays R600
Selection

■	■	■	■	■	■	■	■																										
								■	■	■	■	■	■	■	■	■	■																
																		■	■	■	■	■	■	■	■	■	■	■					
																																■	■
■	■	■	■	■	■	■	■																										
								■	■	■	■	■	■	■	■	■	■																
																		■	■	■	■	■	■	■	■	■	■	■					
																																■	■
■	■	■		■				■		■	■		■				■	■	■	■	■		■	■		■			■	■
			■		■				■			■			■							■			■					
						■	■									■	■										■	■		
		1	1	1	1	2	2	1	1	1	1	1	1	2	2					1	1	1	1	1	1	2	2	1	1
1	1															1	1	1	1										
■		■	■			■		■	■	■				■		■		■		■	■	■				■		■	
	■			■	■		■				■	■	■		■		■		■				■	■	■		■		■

Interface Relays R600
Benefits and advantages

Characteristics

Standard range in screw clamp or spring clamp versions

- Spacing : 6 mm
- Wire size : 2.5 mm² (4 mm² solid wire)
- Contact type : 1 NO, 1 NC, 1 SPDT, 1 DPDT from 1 mA to 8 A / 250 V
- Transistor : 100 mA
  MOS : 1 A to 5 A
  Triac : 1 A to 2 A

Benefits

5

Increased contact life
The contacts are proteced by built in RC-circuits which result in increased contact life.



Variety of connections
R600 relays and optocouplers are available with both screw terminals or spring terminals.

Space safing
With a width of only 6 mm or 12 mm the compact design safes space in each cabinet.

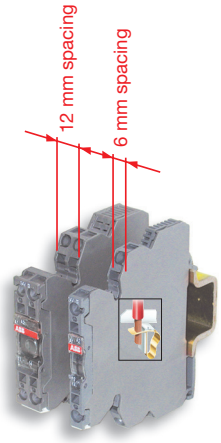

Functionning status
Functionning display through a green LED.

Only one part number AC/DC



Measurement & Test
Holes for holding DIA. 2 mm test plugs to simplify any measury or test.

Excellent adaption and conversion of digital signals

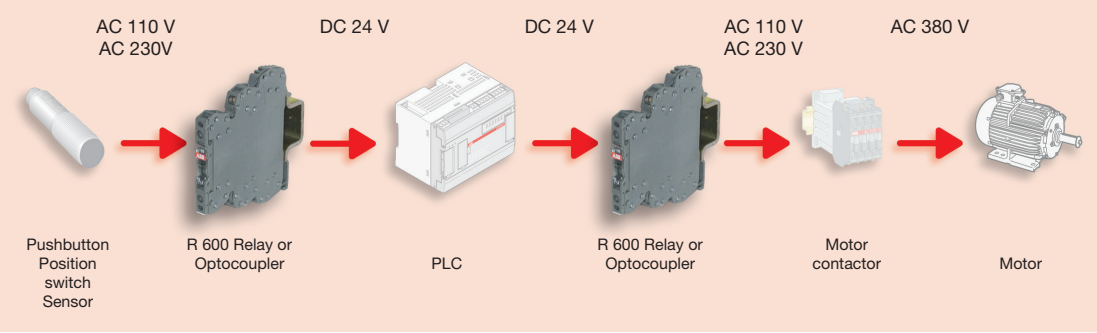

Interface Relays R600
Ordering details

R600

High level

Low level

R600 Relay		Type	Order code	Price	Pkg qty	Weight (1 pce) kg (lb)
Relay module 1 NO high level 6 mm spacing		RB 111 A-24VAC/DC	1SNA645014R2700		10	0.02 (0.44)
		RB 111 A-48-60VAC/DC	1SNA645015R2000			
		RB 111 A-115VAC/DC	1SNA645016R2100			
		RB 111 A-230VAC/DC	1SNA645017R2200			
Relay mod. 1 NO high level w/ safety switch 6 mm spacing		RB 111 AI-24VAC/DC	1SNA645063R0000			
Relay mod. 1 NO high level w/ contact protection 12 mm spacing		RB 111 AR-24VAC/DC	1SNA645018R0300		5	0.03 (0.44)
Relay mod. 1 NC high level w/ contact protection 12 mm spacing		RB 101 AR-24VAC/DC	1SNA645019R0400			
Relay module 1 NO high level 6 mm spacing		RBR 111 A-24VAC/DC	1SNA645514R2100		10	0.02 (0.44)
		RBR 111 A-48-60VAC/DC	1SNA645515R2200			
		RBR 111 A-115VAC/DC	1SNA645516R2300			
		RBR 111 A-230VAC/DC	1SNA645517R2400			
Relay mod. 1 NO high level w/ safety switch 6 mm spacing		RBR 111 AI-24VAC/DC	1SNA645563R0200			
Relay mod. 1 NO high level w/ contact protection 12 mm spacing		RBR 111 AR-24VAC/DC	1SNA645518R0500		5	0.03 (0.44)
Relay mod. 1 NC high level w/ contact protection 12 mm spacing		RBR 101 AR-24VAC/DC	1SNA645519R0600			
Relay module 1 SPDT high level		RB 121-5VDC	1SNA645034R2300		10	0.02 (0.44)
		RB 121-12VDC	1SNA645069R0100			
		RB 121-24VDC	1SNA645064R0100			
		RB 121 A-24VAC/DC	1SNA645001R0300			
		RB 121 A-48-60VAC/DC	1SNA645002R0400			
		RB 121 A-115VAC/DC	1SNA645003R0500			
		RB 121 A-230VAC/DC	1SNA645004R0400			
Relay module 1 SPDT high level		RB 121-5VDC	1SNA645534R2500			
		RB 121-12VDC	1SNA645569R0000			
		RB 121-24VDC	1SNA645564R0300			
		RB 121 A-24VAC/DC	1SNA645501R0500			
		RB 121 A-48-60VAC/DC	1SNA645502R0600			
		RB 121 A-115VAC/DC	1SNA645503R0700			
		RB 121 A-230VAC/DC	1SNA645504R0000			
Relay module 1 SPDT low level		RB 121-5VDC	1SNA645036R2500		10	0.02 (0.44)
		RB 121-12VDC	1SNA645037R2600			
		RB 121-24VDC	1SNA645065R0200			
		RB 121 A-24VAC/DC	1SNA645005R0700			
		RB 121 A-48-60VAC/DC	1SNA645006R0000			
		RB 121 A-115VAC/DC	1SNA645007R0100			
		RB 121 A-230VAC/DC	1SNA645008R1200			
Relay module 1 SPDT low level		RB 121-5VDC	1SNA645536R2700			
		RB 121-12VDC	1SNA645537R2000			
		RB 121-24VDC	1SNA645565R0400			
		RB 121 A-24VAC/DC	1SNA645505R0100			
		RB 121 A-48-60VAC/DC	1SNA645506R0200			
		RB 121 A-115VAC/DC	1SNA645507R0300			
		RB 121 A-230VAC/DC	1SNA645508R1400			



Accessories R600	Type	Order code	Price	Pkg qty	Weight (1 pce) kg (lb)
End section	BADH V0	1SNA116900R2700		50	
	BADL V0	1SNA399903R0200		50	
	BAM2 V0	1SNA399967R0100		50	
Seperator end section	SC 612	1SNA290474R0200		10	
Divisible shunt 10 poles	BJ 612-10	1SNA290488R0100		10	
Divisible shunt 70 poles	BJ 612-70	1SNA290489R0200		10	
Screw clamp distribution block sp. 12 mm	D4/12-3-3	1SNA645031R2000		5	
Spring clamp distribution block sp. 12 mm	D4/12-3R-3R	1SNA645531R2200		5	
Test plug DIA. 2 mm	FC2	1SNA645531R2200		10	
Marking method	RC65 / RC610	see marking			

Interface Relays R600
Ordering details

R600

High level

Low level

R600 Relay		Type	Order code	Price	Pkg qty	Weight (1 pce) kg (lb)
Relay mod. 1SPDT high level w/leakage current protec.		RB 121 AR-115VAC/DC	1SNA645046R0700		5	0.03 (0.066)
		RB 121 AR-230VAC/DC	1SNA645011R2400			
Relay mod. 1SPDT high level w/large coil voltage range		RB 121 A 60-230VAC/DC	1SNA645020R0100			
Relay mod. 1SPDT high level with switch		RB 121 AI-24VAC/DC	1SNA645032R2100			
Relay mod. 1SPDT high level with safety switch		RB 121 AI-24VAC/DC	1SNA645009R1300			
Relay module 1SPDT low level with switch		RB 121 AI-24VAC/DC	1SNA645033R2200			
Relay module 1SPDT low level with safety switch		RB 121 AI-24VAC/DC	1SNA645010R0700			
Relay mod. 1SPDT high level w/leakage current protec.		RB 121 AR-115VAC/DC	1SNA645546R0100			
		RB 121 AR-230VAC/DC	1SNA645511R2600			
Relay mod. 1SPDT high level w/large coil voltage range		RB 121 A 60-230VAC/DC	1SNA645520R0300			
Relay mod. 1SPDT high level with switch		RB 121 AI-24VAC/DC	1SNA645532R2300			
Relay mod. 1SPDT high level with safety switch		RB 121 AI-24VAC/DC	1SNA645509R1500			
Relay module 1SPDT low level with switch		RB 121 AI-24VAC/DC	1SNA645533R2400			
Relay module 1SPDT low level with safety switch		RB 121 AI-24VAC/DC	1SNA645510R0100			
Relay module 1 DPDT low level		RB 122 A-24VAC/DC	1SNA645012R2500		5	0.03 (0.066)
		RB 122 A-48-60VAC/DC	1SNA645040R1500			
		RB 122 A-115VAC/DC	1SNA645041R0200			
		RB 122 A-230VAC/DC	1SNA645013R2600			
Relay module 1 DPDT low level		RBR 122 A-24VAC/DC	1SNA645512R2700			
		RBR 122 A-48-60VAC/DC	1SNA645540R1700			
		RBR 122 A-115VAC/DC	1SNA645541R0400			
		RBR 122 A-230VAC/DC	1SNA645513R2000			



Accessories R600	Type	Order code	Price	Pkg qty	Weight (1 pce) kg (lb)
End section	BADH V0	1SNA116900R2700		50	
	BADL V0	1SNA399903R0200		50	
	BAM2 V0	1SNA399967R0100		50	
Seperator end section	SC 612	1SNA290474R0200		10	
Divisible shunt 10 poles	BJ 612-10	1SNA290488R0100		10	
Divisible shunt 70 poles	BJ 612-70	1SNA290489R0200		10	
Screw clamp distribution block sp. 12 mm	D4/12-3-3	1SNA645031R2000		5	
Spring clamp distribution block sp. 12 mm	D4/12-3R-3R	1SNA645531R2200		5	
Test plug DIA. 2 mm	FC2	1SNA645531R2200		10	
Marking method	RC65 / RC610	see marking			

Interface Relays R600
Connection diagrams



RB...121 - 5-12 V DC



RB...121 - 24 V DC



RB...121 A
48-60-115-230 V AC/DC



RB...121 A - 24 V AC/DC



RB...122 A
24-48-60 V AC/DC



RB...122 A
115-230 V AC/DC



RB...121 A



RB...121 AR



RB...121 AI



RB...121 AI



RB...121 A
48-60-115-230 V AC/DC



RB...121 - 12-24 V DC



RB...121 - 5 V DC



RB...121 A - 24 V AC/DC



RB...101 AR



RB...111 A48-60-115-230 V AC/DC



RB...111 A - 24 V AC/DC



RB...111 AR



RB...111 AI

Interface Relays R600
Technical information

Technical data

Relay : 1NO or 1NC high level contact 10 mA to 6 A - 6 mm .236“ or 12 mm .472“ spacing

		RB 111 A					RB 111 AI	RB 111 AR	RB 101 AR
Relay characteristics coil									
Rated voltage: +20%, -15% on DC ; 10%, -10% on AC		24 VAC/DC	48 VAC/DC	60 VAC/DC	115 VAC/DC	230 VAC/DC ± 10% on AC ± 10%-15% on DC	24 VAC/DC	24 VAC/DC	24 VAC/DC
Frequency		50/60 Hz							
Power		0.24 W	0.34 W	0.54 W	0.46 W	0.8 W	0.24 W	0.24 W	0.24 W
Rated current		10 mA	7 mA	9 mA	4 mA	3.5 mA	10 mA	10 mA	10 mA
Drop-out voltage at 20°C		4.5 V	8 V	8 V	17 V	27 V	4.5 V	4.5 V	4.5 V
Status device		green LED							
Relay characteristics contact									
Type		1 NO						1 NO + RC	
Voltage switching range min./max.		12 V / 250 VAC							
Current switching range min./max.		10 mA / 6 A							
Load switching range	AC1 min./max.	0.6 VA / 1500 VA (ohmic load)							
	DC1 min./max.	0.6 W / 140 W							
Number of on-load operations		10^5 on AC15							
Number of off-load operations		10^7							
Operation speed	F	5 ms			6 ms	7 ms	5 ms		
	O	8 ms			15 ms		8 ms		
Bounce		1.2 ms							
Insulation coil / contact		4000 V RMS					3800 V RMS		4000 V RMS
Resistance to shock coil / contact		4000 V RMS							
Insulation contact / contact		1000 V RMS							
Ambient temperature	storage	-40 °C to +80 °C							
	operating	-20 °C to +70 °C [1]							
Other characteristics		Screw clamp				Spring clamp			
Body material	grey	UL 94 V0							
Wire size	Solid wire	0.2 - 4 mm² (24-12 AWG)				0.2-2.5 mm² (24-12 AWG)			
	Stranded wire	0.22 - 2.5 mm² (24-12 AWG)							
Rated wire size		2.5 mm² (12 AWG)							
Wire stripping length		9 mm (0.354 in)							
Recommended screwdriver		3.5 mm (0.137 in)							
Protection		IP20 *NEMA1*							
Recommended torque		0.4-0.6 Nm (3.5-5.3 lb.in)							
Approvals		c UL us , CSA (pending) , GL , LRS , CE							
Reference standards		CEI 947-7-1 / CEI 947-1 / CEI 1131-2 (in relevant parts) / CEI 60664-1 / CEM : IRC 1000-4-2, 3, 4, 5, 6.							

[1] Over 55°C, blocks have to be mounted on horizontal rail with 10 mm spacing between each block. For vertical rail mounting use temperature is 15°C less decreased.



	DC12	AC12	DC13	AC15
24 V	6 A	6 A	1 A	3 A
110/120 V	0,3 A	6 A	0,2 A	3 A
220/230 V	0,2 A	6 A	0,1 A	3 A

Dimensional drawings



Screw clamp module



Spring clamp module

Interface Relays R600
Technical information

Technical data

Relay : 1 SPDT high level contact 10 mA to 6 A - 6 mm .236“

		RB 121			RB 121A				
Relay characteristics coil									
Rated voltage: +20%, -15% on DC ; 10%, -10% on AC		5 V DC	12 V DC	24 V DC	24 V AC/DC	48 V AC/DC	60 V AC/DC	115 V AC/DC	230 V AC/DC ± 10% on AC ± 10%-15% on DC
Frequency		-			50/60 Hz				
Power		0.2 W	0.2 W	0.28 W	0.24 W	0.33 W	0.54 W	0.46 W	0.8 W
Rated current		40 mA	16 mA	12 mA	10 mA	7 mA	9 mA	4 mA	3.5 mA
Drop-out voltage at 20°C		1.2 V	2.2 V	1.2 V	4.5 V	8 V	8 V	17 V	27 V
Status device		green LED							
Relay characteristics contact									
Type		1 SPDT							
Voltage switching range min./max.		12 V / 250 V AC							
Current switching range min./max.		10 mA / 6 A							
Load switching range	AC1 min./max.	0.6 VA / 1500 VA (ohmic load)							
	DC1 min./max.	0.6 W / 140 W							
Number of on-load operations		10^5 on AC15							
Number of off-load operations		10^7							
Operation speed	F	5 ms						6 ms	7 ms
	O	8 ms						15 ms	16 ms
Bounce		1.2 ms							
Insulation coil / contact		4000 V RMS							
Resistance to shock coil / contact		4000 V RMS							
Insulation contact / contact		1000 V RMS							
Ambient temperature	storage	-40 °C to -80 °C							
	operating	-20 °C to 70 °C [1]							
Other characteristics		**Screw clamp**			**Spring clamp**				
Body material	grey	UL 94 V0							
Wire size	Solid wire	0.2 - 4 mm² (24-12 AWG)			0.2-2.5 mm² (24-12 AWG)				
	Stranded wire	0.22 - 2.5 mm² (24-12 AWG)							
Rated wire size		2.5 mm² (12 AWG)							
Wire stripping length		9 mm (0.354 in)							
Recommended screwdriver		3.5 mm (0.137 in)							
Protection		IP20 *NEMA1*							
Recommended torque		0.4-0.6 Nm (3.5-5.3 lb.in)							
Approvals		c UL us (pending for 12 V DC) , CSA (pending), GL , LRS , CE							
Reference standards		CEI 947-7-1 / CEI 947-1 / CEI 1131-2 (in relevant parts) / CEI 60664-1 / CEM : IRC 1000-4-2, 3, 4, 5, 6.							

[1] Over 55°C, blocks have to be mounted on horizontal rail with 10 mm spacing between each block. For vertical rail mounting use temperature is 15°C less decreased.



	DC12	AC12	DC13	AC15
24 V	6 A	6 A	1 A	3 A
110/120 V	0,3 A	6 A	0,2 A	3 A
220/230 V	0,2 A	6 A	0,1 A	3 A

Dimensional drawings



Screw clamp module



Spring clamp module

Interface Relays R600
Technical information

Technical data

Relay : 1 SPDT low level with contact 1 mA upto 6 A - 6 m 0.236“ spacing

		RB 121			RB 121 A				
Relay characteristics coil									
Rated voltage: +20%, -15% on DC ; 10%, -10% on AC		5 V DC	12 V DC	24 V DC	24 VAC/DC	48 VAC/DC	60 V AC/DC	115 V AC/DC	230 V AC/DC ± 10% on AC ± 10%-15% on DC
Frequency					50/60 Hz				
Power		0.2 W	0.2 W	0.28 W	0.24 W	0.33 W	0.54 W	0.46 W	0.8 W
Rated current		40 mA	16 mA	12 mA	10 mA	7 mA	9 mA	4 mA	3.5 mA
Drop-out voltage at 20°C		1.2 V	2.2 V	1.2 V	4.5 V	8 V	8 V	17 V	27 V
Status device		green LED							
Relay characteristics contact									
Type		1 SPDT							
Voltage switching range min./max.		5 V / 250 V AC							
Current switching range min./max.		1 mA / 6 A							
Load switching range	AC1 min./max.	0.05 VA / 1500 VA (ohmic load)							
	DC1 min./max.	0.05 W / 140 W							
Number of on-load operations		10^5 on AC15							
Number of off-load operations		10^7							
Operation speed	F	5 ms	5 ms	5 ms	5 ms	5 ms	5 ms	6 ms	7 ms
	O	8 ms	8 ms	8 ms	8 ms	8 ms	8 ms	15 ms	16 ms
Insulation coil / contact		4000 V RMS							
Resistance to shock coil / contact		4000 V RMS							
Insulation contact / contact		1000 V RMS							
Ambient temperature	storage	-40 °C to -80 °C							
	operating	-20 °C to 70 °C [1]							
Other characteristics		**Screw clamp**				**Spring clamp**			
Body material	grey	UL 94 V0							
Wire size	Solid wire	0.2 - 4 mm² (24-12 AWG)				0.2-2.5 mm² (24-12 AWG)			
	Stranded wire	0.22 - 2.5 mm² (24-12 AWG)							
Rated wire size		2.5 mm² (12 AWG)							
Wire stripping length		9 mm (0.354 in)							
Recommended screwdriver		3.5 mm (0.137 in)							
Protection		IP20 *NEMA1*							
Recommended torque		0.4-0.6 Nm (3.5-5.3 lb.in)							
Approvals		c UL us (pending for 24 V DC) , CSA (pending) , GL , LRS , CE							
Reference standards		CEI 947-7-1 / CEI 947-1 / CEI 1131-2 (in relevant parts) / CEI 60664-1 / CEM : IRC 1000-4-2, 3, 4, 5, 6.							

[1] Over 55°C, blocks have to be mounted on horizontal rail with 10 mm spacing between each block. For vertical rail mounting use temperature is 15°C less decreased.



	DC12	AC12	DC13	AC15
24 V	6 A	6 A	1 A	3 A
110/120 V	0,3 A	6 A	0,2 A	3 A
220/230 V	0,2 A	6 A	0,1 A	3 A

Dimensional drawings



Screw clamp module



Spring clamp module

Interface Relays R600
Technical information

Technical data

Relay : 1 SPDT high level with switch or large coil voltage range or with leakage current protection 12 mm 0.472“ spacing
Relay : 1 SPDT low level with switch - 12 mm 0.472“ spacing

		RB 121 AR		RB 121AI	RB 121 AI		RB 121 AI
Relay characteristics coil							
Rated voltage: +20%, -15% on DC ; 10%, -10% on AC		115 V AC/DC	230 V AC/DC ± 10% on AC ± 10%-15% on DC	24 VAC/DC	24 VAC/DC		60 to 253 VAC/DC
Frequency		50/60 Hz					
Power		2 W	2.8 W	0.24 W	0.24 W		1 W
Rated current		18 mA	12 mA	10 mA	10 mA		4 mA max.
Drop-out voltage at 20°C		17 V	27 V	4.5 V	4.5 V		15 V
Permissible leakage current		1.6 mA	1 mA				
Status device		green LED					
Relay characteristics contact							
Type		1 SPDT					
Voltage switching range min./max.		12 V / 250 V AC			5 V / 250 V		12 V / 250 V
Current switching range min./max.		10 mA / 6 A					
Load switching range	AC1 min./max.	0.6 VA / 1500 VA (ohmic load)			0.05 VA / 1500 VA (ohmic load)		0.6 VA / 1500 VA (ohmic load)
	DC1 min./max.	0.6 W / 140 W			0.05 W / 140 W		0.6 W / 140 W
Number of on-load operations		10^5 on AC15					
Number of off-load operations		10^7					
Operation speed	F	6 ms	7 ms	5 ms	5 ms	5 ms	7 ms
	O	15 ms	16 ms	8 ms	8 ms	8 ms	20 ms
Insulation coil / contact		4000 V RMS					
Resistance to shock coil / contact		4000 V RMS					
Insulation contact / contact		1000 V RMS					
Ambient temperature	storage	-40 °C to -80 °C					
	operating	-20 °C to 70 °C [1]					
Other characteristics		Screw clamp			Spring clamp		
Body material	grey	UL 94 V0					
Wire size	Solid wire	0.2 - 4 mm² (24-12 AWG)			0.2-2.5 mm² (24-12 AWG)		
	Stranded wire	0.22 - 2.5 mm² (24-12 AWG)					
Rated wire size		2.5 mm² (12 AWG)					
Wire stripping length		9 mm (0.354 in)					
Recommended screwdriver		3.5 mm (0.137 in)					
Protection		IP20 *NEMA1*					
Recommended torque		0.4-0.6 Nm (3.5-5.3 lb.in)					
Approvals		c UL us, CSA (pending), GL , LRS , CE					
Reference standards		CEI 947-7-1 / CEI 947-1 / CEI 1131-2 (in relevant parts) / CEI 60664-1 / CEM : IRC 1000-4-2, 3, 4, 5, 6.					

[1] Over 55°C, blocks have to be mounted on horizontal rail with 10 mm spacing between each block. For vertical rail mounting use temperature is 15°C less decreased.



	DC12	AC12	DC13	AC15
24 V	6 A	6 A	1 A	3 A
110/120 V	0,3 A	6 A	0,2 A	3 A
220/230 V	0,2 A	6 A	0,1 A	3 A

Dimensional drawings



Screw clamp module



Spring clamp module

Interface Relays R600
Technical information

Technical data

Relay : 1 DPDT low level contact 1 mA to 8 A - 12 mm 0.472“ spacing

		RB ... 122A				
Relay characteristics coil						
Rated voltage: +20%, -15% on DC ; 10%, -10% on AC		24 V AC/DC	48 V AC/DC	60 V AC/DC	115 V AC/DC	230 V AC/DC ± 10% on AC ± 10%-15% on DC
Frequency		50/60 Hz				
Power		0.48 W	0.62 W	0.96 W	0.58 W	1.15 W
Rated current		20 mA	13 mA	16 mA	5 mA	5 mA
Drop-out voltage at 20°C		5.4 V	8.8 V	8.8 V	20 V	10 V
Status device		green LED				
Relay characteristics contact						
Type		1 DPDT				
Voltage switching range min./max.		5 V / 250 V DC - 250 V AC				
Current switching range min./max.		1 mA / 8 A		1 mA / 5 A		
Load switching range	AC1 min./max.	5 mVA / 1500 VA (ohmic load)				
	DC1 min./max.	5 mW / 192 W				
Number of on-load operations		10^5				
Number of off-load operations		2×10^7				
Operation speed	F	6 ms	10 ms	10 ms	6 ms	6 ms
	O	10 ms	14 ms	14 ms	15 ms	15 ms
Bounce		1 ms				
Insulation coil / contact		3500 V RMS				
Resistance to shock coil / contact		3500 V RMS				
Insulation contact / contact		3500 V RMS (between 2 contacts)				
Ambient temperature	storage	-40 °C to -80 °C				
	operating	-20 °C to 70 °C [1]				
Other characteristics		**Screw clamp**			**Spring clamp**	
Body material	grey	UL 94 V0				
Wire size	Solid wire	0.2 - 4 mm² (24-12 AWG)			0.2-2.5 mm² (24-12 AWG)	
	Stranded wire	0.22 - 2.5 mm² (24-12 AWG)				
Rated wire size		2.5 mm² (12 AWG)				
Wire stripping length		9 mm (0.354 in)				
Recommended screwdriver		3.5 mm (0.137 in)				
Protection		IP20 *NEMA1*				
Recommended torque		0.4-0.6 Nm (3.5-5.3 lb.in)				
Approvals		c UL us (pending for 12 V DC) , CSA (pending), GL , LRS , CE				
Reference standards		CEI 947-7-1 / CEI 947-1 / CEI 1131-2 (in relevant parts) / CEI 60664-1 / CEM : IRC 1000-4-2, 3, 4, 5, 6.				

[1] Over 55°C, blocks have to be mounted on horizontal rail with 10 mm spacing between each block. For vertical rail mounting use temperature is 15°C less decreased.

Max. DC load breaking capacity



Dimensional drawings



Screw clamp module



Spring clamp module

Interface Relays R500
Selection

Type	D 2,5/5-R121-24VDC	D 2,5/5-R121L-24VDC	D 2,5/5-R121AL-24VAC/DC	D 2,5/5-R121AL-48VAC/DC	D 2,5/5-R121BL-110VAC	D 2,5/5-R121BL-230VAC
Order number	1SNA 645 047 R0000	1SNA 645 547 R0200	1SNA 645 021 R2600	1SNA 645 521 R2000	1SNA 645 049 R1200	1SNA 645 549 R1400
Input voltage						
24 V DC	■	■	■			
48 V DC				■		
24 V AC			■			
48 V AC				■		
110 V AC					■	
230 V AC						■
Output rating						
10 mA - 6 A	■	■	■	■	■	■
Output contacts						
c/o	1	1	1	1	1	1
Type						
with LED		■	■	■	■	■
without LED	■					

R500 series

It is our range offering pluggable functions

- Spacing : 5.08 mm (the smallest in the market)
- Wire size : 2.5 mm² (4 mm² solid)
- Contact type : 1 SPDT from 10 mA to 6 A / 250 V
- Transistor : 30 mA to 100 mA
  MOS : 1 A to 2 A
  Triac : 1 A

Interface Relays R500
Ordering details

R500

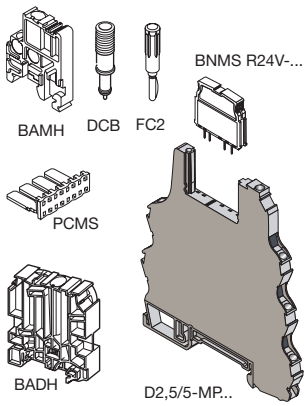

Description of R500 Relay	Type	Order code	Price	Pkg qty	Weight (1 pce) kg (lb)
Relay module 1 SPDT high level	D 2,5/5-R121-24VDC	1SNA607217R0200		10	0.032 (0.071)
Relay module with LED 1 SPDT high level	D 2,5/5-R121L-24VDC	1SNA607201R1300			
	D 2,5/5-R121AL-24VAC/DC	1SNA607231R0000			0.04 (0.088)
	D 2,5/5-R121AL-48VAC/DC	1SNA607232R0100			
	D 2,5/5-R121BL-110VAC	1SNA607264R1100			
	D 2,5/5-R121BL-230VAC	1SNA607265R1200			

R500 Accessories	Type	Order code	Price	Pkg qty	Weight (1 pce) kg (lb)
High end stop	BAMH 9,1 mm	1SNA114836R0000		50	
	BAMH V0 9,1 mm	1SNA194836R0100			
	BADH 12 mm	1SNA116900R2700			
Comb type jumper bar 2 to 22 poles		consult us			
Jumper bar 10 poles grey	PCMS V0	1SNA205523R2200		8	
Relay / Opto base	D 2,5/5-MP	1SNA607224R0100		10	0.028 (0.062)
Relay / Opto base with LED 24 VDC	D 2,5/5-MP-24VDC	1SNA607222R0700			
Relay / Opto base with LED 24 VAC/VDC	D 2,5/5-MP-24VAC/DC	1SNA607260R2100			0.036 (0.0794)
Relay / Opto base with LED 48 VAC/VDC	D 2,5/5-MP-48VAC/DC	1SNA607261R1600			
Relay / Opto base with LED 110 VAC	D 2,5/5-MP-110VAC	1SNA607266R1300			
Relay / Opto base with LED 230 VAC	D 2,5/5-MP-230VAC	1SNA607267R1400			
Plug relay 24 V 1 SPDT 10 mA to 6 A	BNMS R24V-1	1SNA031820R1400			
Plug relay 24 V 1 SPDT 1 mA to 6 A	BNMS R24V-2	1SNA031847R1300		4	
Test device blue	DCB [1]	1SNA105028R2100			
Test plug DIA. 2 mm	FC2	1SNA007865R2600		10	
Marking method	RC55	see marking			

[1] Only on top decks

High level

Connection diagrams



D 2,5/5-R121



D 2,5/5-R121L



D 2,5/5-R121AL-24V



D 2,5/5-R121AL-48V



D 2,5/5-R121BL

Interface Relays R500
Technical information

Technical data

Relay : 1 SPDT high level with contact 10 mA to 6 A - 5.08mm 0.200“ spacing

		D 2.5/5-R121	D 2.5/5-R121L	D 2.5/5-R121AL				D 2.5/5-R121BL	
Relay characteristics coil									
Rated voltage: +20%, -15% on DC ; 10%, -10% on AC		24 V DC	24 V DC	24 V AC	24 V DC	48 V AC	48 V DC	110 V AC	230 V AC
Frequency				50/60 Hz		50/60 Hz		50/60 Hz	50/60 Hz
Power		0.17 W	0.3 W	0.35 W	0.35 W	0.44 W	0.47 W	1.08 W	2.13 W
Rated current		7 mA	12 mA	12.4 mA	10 mA	7.6 mA	6.8 mA	8.4 mA	8 mA
Drop-out voltage at 20°C		2.4 V	2.4 V	4.8 V	4.8 V	10 V	10 V	25 V	45 V
Status device		green LED							
Relay characteristics contact									
Type		1 SPDT							
Voltage switching range min./max.		12 V / 250 V AC							
Current switching range min./max.		10 mA / 6 A							
Load switching range	AC1 min./max.	0.6 VA / 1500 VA (ohmic load)							
	DC1 min./max.	0.6 W / 140 W							
Number of on-load operations		10^5 on AC15							
Number of off-load operations		10 x 10^7							
Operation speed	F	5 ms	5 ms	5 ms	5 ms	5 ms	5 ms	6 ms	7 ms
	O	8 ms	8 ms	15 ms	15 ms	15 ms	15 ms	15 ms	15 ms
Insulation coil / contact		4000 V RMS							
Resistance to shock coil / contact		4000 V RMS							
Insulation contact / contact		1000 V RMS							
Ambient temperature	storage	-40 °C to -80 °C							
	operating	See derating curves							
Other characteristics									
Body material	grey	UL 94 V0							
Wire size	Solid wire	0.2 - 4 mm² (24-12 AWG)							
	Stranded wire	0.22 - 2.5 mm² (24-12 AWG)							
Rated wire size		2.5 mm² (12 AWG)							
Wire stripping length		10 mm (0.394 in)							
Recommended screwdriver		3.5 mm (0.137 in)							
Protection		IP20 *NEMA1*							
Recommended torque		0.4-0.6 Nm (3.5-5.3 lb.in)							
Approvals		c UL us (pending) , CE							
Reference standards		CEI 947-7-1 / CEI 947-1 / CEI 1131-2 (in relevant parts) / CEI 60664-1 / CEM : IRC 1000-4-2, 3, 4, 5, 6.							

	DC12	AC12	DC13	AC15
24 V	6 A	6 A	1 A	3 A
110/120 V	0,3 A	6 A	0,2 A	3 A
220/230 V	0,2 A	6 A	0,1 A	3 A





D 2,5/5-R121

Dimensional drawings



Optocouplers
Product group picture

5

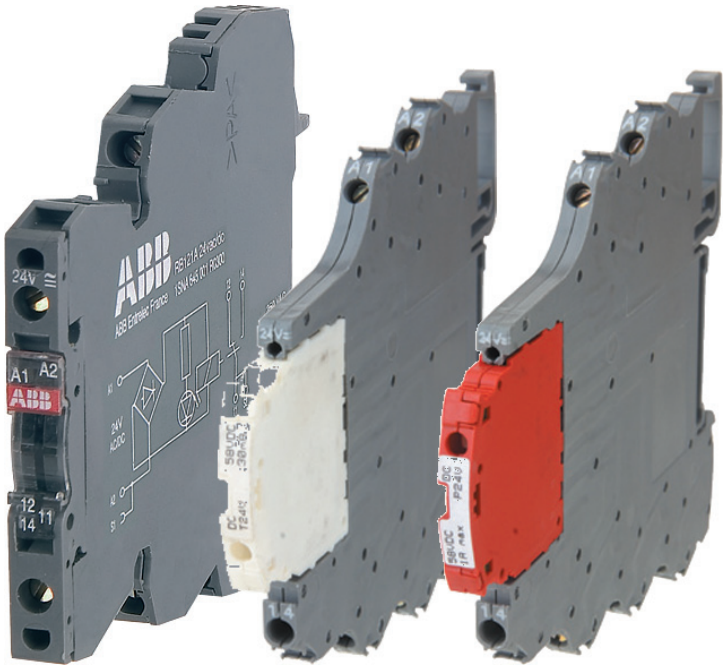

Optocouplers
Table of contents

Optocouplers

Optocouplers 5/39
Product group picture 5/39
Table of contents 5/40
R600 Optocouplers 5/41
Selection 5/41
Ordering details 5/43
Connection diagrams 5/44
Technical data 5/45
R500 Optocouplers 5/49
Selection 5/49
Ordering details 5/50
Connection diagrams 5/51
Technical data 5/52

R600 Optocouplers
Selection

5

Order number	1SNA 645 047 R0000	1SNA 645 547 R0200	1SNA 645 021 R2600	1SNA 645 521 R2000	1SNA 645 049 R1200	1SNA 645 549 R1400	1SNA 645 022 R2700	1SNA 645 522 R2100	1SNA 645 050 R1700	1SNA 645 550 R1100	1SNA 645 051 R0400	1SNA 645 025 R2200	1SNA 645 024 R2100	1SNA 645 551 R0600	1SNA 645 525 R2400	1SNA 645 524 R2300	1SNA 645 053 R0600	1SNA 645 553 R0000	1SNA 645 054 R0700	1SNA 645 058 R1300	1SNA 645 554 R0100	1SNA 645 558 R1500	1SNA 645 026 R2300	1SNA 645 059 R1400	1SNA 645 526 R2500	1SNA 645 559 R1600	1SNA 645 027 R2400	1SNA 645 029 R0600	1SNA 645 527 R2600	1SNA 645 529 R0000
Type	OBIC 0100 5-12VDC	OBRIC 0100 5-12VDC	OBIC 0100 24VDC	OBRIC 0100 24VDC	OBIC 0100 48-60VAC/DC	OBRIC 0100 48-60VAC/DC	OBIC 0100 115-230VAC/DC	OBRIC 0100 115-230VAC/DC	OBOC 1000-5-12VDC	OBROC 1000-5-12VDC	OBOC 1000-24VDC	OBOC 1500-24VAC/DC	OBOC 5000-24VDC	OBROC 1000-24VDC	OBROC 1500-24VAC/DC	OBROC 5000-24VDC	OBOC 1000-48-60VAC/DC	OBROC 1000-48-60VAC/DC	OBOC 1000-115VAC/DC	OBOC 5000-115VAC/DC	OBROC 1000-115VAC/DC	OBROC 5000-115VAC/DC	OBOC 1000-230VAC/DC	OBOC 5000-230VAC/DC	OBROC 1000-230VAC/DC	OBROC 5000-230VAC/DC	OBOA 1000-24VDC	OBOA 2000-24VDC	OBROA 1000-24VDC	OBROA 2000-24VDC
Input voltage																														
5 - 12 V DC	■	■							■	■																				
24 V DC			■	■							■	■	■	■	■	■											■	■	■	■
48 - 60 V DC					■	■											■	■												
115 - 230 V DC							■	■																						
115 V DC																			■	■	■	■								
230 V DC							■	■															■	■	■	■				
24 V AC												■			■															
48 - 60 V AC					■	■											■	■												
115-230 V AC							■	■																						
115 V AC																			■	■	■	■								
230 V AC																							■	■	■	■				
Output rating																														
100 mA	■	■	■	■	■	■	■	■																						
2 A									■	■	■	■		■	■		■	■	■		■		■		■			■		■
5 A													■			■				■		■		■		■				
1 A																											■		■	
Output voltage																														
58 V DC	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■				
400 V AC																											■	■	■	■
Terminal type																														
Screw	■		■		■		■		■		■	■	■				■		■	■			■	■			■	■		
Spring		■		■		■		■		■				■	■	■		■			■	■			■	■			■	■

R600 Optocouplers
Selection

OBOA 1000-48-60VAC/DC	1SNA 645 061 R0600			■					■							■		■	■	
OBROA 1000-48-60VAC/DC	1SNA 645 561 R0000			■					■							■		■		■
OBOA 1000-115VAC/DC	1SNA 645 062 R0700					■					■					■		■	■	
OBROA 1000-115VAC/DC	1SNA 645 562 R0100					■					■					■		■		■
OBOA 1000-230VAC/DC	1SNA 645 028 R0500						■					■				■		■	■	
OBROA 1000-230VAC/DC	1SNA 645 528 R0700						■					■				■		■		■

5

R600 Optocouplers
Ordering details

R600 Optocoupler		Type	Order code	Price	Pkg qty	Weight (1 pce) kg (lb)
Optocoupler module 100 mA/DC		OBIC 0100-5-12VDC	1SNA645047R0000		10	0.02 (0.44)
		OBIC 0100-24VDC	1SNA645021R2600			
		OBIC 0100-48-60VAC/DC	1SNA645049R1200			
		OBIC 0100-115-230VAC/DC	1SNA645022R2700			
Optocoupler module 100 mA/DC		OBRIC 0100-5-12VDC	1SNA645547R0200		10	0.02 (0.44)
		OBRIC 0100-24VDC	1SNA645521R2000			
		OBRIC 0100-48-60VAC/DC	1SNA645549R1400			
		OBRIC 0100-115-230VAC/DC	1SNA645522R2100			
Optocoupler module 2 A/DC		OBOC 1000-5-12VDC	1SNA645050R1700		10	0.02 (0.44)
		OBOC 1000-24VDC	1SNA645051R0400			
		OBOC 1500-24VAC/DC	1SNA645025R2200			
		OBOC 1000-48-60VAC/DC	1SNA645053R0600			
		OBOC 1000-115VAC/DC	1SNA645054R0700			
		OBOC 1000-230VAC/DC	1SNA645026R2300			
Optocoupler module 2 A/DC		OBROC 1000-5-12VDC	1SNA645550R1100		10	0.02 (0.44)
		OBROC 1000-24VDC	1SNA645551R0600			
		OBROC 1500-24VAC/DC	1SNA645525R2400			
		OBROC 1000-48-60VAC/DC	1SNA645553R0000			
		OBROC 1000-115VAC/DC	1SNA645554R0100			
		OBROC 1000-230VAC/DC	1SNA645526R2500			
Optocoupler module 5 A/DC		OBOC 5000-24VDC	1SNA645024R2100		10	0.02 (0.44)
		OBOC 5000-115VAC/DC	1SNA645058R1300			
		OBOC 5000-230VAC/DC	1SNA645059R1400			
Optocoupler module 5 A/DC		OBROC 5000-24VDC	1SNA645524R2300		10	0.02 (0.44)
		OBROC 5000-115VAC/DC	1SNA645558R1500			
		OBROC 5000-230VAC/DC	1SNA645559R1600			
Optocoupler module 1 A/AC 6 mm spacing		OBOA 1000-24VDC	1SNA645027R2400		10	0.03 (0.066)
		OBOA 1000-48-60VAC/DC	1SNA645061R0600			
		OBOA 1000-115VAC/DC	1SNA645062R0700			
		OBOA 1000-230VAC/DC	1SNA645028R0500			
Optocoupler module 2 A/AC 12 mm spacing		OBOA 2000-24VDC	1SNA645029R0600		5	0.03 (0.066)
Optocoupler module 1 A/AC 6 mm spacing		OBROA 1000-24VDC	1SNA645527R2600		10	0.03 (0.066)
		OBROA 1000-48-60VAC/DC	1SNA645561R0000			
		OBROA 1000-115VAC/DC	1SNA645562R0100			
		OBROA 1000-230VAC/DC	1SNA645528R0700			
Optocoupler module 2 A/AC 12 mm spacing		OBROA 2000-24VDC	1SNA645529R0000		5	0.03 (0.066)



Accessories	Type	Order code	Price	Pkg qty	Weight (1 pce) kg (lb)
End section	BADH V0	1SNA116900R2700		50	
	BADL V0	1SNA399903R0200		50	
	BAM2 V0	1SNA399967R0100		50	
Seperator end section	SC 612	1SNA290474R0200		10	
Divisible shunt 10 poles	BJ 612-10	1SNA290488R0100		10	
Divisible shunt 70 poles	BJ 612-70	1SNA290489R0200		10	
Screw clamp distribution block sp. 12 mm	D4/12-3-3	1SNA645031R2000		5	
Spring clamp distribution block sp. 12 mm	D4/12-3R-3R	1SNA645531R2200		5	
Test plug DIA. 2 mm	FC2	1SNA645531R2200		10	
Marking method	RC65 / RC610	see marking			

R600 Optocouplers
Connection diagrams



OB...IC 0100 - 5-12 V DC
115-230 V AC/DC



OB...IC 0100
24 V DC
24-48-60 V AC/DC



OB...OC 1000 - 5-12 V DC



OB...OC 1500 - 24 V AC/DC
OB...OC 1000
24 V DC
48-60-115-230 V AC/DC



OB...OC 5000
24 V DC
24-48-60-115-230 V AC/DC



OB...OA 1000
24 V DC
48-60-115-230 V AC/DC
OB...OA 2000 - 24 V DC

5

R600 Optocouplers
Technical data

Technical data

Optocoupler : 5 to 58 V DC output / 100 mA - 6 mm 0.236“ spacing

		OB...IC 0100						
Relay characteristics coil								
Input voltage: +20%, -15% on DC ; 10%, -10% on AC		5 V DC - 12 V DC		24 V DC	48 V AC/DC	60 V AC/DC	115 V AC/DC	230 V AC/DC
Frequency					50 / 60 Hz			
Input current AC/DC		5 mA	9 mA	4 mA	4 mA	5 mA	7 mA / 16 mA	11.5 mA / 25 mA
Pull-in voltage at Is=100%		4 V		15 V	25 V		60 V AC / 70 V DC	
Switching time C / O		10 µs / 500 µs						
Operating frequency		1000 Hz			5 ms / 20 ms		5 ms / 15 ms	
Permissible leakage current					20 Hz			
Output		0.9 mA		1 mA	0.9 mA		1.6 mA	
Output voltage		4.5 to 58 V DC						
Output current min.		1 mA						
Output current max.		100 mA						
Output leakage current at U_{max}		< 50 µA						
Redidual voltage at I max and U rated	typical	1 V						
	max	1.3 V						
Frequency on inductive load								
Isolation Input / Output	input / Output	2500 V RMS						
Temperature	storage	-40...+80 °C						
	operating	-20...+70 °C [1]						
Other characteristics		**Screw clamp**			**Spring clamp**			
Body material	grey	UL 94 V0						
Wire size	Solid wire	0.2 - 4 mm² (24-12 AWG)			0.2-2.5 mm² (24-12 AWG)			
	Stranded wire	0.22 - 2.5 mm² (24-12 AWG)						
Rated wire size		2.5 mm² (12 AWG)						
Wire stripping length		9 mm (0.354 in)						
Recommended screwdriver		3.5 mm (0.137 in)						
Protection		IP20 *NEMA1*						
Recommended torque		0.4-0.6 Nm (3.5-5.3 lb.in)						
Approvals		c UL us (pending for 12 V DC) , CSA (pending), GL , LRS , CE						
Reference standards		CEI 947-7-1 / CEI 947-1 / CEI 1131-2 (in relevant parts) / CEI 60664-1 / CEM : IRC 1000-4-2, 3, 4, 5, 6.						

[1] Over 55°C, blocks have to be mounted on horizontal rail with 10 mm spacing between each block. For vertical rail mounting use temperature is 15°C less decreased.

Dimensional drawings



Screw clamp module



Spring clamp module

R600 Optocouplers
Technical data

Technical data

Optocoupler : 5 to 58 V DC output / 2 A - 6 mm 0.236“ spacing

		OB...IC 0100			OB..OC 1500	OB...OC 1000			
Relay characteristics coil									
Input voltage: +20%, -15% on DC ; 10%, -10% on AC		5 V DC - 12 V DC		24 V DC	24 V AC/DC	48 V AC/DC	60 V AC/DC	115 V AC/ DC	230 V AC/ DC
Frequency					50 / 60 Hz				
Input current		5 mA	9 mA	4 mA	6.3 mA	4 mA	5.1 mA	4.2 mA	4 mA
Pull-in voltage at Is=100%		4 V		15 V	15 V	27 V		50 V	80 V
Switching time C / O		15 µs / 250 µs		30 µs / 400 µs	1 ms / 7 ms	5 ms / 20 ms		500 µs / 10 ms	1 ms / 15 ms
Operating frequency		2000 Hz		1000 Hz	60 Hz	20 Hz			
Permissible leakage current		1 mA		0.8 mA	0.9 mA	1 mA		0.3 mA	
Output									
Output voltage		4.5 to 58 V DC							
Output current min.		1 mA							
Output current max.		2 A							
Output leakage current at $U_{max.}$		< 50 µA							
Redidual voltage at I max and U rated	typical	0.1 V							
	max	0.5 V							
Frequency on inductive load									
Isolation Input / Output	input / Output	2500 V RMS							
Temperature	storage	-40...+80 °C							
	operating	-20...+70 °C [1]							
Other characteristics		**Screw clamp**				**Spring clamp**			
Body material	grey	UL 94 V0							
Wire size	Solid wire	0.2 - 4 mm² (24-12 AWG)				0.2-2.5 mm² (24-12 AWG)			
	Stranded wire	0.22 - 2.5 mm² (24-12 AWG)							
Rated wire size		2.5 mm² (12 AWG)							
Wire stripping length		9 mm (0.354 in)							
Recommended screwdriver		3.5 mm (0.137 in)							
Protection		IP20 *NEMA1*							
Recommended torque		0.4-0.6 Nm (3.5-5.3 lb.in)							
Approvals		c UL us (pending for 12 V DC) , CSA (pending), GL , LRS , CE							
Reference standards		CEI 947-7-1 / CEI 947-1 / CEI 1131-2 (in relevant parts) / CEI 60664-1 / CEM : IRC 1000-4-2, 3, 4, 5, 6.							

[1] Over 55°C, blocks have to be mounted on horizontal rail with 10 mm spacing between each block. For vertical rail mounting use temperature is 15°C less decreased.

Dimensional drawings



Screw clamp module



Spring clamp module

R600 Optocouplers
Technical data

Technical data

Optocoupler : 5 to 58 V DC output / 5 A - 6 mm 0.236“ spacing

		OB... OC 5000		
Input				
Input voltage		24 V DC	115 V AC/DC	230 V AC/DC
Frequency			50 / 60 Hz	50 / 60 Hz
Input current		5.4 mA	4.2 mA	4 mA
Pull-in voltage at Is=100%		12 V	50 V	80 V
Switching time C / O		30 µs / 400 µs	500 µs / 10 ms	1ms / 15 ms
Operating frequency		1000 Hz	50 Hz	35 Hz
Permissible leakage current		0.8 mA	0.3 mA	0.3 mA
Output				
Output voltage		4.5- 58 V DC		
Output current min.		25 mA		
Output current max.		1 A		
Output leakage current at $U_{max.}$		< 0.50 mA		
Redidual voltage at I max and U rated	typical	1 V		
	max	1.6 V		
Frequency on inductive load		See Note 1		
Isolation Input / Output	input / Output	2500 V RMS		
Temperature				
Ambient temperature	storage	-40...+80 °C		
	operating	See derating curve		
Other characteristics				
Body material	grey	UL 94 V0		
Wire size	Solid wire	0.2 - 4 mm² (24-12 AWG)		
	Stranded wire	0.22 - 2.5 mm² (24-12 AWG)		
Rated wire size		2.5 mm² (12 AWG)		
Wire stripping length		10 mm (0.394 in)		
Recommended screwdriver		3.5 mm (0.137 in)		
Protection		IP20 *NEMA1*		
Recommended torque		0.4-0.6 Nm (3.5-5.3 lb.in)		
Approvals		c UL us (pending), CE		
Reference standards		CEI 947-7-1 / CEI 947-1 / CEI 1131-2 (in relevant parts) / CEI 60664-1 / CEM : IRC 1000-4-2, 3, 4, 5, 6.		

Dimensional drawings



Screw clamp module



Spring clamp module

R600 Optocouplers
Technical data

Technical data

Optocoupler : 24 to 400 V AC output / 2 A max. - 6 mm or 12 mm spacing

		OB...OA 1000					OB...OA 2000
Relay characteristics coil							
Input voltage: +20%, -15% on DC ; 10%, -10% on AC		24 V DC	48 V AC/DC	60 V AC/DC	115 V AC/DC	230 V AC/DC	24 V DC
Frequency			50/60 Hz				
Input current		3.6 mA	4.3 mA	5.5 mA	4.15 mA	4.6 mA	3.6 mA
Pull-in voltage at Is=100%		14 V	15 V	18 V	60 V	135 V	14 V
Switching time C / O		150 µs / 1 ms	3 ms / 30 ms		2.2 ms / 18 ms	2.5 ms / 25 ms	150 µs / 1 ms
Operating frequency		500 Hz	20 Hz		25 Hz	20 Hz	500 Hz
Permissible leakage current		1 mA					
Output							
Output voltage		24-58 V AC					
Frequency		50/60 Hz					
Output current min.		25 mA					
Output current max.		1 A					2 mA
Output leakage current at $U_{max.}$		< 0.50 mA					
Redidual voltage at I max and U rated	typical	1 V					
	max	1.6 V					
Frequency on inductive load							
Isolation Input / Output	input / Output	2500 V RMS					
Temperature	storage	-40...+80 °C					
	operating	-20...+70 °C [1]					
Other characteristics		Screw clamp			Spring clamp		
Body material	grey	UL 94 V0					
Wire size	Solid wire	0.2 - 4 mm² (24-12 AWG)			0.2-2.5 mm² (24-12 AWG)		
	Stranded wire	0.22 - 2.5 mm² (24-12 AWG)					
Rated wire size		2.5 mm² (12 AWG)					
Wire stripping length		9 mm (0.354 in)					
Recommended screwdriver		3.5 mm (0.137 in)					
Protection		IP20 *NEMA1*					
Recommended torque		0.4-0.6 Nm (3.5-5.3 lb.in)					
Approvals		c UL us (pending for 12 V DC) , CSA (pending), GL , LRS , CE					
Reference standards		CEI 947-7-1 / CEI 947-1 / CEI 1131-2 (in relevant parts) / CEI 60664-1 / CEM : IRC 1000-4-2, 3, 4, 5, 6.					

[1] Over 55°C, blocks have to be mounted on horizontal rail with 10 mm spacing between each block. For vertical rail mounting use temperature is 15°C less decreased.

Dimensional drawings



Screw clamp module



Spring clamp module

R500 Optocouplers
Selection

Order number	1SNA 607 274 R1300	1SNA 607 210 R1700	1SNA 607 211 R0400	1SNA 607 275 R1400	1SNA 607 212 R0500	1SNA 607 213 R0600	1SNA 607 214 R0700	1SNA 607 215 R0000	1SNA 607 203 R1500	1SNA 607 204 R1600	1SNA 607 205 R1700	1SNA 607 206 R1000	1SNA 607 207 R1100	1SNA 607 250 R2700	1SNA 607 251 R1400	1SNA 607 270 R2300	1SNA 607 271 R1000	1SNA 607 208 R2200	1SNA 607 209 R2300	1SNA 607 255 R1000	1SNA 607 256 R1100	1SNA 607 272 R1100	1SNA 607 273 R1200	1SNA 607 238 R1700	1SNA 607 240 R2500	1SNA 607 241 R1200	1SNA 607 268 R2500	1SNA 607 269 R2600
Type	D 2,5/5-OBIC-0030-5VDC	D 2,5/5-OBIC-0030-24VDC	D 2,5/5-OBIC-0030-48VDC	D 2,5/5-OBIC-0030-125VDC	D 2,5/5-OBIA-0030-24VAC	D 2,5/5-OBIA-0030-48VAC	D 2,5/5-OBIA-0030-115VAC	D 2,5/5-OBIA-0030-230VAC	D 2,5/5-OBOC-0100-5VDC	D 2,5/5-OBOC-0100-24VDC	D 2,5/5-OBOC-0100-48VDC	D 2,5/5-OBOC-1000-5VDC	D 2,5/5-OBOC-1000-24VDC	D 2,5/5-OBOC-1000-24VAC/DC	D 2,5/5-OBOC-1000-48VAC/DC	D 2,5/5-OBOC-1000-110VAC	D 2,5/5-OBOC-1000-230VAC	D 2,5/5-OBOC-2000-5VDC	D 2,5/5-OBOC-2000-24VDC	D 2,5/5-OBOC-2000-24VAC/DC	D 2,5/5-OBOC-2000-48VAC/DC	D 2,5/5-OBOC-2000-110VAC	D 2,5/5-OBOC-2000-230VAC	D 2,5/5-OBOA-1000-24VDC	D 2,5/5-OBOA-1000-24VAC/DC	D 2,5/5-OBOA-1000-48VAC/DC	D 2,5/5-OBOA-1000-110VAC	D 2,5/5-OBOA-1000-230VAC
Input voltage																												
5 V DC	■								■			■						■										
24 V DC		■								■			■	■					■	■				■	■			
48 V DC			■								■				■						■					■		
125 V DC				■																								
24 V AC					■									■						■					■			
48 V AC						■									■						■					■		
110 V AC																■						■					■	
115 V AC							■																					
230 V AC								■									■						■					■
Output rating																												
30 mA	■	■	■	■	■	■	■	■																				
100 mA									■	■	■																	
2 A																		■	■	■	■	■	■					
1 A												■	■	■	■	■	■							■	■	■	■	■
Output voltage																												
30 V DC																		■	■	■	■	■	■					
58 V DC	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■											
253 V AC																								■	■	■	■	■
Type																												
input optocoupler	■	■	■	■	■	■	■	■																				
output optocoupler									■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■

R500 Optocouplers
Ordering details

Description of R600 Optocoupler	Type	Order code	Price	Pkg qty	Weight (1 pce) kg (lb)
Optocoupler module 30 mA/DC	D 2,5/5-OBIC-0030-5VDC	1SNA607274R1300		1	0.032 (0.071)
	D 2,5/5-OBIC-0030-24VDC	1SNA607210R1700			
	D 2,5/5-OBIC-0030-48VDC	1SNA607211R0400			
	D 2,5/5-OBIC-0030-125VDC	1SNA607275R1400			
Optocoupler module 30 mA/AC	D 2,5/5-OBIA-0030-24VAC	1SNA607212R0500		1	0.032 (0.071)
	D 2,5/5-OBIA-0030-48VAC	1SNA607213R0600			
	D 2,5/5-OBIA-0030-115VAC	1SNA607214R0700			
	D 2,5/5-OBIA-0030-230VAC	1SNA607215R0000			
Optocoupler module 100 mA/DC	D 2,5/5-OBOC-0100-5VAC	1SNA607203R1500		1	0.032 (0.071)
	D 2,5/5-OBOC-0100-24VAC	1SNA607204R1600			
	D 2,5/5-OBOC-0100-48VAC	1SNA607205R1700			
Optocoupler module 1 A/DC	D 2,5/5-OBOC-1000-5VDC	1SNA607206R1000		1	0.04 (0.088)
	D 2,5/5-OBOC-1000-24VDC	1SNA607207R1100			
	D 2,5/5-OBOC-1000-24VAC/DC	1SNA607250R2700			
	D 2,5/5-OBOC-1000-48VAC/DC	1SNA607251R1400			
	D 2,5/5-OBOC-1000-110VAC	1SNA607270R2300			
	D 2,5/5-OBOC-1000-230VAC	1SNA607271R1000			
Optocoupler module 2 A/DC	D 2,5/5-OBOC-2000-5VDC	1SNA607208R2200		1	0.04 (0.088)
	D 2,5/5-OBOC-2000-24VDC	1SNA607209R2300			
	D 2,5/5-OBOC-2000-24VAC/DC	1SNA607255R1000			
	D 2,5/5-OBOC-2000-48VAC/DC	1SNA607256R1100			
	D 2,5/5-OBOC-2000-110VAC	1SNA607272R1100			
	D 2,5/5-OBOC-2000-230VAC	1SNA607273R1200			
Optocoupler module 1 A/DC	D 2,5/5-OBOA-1000-24VAC	1SNA607238R1700		1	0.032 (0.071)
	D 2,5/5-OBOA-1000-24VAC/DC	1SNA607240R2500			0.04 (0.088)
	D 2,5/5-OBOA-1000-48VAC/DC	1SNA607241R1200			
	D 2,5/5-OBOA-1000-110VAC	1SNA607268R2500			
	D 2,5/5-OBOA-1000-230VAC	1SNA607269R2600			

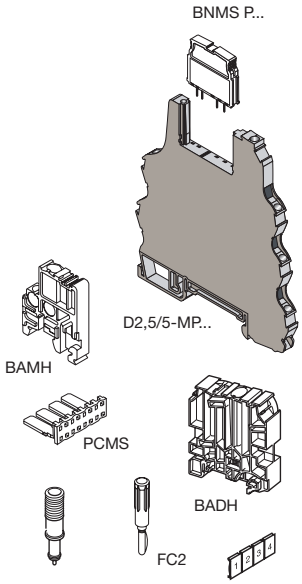

Description of Accessories	Type	Order code	Price	Pkg qty	Weight (1 pce) kg (lb)
High end stop	BAMH 9.1 mm	1SNA114836R0000		50	
	BAMH V0 9.1 mm	1SNA194836R0100			
	BADH 12 mm	1SNA116900R2700			
Comb type jumper bar 2 to 22 poles		consult us			
Jumper bar 10 poles grey	PCMS V0	1SNA205523R2200		8	
Input opto base	D 2.5-5-MP1	1SNA607223R0000		10	0.028 (0.062)
Plug OBIC 5 V white	BNMS T5V-1	1SNA031831R0300		4	
Plug OBIC 24 V white	BNMS T24V-1	1SNA031800R2100			
Plug OBIC 48 V white	BNMS T48V-1	1SNA031801R1600			
Plug OBIC 125 V white	BNMS T125V-1	1SNA031845R1100			
Test device blue	DCB (1)	1SNA105028R2100		10	
Test plug DIA 2 mm	FC2	1SNA105028R2100			
Marking method	RC55	see marking			

R500 Optocouplers
Connection diagrams



D 2,5/5-OBIC-0030



D 2,5/5-OBIA-0030



D 2,5/5-OBOC-0100

5



D 2,5/5-OBOC-1000
24/48 VAC/DC
110/230 VAC



D 2,5/5-OBOC-1000 5/24 VDC



D 2,5/5-OBOC-2000



D 2,5/5-OBOA-1000

R500 Optocouplers
Technical data

Technical data

Pluggable optocoupler : 5 to 58 V DC output / 30 mA - 5.08 mm 0.200“ spacing

		D 2,5/5-OBIC-0030			
Input					
Input voltage		4.5 V to 5.5 VDC	19.2 V to 27.6 VDC	38.4 V to 55.2 VDC	93.5 V to 140 VDC
Input current		6 mA	5 mA	4.1 mA	3 mA
Pull-in voltage at Is=100%		3.5 V	12 V	21 V	50 V
Switching time C / O		20 µs / 1.3 ms			
Operating frequency		400 Hz			
Permissible leakage current			1 mA	0.8 mA	
Output					
Output voltage		4.5 to 58 V DC			
Output current min.		0.5 mA			
Output current max.		30 mA			
Output leakage current at U_{max}		< 50 µA			
Redidual voltage at I max and U rated	typical	2.3 V DC			
	max	2.7 V DC			
Frequency on inductive load					
Isolation Input / Output	input / Output	2500 V RMS			
Ambient temperature	storage	-40...+80 °C			
	operating	See derating curve			
Other characteristics					
Body material	grey	UL 94 V0			
Wire size	Solid wire	0.2 - 4 mm² (24-12 AWG)			
	Stranded wire	0.22 - 2.5 mm² (24-12 AWG)			
Rated wire size		2.5 mm² (12 AWG)			
Wire stripping length		9 mm (0.354 in)			
Recommended screwdriver		3.5 mm (0.137 in)			
Protection		IP20 *NEMA1*			
Recommended torque		0.4-0.6 Nm (3.5-5.3 lb.in)			
Approvals		c UL us (pending), CE			
Reference standards		CEI 947-7-1 / CEI 947-1 / CEI 1131-2 (in relevant parts) / CEI 60664-1 / CEM : IRC 1000-4-2, 3, 4, 5, 6.			

Derating curve

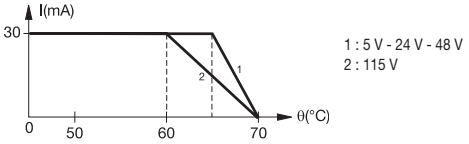

D 2,5/5-OBIC-0030

Dimensional drawings



R500 Optocouplers
Technical data

Technical data

Pluggable optocoupler : 5 to 58 V DC output / 30 mA - 5.08 mm 0.200“ spacing

		D 2,5/5-OBIA-0030			
Input					
Input voltage		20.4 to 26.4 V AC	40.8 V to 52.8 V AC	98 V to 126.5 V AC	195.5 V to 253 V AC
				50 / 60 Hz	50 Hz
Input current		8.5 mA	4.5 mA	8 mA	7 mA
Pull-in voltage at Is=100%		13 V	22 V	50 V	95 V
Switching time C / O		6 ms / 10 ms			
Operating frequency		30 Hz			
Permissible leakage current		1 mA		2 mA	
Output					
Output voltage		4.5 V to 58 V DC			
Output current min.		0.5 mA			
Output current max.		30 mA			
Output leakage current at $U_{max.}$		< 50 µA			
Redidual voltage at I max and U rated	typical	2.3 V DC			
	max	2.7 V DC			
Frequency on inductive load		2500 V RMS			
Isolation Input / Output	input / Output				
Temperature					
Ambient temperature	storage	-40...+80 °C			
	operating	See derating curve			
Other characteristics					
Body material	grey	UL 94 V0			
Wire size	Solid wire	0.2 - 4 mm² (24-12 AWG)			
	Stranded wire	0.22 - 2.5 mm² (24-12 AWG)			
Rated wire size		2.5 mm² (12 AWG)			
Wire stripping length		9 mm (0.354 in)			
Recommended screwdriver		3.5 mm (0.137 in)			
Protection		IP20 *NEMA1*			
Recommended torque		0.4-0.6 Nm (3.5-5.3 lb.in)			
Approvals		c UL us (pending), CE			
Reference standards		CEI 947-7-1 / CEI 947-1 / CEI 1131-2 (in relevant parts) / CEI 60664-1 / CEM : IRC 1000-4-2, 3, 4, 5, 6.			

Derating curve

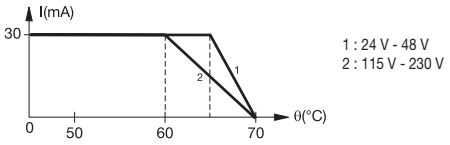

D 2,5/5-OBIA-0030

Dimensional drawings



R500 Optocouplers
Technical data

Technical data

Pluggable optocoupler : 5 to 58 V DC output / 100 mA - 5.08 mm 0.200“ spacing

		D 2,5/5-OBIA-0100 5 V DC / 24 V DC		D 2,5/5-OBIA-0100 48 V DC
Input				
Input voltage		4.5 V to 5.5 V DC	20.4 V to 28.8 V DC	40.8 V to 57.6 V DC
Frequency				
Input current		8.5 mA	4.8 mA	3.9 mA
Pull-in voltage at Is=100%		2.9 V DC	16 V DC	26 V DC
Switching time C / O		20 µs / 1.3 ms		
Operating frequency		400 Hz		
Permissible leakage current		1 mA		
Output				
Output voltage		4.5 V to 58 V DC		
Output current min.		1 mA		
Output current max.		100 mA		
Output leakage current at $U_{max.}$		< 50 µA		
Redidual voltage at I max and U rated	typical	1 V DC		
	max	1.3 V DC		
Frequency on inductive load		See Note 1		
Isolation Input / Output	input / Output	2500 V RMS		
Temperature				
Ambient temperature	storage	-40...+80 °C		
	operating	See derating curve		
Other characteristics				
Body material	grey	UL 94 V0		
Wire size	Solid wire	0.2 - 4 mm² (24-12 AWG)		
	Stranded wire	0.22 - 2.5 mm² (24-12 AWG)		
Rated wire size		2.5 mm² (12 AWG)		
Wire stripping length		9 mm (0.354 in)		
Recommended screwdriver		3.5 mm (0.137 in)		
Protection		IP20 *NEMA1*		
Recommended torque		0.4-0.6 Nm (3.5-5.3 lb.in)		
Approvals		c UL us (pending), CE		
Reference standards		CEI 947-7-1 / CEI 947-1 / CEI 1131-2 (in relevant parts) / CEI 60664-1 / CEM : IRC 1000-4-2, 3, 4, 5, 6.		

Note 1 :

$F_{max} = (1\text{-}0{,}007 \times U_s) / (L \times I_s^2)$

or

$F_{max} = (1\text{-}0{,}007 \times U_s) / (P \times \frac{L}{R})$

U_s = Output voltage
I_s = Output current
L = Inductance of load
P = Power of load
R = Resistance of load

Derating curve



D 2,5/5-OBOC-0100 5 V DC / 24 V DC



D 2,5/5-OBOC-0100 48 V DC

Dimensional drawings



R500 Optocouplers
Technical data

Technical data

Pluggable optocoupler : 5 to 58 V DC output / 1 A - 5.08 mm 0.200“ spacing

		D 2,5/5-OBOC-1000 5/24 V DC		D 2,5/5-OBOC-1000 24/48 V AC/DC				D 2,5/5-OBOC-1000 110/230 V AC	
Input		5 V DC	24 V DC	24 V AC	24 V DC	48 V AC	48 V DC	110 V AC	230 V AC
Input voltage		4.5 - 5.5 V DC	20.4 - 28.8 V DC	24 ± 10 %	20.4 - 28.8 V DC	48 ± 10 %	40.8 to 57.6 V DC	110 ± 10 %	230 ± 10 %
Frequency				50 / 60 Hz		50 / 60 Hz		50 / 60 Hz	50 / 60 Hz
Input current		12.3 mA	6.7 mA	10.5 mA	8 mA	6.8 mA	5.8 mA	8.5 mA	7.5 mA
Pull-in voltage at Is=100%		3.5 V DC	10 V DC						
Switching time C / O		20 / 250 µs	50 / 350 µs	15 / 13 ms	5 / 13 ms	15 / 15 ms	6 / 25 ms	15 / 15 ms	15 / 15 ms
Operating frequency		2000 Hz	1500 Hz	20 Hz					
Permissible leakage current									
Output									
Output voltage		4.5 V to 58 V DC							
Output current min.		1 mA							
Output current max.		1 A							
Output leakage current at $U_{max.}$		< 50 µA							
Redidual voltage at I max and U rated	typical	0.1 V DC							
	max	0.5 V DC							
Frequency on inductive load		See Note 1							
Isolation Input / Output	input / Output	2500 V RMS							
Temperature									
Ambient temperature	storage	-40...+80 °C							
	operating	See derating curve							
Other characteristics									
Body material	grey	UL 94 V0							
Wire size	Solid wire	0.2 - 4 mm² (24-12 AWG)							
	Stranded wire	0.22 - 2.5 mm² (24-12 AWG)							
Rated wire size		2.5 mm² (12 AWG)							
Wire stripping length		10 mm (0.394 in)							
Recommended screwdriver		3.5 mm (0.137 in)							
Protection		IP20 *NEMA1*							
Recommended torque		0.4-0.6 Nm (3.5-5.3 lb.in)							
Approvals		c UL us (pending), CE							
Reference standards		CEI 947-7-1 / CEI 947-1 / CEI 1131-2 (in relevant parts) / CEI 60664-1 / CEM : IRC 1000-4-2, 3, 4, 5, 6.							

Note 1 :

Fmax = (1-0,007 x Us) / (L x Is²)

or

Fmax = (1-0,007 x Us) / (P x $\frac{L}{R}$)

Us = Output voltage
Is = Output current
L = Inductance of load
P = Power of load
R = Resistance of load

Derating curve



Dimensional drawings



R500 Optocouplers
Technical data

Technical data

Pluggable optocoupler : 5 to 30 V DC output / 2 A - 5.08 mm 0.200“ spacing

		D 2,5/5-OBOC-2000 5/24 V DC		D 2,5/5-OBOC-2000 24/48 V AC/DC				D 2,5/5-OBOC-2000 110/230 V AC	
Input		5 V DC	24 V DC	24 V AC	24 V DC	48 V AC	48 V DC	110 V AC	230 V AC
Input voltage		4.5 - 5.5 V DC	20.4 - 28.8 V DC	24 ± 10 %	20.4 - 28.8 V DC	48 ± 10 %	40.8 to 57.6 V DC	110 ± 10 %	230 ± 10 %
Frequency				50 / 60 Hz		50 / 60 Hz		50 / 60 Hz	50 / 60 Hz
Input current		12.3 mA	6.7 mA	10.5 mA	8 mA	6.8 mA	5.8 mA	8.5 mA	7.5 mA
Pull-in voltage at Is=100%		3.5 V DC	10 V DC						
Switching time C / O		20 / 250 µs	50 / 350 µs	15 / 13 ms	5 / 13 ms	15 / 15 ms	6 / 25 ms	15 / 15 ms	15 / 15 ms
Operating frequency		2000 Hz	1500 Hz	20 Hz					
Permissible leakage current									
Output									
Output voltage		4.5 V to 58 V DC							
Output current min.		1 mA							
Output current max.		2 A							
Output leakage current at $U_{max.}$		< 50 µA							
Redidual voltage at I max and U rated	typical	0.1 V DC							
	max	0.5 V DC							
Frequency on inductive load		See Note 1							
Isolation Input / Output	input / Output	2500 V RMS							
Temperature									
Ambient temperature	storage	-40...+80 °C							
	operating	See derating curve							
Other characteristics									
Body material	grey	UL 94 V0							
Wire size	Solid wire	0.2 - 4 mm² (24-12 AWG)							
	Stranded wire	0.22 - 2.5 mm² (24-12 AWG)							
Rated wire size		2.5 mm² (12 AWG)							
Wire stripping length		10 mm (0.394 in)							
Recommended screwdriver		3.5 mm (0.137 in)							
Protection		IP20 *NEMA1*							
Recommended torque		0.4-0.6 Nm (3.5-5.3 lb.in)							
Approvals		c UL us (pending), CE							
Reference standards		CEI 947-7-1 / CEI 947-1 / CEI 1131-2 (in relevant parts) / CEI 60664-1 / CEM : IRC 1000-4-2, 3, 4, 5, 6.							

Note 1 :

$$Fmax = (1-0{,}012 \times Us) / (L \times Is^2)$$

or

$$Fmax = (1-0{,}012 \times Us) / (P \times \frac{L}{R})$$

Us = Output voltage
Is = Output current
L = Inductance of load
P = Power of load
R = Resistance of load

Derating curve



Dimensional drawings



R500 Optocouplers
Technical data

Technical data

Pluggable optocoupler : 24 to 253 V AC output / 1 A - 5.08 mm 0.200“ spacing

		D 2,5/5-... 24 V DC	D 2,5/5-OBOA-1000 24 V AC/DC - 48 V AC/DC				D 2,5/5-OBOA-1000 110 V AC - 230 V AC	
Input		24 V DC	24 V AC	24 V DC	48 V AC	48 V DC	110 V AC	230 V AC
Input voltage		20.4 - 28.8 V DC	24 ± 10 %	20.6 - 28.8 V DC	48 ± 10 %	40.8 -57.6 V DC	110 ± 10 %	230 ± 10 %
Frequency			50 / 60 Hz		50 / 60 Hz		50 / 60 Hz	50 / 60 Hz
Input current		4 mA	10 mA	7 mA	6 mA	5 mA	8 mA	7.5 mA
Pull-in voltage at Is=100%								
Switching time C / O		10/20 ms	20/20 ms	10/20 ms	20/20 ms	10/20 ms	20/20 ms	20/20 ms
Operating frequency		15 Hz						
Permissible leakage current								
Output								
Output voltage		24-253 V AC - 50/60 Hz						
Output current min.		25 mA						
Output current max.		1 A						
Output leakage current at U_{max}		< 0.50 mA						
Redidual voltage at I max and U rated	typical	1 V						
	max	1.6 V						
Frequency on inductive load		See Note 1						
Isolation Input / Output	input / Output	2500 V RMS						
Temperature								
Ambient temperature	storage	-40...+80 °C						
	operating	See derating curve						
Other characteristics								
Body material	grey	UL 94 V0						
Wire size	Solid wire	0.2 - 4 mm² (24-12 AWG)						
	Stranded wire	0.22 - 2.5 mm² (24-12 AWG)						
Rated wire size		2.5 mm² (12 AWG)						
Wire stripping length		10 mm (0.394 in)						
Recommended screwdriver		3.5 mm (0.137 in)						
Protection		IP20 *NEMA1*						
Recommended torque		0.4-0.6 Nm (3.5-5.3 lb.in)						
Approvals		c UL us (pending), CE						
Reference standards		CEI 947-7-1 / CEI 947-1 / CEI 1131-2 (in relevant parts) / CEI 60664-1 / CEM : IRC 1000-4-2, 3, 4, 5, 6.						

Note 1 :

$Fmax = (1-0{,}012 \times Us) / (L \times Is^2)$

or

$Fmax = (1-0{,}012 \times Us) / (P \times \frac{L}{R})$

Us = Output voltage
Is = Output current
L = Inductance of load
P = Power of load
R = Resistance of load

Derating curve



Dimensional drawings



Interface Relays and Optocouplers Accessories
Table of Contents

Interface Relays and Optocouplers Accessories	
Table of Contents	5/58
R500 series component holder terminal blocks	5/59
Input optocoupler plugs	5/60
Transistor or MOS output optocoupler plugs	5/61
MOS or Triac output optocoupler plugs	5/62
Relay or analog plugs, fuse and strap plugs	5/63
Accessories	5/64
Accessories	5/65
Marking	5/66

Terminal blocks component holder

Base for pluggable plug R500 Series

DIN 3

End stop	th. 9 mm	BADL	V0	1SNA 399 903 R0200
End stop	th. 9,1 mm	BAM	V2	1SNA 103 002 R2600
End stop	th. 9,1 mm	BAM V0	V0	1SNA 199 306 R0300
Rail	35 x 7,5 x 1	PR3.Z2		1SNA 174 300 R1700
Rail	35 x 15 x 2,3	PR4		1SNA 168 500 R1200
Rail	35 x 15 x 1,5	PR5		1SNA 168 700 R2200

D 2,5/5-MP

Spacing 5,08 mm *(.200")*





Relay/opto. base without output LED

D 2,5/5-MP1

Spacing 5,08 mm *(.200")*





Relay/opto. base without input LED

D 2,5/5-MP...

Spacing 5,08 mm *(.200")*





Relay/opto. base with output LED

Observations

Terminal blocks are delivered without plugs.

Max. working temperature
version without LED : 100°C
version with LED : 85°C
Contact resistance : < 5 mΩ

Type	Part numbers
D 2,5/5-MP	
Grey V0 **Order plugs separately**	
D 2,5/5-MP	1SNA607224R0100
D 2,5/5-MP1	
Grey V0 **Order plugs separately**	
D 2,5/5-MP1	1SNA607223R0000
D 2,5/5-MP...	
Grey V0 **Order plugs separately**	
D 2,5/5-MP-24VDC	1SNA607222R0700
D 2,5/5-MP-24VAC/DC	1SNA607260R2100
D 2,5/5-MP-48VAC/DC	1SNA607261R1600
D 2,5/5-MP-110VAC	1SNA607266R1300
D 2,5/5-MP-230VAC	1SNA607267R1400

Characteristics

			D 2,5/5-MP IEC	D 2,5/5-MP UL/CSA pending	D 2,5/5-MP1 IEC	D 2,5/5-MP1 UL/CSA pending	D 2,5/5-MP... IEC	D 2,5/5-MP... UL/CSA pending
Wire size	Compression clamp	Solid wire	0,2-4 mm²	24-12 AWG	0,2-4 mm²	24-12 AWG	0,2-4 mm²	24-12 AWG
		Stranded wire	0,22-2,5 mm²	24-12 AWG	0,22-2,5 mm²	24-12 AWG	0,22-2,5 mm²	24-12 AWG
Voltage	Rated		320 V	300 V	320 V	300 V	320 V	300 V
	Pulse		4 kV		4 kV		4 kV	
	Pollution degree		3		3		3	
Current	Rated		6 A	6 A	6 A	6 A	6 A	6 A
Wire size	Rated / Gauge		2,5 mm²	12 AWG	2,5 mm²	12 AWG	2,5 mm²	12 AWG
Wire stripping length			10 mm / .394"		10 mm / .394"		10 mm / .394"	
Recommended screwdriver			3,5 mm / .137"		3,5 mm / .137"		3,5 mm / .137"	
Recommended torque			0,4-0,6 Nm / 3,5-5,3 lb.in		0,4-0,6 Nm / 3,5-5,3 lb.in		0,4-0,6 Nm / 3,5-5,3 lb.in	
Protection			IP 20 / NEMA1		IP 20 / NEMA1		IP 20 / NEMA1	

Accessories

		D 2,5/5-MP Type		D 2,5/5-MP Part numbers	D 2,5/5-MP1 Type		D 2,5/5-MP1 Part numbers	D 2,5/5-MP... Type		D 2,5/5-MP... Part numbers
1	Test device	DCB (1)	blue	1SNA105028R2100	DCB (1)	blue		DCB (1)	blue	1SNA105028R2100
2	Test plug	FC2	DIA. 2	1SNA007865R2600	FC2	DIA. 2	1SNA105028R2100	FC2	DIA. 2	1SNA007865R2600
3	Relay plug 1 SPDT 10 mA/6 A	BNMS R24V-1	beige	1SNA031820R1400			1SNA007865R2600	BNMS R24V-1	beige	1SNA031820R1400
	1 SPDT 1 mA/6 A	BNMS R24V-2	beige	1SNA031847R1300				BNMS R24V-2	beige	1SNA031847R1300
4	Input optocoupler plug 5 V DC				BNMS T5V-1	white	1SNA031831R0300			
	24 V DC				BNMS T24V-1	white	1SNA031848R2400			
	24 V DC				BNMS T24V-2	white	1SNA031800R2100			
	48 V DC				BNMS T48V-1	white	1SNA031801R1600			
	125 V DC				BNMS T125V-1	white	1SNA031845R1100			
	24 V AC				BNMS T24V-1	yellow	1SNA031802R1700			
	48 V AC				BNMS T48V-1	yellow	1SNA031803R1000			
	115 V AC				BNMS T115V-1	yellow	1SNA031804R1100			
	230 V AC				BNMS T230V-1	yellow	1SNA031805R1200			
5	Output optocoupler plug 24 V DC/100 mA	BNMS N24V-3	red	1SNA031807R1400				BNMS N24V-3	red	1SNA031807R1400
	24 V DC/100 mA	BNMS P24V-3	red	1SNA031810R1200				BNMS P24V-3	red	1SNA031810R1200
	24 V DC/2 A	BNMS N24V-1	red	1SNA031813R0100				BNMS N24V-1	red	1SNA031813R0100
	24 V DC/2 A	BNMS P24V-1	red	1SNA031815R0300				BNMS P24V-1	red	1SNA031815R0300
	24 V DC/1 A	BNMS N24V-2	red	1SNA031817R0500				BNMS N24V-2	red	1SNA031817R0500
	24 V DC/1 A	BNMS P24V-2	red	1SNA031819R1700				BNMS P24V-2	red	1SNA031819R1700
	24 V DC/1 A	BNMS A24V-4	black	1SNA031839R1300				BNMS A24V-4	black	1SNA031839R1300
5	Output optocoupler plug 5 V DC/100 mA	BNMS N5V-3	red	1SNA031806R1300						
	5 V DC/100 mA	BNMS P5V-3	red	1SNA031809R2600						
	48 V DC/100 mA	BNMS N48V-3	red	1SNA031808R2500						
	48 V DC/100 mA	BNMS P48V-3	red	1SNA031811R0700						
	5 V DC/2 A	BNMS N5V-1	red	1SNA031812R0000						
	5 V DC/2 A	BNMS P5V-1	red	1SNA031814R0200						
	5 V DC/1 A	BNMS N5V-2	red	1SNA031816R0400						
	5 V DC/1 A	BNMS P5V-2	red	1SNA031818R1600						
7	Fuse plug 125 V/125 mA	BNMS F125mA-1	grey	1SNA031821R0100	BNMS F125mA-1	grey	1SNA031821R0100	BNMS F125mA-1	grey	1SNA031821R0100
	125 V/500 mA	BNMS F500mA-1	grey	1SNA031838R1200	BNMS F500mA-1	grey	1SNA031838R1200	BNMS F500mA-1	grey	1SNA031838R1200
	125 V/2 A	BNMS F2A-1	grey	1SNA031822R0200	BNMS F2A-1	grey	1SNA031822R0200	BNMS F2A-1	grey	1SNA031822R0200
	125 V/5 A	BNMS F5A-1	grey	1SNA031823R0300	BNMS F5A-1	grey	1SNA031823R0300	BNMS F5A-1	grey	1SNA031823R0300
	250 V/125 mA	BNMS F125mA-2	grey	1SNA031824R0400	BNMS F125mA-2	grey	1SNA031824R0400	BNMS F125mA-2	grey	1SNA031824R0400
	250 V/2 A	BNMS F2A-2	grey	1SNA031825R0500	BNMS F2A-2	grey	1SNA031825R0500	BNMS F2A-2	grey	1SNA031825R0500
	250 V/5 A	BNMS F5A-2	grey	1SNA031826R0600	BNMS F5A-2	grey	1SNA031826R0600	BNMS F5A-2	grey	1SNA031826R0600
	125 V/125 mA	BNMS F125mA-3	grey	1SNA031827R0700				BNMS F125mA-3	grey	1SNA031827R0700
	250 V/125 mA	BNMS F125mA-4	grey	1SNA031828R1000				BNMS F125mA-4	grey	1SNA031828R1000
	125 V/2 A	BNMS F2A-7	grey	1SNA031849R2500	BNMS F2A-7	grey	1SNA031849R2500			
8	Strap plug	BNMS ST1	grey	1SNA031829R1100	BNMS ST1	grey	1SNA031829R1100	BNMS ST1	grey	1SNA031829R1100
		BNMS ST2	grey	1SNA031830R1600	BNMS ST2	grey	1SNA031830R1600			
9	Converter plug 0-20 mA/0-10 V	BNMS CAI/U-500	grey	1SNA031832R0400						
	4-20 mA/2-10 V	BNMS CAI/U-500	grey	1SNA031832R0400						
	0-20 mA/0-5 V	BNMS CAI/U-250	grey	1SNA031833R0500						
	4-20 mA/1-5 V	BNMS CAI/U-250		1SNA031833R0500						
10	Comb type jumper bar 10 poles	PCMS V0 (2)		1SNA205523R2200	PCMS V0 (2)		1SNA205523R2200	PCMS V0 (2)		1SNA 205523R2200
R	See section on marking	RC 55			RC 55			RC 55		

(1) Solely on the top stage. (2) Comb type jumper bar from 2 to 22 poles, see accessories.

Input optocoupler plugs



DC plugs



Derating curve



AC plugs



Derating curve



Switching time R_L curve 1 for 24 V DC plugs only

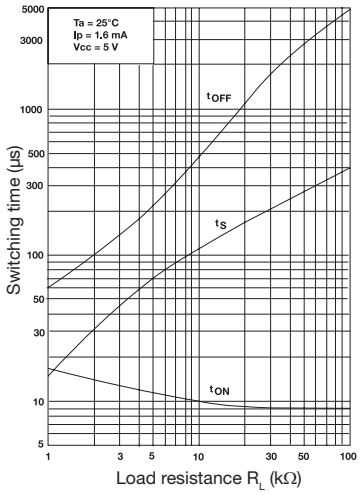

	5 V DC	24 V DC		48 V DC	125 V DC
Part number	Type P/N	Type P/N		Type P/N	Type P/N
	BNMS T5V-1 1SNA031831R0300	**BNMS T24V-1** 1SNA031800R2100		**BNMS T48V-1** 1SNA031801R1600	**BNMS T125V-1** 1SNA031845R1100
		BNMS T24V-2 1SNA031848R2400			
Characteristics					
INPUT		BNMS T24V-1	BNMS T24V-2		
Voltage	4,5 V to 5,5 V DC	19,2 V to 27,6 V DC		38,4 V to 55,2 V DC	93,5 V to 140 V DC
Max. current	6 mA	5 mA		4,1 mA	3 mA
Typical triggering threshol at Is = 100%	3,5 V	12 V DC		21 V DC	50 V DC
Switching time C/O	20 µs / 1,3 ms	20 µs / 1,3 ms	10 µs / see curve 1	20 µs / 1,3 ms	20 µs / 1,3 ms
Leakage current		1 mA		0,8 mA	
OUTPUT					
Max. voltage. / Max. current	58 V / 30 mA	58 V / 30 mA	58 V / 5 mA	58 V / 30 mA	58 V / 30 mA
Residual voltage max. I and rated U standard	2,3 V DC	2,3 V DC	0,3 V DC	2,3 V DC	2,3 V DC
max.	2,7 V DC	2,7 V DC	0,5 V DC	2,7 V DC	2,7 V DC
Compatibility			TTL		
Input / Ouput isolation	2,5 kV	2,5 kV		2,5 kV	2,5 kV
TEMPERATURE					
Storage	- 30°C to + 80°C	- 30°C to + 80°C		- 30°C to + 80°C	- 30°C to + 80°C
Operating	- 20°C to + 55°C	-20°C to + 55°C		- 20°C to + 55°C	- 20°C to + 55°C

	24 V AC	48 V AC	115 V AC	230 V AC
Part number	Type P/N	Type P/N	Type P/N	Type P/N
	BNMS T24V-1 1SNA031802R1700	**BNMS T48V-1** 1SNA031803R1000	**BNMS T115V-1** 1SNA031804R1100	**BNMS T230V-1** 1SNA031805R1200
Charateristics				
INPUT				
Voltage	20,4 V to 26,4 V AC	40,8 V to 52,8 V AC	98 V to 126,5 V AC	195,5 V to 253 V AC
Max. current	8,5 mA	4,5 mA	8 mA	7 mA
Typical triggering threshold at Is = 100%	13 V AC	22 V AC	50 V AC	95 V AC
Switching time C/O	6 ms / 10 ms	6 ms / 10 ms	6 ms / 10 ms	6 ms / 10 ms
Leakage current	1 mA	1 mA	2 mA	2 mA
OUPUT				
Max. voltage / Max. current	58 V / 30 mA	58 V / 30 mA	58 V / 30 mA	58 V / 30 mA
Residual voltage max. I and rated U standard	2,3 V DC	2,3 V	2,3 V	2,3 V
max.	2,7 V DC	2,7 V	2,7 V	2,7 V
Input / Ouput isolation	2,5 kV	2,5 kV	2,5 kV	2,5 kV
TEMPERATURE				
Storage	- 30°C to + 80°C	- 30°C to + 80°C	- 30°C to + 80°C	- 30°C to + 80°C
Operating	- 20°C to + 55°C	- 20°C to + 55°C	- 20°C to + 55°C	- 20°C to + 55°C

Transistor output optocoupler plugs



	100 mA output optocoupler 5 V DC	100 mA output optocoupler 24 V DC	100 mA output optocoupler 48 V DC
			
	Derating curve 	Derating curve 	Derating curve 
Part numbers	**Type** / **P/N**	**Type** / **P/N**	**Type** / **P/N**
	BNMS N5V-3 1SNA**031806**R1300 **BNMS P5V-3** 1SNA**031809**R2600	**BNMS N24V-3** 1SNA**031807**R1400 **BNMS P24V-3** 1SNA**031810**R1200	**BNMS N48V-3** 1SNA**031808**R2500 **BNMS P48V-3** 1SNA**031811**R0700
Characteristics			
INPUT			
Voltage	4,5 V to 5,5 V DC	20,4 V to 28,8 V DC	40,8 V to 57,6 V DC
Max. current	8,5 mA	4,8 mA	3,9 mA
Typical triggering threshold at Is = 100 %	2,9 V DC	16 V DC	26 V DC
Switching time C/O	20 µs / 1,3 ms	20 µs / 1,3 ms	20 µs / 1,3 ms
Leakage current	1 mA	1 mA	1 mA
OUTPUT			
Max. voltage / Max. current	58 V / 100 mA	58 V / 100 mA	58 V / 100 mA
Residual voltage max. I and rated U			
standard U	1 V DC	1 V DC	1 V DC
max.	1,3 V DC	1,3 V DC	1,3 V DC
Frequency on inductive load	See Note 1	See Note 1	See Note 1
Input / Output isolation	2,5 kV	2,5 kV	2,5 kV
TEMPERATURE			
Storage	- 30°C to + 80°C	- 30°C to + 80°C	- 30°C to + 80°C
Operating	- 20°C to + 60°C	- 20°C to + 60°C	- 20°C to + 60°C

MOS output optocoupler plugs



	1 A output optocoupler 5 V DC	1 A output optocoupler 24 V DC
		
	Derating curve 	Derating curve 
Part numbers	**Type** / **P/N**	**Type** / **P/N**
	BNMS N5V-2 1SNA**031816**R0400 **BNMS P5V-2** 1SNA**031818**R1600	**BNMS N24V-2** 1SNA**031817**R0500 **BNMS P24V-2** 1SNA**031819**R1700
Characteristics		
INPUT		
Voltage	4,5 V to 5,5 V DC	20,4 V to 28,8 V DC
Max. current	12,5 mA	6,7 mA
Typical triggering threshold at Is=100%	3,5 V DC	10 V DC
Switching time C/O	20 µs / 250 µs	50 µs / 350 µs
Leakage current	1 mA	1 mA
OUTPUT		
Max. voltage / Max. current	58 V / See graphs	58 V / See graphs
Residual voltage max. I and rated U		
standard U	1 V DC	1 V DC
max.	1,3 V DC	1,3 V DC
Frequency on inductive load	See Note 1	See Note 1
Input / Output isolation	2,5 kV	2,5 kV
TEMPERATURE		
Storage	- 30°C to + 80°C	- 30°C to + 80°C
Operating	- 20°C to + 60°C	- 20°C to + 60°C

Note 1 :

Fmax = (1-0,007 x Us) / (L x Is²)
or
$F_{max} = (1-0{,}007 \times U_s) / (P \times \frac{L}{R})$

Us = Output voltage supply
Is = Output current
L = Inductive load
P = Load power
R = Load resistance

MOS output optocoupler plug



2 A output optocoupler
5 V DC





2 A output optocoupler
24 V DC





Note 2 :

Fmax = (1 - 0,012 x Us) / (L x Is²)
or
Fmax = (1 - 0,012 x Us) / (P x $\frac{L}{R}$)

Us = Output voltage supply
Is = Output current
L = Inductive load
P = Load power
R = Load resistance

Part numbers

Type	P/N	Type	P/N
BNMS N5V-1	1SNA**031812**R0000	**BNMS N24V-1**	1SNA**031813**R0100
BNMS P5V-1	1SNA**031814**R0200	**BNMS P24V-1**	1SNA**031815**R0300

Characteristics

INPUT		
Voltage	4,5 V to 5,5 V DC	20,4 V to 28,8 V DC
Max. current	12,5 mA	6,7 mA
Typical triggering threshold	3,5 V DC	10 V DC
Switching time C/O	20 µs / 250 µs	50 µs / 350 µs
Leakage current	1 mA	1 mA
OUTPUT		
Max. voltage / Max. current	30 V DC / See graphs	30 V / See graphs
Residual voltage max. I and rated U		
standard U	1 V DC	1 V DC
max.	1,3 V DC	1,3 V DC
Frequency on inductive load	See Note 2	See Note 2
Input / Output isolation	2,5 kV	2,5 kV
TEMPERATURE		
Storage	- 30°C to + 80°C	- 30°C to + 80°C
Operating	- 20°C to + 60°C	- 20°C to + 60°C

Triac output optocoupler plug



1 A output optocoupler
24 V DC





Part numbers

Type	P/N
BNMS A24V-4	1SNA**031839**R1300

Characteristics

INPUT	
Voltage	20,4 V to 28,8 V DC
Max. current	3,8 mA
Typical triggering threshold	10 V DC
Switching time C/O	9,5 ms / 12 ms
Leakage current	
OUTPUT	
Max. voltage / Max. current	24 V to 253 V AC / See derating curve
Residual voltage max. I and rated U	
standard U	1 V AC
max.	1,3 V AC
Input / Output isolation	2,5 kV
TEMPERATURE	
Storage	- 30°C to + 80°C
Operating	- 20°C to + 70°C

Relay plugs



1 SPDT relay



R24V-1





	DC12	AC12	DC13	AC15
24 V	6 A	6 A	1 A	3 A
110/120 V	0,3 A	6 A	0,2 A	3 A
220/230 V	0,2 A	6 A	0,1 A	3 A

Part numbers

Type	P/N
BNMS R24V-1	1SNA031820R1400
BNMS R24V-2	1SNA031847R1300

Characteristics

	BNMS R24V-1	BNMS R24V-2
COIL		
Voltage	20,4 V to 28,8 V DC	
Current max.	7 mA	
Trip voltage	1,2 V	
CONTACT		
Type	1 SPDT	
Voltage mini. / max.	12 V / 250 V	5 V / 250 V
Switching current mini. / max.	10 mA / 6 A	1 mA / 6 A
Switching current AC1 mini. / max.	0,6 VA/1500 VA (resistance)	0,05 VA/1500 VA (resistance)
DC1 mini. / max.	0,6 W / 140 W	0,05 W / 140 W
Number of operations on load	10^5 operations for AC15	
Number of operations off load	$10x10^6$ operations	
Operating speed C/O	6 ms / 8 ms	
Bounce	1,5 ms	
Isolation Coil / Contact	4 kV	
Resistance to shock waves Coil / Contact	4 kV	
Isolation Contact / Contact	1 kV	
TEMPERATURE		
Storage	- 40°C to + 80°C	
Operating	- 20°C to + 55°C	

Analogical plugs



Current / Voltage Converter



Plug with 250 Ω accuracy resistance for analogical signals.

Current / Voltage Converter



Plug with 500 Ω accuracy resistance for analogical signals.

Part numbers

Type	P/N	Type	P/N
BNMS CA I/U-250	1SNA031832R0400	BNMS CA I/U-500	1SNA031833R0500

Characteristics

Resistance	250 Ω	500 Ω
Power	0,35 W	0,35 W
Accuracy	0,1 %	0,1 %
Stability	25 ppm	25 ppm

Fuse and strap plugs



Output fuse plug



Input fuse plug



Strap plug



BNMS ST1



BNMS ST2

Part numbers

Type		P/N	Type		P/N	Type	P/N
BNMS F125mA-1	125 V / 125 mA	1SNA031821R0100	BNMS F125mA-3	125 V / 125 mA	1SNA031827R0700	BNMS ST1	1SNA031829R1100
BNMS F500mA-1	125 V / 500 mA	1SNA031838R1200	BNMS F125mA-4	250 V / 125 mA	1SNA031828R1000	BNMS ST2	1SNA031830R1600
BNMS F2A-1	125 V / 2 A	1SNA031822R0200					
BNMS F5A-1	125 V / 5 A	1SNA031823R0300					
BNMS F125mA-2	250 V / 125 mA	1SNA031824R0400					
BNMS F2A-2	250 V / 2 A	1SNA031825R0500					
BNMS F5A-2	250 V / 5 A	1SNA031826R0600					

BADL

BAM2


BAMH


BADH

PR30


PR3.Z2


PR3.G2

PR5

PR4

FC2

End stops

The end stops are mounted at the extremity of the terminal board assembly, giving additional support to the terminal blocks as markers. For various types of marking, refer to the marker section.

Description		Type		Order P/N	Packaging	Weight kg
End stop DIN 3						
grey V0	■	BADL	9 mm	1SNA399903R0200	50	
End stop with screws DIN 3						
grey V0	■	BAM2 V0	10 mm	1SNA399967R0100	50	
grey V2	■	BAM2	10 mm	1SNA206351R1600	50	
beige V0	■	BAM2 V0	10 mm	1SNA296351R0000	50	
High end stop with screws DIN 1 and DIN 3 grey	■	BAMH	9,1 mm	1SNA114836R0000	50	
beige V0	■	BAMH V0	9,1 mm	1SNA194836R0100	50	
High end stop with screws DIN 3						
grey	■	BADH	12 mm	1SNA116900R2700	50	

Mounting rails

Symmetrical zinc bichromate plated steel prepunched rail	PR30	2 m	1SNA173220R0500	1
Symmetrical zinc bichromate plated steel rail	PR3.Z2	2 m	1SNA174300R1700	1
White, symmetrical passivated galvanized steel rail	PR3.G2	2 m	1SNA164800R0300	1
Symmetrical zinc bichromate plated steel rail	PR5	2 m	1SNA168700R2200	1
Symmetrical zinc bichromate plated steel rail	PR4	2 m	1SNA168500R1200	1

Test devices

Test plug DIA. 2 mm	FC2	1SNA007865R2600	10

Assembled jumper bar


BJ612-...

This accessory permits electrical connection between 2 to 70 blocks with 6 mm spacing placed side by side. It can be used with screw clamp or spring clamp blocks with 6 mm or 12 mm spacing.
Interconnection of blocks not placed side by side is possible if teeth of the jumper bar have been cut in front of the blocks not to be connected. These teeth can be removed using pliers.
Use of separator end sections before and after the jumper bar is required to preserve IP20 protection of the assembly.

Assembled jumper bar 10 poles - 24 A	BJ612-10	1SNA290488R0100	10
Assembled jumper bar 70 poles - 24 A	BJ612-70	1SNA290489R0200	10

Separator end section


SC612

Directly mounted on the rail beside the block, it permits to identify and make electrical insulation of product groups using jumper bars. Dimensions are the same as screw clamp blocks : width 70 mm and height on rail 67,5 mm with 2 mm spacing.

Separator end section	SC612	1SNA290474R0200	10

Distribution module


D4/12-3...

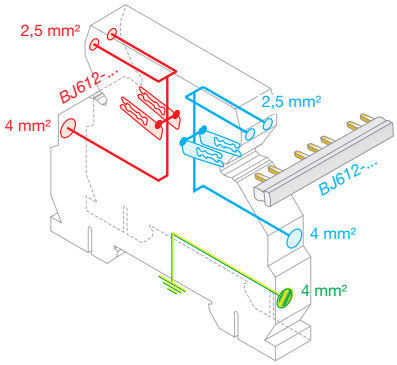

This terminal block with BJ612-... jumper bars permits 2 polarities distribution *(PCL side and process side)* thanks to two separate circuits, each of them including :

- one 4 mm² input,
- two 2,5 mm² outputs
- one double output for jumper bar BJ612-...

It permits also the connection of ground to the rail though a 4 mm² input.

Rated voltage : 250 VAC-DC
Rated current : 32 A (4 mm²) - 16 A (2,5 mm²)
Recommended torque : 0,4 - 0,6 Nm

Screw clamp distribution block sp. 12 mm	D4/12-3-3	1SNA645031R2000	5
Spring clamp distribution block sp. 12 mm	D4/12-3R-3R	1SNA645531R2200	5

Accessories

PCMS

Comb-type jumper



This accessory permits the electrical connection of 2 to 22 blocks.

No. of poles	Grey UL94V0	Red UL94V0	Blue UL94V0	Green/Yellow UL94V0
2	1SNA205491R2300	1SNA205492R2400	1SNA205493R2500	1SNA205494R2600
3	1SNA205495R2700	1SNA205496R2000	1SNA205497R2100	1SNA205498R0200
4	1SNA205499R0300	1SNA205500R1000	1SNA205501R0500	1SNA205502R0600
5	1SNA205503R0700	1SNA205504R0000	1SNA205505R0100	1SNA205506R0200
6	1SNA205507R0300	1SNA205508R1400	1SNA205509R1500	1SNA205510R0100
7	1SNA205511R2600	1SNA205512R2700	1SNA205513R2000	1SNA205514R2100
8	1SNA205515R2200	1SNA205516R2300	1SNA205517R2400	1SNA205518R0500
9	1SNA205519R0600	1SNA205520R0300	1SNA205521R2000	1SNA205522R2100
10	1SNA205523R2200	1SNA205524R2300	1SNA205525R2400	1SNA205526R2500
11	1SNA205527R2600	1SNA205528R0700	1SNA205529R0000	1SNA205530R0500
12	1SNA205531R2200	1SNA205532R2300	1SNA205533R2400	1SNA205534R2500
13	1SNA205535R2600	1SNA205536R2700	1SNA205537R2000	1SNA205538R0100
14	1SNA205539R0200	1SNA205540R1700	1SNA205541R0400	1SNA205542R0500
15	1SNA205543R0600	1SNA205544R0700	1SNA205545R0000	1SNA205546R0100
16	1SNA205547R0200	1SNA205548R1300	1SNA205549R1400	1SNA205550R1100
17	1SNA205551R0600	1SNA205552R0700	1SNA205553R0000	1SNA205554R0100
18	1SNA205555R0200	1SNA205556R0300	1SNA205557R0400	1SNA205558R1500
19	1SNA205559R1600	1SNA205560R1300	1SNA205561R0000	1SNA205562R0100
20	1SNA205563R0200	1SNA205564R0300	1SNA205565R0400	1SNA205566R0500
21	1SNA205567R0600	1SNA205568R1700	1SNA205569R1000	1SNA205570R1500
22	1SNA205571R0200	1SNA205572R0300	1SNA205573R0400	1SNA205574R0500

PEF

Identification label holders

Designed to hold **RPEV** label (see opposite).

PEF * 1SNA020568R0400

* *Delivered with labels.*

The label holders are removable and the labels can be changed easily.

- For mounting on PCB in a 3,7 mm diameter hole.



- For mounting on a PCB block in a 2 mm diameter hole (no support leg).





RPEV

Label for PEF 29 x 6 mm

Sheets of 99 pre-cut labels

✓ **Blank** **RPEV** 1SNA173178R0700

DC

Test device on screw head

This patented device is mounted on the round screwdriver opening. It is used for trouble shooting, measuring and control for monitoring and repairing an installation, on blocks without a test socket. For this, the device receives an **FC2** test plug.



The DC's are differentiated by their colour :

blue for **MA 2,5/5** blocks

DCB 1SNA105028R2100

BJ Jumper bar

BJS **Jumper bar not assembled**

Subassembly screw + washer + post

Perforated jumper bar to be cut to length

To connect terminal blocks, place the metal tube into the top center hole on each terminal block to be connected.
The metal tube contacts the terminal block's internal connector bar.
The perforated bar is cut to length and placed flat along the center opening of the series of terminal blocks.
The screw is inserted into the perforated bar's hole which is located directly above the blocks being connected. The screw goes through the threaded metal tube and is screwed into the terminal block's internal connector bar.
This completes the electrical connection to the perforated bar and connects the block.

To be mounted on blocks series R910 :

Screw + washer + post	**EV6D**			1SNA168400R1600
Perforated jumper bar	**BJS9**	32 A	8 poles	1SNA177583R1200
	BJS9	32 A	16 poles	1SNA177584R1300

RL Lengthwise marker

RLV **Lengthwise marker Width 9 mm *.354"***



Large area for writing.
To be snapped onto the top of blocks.

Blank marker for writing : **RLV** 1SNA103849R0300

PC

Comb-type jumper bar

PC **EIP**



This accessory can be used only on the terminal blocks with at least one compression clamp connection. It permits the electrical connection of 2 to 10 blocks.
Interconnection of non-consecutive blocks is possible by removing the teeth opposite the blocks which must not be connected. The comb-type jumper bars can be cut using pliers (or a saw) : in this case, the use of an insulating tip **EIP** is recommended. The comb is placed in the compression clamp before tightening the screws, above the eventual conductor.



To be mounted on blocks series R900 and R910 :

Insulating tip for comb	**EIP**			1SNA113550R2000
Comb-type jumper bar	**PC9**	15 A	10 poles	1SNA210160R1200

IDC jumper

(insulation displacement jumper)



Characteristics		IEC NFC VDE	CSA
Wire size mm² / AWG	Rigid	2,5 mm²	14 AWG
	Flexible	2,5 mm²	
Voltage	V	600	600
Current	A	26	15
Rated wire size	mm² / AWG	2,5 mm²	14 AWG
Working temperature	°C	-55°C -> +110°C	
Protection		IP20 / *NEMA1*	



Quick-jump lets you interconnect screw clamp terminals of different sizes, levels and all manufacturers quickly and safely. Its insulation displacement technology makes it easy to use, fast, economical and does not require a special tool. Use as a jumper between relays, switches and other electronic components. ABB Quick-jump will fit any screw clamp type terminal block, from 6 mm .238" spacing and larger.

How to use : connecting Quick-jump to your terminal

1 - Insert ABB Quick-jump into your terminal screw clamp.
2 - Tighten the terminal screw.
3 - Guide jumper wire through the V-shaped opening in the Quick-jump.
4 - Secure the wire by closing the Quick-jump lever with any flat nose pliers.



Adding a shunt in an installation :

1 - Insert ABB Quick-jump into your terminal screw clamp.
2 - Guide the terminal screw clamp into contact with the wire.
3 - Secure the wire by closing the Quick-jump lever with any flat nose pliers.
4 - Tighten the terminal screw.



Insulation displacement jumper AD 2,5 1SNA114205R2000



1
Remove one of the side bands of the card.



2
Separate the chosen strip from the rest of the card.



3
Press the first marker in place, hold it and slide your thumb on the rest of the strip.



Horizontal marking



Vertical marking

Refilable box of 100 cards of 18 RC markers

Marking for Interface Modules

Selection table

Markers for modules :	RC610	RC55	RC65
R500	⊖	●	⊖
R600	●	POSSIBLE	●
R900	⊖	●	⊖
R910	●	POSSIBLE	●
R1800	⊖	●	⊖

Possible mounting : POSSIBLE

Recommended mounting : ●

Impossible mounting : ⊖

Marking for terminal blocks

Standard RC marker cards

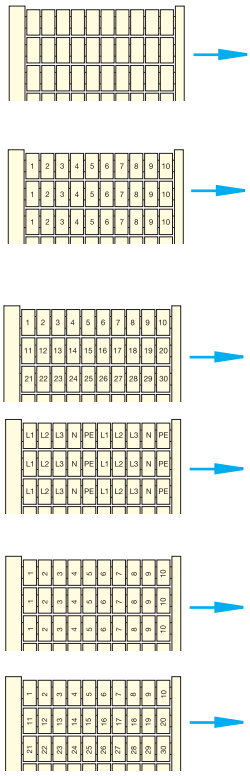

Marker sizes	RC55 (x) = Nb of cards in 5 mm spacing kit	RC65 (x) = Nb of cards in 6 mm spacing kit	RC610 (x) = Nb of cards in 6 mm spacing kit
Blank cards	1SNA230000R1200	1SNA232000R0000	1SNA233000R0100
Horizontal marking			
10 strips from 1 to 10	1SNA230002R0000 (5)	1SNA232002R2600 (5)	1SNA233002R2700 (25)
10 strips from 11 to 20	1SNA230003R0100 (2)	1SNA232003R2700 (2)	1SNA233003R2000 (10)
10 strips from 21 to 30	1SNA230004R0200	1SNA232004R2000	1SNA233004R2100 (6)
10 strips from 31 to 40	1SNA230005R0300	1SNA232005R2100	1SNA233005R2200 (4)
10 strips from 41 to 50	1SNA230006R0400	1SNA232006R2200	1SNA233006R2300 (3)
10 strips from 51 to 60	1SNA230007R0500	1SNA232007R2300	1SNA233007R2400 (2)
10 strips from 61 to 70	1SNA230008R1600	1SNA232008R0400	1SNA233008R0500 (2)
From 1 to 100	1SNA230030R0700 (2)	1SNA232030R2500 (2)	1SNA233030R2600 (15)
From 101 to 200	1SNA230031R2400	1SNA232031R1200	1SNA233031R1300 (2)
20 times L1-L2-L3-N-PE	1SNA230131R2500	1SNA232131R1300	1SNA233131R1400 (2)
Vertical marking			
10 strips from 1 to 10	1SNA230041R0600	1SNA232041R2400	1SNA233041R2500 **(5)**
10 strips from 11 to 20	1SNA230042R0700	1SNA232042R2500	1SNA233042R2600 **(3)**
10 strips from 21 to 30	1SNA230043R0000	1SNA232043R2600	1SNA233043R2700 **(2)**
10 strips from 31 to 40	1SNA230044R0100	1SNA232044R2700	1SNA233044R2000 **(2)**
From 1 to 100	1SNA230060R1500	1SNA232060R0300	1SNA233060R0400 **(8)**

Marking kit RC 5 mm spacing or 6 mm spacing

Box with 100 cards with 18 various part numbers (see table next page)

Description	Type	Order P/N	Packaging	Weight kg
Box with 100 cards RC 5 mm spacing		1SNA400085R2700	1	
Refill for box RC 5 mm		1SNA400145R0700	1	
Box with 100 cards RC 6 mm spacing		1SNA400084R2600	1	
Refill for box RC 6 mm		1SNA400144R0600	1	