


FurseWELD

Cable to earth rod CR17

Cable to earth rod CR17 - FurseWELD

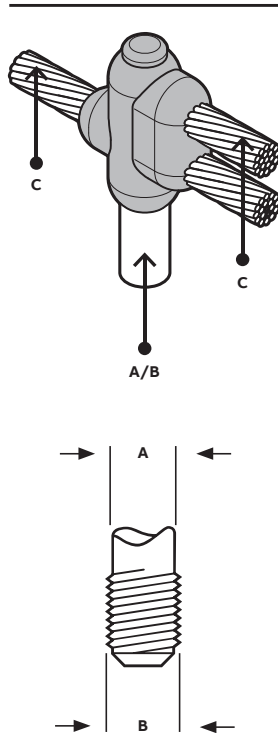

Earth rod A ø (mm)	Earth rod B ø (")	Stranded/solid circular conductor size C (mm ²)	Mould part no.	Order code	Powder cartridge part no.	Handle clamp part no.
14.2	5/8	16 *	CR17-4-14216	7TCA083910R2976	90P10	HCPK4
14.2	5/8	25	CR17-4-14225	7TCA083910R2977	90P10	HCPK4
14.2	5/8	35	CR17-4-14235	7TCA083910R2978	90P10	HCPK4
14.2	5/8	50	CR17-4-14250	7TCA083910R2979	115P10	HCPK4
14.2	5/8	70	CR17-4-14270	7TCA083910R1681	200P10	HCPK4
14.2	5/8	95	CR17-4-14295	7TCA083910R2833	250P10	HCPK4
14.2	5/8	120	CR17-4-142120	7TCA083910R1680	250P10	HCPK4
14.2	5/8	150	CR17-4-142150	7TCA083910R2981	250P10	HCPK4
14.2	5/8	185	CR17-4-142185	7TCA083910R2982	2 x 150P10	HCPK4
14.2	5/8	240	CR17-5-142240	7TCA083910R2402	2 x 200P10	HCPK5
17.2	3/4	16 *	CR17-4-17216	7TCA083910R2628	115P10	HCPK4
17.2	3/4	25	CR17-4-17225	7TCA083910R2983	115P10	HCPK4
17.2	3/4	35	CR17-4-17235	7TCA083910R2984	115P10	HCPK4
17.2	3/4	50	CR17-4-17250	7TCA083910R2417	150P10	HCPK4
17.2	3/4	70	CR17-4-17270	7TCA083910R2343	200P10	HCPK4
17.2	3/4	95	CR17-4-17295	7TCA083910R2535	250P10	HCPK4
17.2	3/4	120	CR17-4-172120	7TCA083910R1682	250P10	HCPK4
17.2	3/4	150	CR17-4-172150	7TCA083910R2986	2 x 150P10	HCPK4
17.2	3/4	185	CR17-4-172185	7TCA083910R2987	2 x 150P10	HCPK4
17.2	3/4	240	CR17-5-172240	7TCA083910R2644	2 x 200P10	HCPK5
17.2	3/4	300	CR17-5-172300	7TCA083910R2425	2 x 250P10	HCPK5

Suitable for connections to copperbond rods - for connections to solid copper and stainless steel rods please contact our sales office

Threaded portion of copperbond rods must be removed prior to welding

Special moulds for all FurseWELD products can be manufactured to meet specific customer applications on request

*3 x S103 Sleeve required when joining conductors 16 mm² or smaller

For order codes of powder cartridges and handle clamps, see pages 49-50

FurseWELD moulds should only be used with FurseWELD powders, handle clamps and accessories. If moulds, powders, handle clamps and accessories from other manufacturers are utilized, we cannot guarantee the safe use or the integrity of the completed joint

FurseWELD moulds for use with stranded conductor are designed for use with non-compacted conductor to BS EN 60228. If a mould for compacted conductor is required, please contact your local representative

Conductors must be installed in the orientation shown to achieve the correct connection