


Mini contactor relay

MCR

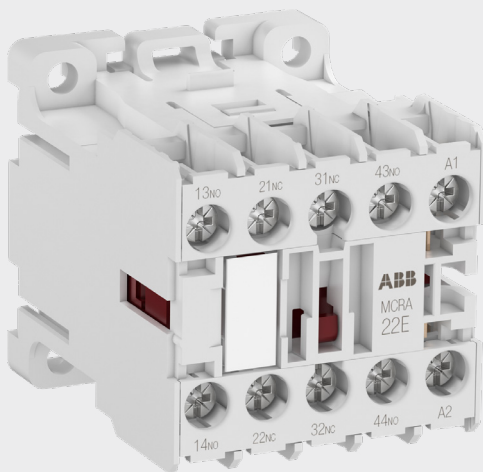

ABB's MCR mini contactor relays are a performance-dimension optimized solution for all purposes. Mainly dedicated to the control of small AC/DC loads, also in harsh conditions, all the devices are equipped with four poles and two different types of terminals. A wide range of variants dedicated to rolling stock applications, and a complete set of accessories are also available.

Features

MCR mini contactors relays are used in industrial, but also household environments for the control of small loads up to 6 A. These devices can be equipped with standard AC or DC coils, low energy consumption coils for direct control by PLC, and extended operating limit coils for facing voltage fluctuations. The superior quality of materials they are built with ensures suitability for household appliances according to IEC 60335-1 clause 30, and in applications characterized by extreme conditions (e.g. high temperature, high altitude, fast operation).

Product conformity & compliance

REACH (Regulation EC 1907/2006)

MCR and related accessories were classified as Articles and, during normal and reasonably foreseeable conditions of use, do not intentionally release any substance or preparation. ABB continuously undertakes communications throughout its supply chain in order to collect information about suppliers' compliance with REACH regulation.

SVHC (Regulation EC 1907/2006 REACH)

ABB continuously assesses its products for content of Substances of Very High Concern (SVHC), as included in the "Candidate List" by the European Chemicals Agency (ECHA). ABB publishes the data about the products that are having a part with SVHC in the SCIP database.

RoHS II

MCR and related accessories are within the scope of directive 2011/65/EU (RoHS II) and amendment 2015/863, starting from July 22 2019.

WEEE

The Waste Electrical and Electronic Equipment Directive (WEEE Directive) is the European Community directive 2012/19/EU on waste electrical and electronic equipment (WEEE) which, together with the RoHS directive, became European law in February 2003.

Product safety

Compliance with essential health and safety requirements has been assured by compliance with the applicable Product and safety standards. The validation according to the product and safety standards is carried out by third party tests laboratory (STIEE / TL030) in respect of the EN ISO/IEC 17025 European standard, according to IECEE CB scheme. CB certificate has been issued.

Standards:

- IEC/EN 60947-1
- IEC/EN 60947-5-1
- UL 60947-1
- UL 60947-5-1


Directives:

- EC Low Voltage Directive (LVD) 2014/35/EU

Material declaration


This section outlines the material composition of two representative products of the MCR mini contactor relays. MCRA040AT6 for AC operated and MCRC040ATD for DC operated mini contactor. The constituent materials are distributed as follows.

MCRA040AT6. The total weight of the product is 170 gr.

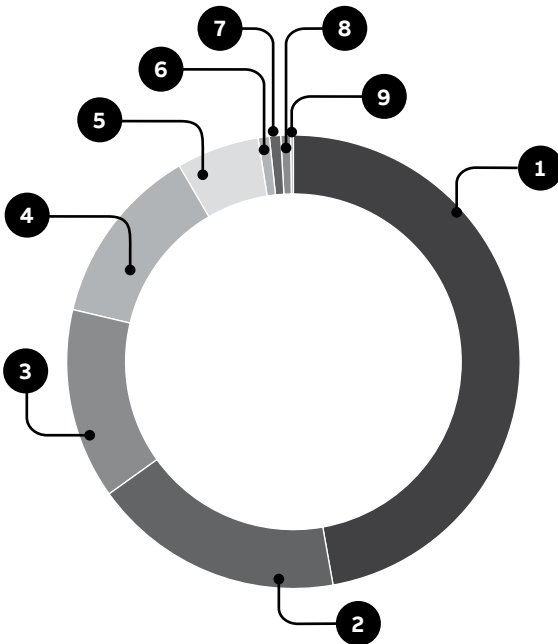

Material	% wt
1 Steel	47.2 %
2 Copper	17.9 %
3 PA	13.6 %
4 PBT	12.9 %
5 Copper alloys	5.9 %
6 Silver alloys	0.8 %
7 Stainless steel	0.8 %
8 Other metals	0.7 %
9 Other thermoplastic	0.2 %
TOTAL	100 %

MCRC040ATD. The total weight of the product is 250 gr.

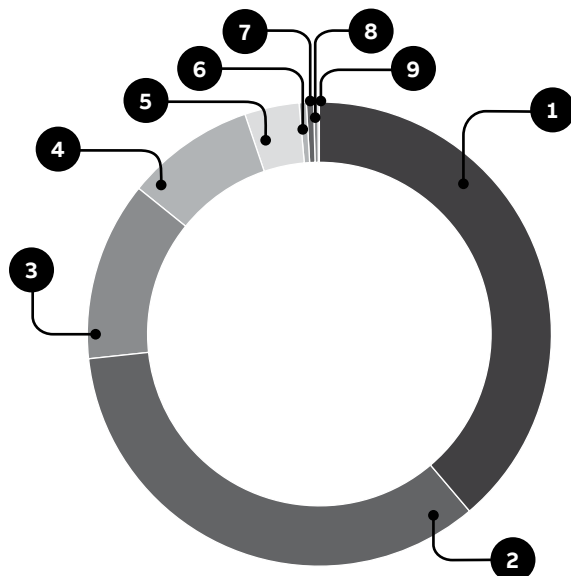


Material	% wt
1 Copper	38.8 %
2 Steel	34.5 %
3 PBT	12.5 %
4 PA	9.0 %
5 Copper alloys	3.8 %
6 Silver alloys	0.5 %
7 Stainless steel	0.5 %
8 Other metals	0.3 %
9 Other thermoplastic	0.1 %
TOTAL	100 %

Packaging


The tables below provide information for each packaging material used. The card box used for the product material are made of recycled fibers and are 100 % recyclables.

MCRA040AT6. Packaging material composition: total weight 10 gr.

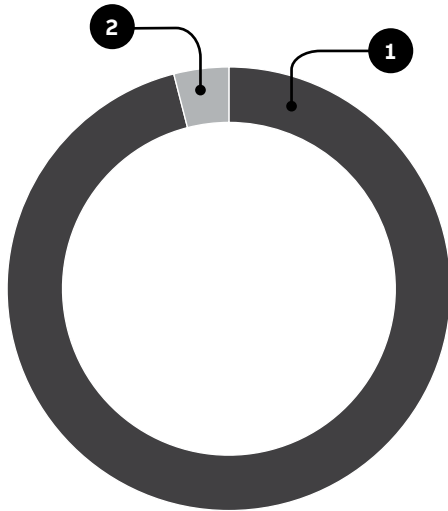

Material	% wt
1 Cardbox	95.9 %
2 Paper	4.1 %
TOTAL	100 %

MCRC040ATD. Packaging material composition: total weight 13.5 gr.

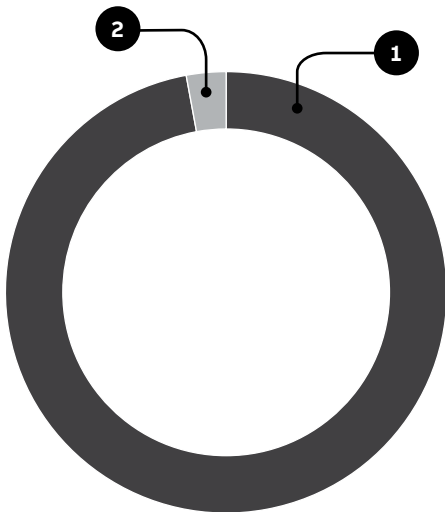

Material	% wt
1 Cardbox	97.1 %
2 Paper	2.9 %
TOTAL	100 %

Product use



Energy

Power losses for mini contactor MCR are indicated in the following table:

Type	Power loss (W/device)
MCRA	I_{th} 8.1
MCRC	I_{th} 7.0

End-of-life

At the end of operating life, constituent components of MCR mini contactor have been optimized in order to reduce waste amount and increase recovery of the material. Metals and polymers contained into MCR mini contactor are characterized by high recycling rates. Most plastic parts are marked for easy sorting.

ABB STOTZ-KONTAKT GmbH
Eppelheimer Strasse 82
69123 Heidelberg, Germany

abb.com/lowvoltage

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB AG does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB AG.
Copyright © 2022 ABB
All rights reserved