

Smart temperature monitoring relays

Reduced stocks, flexible adjustment
and easy setup: One relay for all applications.

One...



look

back-lit LCD for easy reading and setup



touch

NFC parametrization via smartphone



device

for a wide range of applications



Set up these innovative temperature monitoring relays exactly as you need, either via a back-lit LCD or smartphone app. Parametrization and configuration are just one touch away with the ABB EPiC app – even in a non-powered state – reducing installation time by 80%.

By keeping an eye on temperatures – either from the cloud, in a control room, or locally – operators can help minimize cost and risk while maximizing performance and safety.



Table of contents



Features and benefits

The temperature monitoring relays can measure temperatures of solids, liquids and gaseous media in up to three sensor circuits using various types of sensors.



One...

look

touch

device




One look – back-lit LCD

Easy reading and setup with one push

Just one look is all it takes to see the status and measured values of the relay, easily navigate through the symbol-based menu and even configure the device with the new, back-lit LCD at the front of the relay.

- Start screen
- Symbol-based menu structure
- Pre- and user-defined settings
- Simulation mode
- Push-rotate adjustment
- Back-lit LCD
- Diagnostic data
- Password & parameter lock

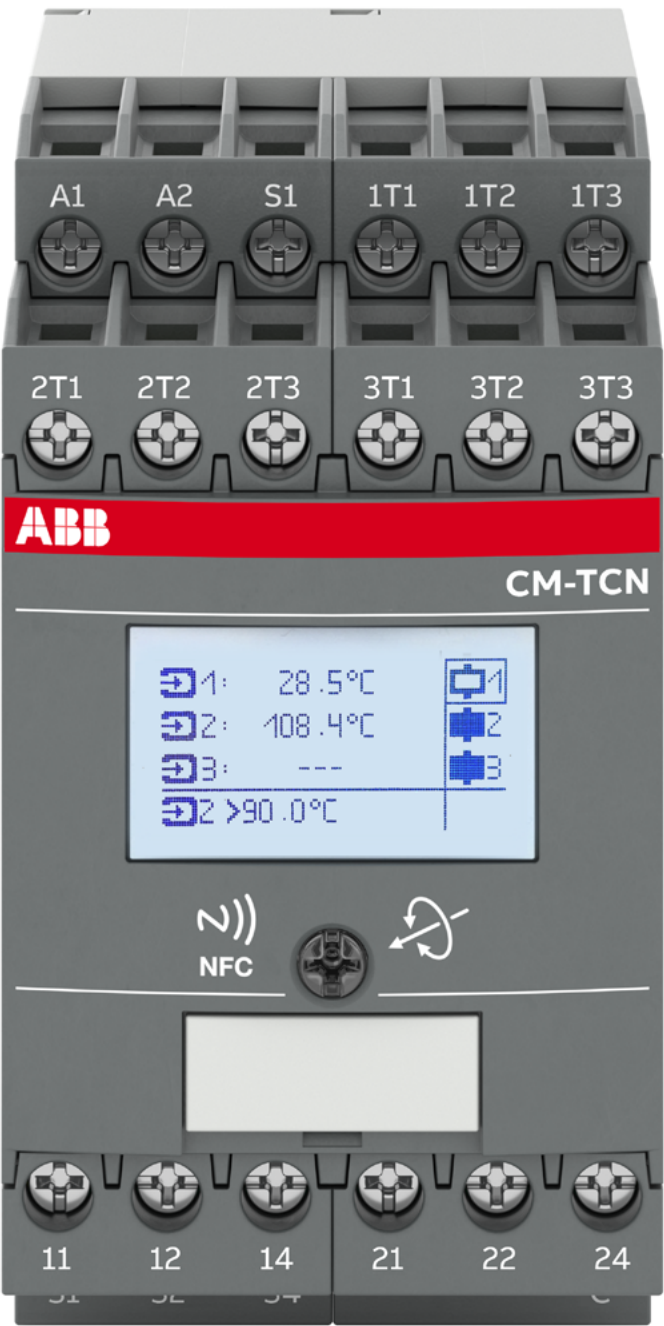



One touch – setup via smartphone app

Powerless configuration with NFC

Configuration and parametrization of temperature monitoring relays has never been simpler. One touch is all that is needed for fast, easy and intuitive configuration with the ABB EPiC mobile phone app.

Near Field Communication (NFC)

ABB EPiC smartphone app

Easy visualization


Store and send parameters

One touch setup

Event history

Powerless adjustment

Copy and paste functionality

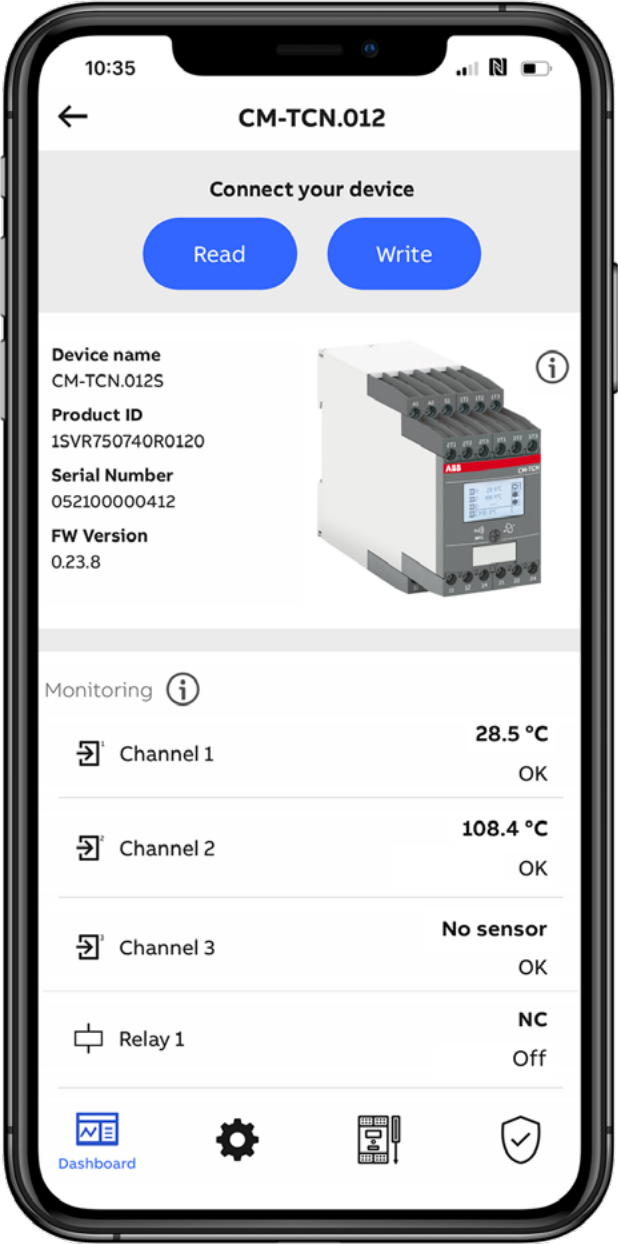



One device – thermal protection


Flexible adjustment and condition monitoring

Knowing the status of your devices at all times: thanks to the smart monitoring relays, you are always up to date and flexible in controlling your devices. Remote monitoring via Modbus RTU and ABB Ability™ Energy Manager and ABB Ability™ Asset Manager also enables the early detection of potential errors and possible maintenance requirements.

Flexible
adjustment

Early detection of po-
tential fault and need
for maintenance

Improved safety

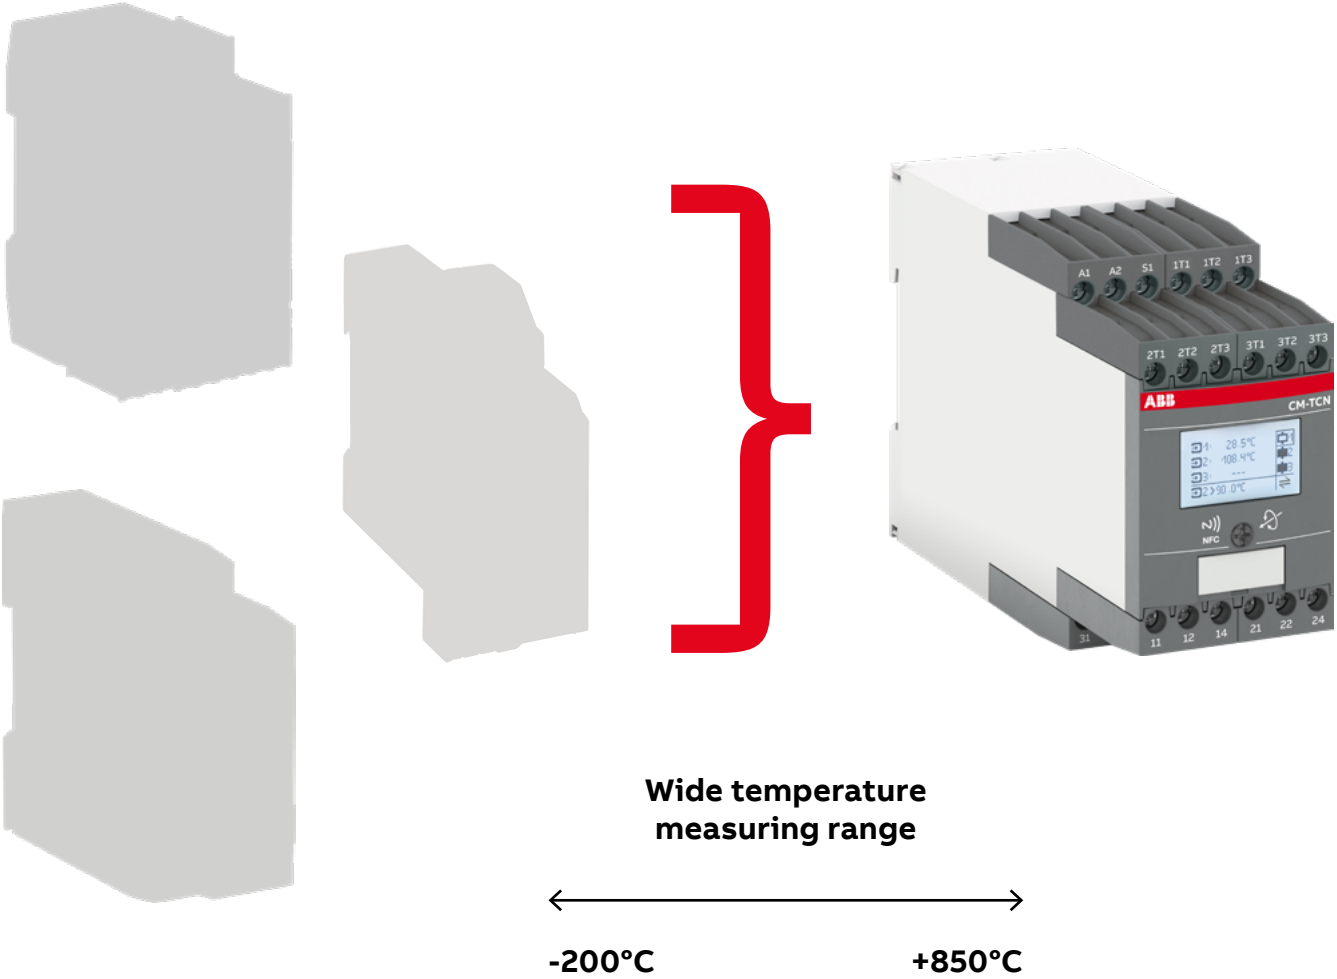


Built-in connectivity

Communication via embedded Modbus RTU



The smart temperature monitoring relay CM-TCN.012 supports the data transfer using the Modbus RTU communication protocol. The communication interface RS-485 is embedded in the relay and does not require installation of any accessories.

The communication interface makes it possible to:

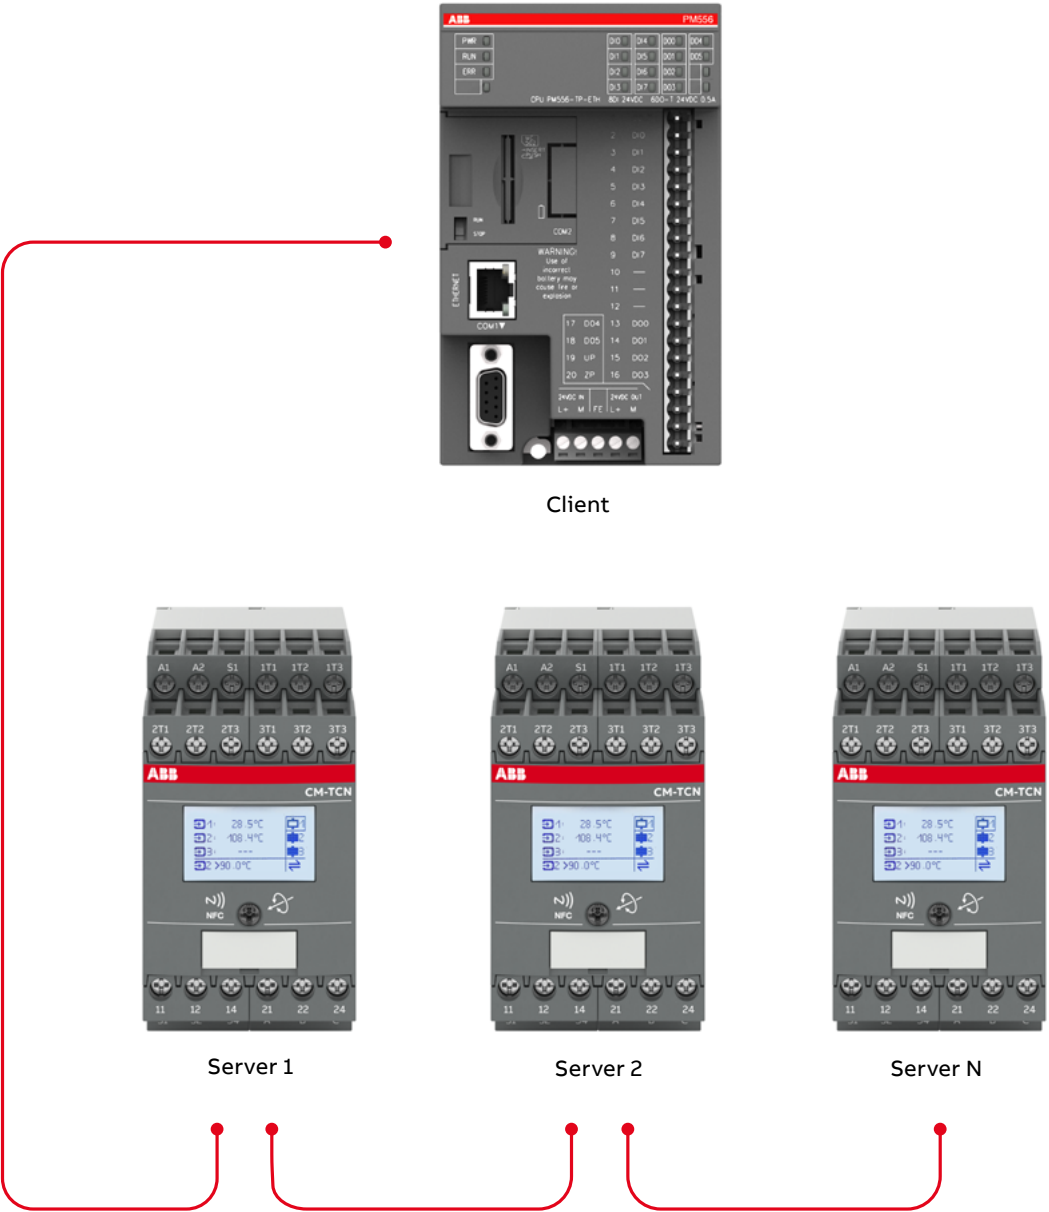

Applications

Temperature monitoring relays are used in a wide array of applications. In conjunction with temperature sensors, such as PT100 or PTC sensors, they monitor motor temperature, control cabinet temperature and protect transformers from overheating.

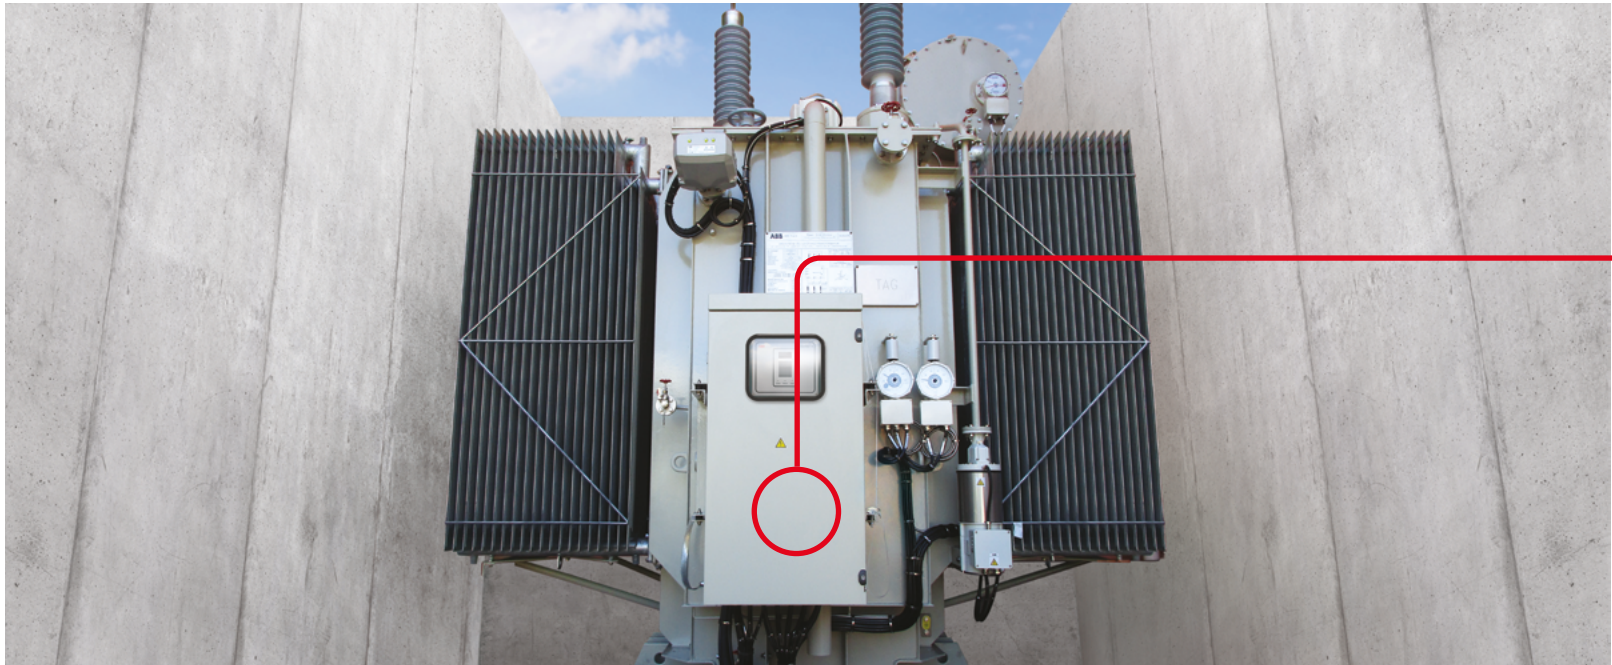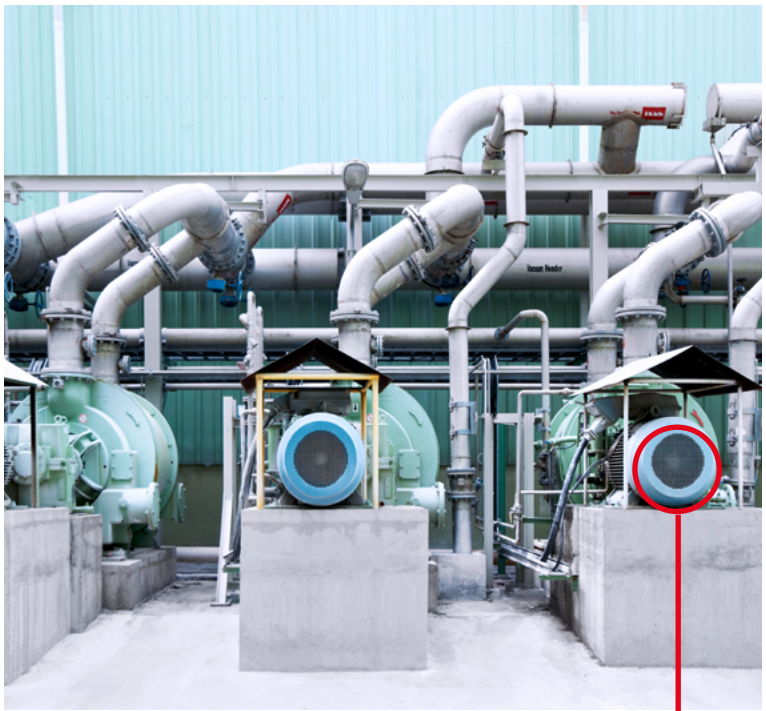

Temperature sensor, e.g. PT100




Smart temperature monitoring relay



ABB EPiC smartphone app

Operating controls

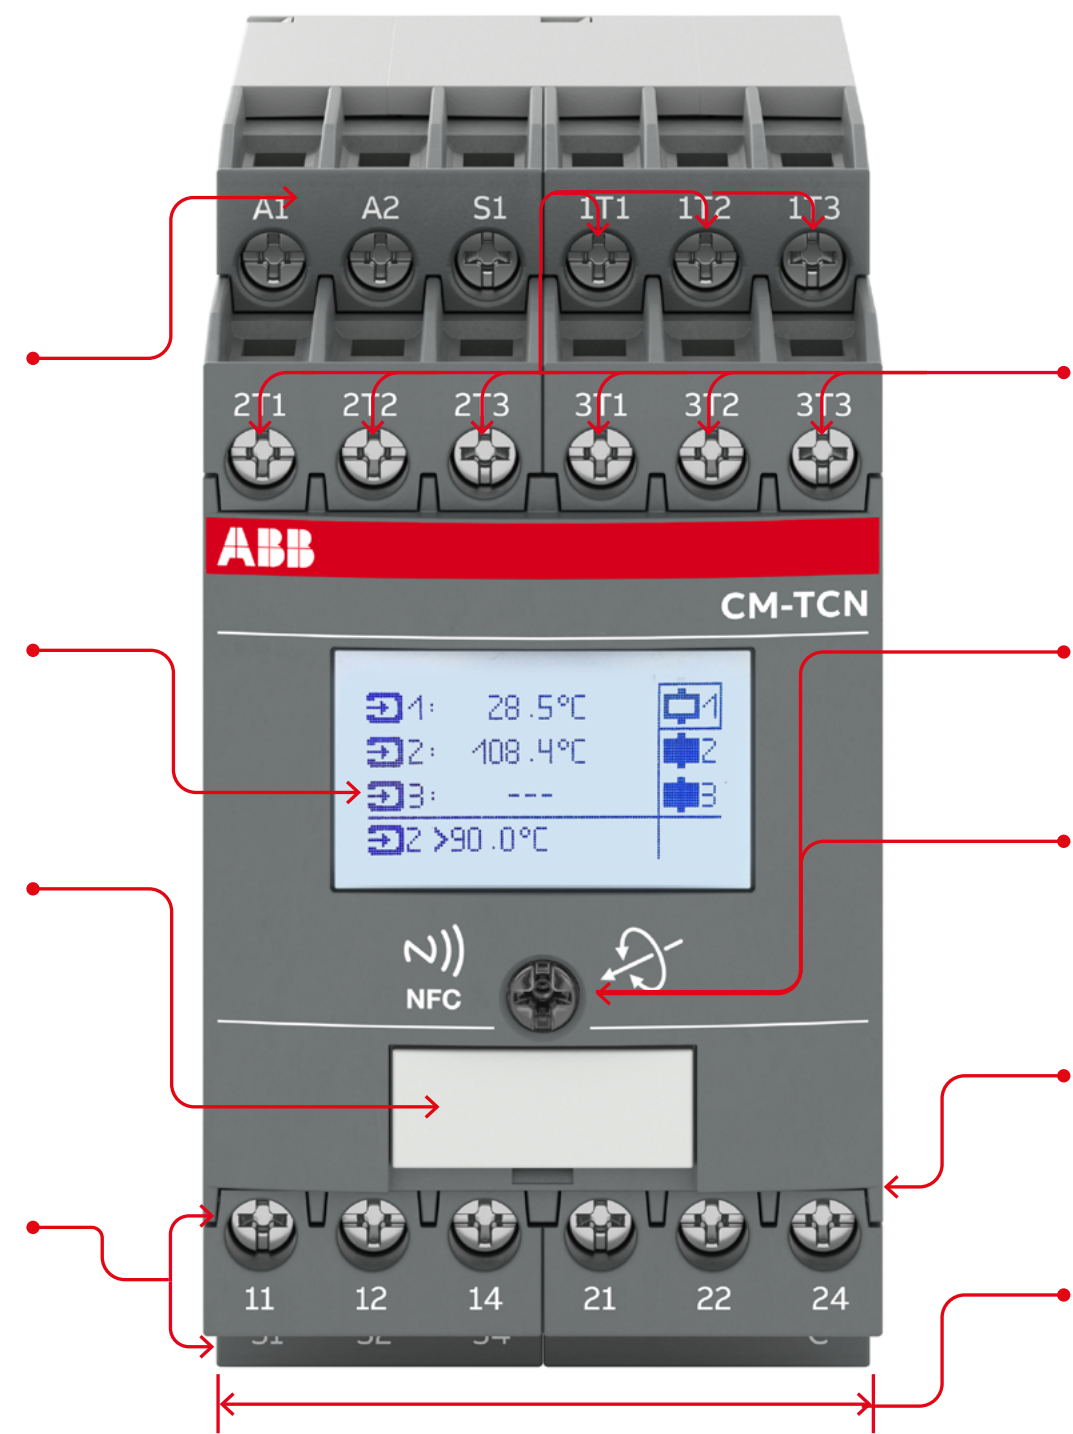

Ordering details


The temperature monitoring relays CM-TCS and CM-TCN are able to measure temperatures of solids, liquids and gaseous media using different types of sensors, such as PT100, PT1000, PTC, NTC or bi-metal switch. CM-TCN allows to connect up to three sensor circuits, different types of sensors, e.g. PT100 and PTC sensors, can be monitored simultaneously. CM-TCS allows to connect one sensor circuit. The temperature is obtained by the sensors in the medium, evaluated by the device and monitored to determine whether it is within an operating range (range monitoring function) or has exceeded or fallen below a threshold. Depending on the parametrization, output relays signalize the changes in the measuring circuits.

Smart temperature monitoring relays

Rated control supply voltage	Terminal type	Number of measuring circuits	Modbus RTU	Temperature sensor	Width mm	Type	Order code	Weight (1 pc) kg (lb)
24-240 V AC/DC	Screw	1	no	PT100, PTC, PT1000, NTC	22.5	CM-TCS.011S	1SVR730740R0110	0.172 (0.379)
	Push-in					CM-TCS.011P	1SVR740740R0110	0.172 (0.379)
	Screw	3			45	CM-TCN.011S	1SVR750740R0110	0.293 (0.646)
	Push-in					CM-TCN.011P	1SVR760740R0110	0.293 (0.646)
	Screw		yes			CM-TCN.012S	1SVR750740R0120	0.299 (0.659)
	Push-in					CM-TCN.012P	1SVR760740R0120	0.299 (0.659)

Accessories

Description	for type	Width mm	Type	Order code	Pkg qty	Weight (1 pc) g (oz)
Operating element for push-rotate button	CM-TCS.011, CM-TCN.01x		OPR.01	1SVR730007R0100	10	15 (0.53)
Adapter for screw mounting	CM-N.S/P	45	ADP.02	1SVR440029R0100	1	36.7 (1.30)
	CM-S.S/P	22.5	ADP.01	1SVR430029R0100	1	18.4 (0.65)
Marker label	CM-S.S/P, CM-N.S/P		MAR.01	1SVR366017R0100	10	0.19 (0.007)
Sealable transparent cover	CM-N.S/P	45	COV.12	1SVR750005R0100	1	7.0 (0.247)
	CM-S.S/P	22.5	COV.11	1SVR730005R0100	1	4.0 (0.129)

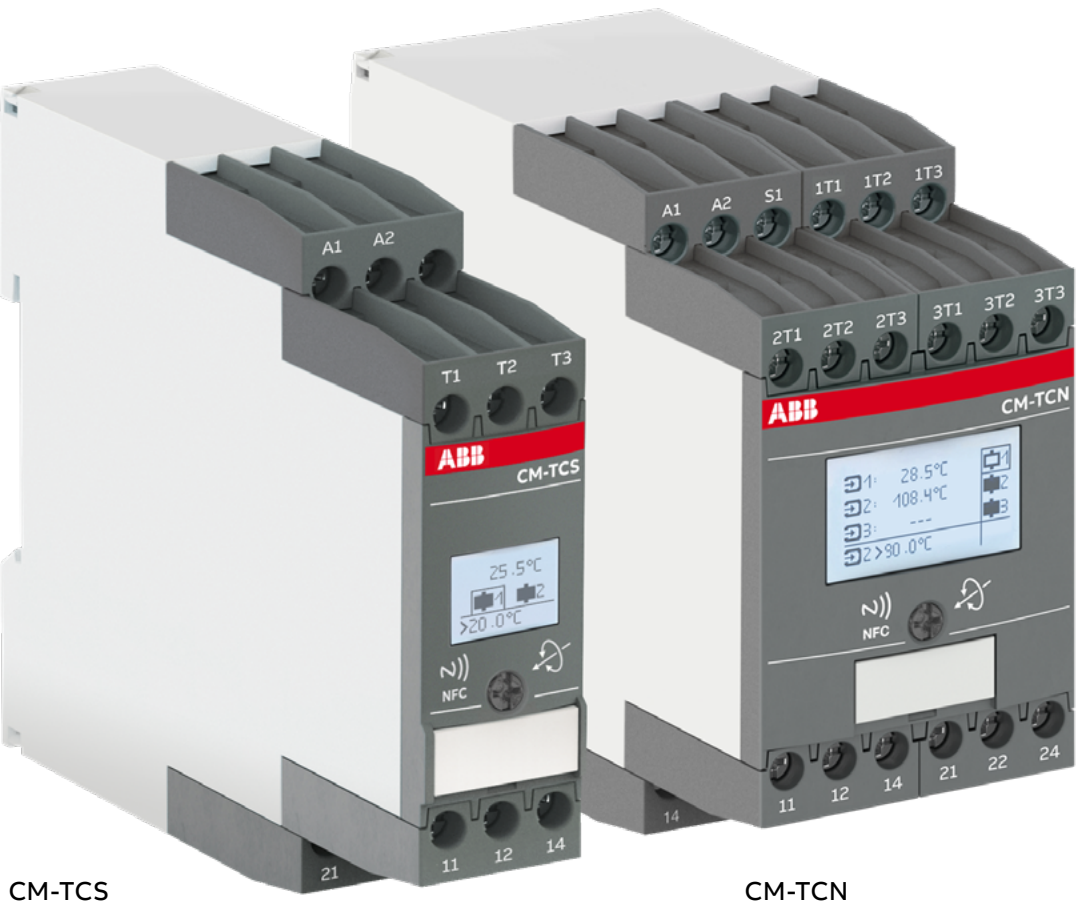

ABIB