


Safety instruction:

- ⚠ The fitting should be grounded if necessary.
- Tightening torque according to info no. 12 Table 4


23 Assembly Instruction



1


Single piece fitting

A. Overextruded Conduit
B. Fitting
C. Lock Nut (not included in content of delivery)




2

Cut the conduit straight in the corrugation valley (A).




3

Push the overextruded conduit (A) into the fitting (B) until at least one click can be heard.



4

While holding the flats of the thread, turn the cap nut clockwise with specified torque value. The seal (D) must be visible.



5

Tighten the lock nut clockwise with specified torque value, while holding the cap nut of fitting.

Remark: When disassembling fitting, loosen the lock nut anticlockwise while the cap is fixed using an adjustable spanner.

The specifications and instructions for our customers in this document reflect the product engineering level at the time of manufacturing. ABB/PMAAG accepts no liability for damages resulting from unprofessional installation or misuse of the products. This disclaimer also includes damages to third parties. It is the customer's responsibility to check the delivered products and immediately notify PMAAG of detected faults. It is also the customer's responsibility to test the delivered product on its applicability for the intended purpose. ABB / PMA AG will accept no liability or responsibility for their products if a product or a ABB / PMA system is combined or used together with third-party products, i.e. products from other companies than PABB / PMA AG. Jurisdiction in all legal disputes concerning product liability have the courts of the canton of Zurich/Switzerland. Swiss law applies. For more information go to: www.abb.ch

Contact us

ABB Switzerland Ltd
PMA Cable Protection

Aathalstrasse 90, CH-8610 Uster, Switzerland,
Phone: +41 58 585 00 11, Fax: +41 58 585 00 22,
E-Mail: pma-info@ch.abb.com, www.pma.ch






Power and productivity
for a better world™



Sicherheitshinweise:

- ⚠ Falls erforderlich ist es sicherzustellen, dass die Verschraubung elektrisch geerdet wird.
- Anzugsdrehmomente gemäss Info No.12
Tabelle 4

23 Montageanleitung

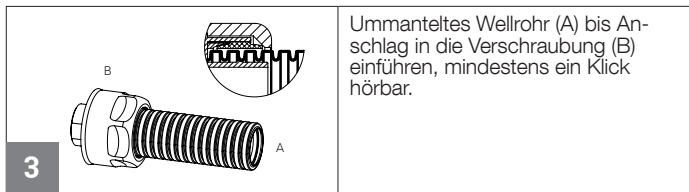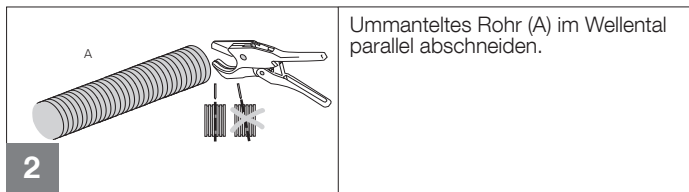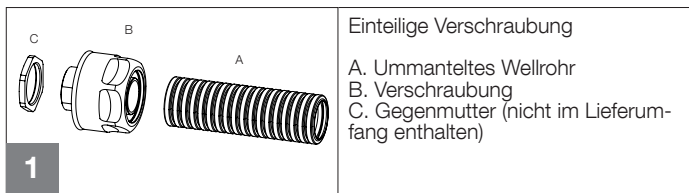

Hinweis: Bei der Demontage der Verschraubung die Gegenmutter gegen den Uhrzeigersinn lösen. Dabei Hutmutter gegenhalten.

Die in diesem Dokument für unsere Kunden enthaltenen Angaben und Instruktionen entsprechen dem neuesten Stand unserer Technik zum Zeitpunkt der Herstellung des Produktes. Die ABB / PMA AG lehnt jede Haftung bei unsachgemässer Montage oder Verwendung sowie Zweckentfremdung des Produktes ab. Dieser Haftungsausschluss umfasst auch allfällige Drittschäden. Es obliegt dem Kunden, die gelieferte Ware zu prüfen und allfällig festgestellte Mängel sofort der ABB / PMA AG anzuzeigen. Es obliegt ferner dem Kunden, die Ware auf ihre Eignung zwecks einer spezifischen Anwendung zu überprüfen. Die ABB / PMA AG lehnt jegliche Haftung für ihre Produkte ab, wenn ein einzelnes Produkt oder ein ABB / PMA-System mit Fremdprodukten, d.h. Produkten anderer Unternehmungen kombiniert bzw. verwendet wird. Gerichtsstand für Streitigkeiten bezüglich Produkthaftung sind die Gerichte des Kantons Zürich/Schweiz. Es kommt Schweizer Recht zur Anwendung. Ergänzende Informationen unter: www.abb.ch

Contact us

ABB Switzerland Ltd
PMA Cable Protection

Aathalstrasse 90, CH-8610 Uster, Switzerland,
Phone: +41 58 585 00 11, Fax: +41 58 585 00 22,
E-Mail: pma-info@ch.abb.com, www.pma.ch



Power and productivity
for a better world™

