DCN0649 RFQ-0009-1 Rev C (02-27-12)

Quotation Request for ABB K-Tek Products KM26T Magnetic Level Gauge (Top Mount)

Factory Contact:	
Seller Information Name: Phone: Email: Company or LBU: Main Phone: Fax:	End User Information Name: Phone: Email: Company: Country of Final Destination: Note: This information will be required before accepting an order
Tag ID #	
Process Conditions: Application for (select one): Total Level - In Upper Fluid Operating Sp. Gravity: Minimum Specific Gravity: Lower Fluid Second Sp. Gravity: Fluid(s): Operating Temp: Operating Pressure: Max Minimum Ambient Temperature: High Vibration Environment (Compressor Etc.)	If water, steam service? Yes - No Temp: Pressure:
Chamber & Float Details: Chamber Material: Float Material: Flange Material: Stilling Well Material (for H1 & H3 options; selection Length (IL):	Process Connection Type: Size: Rating:
Indicator Details: Select: Shuttle or Bar Graph up to 1000°F/538°C (select Scale (select one): Feet/In - Running In. (1/2 Special Requirements:	" Div.) - Running In. (1/8/") - Meter/cm - Custom


Accessories Required (circle all that apply)

Switches (specify type:)Transmitter - AT600 or AT200 (select: FFB, Hart, LCD, Honeywell DE)				
Approval or Docur	mentation Required			
CRN GOST – Russian	PED ASME	NACE Other		

Choose the appropriate configuration below or attach a sketch

__Lloyds

Note: Insertion length will always be greater than measuring length (ML). Please specify available insertion length (IL) and required measure length (ML). KM26T insertion lengths (IL) >24" require a stilling well.)

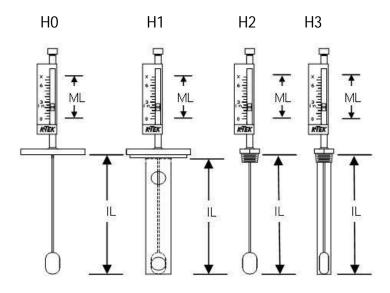

ABB, Inc. Level Measurement 18321 Swamp Rd. Prairieville, La 70769 Tel: +1 (225) 673-6100

__ABS

Fax: +1 (225) 673-6100 Fax: +1 (225) 673-2525