8187.9 FRENCH NORM NF - 9MM – R 60 SKY NIESSEN

PEP ecopassport®

Environmental Product Declaration

Document in compliance with ISO 14025: 2006 "Environmental labels and declarations. Type III environmental declarations"

ORGANIZATION		CONTACT INFORMATION			
ABB Niessen		Lide Brito - lide.brito@es.abb.com			
ADDRESS		WEBSITE			
Aranguren Pol., 6, 20180 Oiartzun, Gipuzkoa		www.new.abb.com			
STATUS	SECURITY LEVEL	REGISTRATION NUMBER	REV.	LANG.	PAGE
In Review	Public	ABBG-00228-V01.01-EN	1	en	1/10

© Copyright 2022 ABB. All rights reserved.

ABB Purpose & Embedding Sustainability

ABB is committed to continually promoting and embedding sustainability across its operations and value chain, aspiring to become a role model for others to follow. With its ABB Purpose, ABB is focusing on reducing harmful emissions, preserving natural resources and championing ethical and humane behavior.

Scan QR code for more information

General Information

Reference product	2CLA818790A1001 schuko 9mm French R60 socket with 2CLA858700A5101 cover and 2CLA857110A1101 frame
Description of the product	Schuko socket-type product family, which is used to connect appliances to the electrical current in a circuit
Functional unit	Connect during 20 years the plug of a load consuming 16A under a voltage of 250V while protecting the user from direct contact with live parts and with a protection class IP20. In= Rated current of the socket (16A). U = Voltage (250V) IP = Type F: 2P + E.
Other products covered	List of other products covered or a reference to page 9.10.11

© Copyright 2022 ABB. All rights reserved.

Constituent Materials

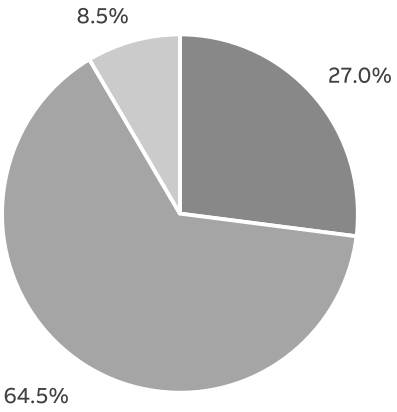

Total weight of Reference product	206	g

Plastics as % of weight		Metals as % of weight		Others as % of weight	
Name and CAS number	Weight%	Name and CAS number	Weight%	Name and CAS number	Weight%
PC	22.4	**STEEL**	41.0	**CARDBOARD**	8.5
PA	4.6	**BRASS**	13.6	**-**	-
-	x	**STAINLESS STEEL**	9.8	**-**	-

© Copyright 2022 ABB. All rights reserved.

Additional Environmental Information

Manufacturing	Includes the environmental impacts associated with extraction and processing of the raw materials used to produce the product and its pacakging, transport to the manufacturing site and assembly.
Distribution	Includes the transportation of the product in its packaging from the manufacturer's last logistic platform to the distributor.
Installation	Installation stage includes the installation of the products made manually and the end of life of packaging.
Use	The use scenario requirements take into account the loss of energy at a 50% of the load rate with a use time rate of 30% during 20 years: 7,23 kWh. The energy models used in this phase are the specific energy mixes based on ABB distribution. No maintenance is necessary.
End of life	Includes its transportation from the installation site to the final end of life treatment site, and end of life treatment processes. A value of 1000 km transport by lorry is used for the transportation.
Benefits and loads beyond the system boundaries	Prevented impacts of recycling materials.

© Copyright 2022 ABB. All rights reserved.

Environmental Impacts

Reference lifetime	20 years
Product category	Sockets
Installation elements	End of life of packaging
Use scenario	France
Geographical representativeness	Europe
Technological representativeness	Materials and processes data are specific for the production of socket and its family
Software and database used	SimaPro 9.3 and ecoinvent 3.8.
Energy model used	
Manufacturing	Spain
Installation	Europe
Use	France
End of life	France

© Copyright 2022 ABB. All rights reserved.

Common base of mandatory indicators

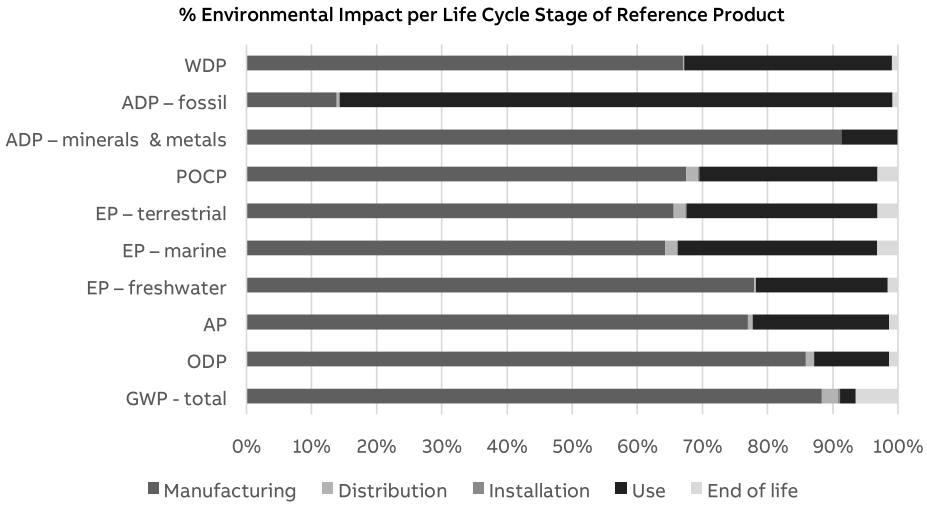

Environmental impact indicators

Indicator	Unit	Total	Manu-facturing	Distri-bution	Installation	Use	End of life	Bene-fits
GWP-total	**kg CO_2 eq.**	1.84E+00	1.08E+00	2.95E-02	4.97E-03	6.42E-01	7.96E-02	-8.14E-01
GWP-fossil	**kg CO_2 eq.**	1.81E+00	1.07E+00	2.94E-02	2.68E-03	6.29E-01	7.86E-02	-8.13E-01
GWP-biogenic	**kg CO_2 eq.**	3.11E-02	1.51E-02	2.65E-05	2.28E-03	1.26E-02	1.02E-03	-2.84E-04
GWP-luluc	**kg CO_2 eq.**	1.47E-03	1.05E-03	1.16E-05	1.06E-06	3.88E-04	1.72E-05	-5.44E-04
GWP-fossil = Global Warming Potential fossil fuels GWP-biogenic = Global Warming Potential biogenic GWP-luluc = Global Warming Potential land use and land use change								
ODP	**kg CFC-11 eq.**	5.76E-07	4.94E-07	6.81E-09	6.15E-10	6.62E-08	7.83E-09	-2.20E-08
ODP = Depletion potential of the stratospheric ozone layer								
AP	**H+ eq.**	1.80E-02	0.00E+00	1.19E-04	1.11E-05	3.77E-03	2.48E-04	-1.22E-02
AP = Acidification potential, Accumulated Exceedance								
EP-freshwater	**kg P eq.**	9.64E-05	1.05E-03	2.06E-07	1.90E-08	1.95E-05	1.52E-06	-5.95E-05
EP-marine	**kg N eq.**	1.98E-03	1.28E-03	3.56E-05	3.38E-06	6.06E-04	6.39E-05	-9.68E-04
EP-terrestrial	**mol N eq.**	2.20E-02	1.44E-02	3.93E-04	3.72E-05	6.45E-03	6.87E-04	-1.20E-02
EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment EP-terrestrial = Eutrophication potential, Accumulated Exceedance								
POCP	**kg NMVOCeq.**	6.54E-03	4.42E-03	1.20E-04	1.13E-05	1.79E-03	2.05E-04	-3.83E-03
POCP = Formation potential of tropo-spheric ozone								
ADP-minerals & metals	**kg Sb eq.**	2.84E-04	2.59E-04	1.02E-07	6.15E-10	2.45E-05	1.97E-07	-2.40E-04
ADP-fossil	**MJ**	1.01E+02	1.40E+01	4.45E-01	4.03E-02	8.61E+01	8.32E-01	-9.37E+00
ADP-minerals & metals = Abiotic depletion potential for non-fossil resources ADP-fossil = Abiotic deple-tion for fossil resources potential								
WDP	**m^3 e depr.**	7.37E-01	4.94E-01	1.33E-03	1.82E-04	2.35E-01	6.85E-03	-3.50E-01
WDP = Water Deprivation potential								

© Copyright 2022 ABB. All rights reserved.

Common base of mandatory indicators

Inventory flows indicator – Resource use indicators

Indicator	Unit	Total	Manu-facturing	Distri-bution	Installation	Use	End of life	Bene-fits
PERE	**MJ**	8.32E+00	1.28E+00	6.27E-03	5.75E-04	7.01E+00	2.02E-02	-1.00E+00
PERM	**MJ**	2.54E-01	2.54E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
PERT	**MJ**	8.58E+00	1.54E+00	6.27E-03	5.75E-04	7.01E+00	2.02E-02	-1.00E+00
PENRE	**MJ**	9.98E+01	1.24E+01	4.45E-01	4.03E-02	8.61E+01	8.32E-01	-9.37E+00
PENRM	**MJ**	1.67E+00	1.67E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
PENRT	**MJ**	1.01E+02	1.40E+01	4.45E-01	4.03E-02	8.61E+01	8.32E-01	-9.37E+00

PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials
PERM = Use of renewable primary energy resources used as raw materials
PERT = Total Use of renewable primary energy resources
PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials
PENRM = Use of non-renewable primary energy resources used as raw materials
PENRT = Total Use of non-renewable primary energy re-sources)

Inventory flows indicator – Indicators describing the use of secondary materials, water, and energy re-sources

Indicator	Unit	Total	Manu-facturing	Distri-bution	Installation	Use	End of life	Bene-fits
SM	**kg**	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
RSF	**MJ**	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRSF	**MJ**	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
FW	**m³**	3.90E-02	1.33E-02	4.96E-05	6.46E-06	2.54E-02	2.02E-04	-8.84E-03

SM = Use of secondary material
RSF = Use of renewable secondary fuels
NRSF = Use of non-renewable secondary fuels
FW = Use of net fresh water

Inventory flows indicator – Waste category indicators

Indicator	Unit	Total	Manu-facturing	Distri-bution	Installation	Use	End of life	Bene-fits
Hazardous waste disposed	kg	4.12E-01	2.24E-01	2.29E-02	3.57E-03	1.23E-01	3.83E-02	-2.17E-01
Non- hazardous waste disposed	kg	1.19E-03	4.13E-05	3.01E-06	2.71E-07	1.14E-03	3.42E-06	-1.41E-05
Radioactive waste disposed	kg	8.58E+00	1.54E+00	6.27E-03	5.75E-04	7.01E+00	2.02E-02	-1.00E+00

© Copyright 2022 ABB. All rights reserved.

Common base of mandatory indicators

Inventory flows indicator – Output flow indicators

Indicator	Unit	Total	Manu-facturing	Distri-bution	Installation	Use	End of life	Bene-fits
Components for re-use	kg	1.55E-03	1.55E-03	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling	kg	1.51E-01	6.18E-04	0.00E+00	1.61E-02	0.00E+00	1.34E-01	0.00E+00
Materials for energy recovery	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Exported energy	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

Inventory flow indicator – other indicators

Indicator	Unit	Total
Biogenic carbon content of the product	kg of C	0.00E+00
Biogenic carbon content of the associated packaging	kg of C	8.75E-03

© Copyright 2022 ABB. All rights reserved.

Environmental Impact Indicator Glossary

Impact indicators

Indicator	Description	Distri-bution
Global warming potential (GWP) - total	Indicator of potential global warming caused by emissions to air contributing to the greenhouse effect. The total global warming potential (GWP-total) is the sum of three sub-categories of climate change. GWP-total = GWP-fossil + GWP-biogenic + GWP- land use and land use change	kg CO_2 eq.
Ozone depletion (ODP)	Emissions to air that contribute to the destruction of the stratospheric ozone layer	kg CFC-11 eq.
Acidification of soil and water (A)	Acidification of soils and water caused by the release of certain gases to the atmosphere, such as nitrogen oxides and sulphur oxides	H+ eq.
Eutrophication (E)	Indicator of the contribution to eutrophication of water by the enrichment of the aquatic ecosystem with nutritional elements, e.g. industrial or domestic effluents, agriculture, etc. This indicator is divided to three: freshwater, marine and terrestrial.	kg P eq., kg N eq., mole N eq.
Photochemical ozone creation (POCP)	Indicator of emissions of gases that affect the creation of photochemical ozone in the lower atmosphere (smog) because of the rays of the sun.	kg NMVOC eq.
Depletion of abiotic resources – elements (ADPe)	Indicator of the depletion of natural non-fossil resources	kg Sb eq.
Depletion of abiotic resources – fossil fuels (ADPf)	The use of non-renewable fossil resources in an unsustainable way (e.g. from material to waste)	MJ (lower heating value)
Water Deprivation potential (WDP)	Deprivation-weighted water consumption. Assesses the potential of water deprivation, to either humans or ecosystems, building on the assumption that the less water remaining available per area, the more likely another user will be deprived.	m^3 e depr.

Resource use indicators

Indicator	Description	Distri-bution
Total use of primary energy	Total use of non-renewable primary energy resources (primary energy and primary energy resources used as raw materials) + Total use of renewable primary energy re-sources (primary energy and primary energy resources used as raw materials)	MJ (lower heating value)

© Copyright 2022 ABB. All rights reserved.

Registration number:		**Drafting Rules:**	PCR-ed4-EN-2021 09 06
ABBG-00228-V01.01-EN		**Supplemented by:**	PSR-0005-ed2-EN—2016 03 29
Verifier accreditation number:		**Information and reference documents:**	
VH32		www.pep-ecopassport.org	
Date of issue:	07/2023	**Validity period:**	5 years
Internal ○		External ◉	

Independent verification of the declaration and data, in compliance with ISO 14025: 2006

The PCR review was conducted by a panel of experts chaired by Julie ORGELET (DDemain)

PEP are compliant with XP C08-100-1 :2016 or EN 50693:2019
The elements of the present PEP cannot be compared with elements from another program

Document in compliance with ISO 14025: 2006 "Environmental labels and declarations. Type III environmental declarations"

© Copyright 2022 ABB. All rights reserved.