

---

 TECHNICAL DATA SHEET

# PMAJACK - F.66 - Braided Hose

## PMA



Fire safety bundling and protection of cables and wire in applications where high standards and excellent abrasion properties are required


**Applications:**

- Industry, aviation, construction of vehicles and trains

**Features & Benefits:**

- Coverage: > 90%
- Excellent abrasion properties
- High temperature stability
- Lightweight structure
- High flexibility
- Self-extinguishing

**Materials:**

- Polyamide 6.6

**Compatible with:**

- PMAJACK terminations

**Temperature range:**

- -55°C ... +135°C continuous, +160°C short-term

**Conforms to:**

- EN 45545-2 HL3 (R22 & R23)
- NFPA 130
- UL94 V2
- UL 1696 (UL Flie 125619 / black colour)

**Construction:**

- According to DIN 65164 (part 1 and 2)
- Stand Ø: 0.28 mm

**Colour:**

- Black
- Grey

**Chemical properties:**

- Please refer to [www.pma.ch](http://www.pma.ch)  
(Technical Information / Chemical Resistance)


**Environmental properties:**

- Free from halogens and cadmium
- RoHS and REACH compliant

**Product selection:**

Part no.		Construction	Braid size	fits to	Range of application		Weight	Packing unit
black	grey	numb. x Ø mm	NW	PMA terminations	min. Ø mm	max. Ø mm	kg/100 m	metre
F.66.04SW	F.66.04GR	48 x 0.28	4	-	3.0	7.0	0.4	100
F.66.06SW	F.66.06GR	72 x 0.28	6	SRER-06	5.0	8.0	0.6	100
F.66.08SW	F.66.08GR	96 x 0.28	8	SRER-06	7.0	10.0	0.8	100
F.66.10SW	F.66.10GR	120 x 0.28	10	SRER-06	9.0	13.0	1.0	50
F.66.12SW	F.66.12GR	160 x 0.28	12	SRER-06	11.0	16.0	1.4	50
F.66.16SW	F.66.16GR	192 x 0.28	16	SRER-16	15.0	21.0	1.7	50
F.66.20SW	F.66.20GR	240 x 0.28	20	SRER-16	20.0	26.0	2.0	50
F.66.25SW	F.66.25GR	280 x 0.28	25	SRER-21	24.0	31.0	2.2	50
F.66.30SW	F.66.30GR	384 x 0.28	30	SRER-21 / SRER-29	28.0	38.0	3.5	50
F.66.40SW	F.66.40GR	480 x 0.28	40	SRER-29	38.0	49.0	4.2	50
F.66.50SW	F.66.50GR	600 x 0.28	50	SREV-40 / SRER-50	48.0	65.0	5.1	50
F.66.70SW	F.66.70GR	600 x 0.28	70	SREV-40 / SRER-50	48.0	85.0	4.9	50

Our customer service dept. or local distribution partner will be pleased to help you concerning product availability and lead time  
Braids in black colour UL recognized to UL 1696 (UL file E 80294)

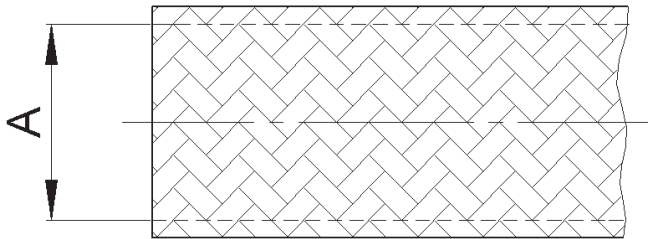

Thermal properties:	Value:	Test parameters:	Test method:
Continuous application temperature	-55 ... +135°C		PMA DO 9.21-4510
Short-term	+160°C	(168 h)	PMA DO 9.21-4360

Fire safety properties:	Value:	Test parameters:	Test method:
Flammability class	V2		UL 94
Fire hazard level	HL3		EN 45545-2 (R22)
Oxygen index	> 32 %		EN ISO 4589-2
Smoke density	< 150 Ds max.		EN ISO 5659-2 (25 kW/m <sup>2</sup> )
Toxicity	< 0.75 CIT <sub>NLP</sub>		NF X 70-100-1/-2: (600°C)
Fire hazard level	HL3		EN 45545-2 (R23)
Oxygen index	> 32 %		EN ISO 4589-2
Smoke density	< 300 Ds max.		EN ISO 5659-2 (25 kW/m <sup>2</sup> )
Toxicity	< 1.5 CIT <sub>NLP</sub>		NF X 70-100-1/-2: (600°C)

Fire performance:		
- Flammability	compliant	NFPA 130 ASTM E 162
- Smoke density	compliant	ASTM E 662

ABB Switzerland Ltd,  
PMA Cable Protection  
Aathalstrasse 90  
8610 Uster, Switzerland  
Phone: +41 58 585 00 11  
pma-info@ch.abb.com  
www.pma.ch

Let's write the future.  
Together. **abb.com**

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB Installation Products Inc. does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB Inc. Copyright© 2019 ABB Installation Products Inc. All rights reserved

