


On-load tap-changer type UCGL./III, VUCGL./III, UCLL./III, VUCLR./III, UC DL./III,  
 10 tap positions, linear switching.  
 Max. effective No. of turns in pos. 1.  
 The tap-changer is delivered set in pos. 6,  
 the preceding pos. was 5.

Lindningskopplare typ UCGL./III, VUCGL./III, UCLL./III, VUCLR./III, UC DL./III,  
 10 lägen, linjär koppling.  
 Max antal effektiva varv i läge 1.  
 Lindningskopplaren levereras inställd i läge 6,  
 föregående läge var 5.

Pos. Läge	Tap selector and diverter switch connect	Väljaren och lastkopplaren förbinder
1	1-V-x	30
2	2-H-v	
3	3-V-x	
4	4-H-v	
5	5-V-x	
6	6-H-v	
7	7-V-x	
8	8-H-v	
9	9-V-x	
10	10-H-v	

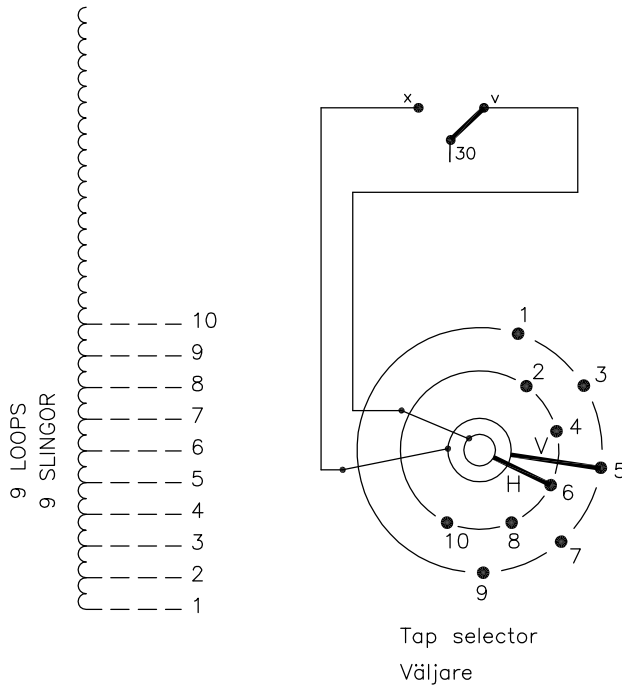

Diverter switch  
Lastkopplare

Tap selector  
Väljare


The tap-changer is shown in pos. 6,  
 the preceding pos. was 5.  
 The tap selector is seen from above.  
 Contact arm V is located above contact arm H.

Lindningskopplaren visad i läge 6,  
 föregående läge var 5.  
 Väljaren sedd uppifrån.  
 Kontaktarm V ligger över kontaktarm H.

Continuous lines show leads included in the  
 tap-changer. Dashed lines show leads belonging  
 to the cleats and leads.

Heldragna linjer visar ledare som ingår i  
 lindningskopplaren. Streckade linjer visar  
 ledare som tillhör anslutningsdonet.

We reserve all rights in this document and in the information contained therein. Reproduction, use or disclosure to third parties without express authority is strictly forbidden. © ABB '19

Sheet	Cont					
	Year	Week				
Form No.	Design checked by	Dept				
		Rev Ind	Revision	Appd	Year	Week
Accepted by qual control R.Yngvesson		Accepted for prod by		Description (English) CONNECTION DIAGRAM		DATAORIGINAL
Design checked by B.O.Stenestam		Drawn by L.Bergman		Description (own language) KOPPLINGSSCHEMA		File name 0367-2
Drawing checked by M.Hedlund		Issued by Dept Year Week COM/TKO 97 23		5492 0367-2		Lang 1
 Asea Brown Boveri						Revind -