


On-load tap-changer type UCGR./III, VUCGR./III, UCLR./III, VUCLR./III, UCDR./III, 13 tap positions, plus/minus switching.
 Min. effective No. of turns in pos. 1.
 The tap-changer is delivered set in pos. 7,
 the preceding pos. was 6.

Lindningskopplare typ UCGR./III, VUCGR./III, UCLR./III, VUCLR./III, UCDR./III, 13 lägen, plus/minus koppling.
 Min antal effektiva varv i läge 1.
 Lindningskopplaren levereras inställd i läge 7,
 föregående läge var 6.

Pos. Läge	R connects in direction R förbinder i riktning	Tap selector and diverter switch connect Väljaren och lastkopplaren förbinder
1		1-H-v
2		2-V-x
3		3-H-v
4	20-21	4-V-x
5		5-H-v
6		6-V-x
7	20-21	7-H-v
8		8-V-x
9		9-H-v
10	20-22	10-V-x
11		11-H-v
12		12-V-x
13	20-22	13-H-v

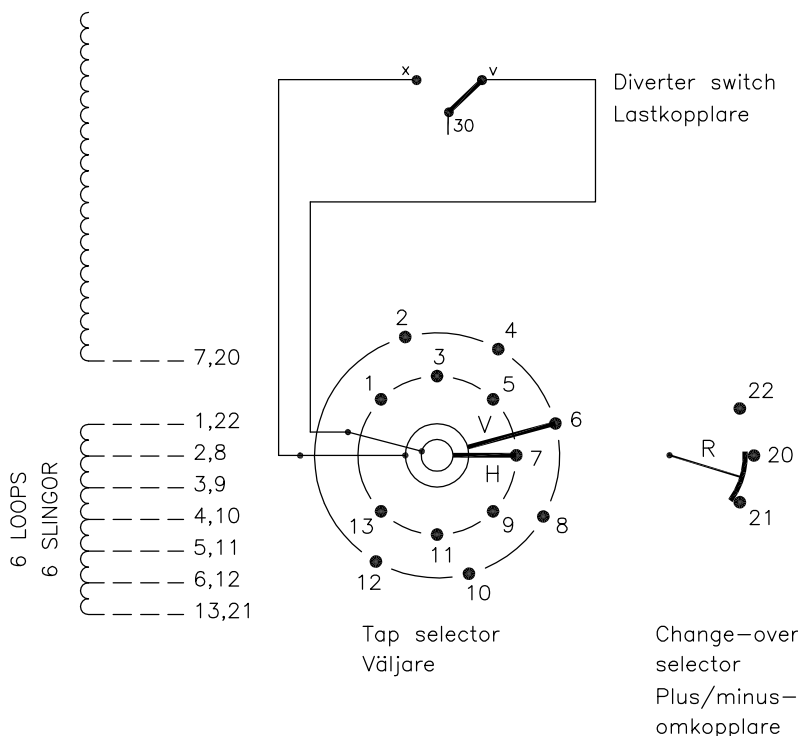

The tap-changer is shown in pos. 7,
 the preceding pos. was 6.
 The tap selector and the change-over selector
 are seen from above.
 Contact arm V is located above contact arm H.

Lindningskopplaren visad i läge 7,
 föregående läge var 6.
 Väljaren och plus/minus-omkopplaren sedda uppifrån.
 Kontaktarm V ligger över kontaktarm H.

Continuous lines show leads included in the
 tap-changer. Dashed lines show leads belonging
 to the cleats and leads.

Heldragna linjer visar ledare som ingår i
 lindningskopplaren. Streckade linjer visar
 ledare som tillhör anslutningsdonet.

2	VUCL Added.	CA	12	37
1	VUCG Added.	TOLA	07	47
Rev Ind	Revision	Appd	Year	Week

Accepted by qual control R.Yngvesson	Accepted for prod by	Description (English) CONNECTION DIAGRAM	DATA ORIGINAL
Design checked by B-O.Stenestam	Drawn by L.Bergman	Description (own language) KOPPLINGSSCHEMA	File name 0371-3
Drawing checked by M.Hedlund	Issued by Dept Year Week COM/TKO 97 23	5492 0371-3	Lang 1
Asea Brown Boveri			Revind -

We reserve all rights in this document and in the
 information contained therein. Reproduction, use or
 disclosure to third parties without express authority
 is strictly forbidden. © ABB '19

Sheet	Cont
Year	Week
Dept	
Revind	
Form No.	
Design checked by	