



# Non-Metallic Systems

## Hi-Spec Peek - Type A



### Technical Characteristics

Conforms to	BSI Kitemark KM-35161 Low voltage directive		
Approvals and Standards	 		
Degree of mechanical protection	High Impact Resistance		
Degree of protection	IP66 - As standard IP67 - As standard		
UV protection	Very High		
Fitting Characteristics	Straight fitting - Fixed external male thread		
Application	For insertion into threaded entries or knockouts using a locknut to secure		
Normal operating temperature range	Application	Min Temp	Max Temp
	Static	- 60°C	+260°C
	Dynamic	- 45°C	+250 °C
For use with - Conduit Series	Un-braided Hi-Spec Peek - <a href="#">PK</a>		

### Fire performance

For fire performance information, please refer to relevant conduit data sheet as highlighted above.



Testing data	Click or See page <a href="#">3</a>
Type of material	Nickel Plated Brass body & back nut. Silicone seals

### Image



#### Cable Management Products Ltd.

CMG House - Station Road - Coleshill - B46 1HT - United Kingdom  
Tel: +44(0)1675 468 222 - Fax: +44(0)1675 464 930

Technical Support e-mail: [cmg.conduitsystems@abb.com](mailto:cmg.conduitsystems@abb.com) - [www.adaptaflex.com](http://www.adaptaflex.com)

# Non-Metallic Systems




## Hi-Spec Peek - Type A

### Dimensional & Thread Data

Part No Metric Threads	Thread A	Nominal Dimensions (mm)				
		B	C	D	E	F
PK13/M16/A	M16 x1.5	12.0	20.0	22.0	12.0	22.0
PK16/M16/A	M16 x1.5	12.0	24.0	24.0	12.0	25.4
PK21/M20/A	M20 x1.5	14.0	28.0	28.0	15.8	30.0
PK28/M25/A	M25 x1.5	15.0	33.0	38.0	19.0	38.0
PK34/M32/A	M32 x1.5	18.0	36.0	42.0	26.5	44.5

Metric	Standard thread conforming to EN60423 & BS3643		
Thread Size	Ext Thread Outside Diameter	Int Thread Inside Diameter	Pitch
M16	16mm	14.4mm	1.5mm
M20	20mm	18.4mm	1.5mm
M25	25mm	23.4mm	1.5mm
M32	32mm	30.4mm	1.5mm

NOTE: Dimensions are nominal

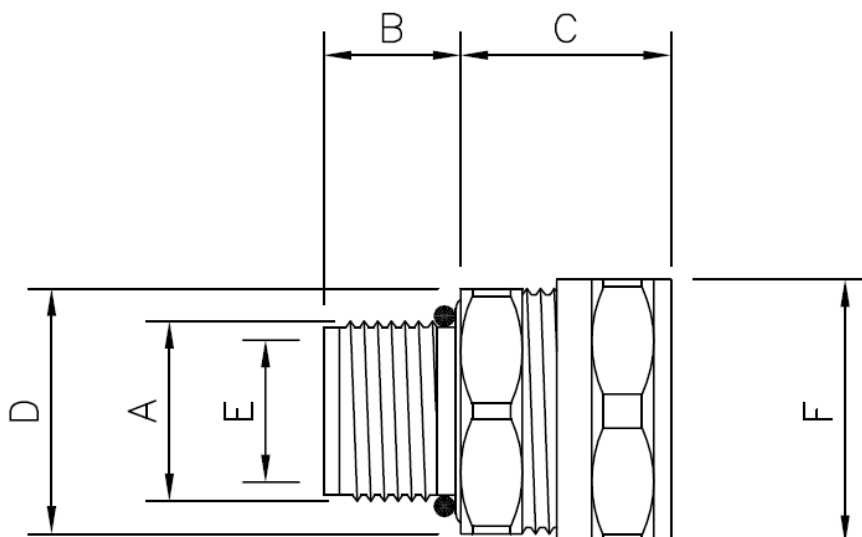

# Non-Metallic Systems

## Hi-Spec Peek - Type A



### BS EN 61386 Classification

Fitting	Compression	Impact	Min temp	Max temp	bending	electrical	IP solids	IP water	Corrosion	Tensile	Non-flame Propogating	Suspended load
PK	N/A	5	5	6	N/A	N/A	6	7	0	1	1	0

### Mechanical Properties

Test Type	Methods / Standards	Requirements	Value
Tensile Strength	IEC61386-1	2 mins at Specified Value ( <i>PK Conduit</i> )	Class 1
Tensile Strength		Ultimate Pullout ( <i>PK Conduit</i> )	320N
Impact Strength @ -45°C	IEC61386-1	No visible damage	Class 3
Impact Strength @ -5°C	IEC61386-1	No visible damage	Class 5
Impact Strength @ 23°C	IEC61386-1	No visible damage	Class 5

Tensile Tests to IEC 61386 gives the minimum classification value only. Actual values will depend on the type and size of the fittings used and will always be greater than the minimum – Impact strength is the minimum classification value at the minimum temperature – actual values will depend on size and temperature. Specific values available on request.

### Thermal Properties

Test Type	Methods / Standards	Requirements	Value
Dynamic Applications	IEC 61386-23	5000 Operations at MBR 2hrs	-45°C to +250°C
Static Short Term Temp		Temporary Use (3000hrs)	-60°C to +260°C
Static Long Term Temp		Permanent Use (30,000) Hours	-45°C to +260°C

### Chemical Resistance Chart

Key:				
Suitable :	Astm No.1	Diesel oil	Methyl Bromide	Sulphur Dioxide (Gas)
Limited Suitability :	Astm No.2	Diethylamine	MEK	Sulphuric Acid (10%)
Unsuitable :	Astm No.3	Ethanol	Nitric Acid (10%)	Sulphuric Acid (70%)
Not Tested :	Acetic Acid (10%)	Ether	Nitric Acid (70%)	Toluene
	Acetone	Ethylamine	Oxalic Acid	Transformer Oil
	Aluminium Chloride	Ethylene Glycol	Ozone (Gas)	1,1,1-Trichloroethane
	Aniline	Ethyl Ethanoate	Paraffin oil	Trichloroethylene
	Benzaldehyde	Freon 32	Petrol	Turpentine
	Benzene	Hydrochloric Acid (10%)	Phenol	Vegetable Oil
	Carbon tetrachloride	Hydrochloric Acid (36%)	Sea Water	Vinyl Acetate
	Chlorine water	Hydrogen Peroxide (35%)	Silver Nitrate	Water
	Chloroform	Hydrogen Peroxide (87%)	Skydrol	White Spirit
	Citric Acid	Lactic Acid	Sodium Chloride	Zinc Chloride
	Copper Sulphate	Lubricating oil	Sodium Hydroxide (10%)	
	Cresol	Methanol	Sodium Hydroxide (60%)	

The information above is given as a guide only and is based on published technical data and experience.

The chemical resistance of the above products is dependant on factors such as chemical exposure, concentration of the chemical and temperature. The above chemicals are valid for a temperature of 23°C. Use of the above table is at the users own discretion and risk. Those using it must satisfy themselves that their application presents no health and safety risks. The end user should assess compatibility with their application and contact Thomas & Betts for further information.

ADHERENCE TO THE CURRENT WIRING REGULATIONS BS7671 OR NEC WIRING REGULATIONS (FOR USA) IS STRONGLY ADVISED.  
 MINIMUM BEND RADIUS FOR FLEXING IS DEPENDANT UPON MINIMUM TEMPERATURE, BENDING FREQUENCY AND CHEMICAL ENVIRONMENT.

**Cable Management Products Ltd.**

CMG House - Station Road - Coleshill - B46 1HT - United Kingdom  
 Tel: +44(0)1675 468 222 - Fax: +44(0)1675 464 930  
 Technical Support e-mail: [cmg.conduitsystems@abb.com](mailto:cmg.conduitsystems@abb.com) - [www.adaptaflex.com](http://www.adaptaflex.com)