



MULTIPLE OF SENSOR

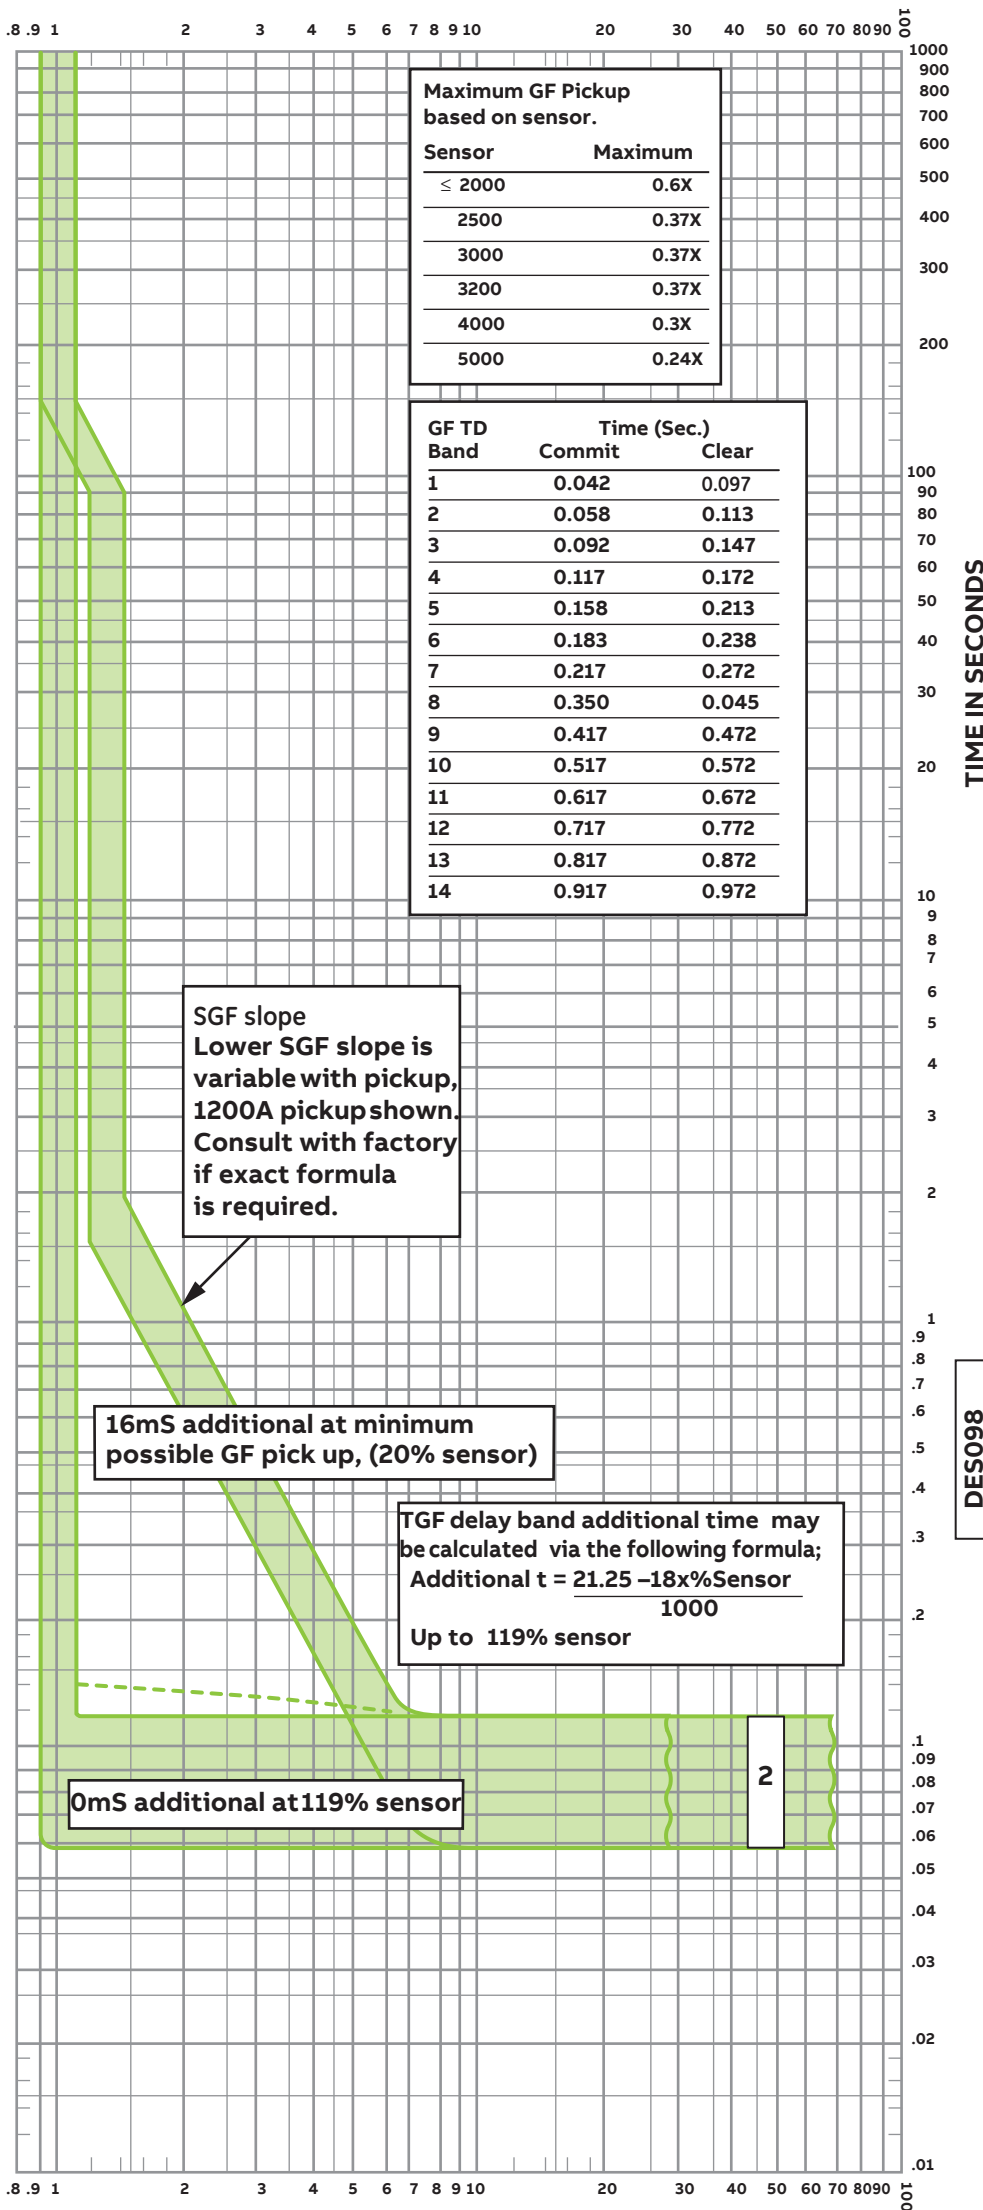

MULTIPLE OF SENSOR

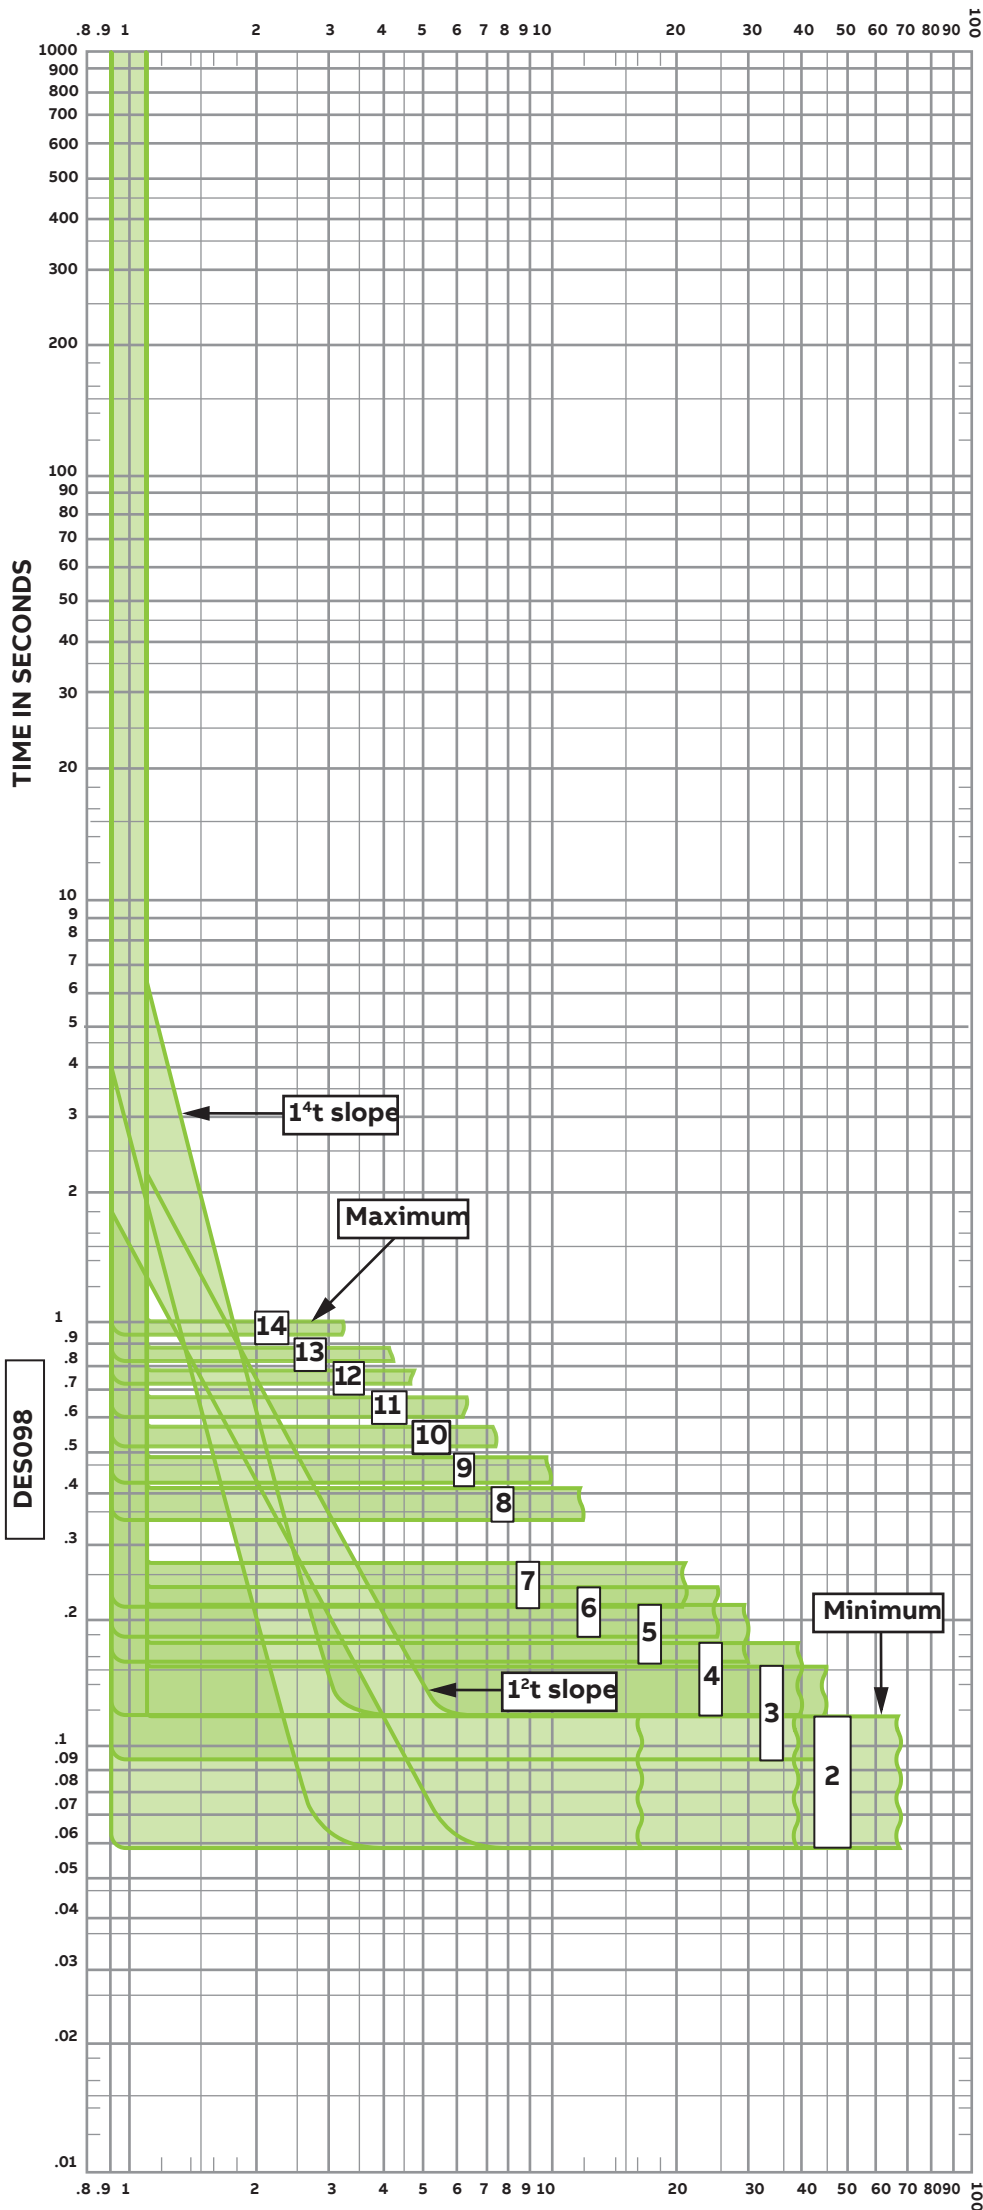

**Frames** 800-5000A AK, AKR & WavePro  
**Frames** 800-4000A PowerBreak® I & PowerBreak® II

**All Voltages:** 600 Vac and below

**Low-Voltage Circuit Breakers**

EntelliGuard® TU Trip Unit for PowerBreak® I & II, AK & AKR, WavePro  
 Circuit Breakers and Conversion Kits  
 UL489 and UL1066 Stored Energy Mechanism Circuit Breakers

**Ground Fault**

Applies to trip units manufactured with firmware version 08.00.25 and earlier  
 Curves apply at 50/60 Hertz and from -20°C to 55°C circuit breaker ambient temperature.

**DES098**

**Pickup Range**  
 Minimum 0.2X Sensor  
 Maximum up to 0.6X  
 Sensor Not to exceed 1200A