

TECHNICAL DATA SHEET

PMA Accessories - 514-M - Plug screws

Metric thread

PMA**Features & Benefits:**

- Suitable for closing off (and sealing with gasket ring, IP65) unused threaded holes

Ingress protection:

- IP54
- IP65 with gasket ring on request

Materials:

- Polyamide 6 glass fibre reinforced

Temperature range:

- -30°C ... +100°C

Conforms to:

- Thread according to EN 60423

Colour:

- Light-grey, RAL 7035

Environmental properties:

- Free from halogens and cadmium
- RoHS and REACH compliant

Product selection:

Part no.	Thread size	Dimensions in mm (nom.)			Weight	Packing unit
		g	H	d2		
light-grey	metric	g	H	d2	kg/100 pcs	pcs/PU
514-M12	M12 x 1.5	6.0	10.0	15.0	0.1	100
514-M16	M16 x 1.5	6.0	10.5	20.0	0.2	100
514-M20	M20 x 1.5	6.0	10.5	24.0	0.3	100
514-M25	M25 x 1.5	8.0	13.0	30.0	0.5	100
514-M32	M32 x 1.5	8.0	13.5	37.0	0.6	100
514-M40	M40 x 1.5	8.0	14.0	46.0	1.0	50
514-M50	M50 x 1.5	10.0	16.5	56.0	1.6	50
514-M63	M63 x 1.5	12.0	17.0	70.0	2.1	50

Our customer service dept. or local distribution partner will be pleased to help you concerning product availability and lead time

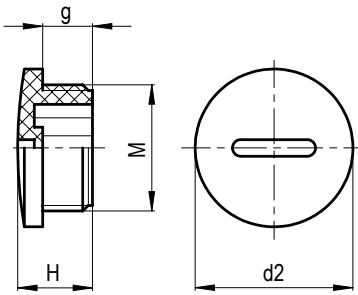


ABB Switzerland Ltd,
PMA Cable Protection
Aathalstrasse 90
8610 Uster, Switzerland
Phone: +41 58 585 00 11
pma-info@ch.abb.com
www.pma.ch

Let's write the future.
Together. **abb.com**

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB Installation Products Inc. does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB Inc. Copyright© 2019 ABB Installation Products Inc. All rights reserved

