This document is issued by means of a computerized system.
The digitally stored original is electronically approved. The approved document has a date entered in the 'Approved'-field.
A manual signature is not required.

Revision	Revision text
D	ANSI and IEC values changed

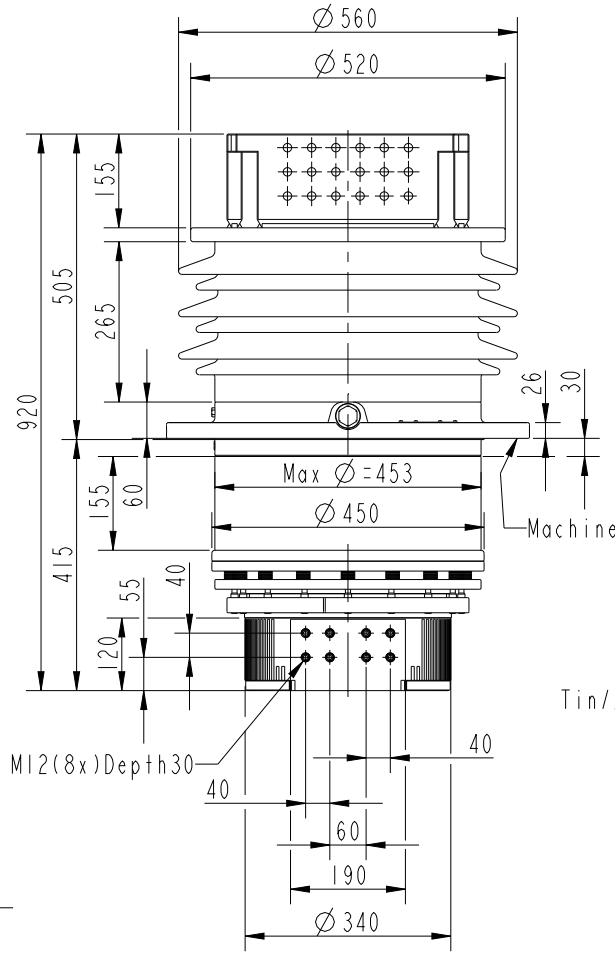

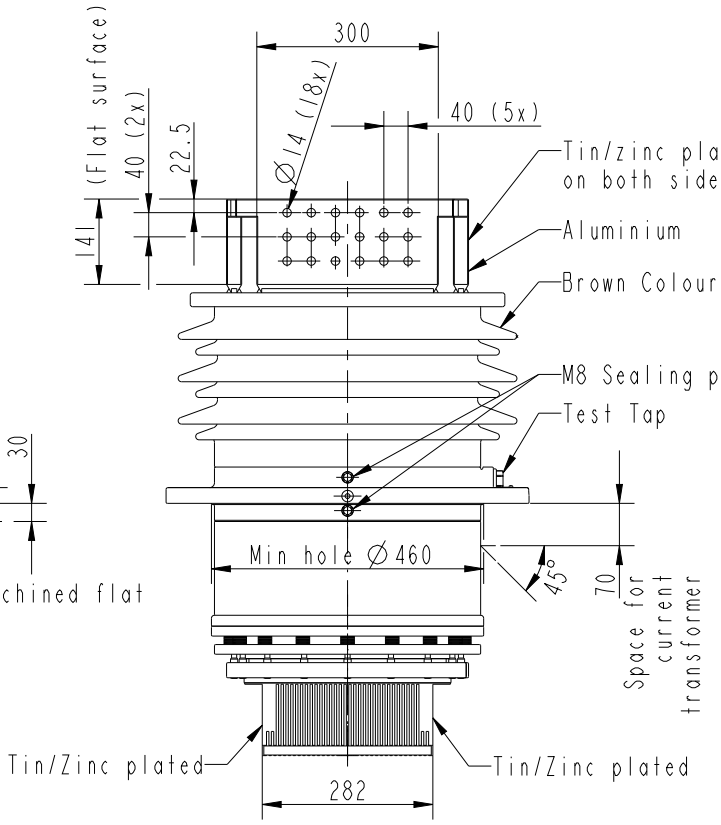

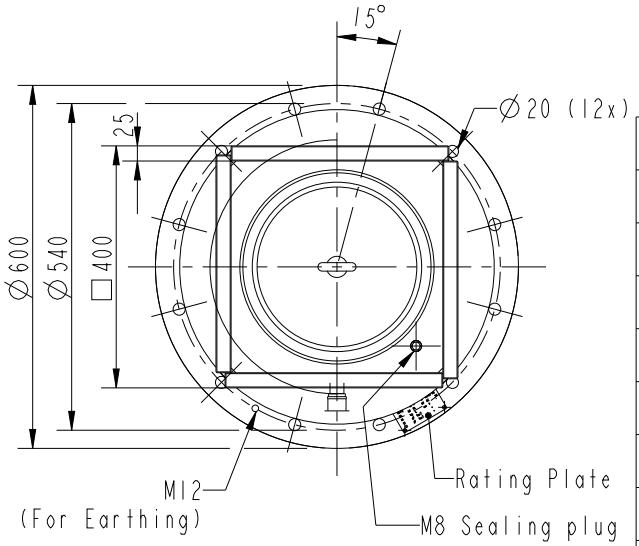

D

Bushing Data	IEC	ANSI
Rated Voltage	36 kV	34.5 kV
Phase-to-ground Voltage (D)	21 kV	22 KV
Dry Lightning Impulse 1.2/50µs	170 kV	200 KV
Wet Power frequence AC	75 kV	75 KV
Routine test 1min dry 50Hz	80 kV	80 kV
Insulation class		34.5 KV
Current carrying capacity acc to IZSE2750-107		
Creepage Distance	760 mm	
Mass	280 kg	
Catalogue number LF126009-A		

Approved	Document Kind	Based on doc.id	Work order id	Project id
2020-09-03	Outline Drawing			

Company	Title, Supplimentary title
ABB Technology Ltd	Bushing GOH 170/25
Responsible Department	
SEABB-9AAE300824	

Document id	Status	Revision	Iteration	Sheet
2751312-17	Released	D		1/1

We reserve all rights in this document and in the information contained therein. Reproduction, use or disclosure to third parties without express authority is strictly forbidden.