

SAFETY PRODUCTS

Non-contact safety sensor Eden

Eden is a non-contact safety sensor used as interlocking device for e.g. doors and safe position monitoring.

Eden consists of two parts: Adam and Eva. Adam senses the presence of Eva without mechanical contact and therefore without any wear. The compact size of Eden and its 360° mounting possibility make it easy to use in most applications.

Different models of Eden are available for different types of control modules. All Eden models make it very easy to reach PL e, often using fewer components than other solutions.

All Eden models have an IP67/IP69K sealing and it is available with coated electronics for increased protection.



Continuous operation

Easier troubleshooting

Extensive LED indication and status information reduce downtime.

Suitable in demanding environments

IP67/IP69K, a temperature range of -40 to +70°C and optional coated electronics offer an increased resistance in demanding environments.

No wear, no mechanical breakage

Non-contact sensing means no mechanical wear and the large sensing tolerance gives a better tolerance to vibrations, resulting in fewer unwanted process stops.



Affordable range

Local reset function

The integrated reset function reduces the number of cables and PLC inputs.

PL e with fewer components

Series connection with PL e, local reset and DYNlink signal allow to considerably reduce the number of components needed to reach PL e.



Easy to install

Large mounting tolerance

A 360° mounting possibility with generous tolerances facilitates mounting.

Fast connection


M12 connectors, local reset and accessories speed up installation.

Eden

Features

OSSD and DYNlink


Eden is available with two different communication protocols - OSSD and DYNlink. **OSSD** is a standardized 2-channel safety signal commonly used for e.g. light guards. It can be used with most safety relays and safety PLC's on the market. **DYNlink** is a unique signal for ABB Safety Products with excellent fault detection capabilities. In order to use DYNlink you need a Vital safety controller, Pluto programmable safety controller or B&R X20 safety PLC.

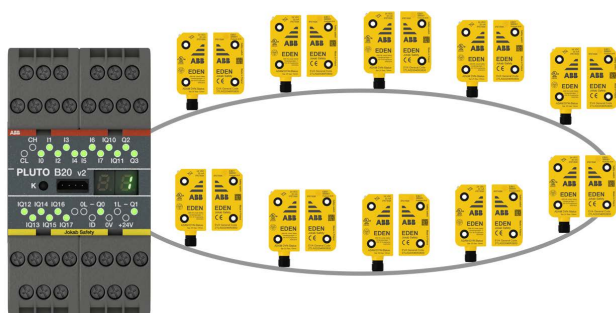

Pluto and a DYNlink circuit with 10 Eden sensors

StatusBus

Simpler models of Eden have an info signal for indicating the status of a sensor. But Eden is also available with StatusBus - a simple and clever way to get individual status information from up to 30 sensors using just one I/O on the Safety PLC. No specific bus cable or extra communication module is required.

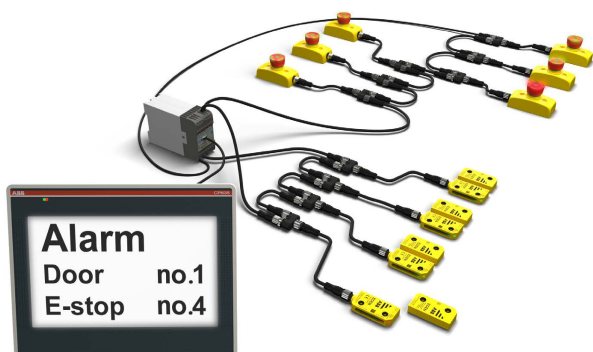

Eden C

Models of Eden are available with optional coated electronics, in order to increase the protection in demanding environments. Eden C has an increase resistance to rapid temperature changes and can be exposed to humidity up to 95%, regardless of icing or condensation.

Eden C should not be used in direct contact with food-stuff, but is recommended for Food and Beverage areas with wash down and indirect or no food contact.



Local reset

Each Eden sensor can have its own local reset button without the need of separate cables for each button.

- One reset button per Eden with only one control module
- Each button has its own reset indication





2TLC00045V0201

Adam DYN-Info M12-5

—
Adam

Type of safety controller	StatusBus	Info signal	Local reset	Series connection	Connector male	Coated electronics	Type	Order code
Pluto	x	x ¹⁾		x	M12-5		Adam DYN-Status M12-5	2TLA020051R5200
Pluto or Vital		x		x	M12-5		Adam DYN-Info M12-5	2TLA020051R5100
			x	x	M12-5	x	Adam C DYN-Info M12-5	2TLA020051R5101
OSSD compatible (incl. Pluto and Sentry)					M12-5		Adam DYN-Reset M12-5	2TLA020051R5300
		x			M12-5		Adam OSSD-Info M12-5	2TLA020051R5400
				x	M12-8	x	Adam C OSSD-Info M12-5	2TLA020051R5401
					M12-8		Adam OSSD-Info M12-8	2TLA020051R5700
				x	M12-5	x	Adam C OSSD-Info M12-8	2TLA020051R5701
			x		M12-5		Adam OSSD-Reset M12-5	2TLA020051R5600
				x	M12-8		Adam OSSD-Reset M12-8	2TLA020051R5900

1) Pin 5 can be used as a standard info signal or StatusBus.



2TLC010061V0201

Eva General code

—
Eva

Compatible Adam	Code description	Code level	Coated electronics	Type	Order code
Adam DYN and OSSD	General code. (Eva is interchangeable)	Low level		Eva General code	2TLA020046R0800
			x	Eva C General code	2TLA020046R0801
	Unique code. (Prevents defeat/fraud)	High level		Eva Unique code	2TLA020046R0900
			x	Eva C Unique code	2TLA020046R0901