


# Stanilite®

## Platinum Spitfire® LED recessed DALI non-maintained

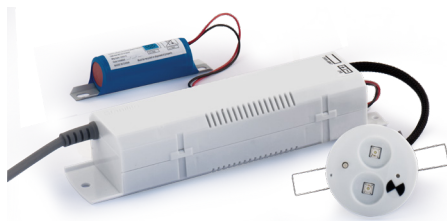

### Range

Platinum range

### Product group


Spitfire LED



### Features

- Superior photometric classification
- LED technology 100,000 hours plus lamp life
- Dual LED
- Low power consumption and LED light source for reduced operation and maintenance costs
- Advanced charging technology combined with Lithium iron phosphate battery for long life and low maintenance
- DALI lighting system
- Spring fixing design allows for different ceiling thickness (1mm-20mm)
- Supplied complete with 2m 4 core flex for easy installation
- White adaptors included to convert standard 60mm lamp head to 85mm diameter and 141mm diameter size
- White square adaptor available for standard lamp head
- Metal trim covers available in black and stainless steel finish for standard round and square lamp heads
- Metal trim covers can also be painted to any colour

Catalogue no.	Description
<b>DALI products</b>	
SFDA2LEDP	Platinum Spitfire dual LED recessed DALI
SFDA2LEDP-HP	Platinum Spitfire dual LED recessed DALI higher photometric
<b>Accessories</b>	
02-SF2LSSTRIM	Dual LED round trim stainless steel
02-SF2LBLTRIM	Dual LED round trim black
02-SF2LSQSSTRIM	Dual LED with square adaptor trim stainless steel
02-SF2LSQBLTRIM	Dual LED with square adaptor trim black
02-SFLEDSQADAPT	White plastic square adaptor for LED Spitfire
02-SFLEDLGBLKIT	Black adaptor kit
SFLEDVRWR-KIT	Vandal resistant and weather resistant kit to suit to 60mm recessed head
<b>Spare parts</b>	
03-01310PB	Battery LiFePO4 3.2V 3.2Ah (suits SFDA2LEDP)
03-01311PB	Battery LiFePO4 3.2V 4.5Ah (suits SFDA2LEDP-HP)

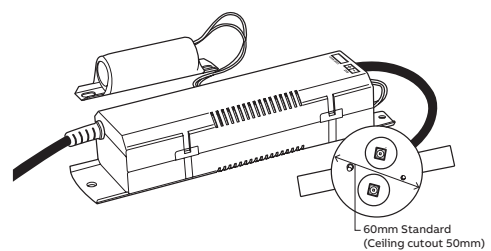

### Dimensions

Lamp head	Ceiling cutout
60mm standard	50mm
85mm adaptor	70mm
141mm adaptor	130mm

### Weight

Model	Weight
DALI	1.0kg

### Construction

Part	Construction
Lamp head	White polycarbonate

Light source		
Model	Light source	
Dual LED	3W	

Power consumption		
Model	Power consumption	
DALI	1.0W	

Note: Preliminary results








  

Photometrics			
Model	Class	Classification	
Dual LED	C0	D40	
	C90	D40	
Dual LED HP	C0	D63	
	C90	D63	








Note:

- Designed to comply with AS2293 and meet relevant Australian EMC standards

### Spitfire LED lamp head options

Supplied with product			Black adaptor			
						
60mm lamp head	85mm adaptor	141mm adaptor	60mm lamp head	Round trim black 02-SF2LBLTRIM	Black adaptor kit 02-SFLEDLGBLKIT	

Round trims			Square trims			
						
60mm lamp head	Round trim black 02-SF2LBLTRIM	Round trim stainless steel 02-SF2LSSTRIM	60mm lamp head	White square adaptor 02-SFLEDSQ-ADAPT	Square trim black 02-SF2LSQBL-TRIM	Square trim stainless steel 02-SF2LSQSSTRIM

Note:

- All trims clip over the face of the 60mm lamp head and all adaptors fit behind the 60mm lamp head
- Images indicative only