


FACT SHEET

Fieldbus communication

Modbus TCP

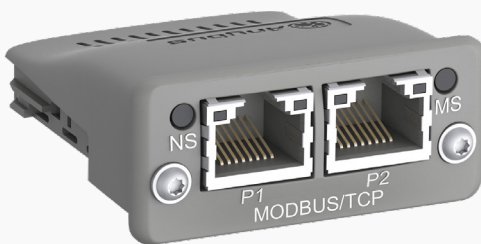

- Fast communication
- Innovative mounting
- Robust design

Modbus-TCP is a complete communication module which enables your products to communicate on a Modbus-TCP network.

01 Modbus TCP

Fast and easy communication

MODBUS TCP is a variant of the MODBUS family of simple, vendor-neutral communication protocols intended for supervision and control of automation equipment. Specifically, it covers the use of MODBUS messaging over the TCP/IP protocols. The anybus module have solid security to prevent unauthorized software to be downloaded to the module. Furthermore, encryption is used to prevent illicit copying.

Ordering details

Module	Type	Order code	Pkg	KG
Modbus TCP	AB-MODBUS-TCP-2	1SFA899300R1008	1	0.042

For more information, please contact your local ABB representative or visit <https://new.abb.com/drives/softstarters>

Anybus® is a registered trademark of HMS Industrial Networks AB, Sweden, USA, Germany and other countries. Other marks and words belong to their respective companies. All other product or service names mentioned in this document are trademarks of their respective companies.

Technical Details

Dimensions (LxWxH)	52x50x22 mm, 2.04x1.97x0.86" 51x37x16 mm, 2.014.46x0.63" (modules without housing)
Protection class	IP20
RoHS Compliance	Yes
Galvanically isolated network interface	Yes
Profile support	Generic device
LED indicator	Integrated on front (with housing), via application interface (without housing). Indicates Module Status and Network Status.

Certifications

CE, CULUS, RoHS	Yes
Network conformance	Yes (Interoperability tested)

CE - Declaration of Pre-Conformity

Emission EN 61000-6-4	EN55016-2-3 Radiated emission EN55022 Conducted emission
Immunity EN 61000-6-2	EN61000-4-2 Electrostatic discharge, EN61000-4-3 Radiated immunity. EN61000-4-4 Fast transients/burst, EN61000-4-5 Surge immunity. EN61000-4-6 Conducted immunity.

Electrical Characteristics

Power requirements	3.3 VDC, +/- 0.15 VDC
--------------------	-----------------------

Environmental Characteristics

Operating temp	-40 to 70 oC, -40-158 oF -40 to 85 oC, -40-176 oF (modules without housing)
Humidity	5-95 % non-condensing