



INSTRUCTION SHEET

BULLET® Quick Connect™ liquidtight fittings

Series: LT38P-QC



Important notice:
This product should not be modified in any way and is intended for use by qualified and trained personnel, in compliance with national and local laws.

	<p>⚠ WARNING ⚠</p> <p>RISK OF SHOCK, DISCONNECT POWER BEFORE INSTALLATION.</p>
---	--

Instruction

for the following product part numbers:
LT38P-QC-X; LT50P-QC-X; LT75P-QC-X;
LT100P-QC-X

Replace the "X" in the part number by one of the following:
B = black , G = gray, LG = light gray

1. Cut conduit clean and square
2. Insert conduit through gland-nut opening and push conduit firmly to bottom with slight twist (Figure 1)
3. Tighten gland-nut by hand or with a wrench to bottom on body shoulder (Figure 2)

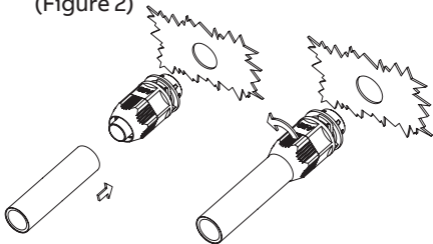


Figure 1

Figure 2

4. Insert fitting in clearance or threaded hole (Figure 3)



Figure 3

5. Tighten body to enclosure (Figure 4)




Figure 4

Important notice

ABB Installation Products Inc. will take no responsibility for any damage, injury or loss caused where products have not been installed or used as detailed in these instructions.

—
We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB Installation Products Inc. (Formally Thomas & Betts Corp.) does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

—
We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction – in whole or in part – is forbidden without prior written consent of ABB Installation Products Inc. Copyright© 2019 ABB Installation Products Inc. All rights reserved.

Warranty: tnb.abb.com/ecpwarranty

—
ABB Installation Products Inc.
Memphis, Tennessee
tnb.abb.com
USA

abb.com/cableglands