

Series 200

I/O System Units



The Series 200 I/O System features a number of interface units for various process applications. The I/O units are compatible with the I/O 200C units and can be mixed with them in any order on the same DIN rail.

The units in the I/O system are intended for use in industrial environment and they fulfil the EMC directive 89/336/EEC. The I/O units may be mounted centrally at the Central System or remotely.

The inputs and outputs are filtered and galvanically isolated by optocouplers.

Configuration of the I/O units' functions and measuring ranges is performed using the system software.

The units of Series 200 are used by SattCon 200 and SattLine to varying extents, and in various combinations.

The Series 200 I/O System features:

- Replacement under system power
- CE and UL approval
- Software configurable function
- Mechanical coding for safe replacement
- Safety function on outputs in remote configuration
- Variety of termination options
- The same I/O units in central and remote configurations
- Compatible with I/O 200C




I/O Units

The in/outputs are filtered and galvanically isolated by optocouplers. LEDs are located on the front.

It is possible under system power to remove/insert the units. The process is connected to the units via the terminal base. Power for the internal logic is provided on the serial bus via the adapter for the I/O system.

The use of I/O units and their functionality with SattCon 200 and SattLine systems is dependent on certain system versions and configurations. Please refer to the relevant manuals or data sheets.

200-IB16

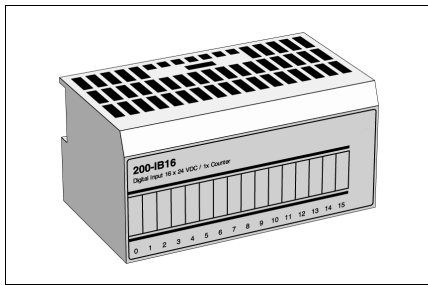


I/O unit for 16 digital input signals. The status of each input signal is indicated by a yellow LED.

Each signal is isolated from the logic circuits by an optocoupler and filtered with a low-pass filter. The inputs share a common ground connection.

The input signals are sampled at intervals determined by a filter time. The signal status is changed only if two consecutive samples are the same. The filter time is set with the programming software.

200-IB16 contains a counter.

200-OB16, 200-OB16P

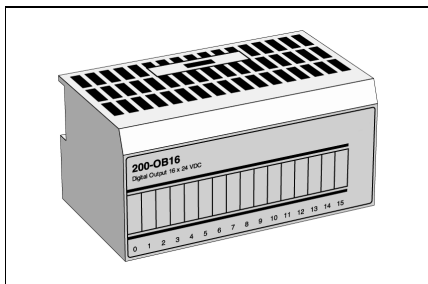

I/O units for 16 digital output signals. The outputs of 200-OB16P are short-circuit proof. Up to four outputs can be connected in parallel (the total load must, however, not exceed 1.8 A).


The status of each output signal is indicated by a yellow LED if +24 V DC is supplied.

The 16 outputs share a common ground connection.

200-IB10xOB6

I/O unit for ten digital input and six digital output signals. The status of each signal is indicated by a yellow LED.


The outputs can deliver up to 2 A to the I/O system.

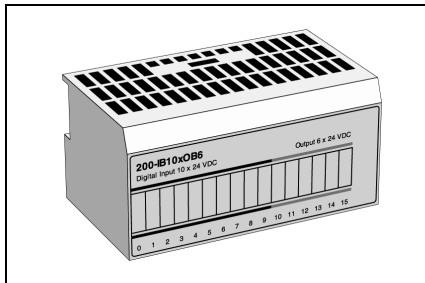

Each signal is isolated from the logic circuits by an optocoupler and filtered with a low-pass filter. The inputs have a programmable filter time.

200-IE8

I/O unit for eight analogue input signals. The unit has 12-bit resolution and each of the inputs can be either a voltage (0–10 V DC, ± 10 V DC) or a current (0–20 mA, 4–20 mA) input. Selection of voltage or current is made both by the programming software and by the input on the terminal base unit.

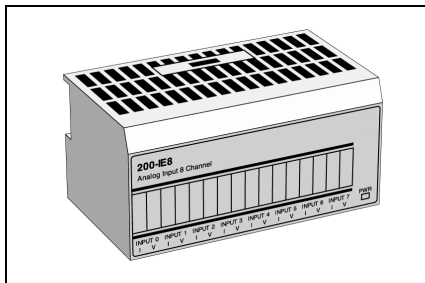


One green LED indicates power on/off.

The inputs are, as a group of eight, galvanically isolated from the system by optocouplers and the eight inputs are single ended.

An additional power supply is required.

200-OE4

I/O unit for four analogue output signals. The unit has 12-bit resolution and each of the outputs can be either a voltage (0–10 V DC, ± 10 V DC) or a current (0–20 mA, 4–20 mA) output. Selection of voltage or current is made both by the programming software and by the output on the terminal base unit.

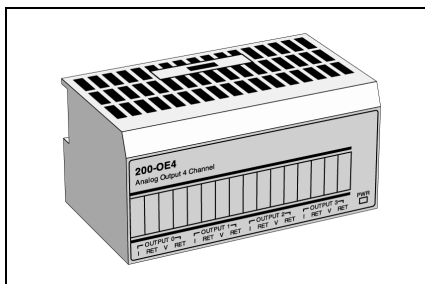

One green LED indicates power on/off.

The outputs are, as a group of four, galvanically isolated from the system by optocouplers.


An additional power supply is required.

200-IE4xOE2

I/O unit for four analogue input and two analogue output signals.

Selection of voltage or current is made both by the programming software and directly on the terminal base unit.

One green LED indicates power on/off.

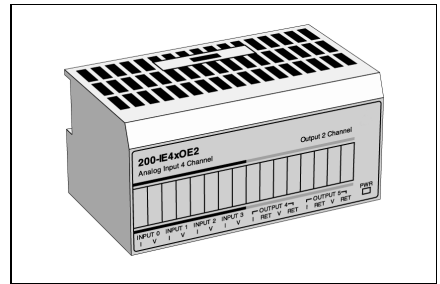


The inputs and the outputs are, as a group, galvanically isolated from the system by optocouplers.

An additional power supply is required.

200-IP2

I/O unit with two pulse transmitter interfaces, each with four optocoupled inputs. The maximum pulse frequency is 100 kHz. The I/O unit is configured using the control system program.

200-IP2 can be adapted for a wide range of applications, for example, for counting pulses from pulse transmitters or incremental encoders with one or two pulse trains. Quantity counting, positioning and speed calculation are examples of other applications.

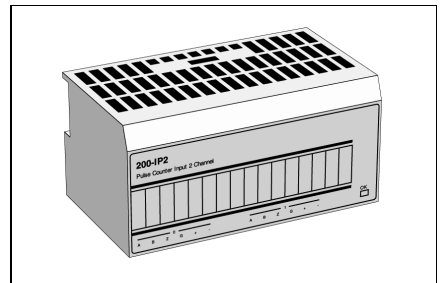


200-IP2 has two 16-bit up/down counters, which are individually programmable. The number of edges to be counted in a pulse train can be specified to x1, x2 or x4.

Complementary or non-complementary pulse transmitters can be connected.

The status of each input signal is indicated by a yellow LED. One bi-coloured LED indicates function status.

200-IP4

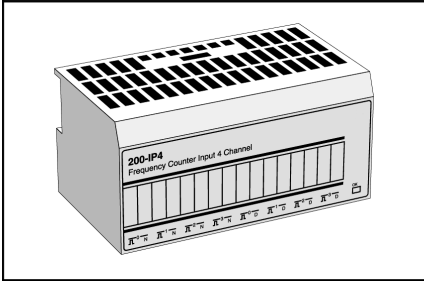

I/O unit with four pulse transmitter interfaces, each with two optocoupled inputs. The maximum pulse frequency is 100 kHz. The I/O unit is configured using the control system program.


200-IP4 can be adapted for a wide range of applications, for example, for counting pulses from flow and density meters, quantity counting and speed calculation.

200-IP4 has two 16-bit counters per channel. Each can be individually configured for either period time measurement, using one 16-bit counter and accumulating pulse counting using the other 16-bit counter or period time measurement using a 32-bit counter.

An internal clock (1 or 10 MHz) is used for the period time measurement.

The status of each input signal is indicated by a yellow LED. One bi-coloured LED indicates function status.


200-IT8

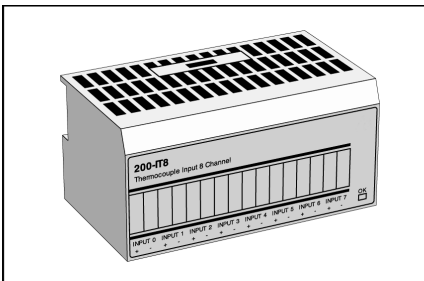

I/O unit for eight thermocouple input signals with programmable filters and 16-bit resolution. One bi-coloured LED indicates power on/off.

Terminal base unit TB3T must always be used. An additional power supply is required.

200-IR8

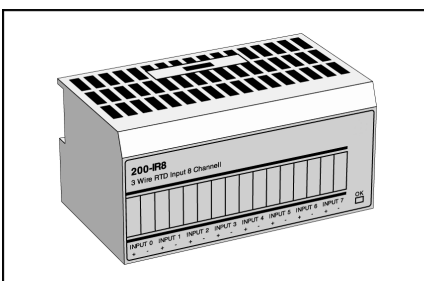


I/O unit for eight three-wire RTD input signals with programmable filters and 16-bit resolution. A number of sensors are supported. One bi-coloured LED indicates function status.

The inputs are, as a group of eight, galvanically isolated from the system by optocouplers. Each channel can be turned off to improve system throughput.

An additional power supply is required.

200-IR8R

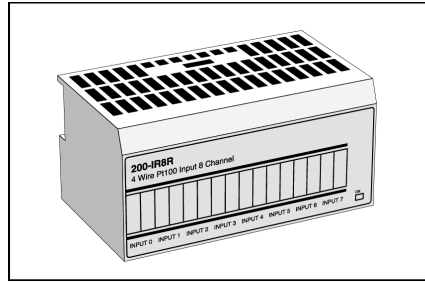

I/O unit for eight four-wire RTD input signals. The inputs have programmable filters and 16-bit resolution. One sensor type is supported.


The status of each input signal is indicated by a yellow LED. A green LED indicates function status.

The inputs are, as a group of eight, galvanically isolated from the system by optocouplers. Each channel can be turned off to improve system throughput.

An additional power supply is required.

200-IA8


I/O unit for eight digital 120 V AC input signals. The status of each input signal is indicated by a yellow LED. Each signal is filtered with a low-pass filter.

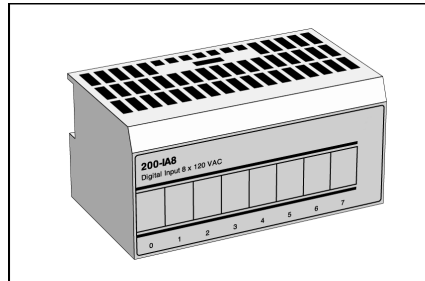

The input signals are sampled at intervals determined by the filter time. The signal status is changed only if two consecutive samples are the same. The filter time is set with the programming software.

The eight inputs share a common voltage connection.

200-OA8

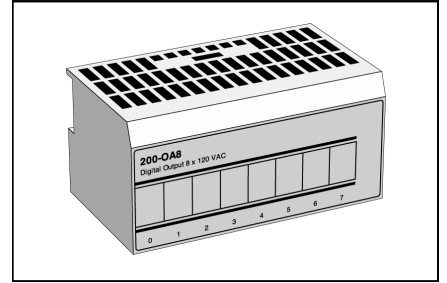

I/O unit for eight digital 120 V AC output signals. The status of each output signal is indicated by a yellow LED.

Output indicators will not work unless 120 V AC is supplied.


The eight outputs share a common 0 V AC connection.

200-OW8

I/O unit for eight relay output signals. The status of each output signal is indicated by a yellow LED.

If the voltage exceeds 132 V, terminal base unit 200-TBN or 200-TBNF must be used.

An additional power supply is required.

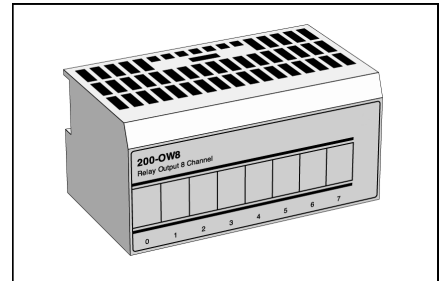


200-OB8EP

I/O unit for eight short-circuit proof output signals. The unit is intended for detection of short-circuit condition in its output circuit or low impedance loads causing excessive current drain. Each of the eight output channels has a current sensing circuit. The unit is designed to allow up to 2.0 A current per channel.

The status of each output signal is indicated by a yellow LED. Diagnostics are carried out for each output and a fault is indicated by a red LED.

By pressing a manual reset button, all output faults are reset simultaneously. Diagnostics and reset functions are fully accessible from the application.

The eight outputs share a common ground connection.

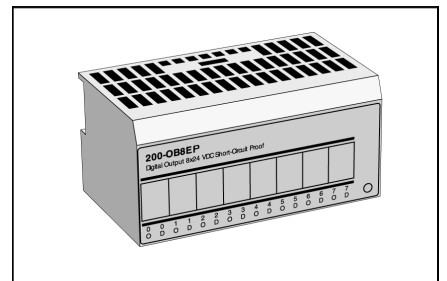

Technical Data

General specifications

Power supply	24 V DC (19.2–30 V DC) incl. 5% ripple acc. to EN 61131-2 standard i.e. +20%, -15% and max. 5% ripple
Temperature (unless stated otherwise)	
Operating	±0 °C to +55 °C
Non-operating	–40 °C to +85 °C
Protection rating	IP20
Environment	Industrial areas
Approvals (when product or packaging is marked)	CE marked and meets EMC directive 89/336/EEC according to EN 50081-2 and EN 50082-2. Low Voltage Directive 73/23/EEC with suppl. 93/68/EEC acc. to EN 61131-2 (only appl. for units connected to 50–1000 V AC and/or 75–1500 V DC). UL listed according to UL 508. CSA certified; class 1 div. 2 hazardous locations.
Package volume	
1 unit	H133 x W133 x D93 mm (1.65 dm ³)
10 units	H278 x W470 x D150 mm (19.60 dm ³)
Dimensions	H 46 x W 94 x D 53 mm
Weight (unless stated otherwise)	0.085 kg excl. package 0.180 kg incl. package

200-IB16

Number of inputs	16 positive logic
Galvanic isolation	Yes (via optocouplers)
Status indicators	16 yellow LEDs for input indications
ON-state input voltage	10.0 V DC min., 24 V DC nominal, 31.2 V DC max.
ON-state input current	2.0 mA min., 8.0 mA nominal at 24V DC, 12.0 mA max.
OFF-state input voltage	5.0 V DC max.
OFF-state input current	Current must be ≤1.5 mA to be defined as being in OFF state
Filter time	Software programmable
Filter	First-order, low-pass filter with time constant 5 μs
Input impedance	4.6 kΩ max.
Isolation voltage	100% tested at 850 V DC for 1 s between user and system. No isolation between individual channels
Internal current consumption (from serial bus)	30 mA max.
Power dissipation	6.1 W at 31.2 V DC max.
Unit identity	281H
Counter	5 bits on channel 15. 500 Hz max. Min. pulse width 1 ms
Backplane key code	2
Humidity	Max. 5–95%, non-condensing
Order code	200-IB16

200-OB16, 200-OB16P

Number of outputs	16 positive logic
Galvanic isolation	Yes (via optocouplers)
Status indicators	16 yellow LEDs for output indications
ON-state voltage range	10 V DC min., 24 V DC nominal, 31.2 V DC max.
ON-state voltage drop	0.5 V DC max.
Output current rating	8 A (16 outputs at 0.5 A)

ON-state current	1.0 mA min. per channel 450 mA max. per channel when in parallel 500 mA max. per channel
OFF-state voltage	31.2 V DC max.
Surge current	
200-OB16	2 A for 50 ms, repeatable every 2 s
200-OB16P	1.5 A for 50 ms, repeatable every 2 s
OFF-state leakage	0.5 mA max.
Isolation voltage	100% tested at 850 V DC for 1 s between plant and system. No isolation between individual channels
Output signal delay	
OFF to ON	0.5 ms max.
ON to OFF	1.0 ms max.
Internal current consumption (from serial bus)	
200-OB16	80 mA max.
200-OB16P	60 mA max.
Power dissipation	5.3 W at 31.2 V DC max.
Unit identity	
200-OB16	191H
200-OB16P	108H
Backplane key code	2
External DC power	
Supply voltage	24 V DC nom. (19.2–31.2 V DC)
Supply current	49 mA at 24 V DC (38 mA–65 mA)
Humidity	Max. 5–95%, non-condensing
Fuse	
200-OB16	800 mA (when used in TBNF)
200-OB16P	Outputs are electronically protected
Order codes	200-OB16 200-OB16P

200-IB10xOB6

General specifications:

Galvanic isolation	Yes (via optocouplers)
Status indicators	16 yellow LEDs for in/output indications
Isolation voltage	100% tested at 2100 V DC for 1 s between plant and system
Internal current consumption (from the serial bus)	35 mA max.
Power dissipation	4.0 W at 31.2 V DC max.
Unit identity	100H
Backplane key code	2
External DC Power	
Supply voltage	24 V DC nom. (19.2–31.2 V DC)
Supply current	70 mA at 24 V DC (not incl. outputs)
Humidity	Max. 5–95%, non-condensing
Order code	200-IB10xOB6

Input specifications:

Number of inputs	10 positive logic, non-isolated
ON-state input voltage	10 V DC min., 24 V DC nominal, 31.2 V DC max.
ON-state input current	2.0 mA min., 8.0 mA nominal, 11.0 mA max.
OFF-state input voltage	5 V DC max.
OFF-state input current	Current ≤1.5 mA to be defined as being in OFF state
Input impedance	4.4 kΩ max.
Filter time	Software programmable
Filter	First-order, low-pass filter with time constant 100 μs (i.e. time to reach 63% of FS)

External DC Power	
Supply voltage	24 V DC nom. (19.2–31.2 V DC)
Supply current	70 mA at 24 V DC (not incl. outputs)
Humidity	
Operating	Max. 5–95%
Non-operating	Max. 5–80%
Order code	200-OE4

Accuracy	
Voltage terminal	± 0.14% FS at 25°C
Current terminal	± 0.43% FS at 25°C
Accuracy drift with temperature	
Voltage terminal	± 0.005% FS/°C
Current terminal	± 0.007% FS/°C

200-IE4xOE2

General specifications:

Number of inputs	4 single-ended
Number of outputs	2 single-ended
Galvanic isolation	Yes (via optocouplers)
Status indicators	One green LED for Power
Resolution	12-bit
Isolation Voltage	Type-test voltage: 850 V DC for 1 s between user and system. No isolation between individual channels

Internal current consumption (from serial bus)	20 mA max.
Power dissipation	4.0 W at 31.2 V DC max.
Unit identity	1526H
Backplane key code	5

External DC Power	
Supply voltage	24 V DC nom. (19.2–31.2 V DC)
Supply current	70 mA at 24V DC (not incl. outputs)
Humidity	
Operating	Max. 5–95%
Non-operating	Max. 5–80%
Order code	200-IE4xOE2

Input specifications:

Number of inputs	4 single-ended
Input voltage range	2–10 V DC, ±10 V DC, 0–10 V DC
Input current range	4–20 mA, 0–20 mA
Input resistance	
Voltage	200 kΩ
Current	238 Ω
Filter	First-order, low-pass filter with time constant 100 ms (i.e. time to reach 63% of FS)

Accuracy	
Voltage terminal	± 0.3% FS at 25°C
Current terminal	± 0.3% FS at 25°C

Accuracy drift with temperature	
Voltage terminal	± 0.0045% FS/°C
Current terminal	± 0.0045% FS/°C

Overload without damage	
Voltage	30 V DC continuously
Current	32 mA continuously, one channel at a time max.

Output specifications:

Number of outputs	2 single-ended, non-isolated
Output current range	4–20 mA, 0–20 mA
Output voltage range	2–10 V DC, ±10 V DC, 0–10 V DC
Time to reach 63% of FS	24 ms (first-order, low-pass filter time constant)
Current load on voltage output	3 mA max.
Resistive load on mA output	15–750 Ω
Non-linearity	
Current	0.1%
Voltage	0.1%

200-IT8

Number of inputs	8
Galvanic isolation	Yes
Status indicator	Bi-colour (green/red) LED for OK
Resolution	16-bits
Input voltage range	± 76.5 mV DC
Overvoltage capability	35 V DC, 25 V AC continuous at 25 °C, 250 V peak transient
Accuracy with filter	0.025% of FSR ± 0.5 °C max.
Accuracy without filter	0.05% of FSR ± 0.5 °C max.
Filter	Programmable

Internal current consumption (from serial bus)	20 mA max.
---	------------

Normal mode noise rejection	–60 dB at 60 Hz
------------------------------------	-----------------

Common mode rejection	–115 dB at 60 Hz; –100 dB at 50 Hz
------------------------------	------------------------------------

System throughput	Programmable 28–325 ms for 1 channel; 2.6 s for 8 channels
--------------------------	--

Open-thermocouple detection	Out of range reading (upscale)
------------------------------------	--------------------------------

Open-thermocouple detection time	1 s, typically
---	----------------

Input offset drift with temperature	± 6 μV/°C max.
--	----------------

Gain drift with temperature	10 ppm/°C
------------------------------------	-----------

Overall drift with temperature	50 ppm 1 °C of span max.
---------------------------------------	--------------------------

Supported thermocouple types	Millivolt ± 76.5 mV Type B: +300–+1800 °C Type C: ±0–+2315 °C Type E: -270–+1000 °C Type J: -210–+1200 °C Type K: -270–+1372 °C Type N: -270–+1300 °C Type R: -50–+1768 °C Type S: -50–+1768 °C Type T: -270–+400 °C
-------------------------------------	---

Power dissipation	3 W at 31.2 V DC max.
--------------------------	-----------------------

Unit identity	1B00H
----------------------	-------

Backplane key code	3
---------------------------	---

External DC Power	
Supply voltage	24 V DC nom. (19.2–31.2 V DC)
Supply current	60 mA at 24 V DC

Humidity	
Operating	5–95%, non-condensing
Non-operating	5–80%, non-condensing

Order code	200-IT8
-------------------	---------

200-IR8

Number of inputs	8
Galvanic isolation	Yes (via optocouplers)
Status indicators	Bi-colour (green/red) LED for Power
Resolution	16-bit across 435 Ω
Input range	1–433 Ω
Overvoltage capability	±35 V DC, 25 V AC continuous at 25 °C, 250 V peak transient
Filter	Programmable
Accuracy without calibration and at low humidity levels	0.05% of FSR max. in normal mode (0.01% of FSR typ. in enhanced mode) at 25 °C

External AC Power		Output signal delay	
Supply voltage	120 V AC nominal	OFF to ON	8 ms max. (time from a valid output on signal-to-relay energization by the module)
Input frequency	47–63 Hz		
Voltage range	85–132 V AC	ON to OFF	26 ms max. (time from a valid output on signal-to-relay de-energization by the module)
Supply current	150 mA min.		
Surge current capability	50 A for 1/2 cycle at power-up max.		
Humidity	Max. 5–95%, non-condensing	Internal current consumption (from serial bus)	69 mA max.
Fuse	1.6 A, slow (when used in TBNF)	Power dissipation	5.5 W max.
Order code	200-OA8	Unit identity	199H
		Backplane key code	8
200-OW8		External AC Power	
Number of outputs	8 (1 group of 8), normally open electromechanical relays	Supply voltage	24 V DC
Galvanic isolation	Yes (via optocouplers and relays)	Voltage range	19.2 to 31.2 V DC (incl. 5% ripple)
Status indicators	8 yellow LEDs	Supply current	125 mA max.
Output voltage range (load dependent)	5–30 V DC at 2.0 A resistive 48 V DC at 0.5 A resistive 125 V DC at 0.25 A resistive 125 V AC at 2.0 A resistive 240 V AC at 2.0 A resistive	Fuse	Max. 3 A (when used in TBNF)
Output current rating (at rated power)		Humidity	Max. 5–95%, non-condensing
Resistive	2 A at 5–30 V DC 0.5 A at 48 V DC 0.25 A at 125 V DC 2 A at 125 V AC 2 A at 240 V AC	Order code	200-OW8
Inductive (steady state)	2.0 A at 5–30 V DC, L/R = 7 ms 0.5 A at 48 V DC, L/R = 7 ms 0.25 A at 125 V DC, L/R = 7 ms 2.0 A, 15 A at operation of a relay at 125 V AC, $\cos \phi = 0.4$ 2.0 A, 15 A at operation of a relay at 240 V AC, $\cos \phi = 0.4$	200-OB8EP	
Power rating (steady state)		Number of outputs	8 (1 group of 8)
Resistive	250 W max. for 125 V AC 480 W max. for 240 V AC 60 W max. for 30 V DC 24 W max. for 48 V DC 31 W max. for 125 V DC	Galvanic isolation	Yes (via optocouplers)
Inductive	250 VA max. for 125 V AC 480 VA max. for 240 V AC 60 VA max. for 30 V DC 24 VA max. for 48 V DC 31 VA max. for 125 V DC	Status indicators	8 yellow LEDs for status indications and 8 red LEDs for diagnostic fault indication
Initial contact resistance	30 m Ω	ON-state voltage range	19.2 V DC min., 24 V DC nominal, 31.2 V DC max.
Switching frequency	1 operation/3 s (0.3 Hz at rated load) max.	ON-state voltage drop	0.2 V DC max.
Operate/release time	10 ms, max.	Output current rating	10 A (e.g. 8 outputs at 1.25 A, 5 outputs at 2.0 A or similar output/A combinations, tot. ≤ 10 A)
Bounce time	1.2 ms, mean	ON-state current	1.0 A min. per channel 2.0 A max. per channel
Contact load	100 μ A at 100 mV DC min.	OFF-state voltage	31.2 V DC max.
Expected life of electrical contacts	100,000 operations min. at rated loads	Surge current	4 A for 10 ms, repeatable every 3 s
OFF-state leakage current	1 mA max. at 240 V AC through snubber circuit	OFF-state leakage	0.5 mA max.
Isolation voltage		Isolation voltage	100% tested at 850 V DC for 1 s between plant and system. No isolation between individual channels
between any 2 sets of contacts	2550 V DC for 1 s	Output signal delay	
customer load to logic	2550 V DC for 1 s	OFF to ON	0.4 ms max.
customer load to 24 V DC supply	2550 V DC for 1 s	ON to OFF	0.2 ms max.
customer 24 V DC supply to logic	850 V DC for 1 s	Internal current consumption (from serial bus)	73 mA max.
		Power dissipation	5.5 W at 31.2 V DC max.
		Unit identity	19DH
		Backplane key code	2
		Humidity	Max. 5–95%, non-condensing
		Order code	200-OB8EP

