


On-load tap-changer type VUBBL, UBBL,  
9 tap positions, linear switching.  
Max effective No. of turns in pos 1.  
The tap-changer is delivered set in pos 5.


Lindningskopplare typ VUBBL, UBBL,  
9 lägen, linjär-koppling.  
Max antal effektiva varv i läge 1.  
Lindningskopplaren levereras inställd i läge 5.

Pos Läge	H connects förbinder
1	2 - 15
2	3 - 15
3	4 - 15
4	5 - 15
5	6 - 15
6	7 - 15
7	8 - 15
8	9 - 15
9	10 - 15

We reserve all rights in this document and in the information contained therein. Reproduction, use or disclosure to third parties without express authority is strictly forbidden.  
© ABB '19

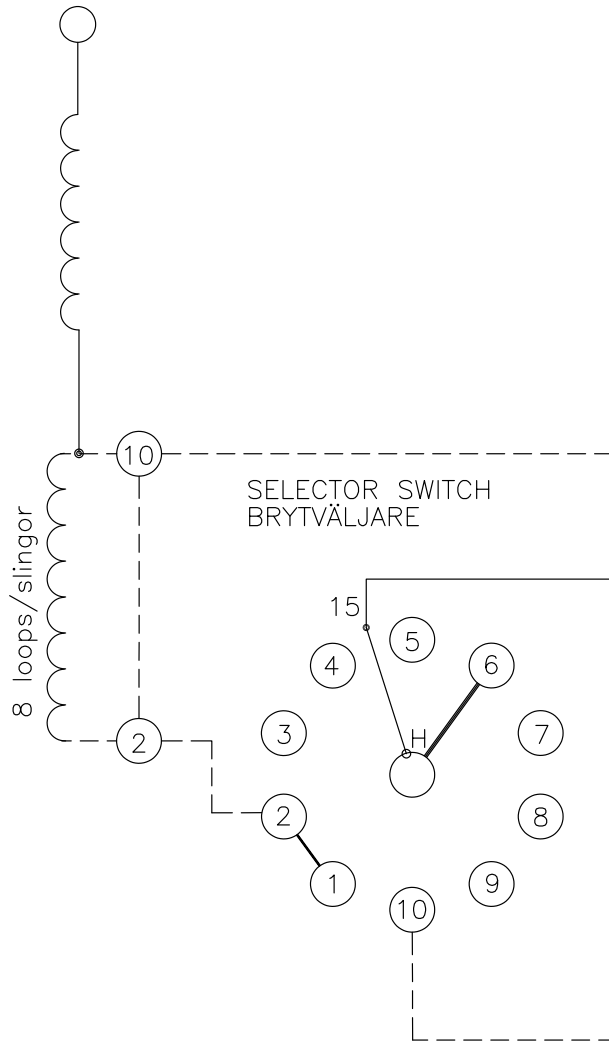

1) OUTPUT TERMINAL  
STRÖMAVTAGNING  
\*) FOR VUBB TYPE OF OLTC  
I VUBB UTFÖRANDE



1) Internal connections between the terminals 15 of the three phases are included in the star-point type. Connection between 1 and 2 is included. Dashed lines show in delivery not included leads belonging to cleats and leads.

Inre förbindningar mellan uttag 15 i de tre faserna ingår i nollpunktsutförande. Förbindningar mellan 1 och 2 ingår. Streckade linjer visar i leveransen ej ingående ledare tillhörande anslutningsdonet.

H Main contact  
Huvudkontakt

2	Output for VUBB type added.	DAAN	20	14
1	VUBBL added.	TL	10	27
Rev Ind	Revision	Appd	Year	Week

Accepted by qual control R.Yngvesson	Accepted for prod by	Description (English) CONNECTION DIAGRAM	DATAORIGINAL
Design checked by B-O.Stenestam	Drawn by L.Bergman	Description (own language) KOPPLINGSSHEMA	File name 0387-5
Drawing checked by M.Hedlund	Issued by Dept Year Week COM/TKO 97 32		Lang 1
<b>ABB</b> Asea Brown Boveri		5492 0387-5	RevInd 2
			Cont -