


Electronic timer CT-EAS

ON-delayed and OFF-delayed with 1 c/o contact

Data sheet



CT-EAS

- ① 10 selectable time ranges, from 0.05 s to 300 h
- ② Potentiometer with direct reading scale for the fine adjustment of the time delay
- ③ U/T: green LED - Supply voltage (LED flashes during timing)
- ④ R1: red LED - Output relay 1 energized
- ⑤ Circuit diagram
- ⑥ Marker label

Characteristics

- Single-function ON-delay and OFF-delay timer
- One device includes 10 time ranges, from 0.05 s to 300 h, for the adjustment of the time delay
- Remote potentiometer connection
- 1 c/o contact
- Volt-free (dry) control contact
- Starting the time delay is possible:
 - via an external control contact
- Pause timing / time storage is possible via an external control contact
- 2 LEDs for status indication
- Width 22.5 mm

Approvals

- cULus
- GL
- GOST
- CCC

Marks

- CE CE
- C-Tick

Order data

Type	Supply voltage	Order code
CT-EAS	24 V, 42-48V AC/DC, 110-240 V AC	1SVR 430 173 R0100

Order data (Accessories)

Description	Order code
Remote potentiometer 30.5 mm	1SVR 700 800 R1000
Remote potentiometer 22.5 mm	1SVR 701 800 R1000
Remote potentiometer 10.5 mm	1SVR 214 017 R0900
Adapter for screw mounting on panel	1SVR 430 029 R0100
Sealable cover	1SVR 430 005 R0100
Marker label	1SVR 366 017 R0100

Application

The CT-S range timers are designed for use in industrial applications. They operate over a universal range of supply voltages and a large time delay range, within compact dimensions. The easy-to-set front-face potentiometers, with direct reading scales, provide accurate time delay adjustment.

Operating mode

The CT-EAS with 1 c/o contact offers 10 time ranges, from 0.05 s to 300 h. The time delay range is rotary switch selectable on the front of the unit. The fine adjustment of the time delay is made via an internal potentiometer, with a direct reading scale, on the front of the unit. When an external potentiometer is connected to terminals Z1- Z2, the internal adjustment is disabled and external adjustment is enabled. Timing is displayed by a flashing green LED labelled U/T.

Electronic timer CT-EAS

ON-delayed and OFF-delayed with 1 c/o contact

Data sheet

Function diagram


⊠ ■ Symmetrical ON-delay and OFF-delay (Symmetrical delay on make and delay on break)

This function requires continuous supply voltage at terminals A1/B1/B2-A2 for timing. Closing control contact Y1-Z2 starts the ON-delay. When timing is complete, the output relay energizes. Opening control contact Y1-Z2 starts the OFF-delay. When the OFF-delay is complete, the output relay de-energizes. Both timing functions are displayed by the flashing green LED.

If control contact Y1-Z2 closes before the time delay is complete, the time delay is reset and the output relay does not change state.

Timing can be paused by closing control contact X1-Z2. The elapsed time is stored and continues from this time value when X1-Z2 is re-opened. This can be repeated as often as required.

When an external potentiometer is connected to terminals Z1-Z2, the internal, front-face potentiometer is disabled and the time adjustment is made via the external potentiometer.

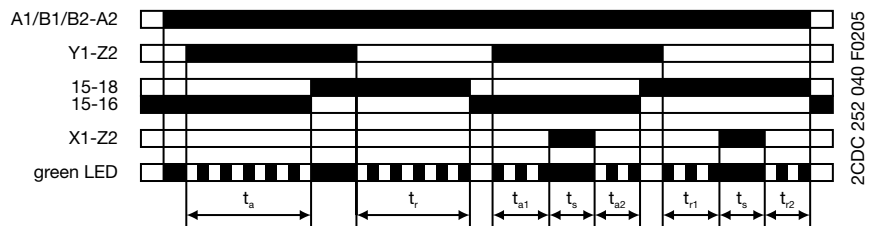

$$t_a = \text{ON-delay:}$$

$$t_r = \text{OFF-delay:}$$

$$t_s = \text{storage time}$$


$$t_a = t_r$$

$$t_{a2} = t_{a1} + t_{a2}$$

$$t_r = t_{r1} + t_{r2}$$

Connection diagram

⊠ ■ CT-EAS



- Version: 1SVR 430 173 R0100
 A1-A2 Supply: 110-240 V AC
 B1-A2 Supply: 24 V AC/DC
 B2-A2 Supply: 42-48 V AC/DC
 Z1-Z2 Remote potentiometer
 Y1-Z2 Control contact to start timing
 X1-Z2 Control contact to pause timing
 15-16/18 1. c/o contact


Electronic timer CT-EAS

ON-delayed and OFF-delayed with 1 c/o contact


Data sheet

Wiring notes


Connection diagram for remote potentiometer

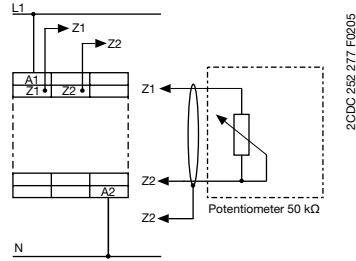


Connection diagram for proximity switch (3 wire) with 230 V AC supply

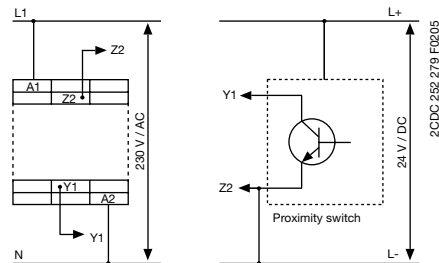

Connection diagram for proximity switch (3 wire) with 24 V DC supply

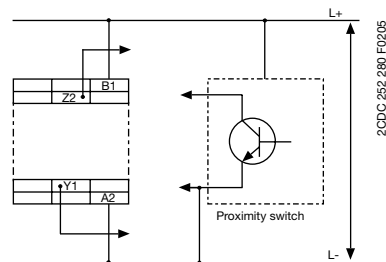

Connection diagram for control contacts

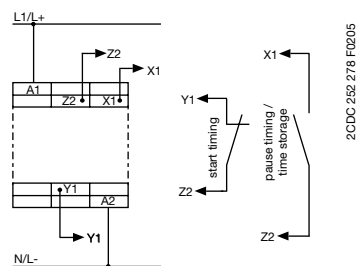

Electronic timer CT-EAS

ON-delayed and OFF-delayed with 1 c/o contact

Data sheet

Technical Data

Input circuits			
Supply voltage	A1-A2	110-240 V AC	
	B1-A2	24 V AC/DC	
	B2-A2	42-48 V AC/DC	
Power consumption	110-240 V AC	approx. 2.5-12 VA	
	24 V AC/DC	approx. 0.5 VA/W	
	42-48 V AC/DC	approx. 1.8 VA/W	
Supply voltage tolerance		-15...+10 %	
Supply voltage frequency	AC/DC Version	DC or 50/60 Hz	
	AC Version	50/60 Hz	
Control contact connections volt-free (dry)	Y1-Z2	start timing external	
	X1-Z2	time pause, time storage	
Minimum control pulse length		20 ms	
Non-load voltage at the control contacts		10-40 V DC (no galvanic separation to supply circuit)	
Max. current in the control circuit		1 mA	
Max. cable length to the control inputs		50 m	
Remote potentiometer connection	Z1/Z3-Z2	50 kΩ	
Max. cable length to remote potentiometer		2 x 25 m, shield connected to Z2 potential	
Duty time		100 %	
Timing circuit			
Time ranges 0.05 s - 300 h	1)	0.05-1 s	
	2)	0.15-3 s	
	3)	0.5-10 s	
	4)	1.5-30 s	
	5)	5-100 s	
	6)	15-300 s	
	7)	1.5-30 min	
	8)	15-300 min	
	9)	1.5-30 h	
	10)	15-300 h	
Recovery time		< 50 ms	
Repeat accuracy (constant parameters)		< 0.2 %	
Timing error within the supply voltage tolerance range		< 0.008 % / % Δ U	
Timing error within operating temperature range		< 0.07 % / °C	
Indication of operational states			
Supply voltage / timer		green LED steady / flashing while timing	
output relay energized		red LED	
Output circuits	15-16/18		
Number of contacts		Relays, 1 c/o contact	
Contact material		AgCdO	
Related voltage	acc. to VDE 0110, IEC 60947-1	250 V	
Maximum switching voltage		250 V AC, 250 V DC	
Rated switching current acc. to IEC 60947-5-1	AC-12 (resistive) 230 V	4 A	
	AC-15 (inductive) 230 V	3 A	
	DC-12 (resistive) 24 V	4 A	
	DC-13 (inductive) 24 V	2 A	
Maximum lifetime	mechanical	30 x 10 ⁶ switching cycles	
	electrical (AC-12, 230 V, 4 A)	0.1 x 10 ⁶ switching cycles	
Short circuit proof, max. fuse rating	n/c	10 A fast, operating class gL	
	n/o	10 A fast, operating class gL	
General data			
Enclosure	width	22.5 mm	
	length	78.0 mm	
	depth	100.0 mm	
Wire size	fine-strand with wire end ferrule	2 x 0.75 - 2.5 mm ² (18-14 AWG)	
	fine-strand without wire end ferrule		
	rigid	2 x 0.5 - 4 mm ² (20-12 AWG)	
Weight		approx. 150 g (5.3 oz)	

Electronic timer CT-EAS


ON-delayed and OFF-delayed with 1 c/o contact

Data sheet


Mounting position	any	
Degree of protection	enclosure / terminals	IP50 / IP20
Temperature	operating	-20...+60 °C
	storage	-40...+85 °C
Mounting	DIN rail (EN 50022)	
Standards		
Product standard	IEC 61812-1, EN 61812-1	
EMC Directive	89/336/EEC	
Electromagnetic compatibility	IEC 61000-6-2, EN 61000-6-4	
ESD	acc. to IEC 61000-4-2, EN 61000-4-2	level 3 6 kV / 8 kV
HF radiation resistance	acc. to IEC 61000-4-3, EN 61000-4-3	level 3 10 V/m
Burst	acc. to IEC 61000-4-4, EN 61000-4-4	level 3 2 kV / 5 kHz
Surge	acc. to IEC 1000-4-5, EN 61000-4-5	level 4 2 kV L-L
HF line emission	acc. to IEC 1000-4-6, EN 61000-4-6	level 3 10 V
Low Voltage Directive	73/23/EEC	
Operational reliability	acc. to IEC 68-2-6	4 g
Mechanical resistance	acc. to IEC 68-2-6	6 g
Approvals / marks		
Approvals	cULus, GL, GOST and CCC	
Marks	CE and C-Tick	
Isolation data		
Rated insulation voltage between supply circuit, control circuit and output circuit	acc. to VDE 0110, IEC 60947-1	supply up to 240 V: 300 V supply up to 440 V: 500 V
Rated impulse withstand voltage between all isolated circuits	acc. to VDE 0110, IEC 664	4 kV / 1.2-50 µs
Test voltage between all isolated circuits	2.5 kV, 50 Hz, 1 min.	
Pollution category	acc. to VDE 0110, IEC 664, IEC 255-5	III/C
Overvoltage category	acc. to VDE 0110, IEC 664, IEC 255-5	III/C
Environmental testing	acc. to IEC 68-2-30	24 h cycle time, 55 °C, 93 % rel., 96 h

Load limit curves

AC load (resistive)



DC load (resistive)




Electronic timer CT-EAS


ON-delayed and OFF-delayed with 1 c/o contact

Data sheet

Derating factor F for inductive AC load




Contact lifetime /switching cycles N




220 V 50 Hz 1 AC 360 cycles/h

Dimensional drawings


Dimensions in mm

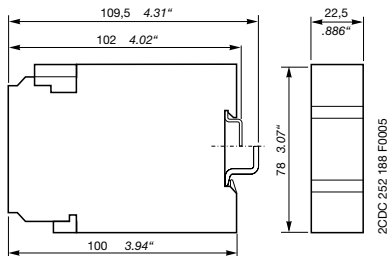

Dimensional drawings (Accessories)



Remote potentiometer 30.5 mm




Remote potentiometer 22.5 mm


Electronic timer CT-EAS

ON-delayed and OFF-delayed with 1 c/o contact


Data sheet




Remote potentiometer 10.5 mm



Adapter for screw mounting on panel



Sealable cover



Marker label



ABB STOTZ-KONTAKT GmbH

Eppelheimer Straße 82 69123 Heidelberg, Deutschland

Postfach 10 16 80 69006 Heidelberg, Deutschland

Internet <http://www.abb.com/lowvoltage> -> Control Products -> Electronic Relays

E-Mail epr-support@stotzkontakt.de