

MEDIUM VOLTAGE PRODUCT

KOLMA, KOLA

Indoor cable current transformers



—
01 Difference of secondary connection between multi-tap KOLMA 06 A1 and KOLMA 06 D1 and single ratio types

Technical parameters	Values	
	KOLMA	KOLA
Highest voltage for equipment	0.72 kV	
Rated power-frequency withstand voltage	3 kV	
Rated lightning impulse withstand voltage	-	
Rated frequency fR	50 or 60 Hz	
Rated primary current, I_{pr}		
Rated secondary current I_{sr}	1 or 5 A	
Rated short-time thermal current, I_{th}	$60 \times I_{pr}$	
Rated dynamic current, I_{dyn}	$2,5 \times I_{th}$	
Operating temperature range	-25 ~ +40°C	

NOTE: other parameters on request

Description

The transformers KOLMA are suitable for measuring of the sum of three phase current in a three phase cable. Transformers are usually used together with earth-fault protection relay.

The cable current transformers KOLA are suitable for wide range of applications. They are mainly used for residual current metering together with earth-fault protection relay. Thanks to its construction the transformer can be installed without disconnecting the cable.

How to select the correct residual current transformer

The transformer for an earth-fault relay is selected according to dimension of the window and construction of the transformer. For types KOLMA 06 A1 and KOLMA 06 D1 is easy to test by means of the transformer test winding (terminals P1x – P2x). The test winding is rated for 6 A maximum continuous current.

KOLMA, KOLA overview

Type	Ø [mm]	Construction
KOLMA 06 A1	90	Ring core, multi-tap
KOLMA 06 A2	58	Ring core
KOLMA 06 B2	100	Ring core
KOLMA 06 D1	180	Ring core, multi-tap

Type	Ø [mm]	Construction
KOLMA 06 D2	180	Ring core
KOLA 06 B2	100	Split ring core
KOLA 06D2	180	Split ring core
KOLA 06 J2	497 x 300	Split window type

Ordering data


The order should contain the following data:

- Type of current transformer
- Rated primary current/rated secondary current [A/A]
- Rated burden and accuracy class for each winding [VA]
- Short-time thermal current I_{th}
- Dimension of the window [mm]
- Standard
- Quantity

Order example

KOLMA 06 B2; 100/1 A/A; 2 VA; 10P10; $I_{th} = 60 \times I_{pn}/1s$; IEC 60044-1; 12 pcs.

Number of turns and terminal markings

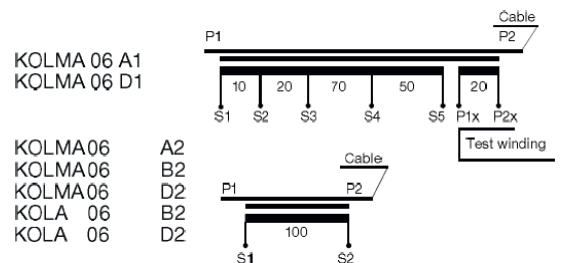

—
01



Dimensional Drawings

Note: Unless explicitly stated, all dimensions and tolerances are valid with generally defined tolerance 0,6 %. Tolerance applies to the all geometric characteristics including form variation of the products. All dimensional references representing a diameter or radius of a circles are defined as the minimal value of a real dimension.

KOLMA 06 A1

Weight: app. 7,5 kg



KOLMA 06 A2, B2

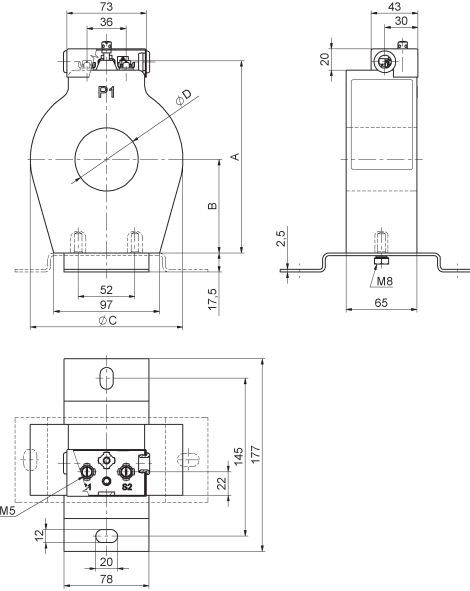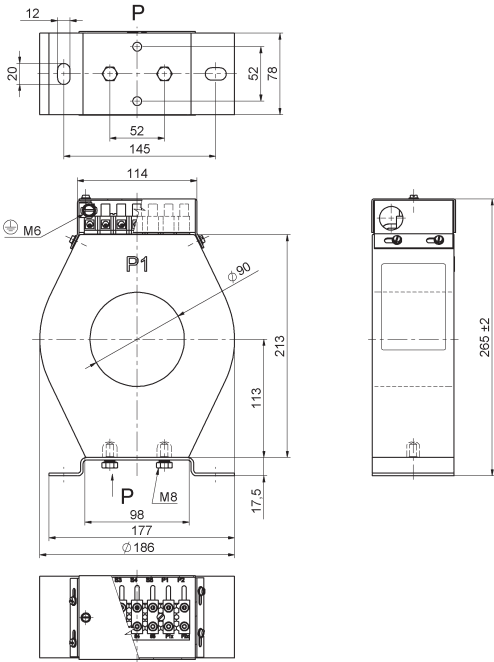

Type	Dimensions [mm]				Weight [kg]
	A	B	C	D	
KOLMA 06 A2	117	86	140	58	4,7
KOLMA 06 B2	229	112	195	100	8,5


KOLMA 06 D1, D2

Weight: app. 13 kg

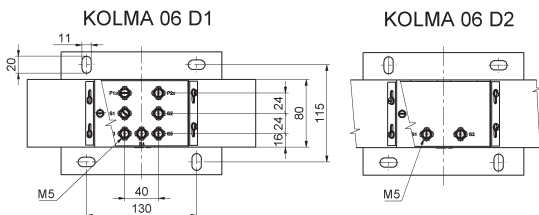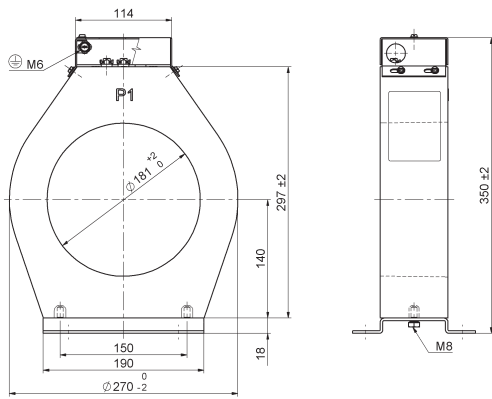


KOLA 06 B2

Weight: app. 8 kg

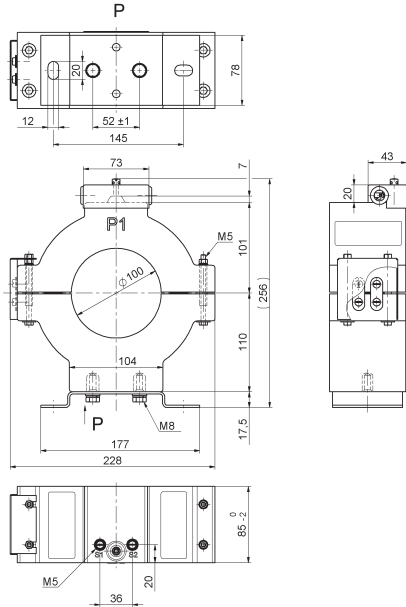


KOLA 06 D2

Weight: app. 12,5 kg

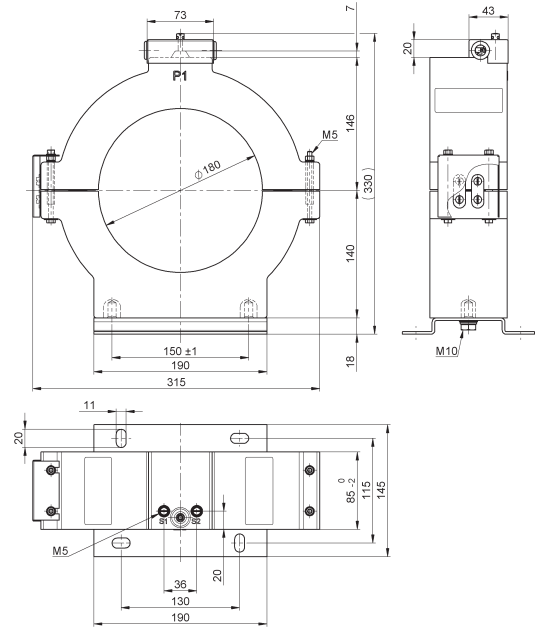

KOLA 06 J2

Weight: app. 32 kg

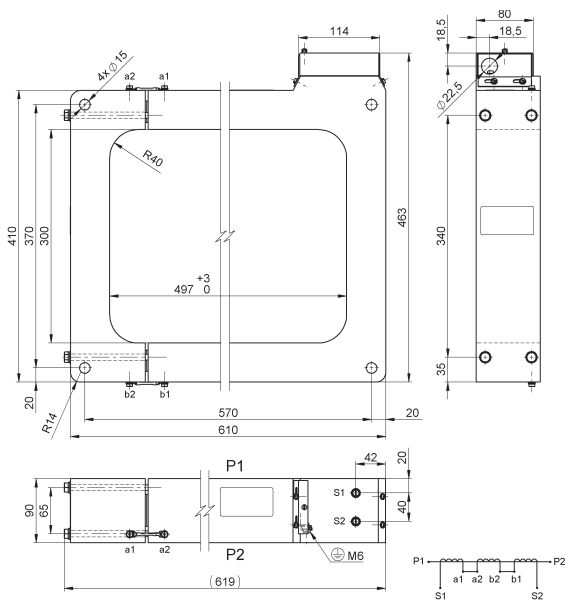

CONTACT US

ABB s.r.o.
ELDS Brno
Videnska 117, 619 00 Brno,
Czech Republic
Tel.: +420 547 152 021
+420 547 152 854
Fax: +420 547 152 626
E-mail: kontakt@cz.abb.com

NOTE

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents - in whole or in parts - is forbidden without prior written consent of ABB.

Copyright© 2020 ABB
All rights reserved