




On-load tap-changer type UCGL./III, VUCGL./III, UCLL./III, UC DL./III, 20 tap positions, linear switching.  
 Max. effective No. of turns in pos. 1.  
 The tap-changer is delivered set in pos. 11,  
 the preceding pos. was 10.

Lindningskopplare typ UCGL./III, VUCGL./III, UCLL./III, UC DL./III, 20 lägen, linjär koppling.  
 Max. antal effektiva varv i läge 1.  
 Lindningskopplaren levereras inställd i läge 11,  
 föregående läge var 10.

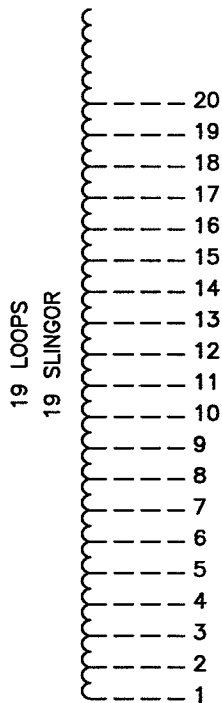

Tap selector  
Väljare

Pos. Läge	Tap selector and diverter switch connect	Väljaren och lastkopplaren förbinder
1	1-V-x	30
2	2-H-v	
3	3-V-x	
4	4-H-v	
5	5-V-x	
6	6-H-v	
7	7-V-x	
8	8-H-v	
9	9-V-x	
10	10-H-v	
11	11-V-x	
12	12-H-v	
13	13-V-x	
14	14-H-v	
15	15-V-x	
16	16-H-v	
17	17-V-x	
18	18-H-v	
19	19-V-x	
20	20-H-v	

The tap-changer is shown in pos. 11,  
 the preceding pos. was 10.  
 The tap selector is seen from above.  
 Contact arm V is located above contact arm H.

Lindningskopplaren visad i läge 11,  
 föregående läge var 10.  
 Väljaren sedd uppifrån.  
 Kontaktarm V ligger över kontaktarm H.

Continuous lines show leads included in the  
 tap-changer. Dashed lines show leads belonging  
 to the cleats and leads.

Heldragna linjer visar ledare som ingår i  
 lindningskopplaren. Streckade linjer visar  
 ledare som tillhör anslutningsdonet.

Sheet	Year	Week	Cont		
	Dept	Year	Week	Appd	Year
	Revind	Accepted by qual control	Accepted for prod by	Description (English)	
	Design checked by	G.Andersson GA	Drawn by	T.Larsen	Description (own language)
Form No.	Drawing checked by	A.Hultberg	Issued by Dept	Year	Week
	ABB		Asea Brown Boveri		5492 0367-16
				Description (English)	DATAORIGINAL
				Description (own language)	File name
				Lang	Sheet
				Revind	Cont

We reserve all rights in this document and in the  
 information contained therein. Reproduction, use or  
 disclosure to third parties without express authority  
 is strictly forbidden. © ABB '99