


OVRHMSU

Series-Connected Suppression Filter System



The OVRHMSU is engineered for hard-wired installation within or adjacent to electrical loads such as outdoor lighting, robotics, process automation systems, motors, HVAC systems, pumps, heaters, programmable logic controllers and other point-of-use applications. Compact and powerful, the OVRHMSU protects these and other individual components from damaging electrical transients, high-frequency noise and high-energy disturbances. OVRHMSU provides 50kA of surge protection for loads up to 24 amps.

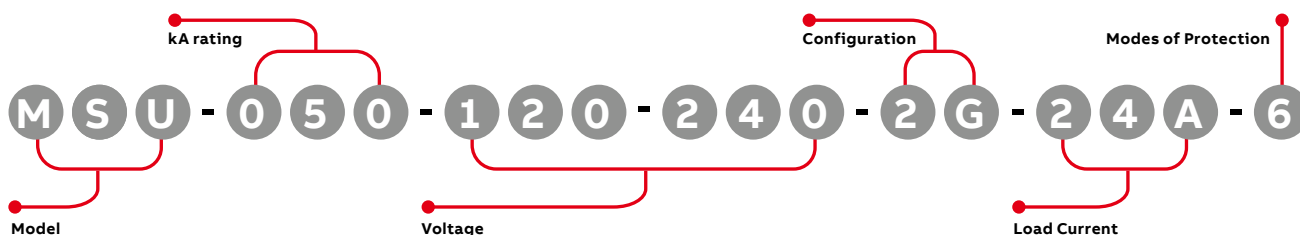


Product Specifications

General Specifications	
Maximum Surge Current Rating	50kA Per Mode
Voltage (Single-Phase Applications)	120, 220 or 277
Voltage (3-Wire + Ground Applications)	220/380 or 277/480
Voltage (Split-Phase Applications)	120/240
Safety Listings	Listed by ETL to UL 1449 4th Edition, Type 4 for Type 2 SPD applications, cUL, and UL 1283 / Compliant to IEEE C62.41.1-2002, C62.41.2-2002 and C62.45-2002 / NFPA 70 [NEC], Article 285 / RoHS Compliant / CE, IEC 61643-11-2011 / EMC Directive 2004/108/EC
Product Design	Individually fused MOVs UL 1283 EMI/RFI filter
Ampacity Rating	24A
Dimensions	5.8"W x 4"H x 1.875"D
Weight	2.25 lbs.
Enclosure Type	Nonmetallic
Operating Environment	-40°F to 140°F (-40°C to 60°C) 5% – 95% Non-Condensing Humidity
Connection Method	Series/in-line; Terminal Block Termination
Connection Means	#8 Screws
Protection Modes	3 or 6
Warranty	5 Years

kA/mode	Voltage*	
50 kA = 050	208	120/240
	240	208Y/120
	380	380Y/220
	480	480Y/277

Configuration*	Load Current	Modes of Protection
1G 1 Phase, Grounded	24 Amp	3 or 6
2G 2 Phase, Grounded, Split Phase		

*Consult factory for additional voltage configurations

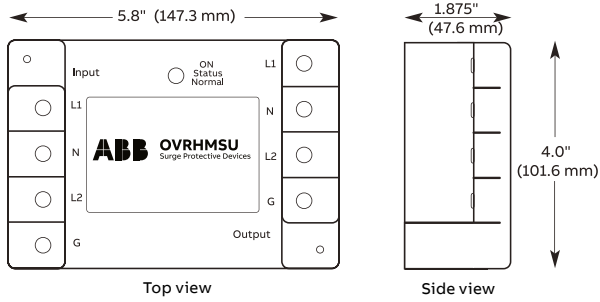

Input Voltages	Phase	Load Current Ratings (A)	Line Frequency Range (Hz)
120V	1	24	50-60
120/240V	Split-Phase	24	50-60
220V	1	24	50-60
220/380V	2	24	50-60
277V	1	24	50-60
277/480V	2	24	50-60

High-frequency noise filtration

Model No.	Voltage	Mode	1KHz	10KHz	100KHz	1MHz	10MHz	100MHz
MSU50-120-1G-24A-3	120	L-N	6 dB	16 dB	42 dB	25 dB	21 dB	36 dB
MSU50-120/240-2G-24A-6	120/240	L-G	6 dB	6 dB	16 dB	55 dB	81 dB	80 dB
MSU50-220-1G-24A-3	220	L-N	6 dB	16 dB	42 dB	25 dB	21 dB	36 dB
MSU50-220/380-2G-24A-6	220/380	L-G	6 dB	6 dB	16 dB	55 dB	81 dB	80 dB
MSU50-277-1G-24A-3	277	L-N	6 dB	16 dB	42 dB	25 dB	21 dB	36 dB
MSU50-277/480-2G-24A-6	277/480	L-G	6 dB	6 dB	8 dB	36 dB	82 dB	81 dB

This table represents select OVRHMSU configurations. Inquire about additional voltages.

OVRHMSU performance data

Model No.	System Voltage (VAC)	Current (A)	Phase 1 or 2	MCOV / UC (V)				VPR / VPL (Up)				I-n (kA)
				L-N	L-G	N-G	L-L	L-N	L-G	N-G	L-L	
MSU50-120-1G-24A-3	120	24A	1	150	300	150	N/A	800	800	800	N/A	20
MSU50-120/240-2G-24A-6	120/240	24A	2	150	300	150	300	800	N/A	800	1200	20
MSU50-220-1G-24A-3	220	24A	1	320	552	320	N/A	1200	1200	1000	N/A	20
MSU50-220/380-2G-24A-6	220/380	24A	2	320	552	320	552	1200	N/A	1000	2000	20
MSU50-277-1G-24A-3	277	24A	1	320	552	320	N/A	1200	1200	1000	N/A	20
MSU50-277/480-2G-24A-6	277/480	24A	2	320	552	320	552	1200	N/A	1000	2000	20



ABB Inc.
860 Ridge Lake Blvd.
Memphis, TN 38120
USA

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB Inc. does not accept any responsibility whatsoever for potential errors or possible lack of information in this document

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB Inc. Copyright © 2022 ABB