


CATALOG

Interface relays and optocouplers

CR-S, CR-P, CR-M, CR-U and R600

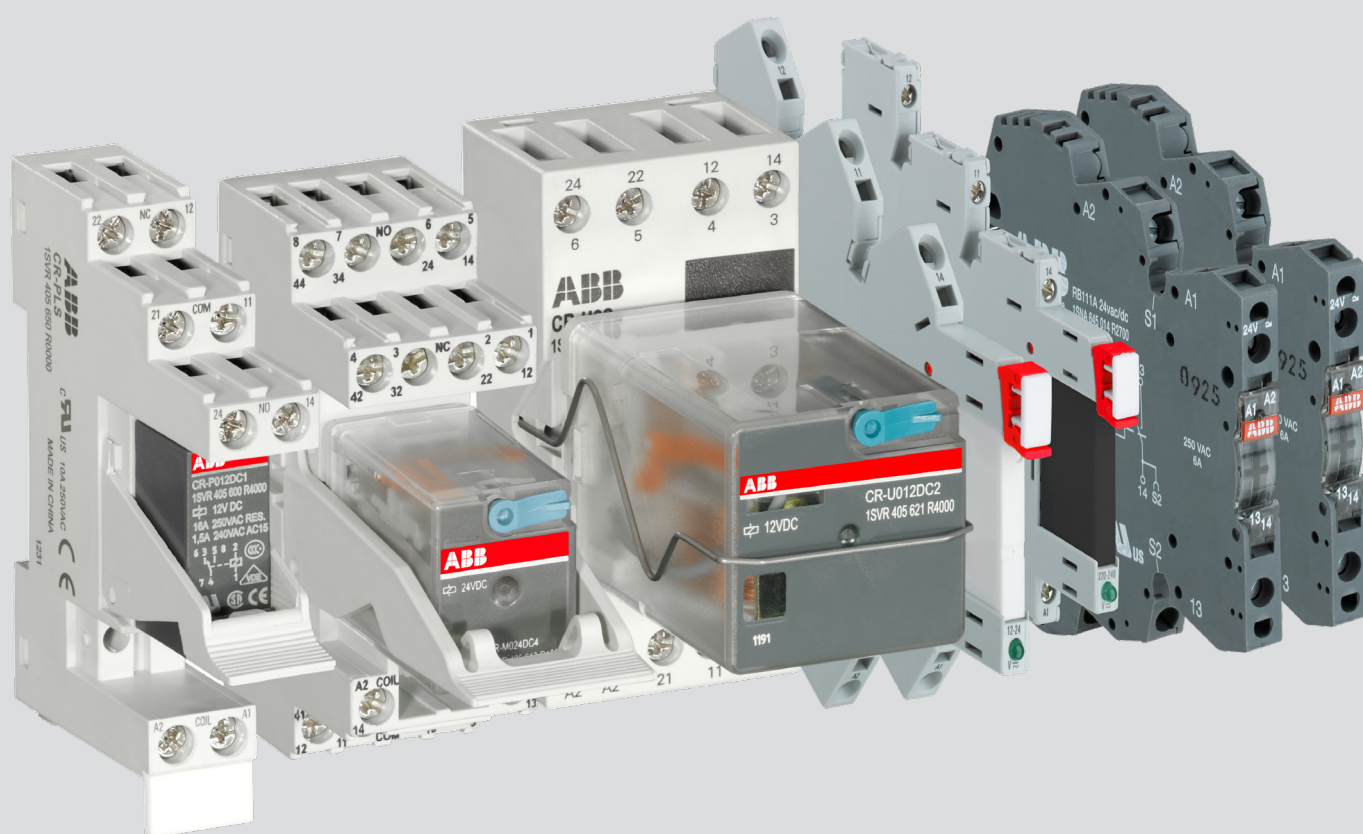


- Wide variety and flexibility
- High contact ratings
- Globally approved and available

ABB offers a complete range of interface relays and optocouplers for increased flexibility and choice. This portfolio includes pluggable relays for easy interchangeability and optocouplers for an extended electrical life. Furthermore, interface relays with gold plated contacts suitable for sensitive applications are available. This wide selection of relays adhere to the highest global standards and satisfy the requirements for a diverse number of applications and needs.

Interface relays and optocouplers


Table of contents

6	Offer overview
9	Pluggable interface relays and optocouplers
10	Type selection
24	Benefits and advantages
28	Ordering details
45	Technical data
55	Technical diagrams
65	Boxed interface relays and optocouplers R600 range
66	Overview
68	Boxed interface relays R600 range
68	Type selection
70	Ordering details
72	Technical data
76	Technical diagrams
78	Boxed optocouplers R600 range
78	Type selection
79	Ordering details
81	Technical data
84	Technical diagrams

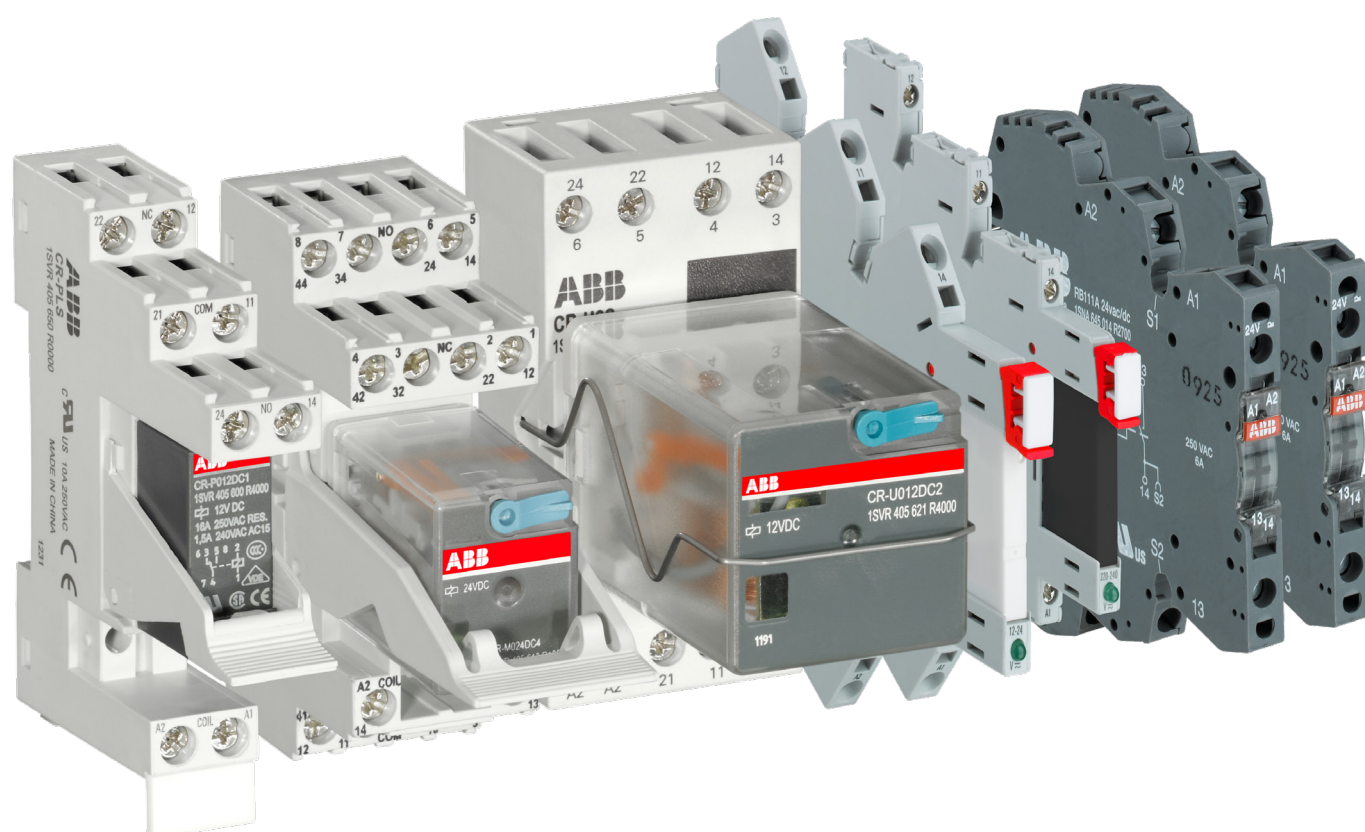

Interface relays and optocouplers

Offer overview

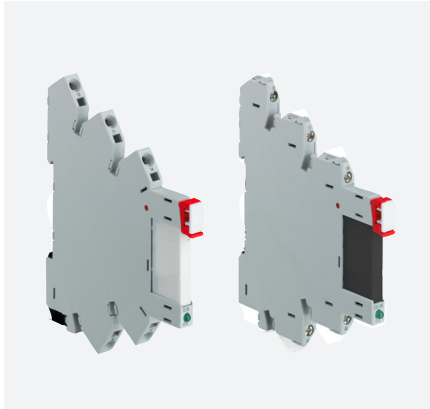

CR-S range

The slim line of interface relays and optocouplers

The pluggable interface relays and optocouplers of the CR-S Range are used for electrical isolation, amplification and signal matching between the electronic controlling, e.g. PLC, iPC or field bus systems and the sensor / actuator level. The CR-S Range combines the flexibility of a modular system and the ability of switching high currents on a small footprint thus can be used in applications where space saving is essential.



CR-P range

The pluggable pcb interface relays

The pluggable interface relays of the CR-P range are used for electrical isolation, amplification and signal matching between the electronic controlling, e.g. PLC, iPC or field bus systems and the sensor / actuator level. The CR-P range offers highest current switching in an IP67 rated relay housing. Furthermore, nine different coil voltages are available to suit world wide applications and even gold contact version are available which is essential when it comes to switch sensitive signals. The CR-P range also includes complete versions consisting of a relay, socket, holder and functional module.



CR-M range

The pluggable miniature interface relays

The pluggable interface relays of the CR-M range are used for electrical isolation, amplification and signal matching between the electronic controlling, e.g. PLC, iPC or field bus systems and the sensor / actuator level. The CR-M range offers up to 4 contacts in one relay and a built in test button which makes a circuit check fast and easy. 12 different coil voltages are available to suit world wide applications and even gold contact version are available which is essential when it comes to switch sensitive signals.. The CR-M range also includes complete versions consisting of a relay, socket, holder and functional module.

Interface relays and optocouplers


Offer overview



CR-U range

The pluggable universal interface relays


The pluggable interface relays of the CR-U range are used for electrical isolation, amplification and signal matching between the electronic controlling, e.g. PLC, iPC or field bus systems and the sensor / actuator level. The CR-U range offers up to 3 contacts in one relay and a built in test button which makes a circuit check fast and easy. 12 different coil voltages are available to suit world wide applications.

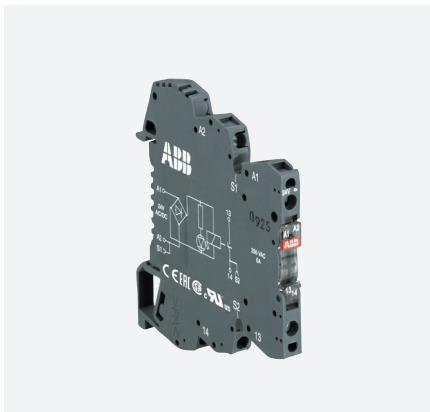

R600 range

Boxed interface relays and optocouplers

Boxed interface relays of the R600 range are used for electrical isolation, amplification and signal matching between the electronic controlling, e.g. PLC, iPC or field bus systems and the sensor / actuator level. The relay itself is built in thus the perfect solution because this design fulfills highest vibration requirements. The compact design and different connection terminal possibilities further optimize your panel installation.

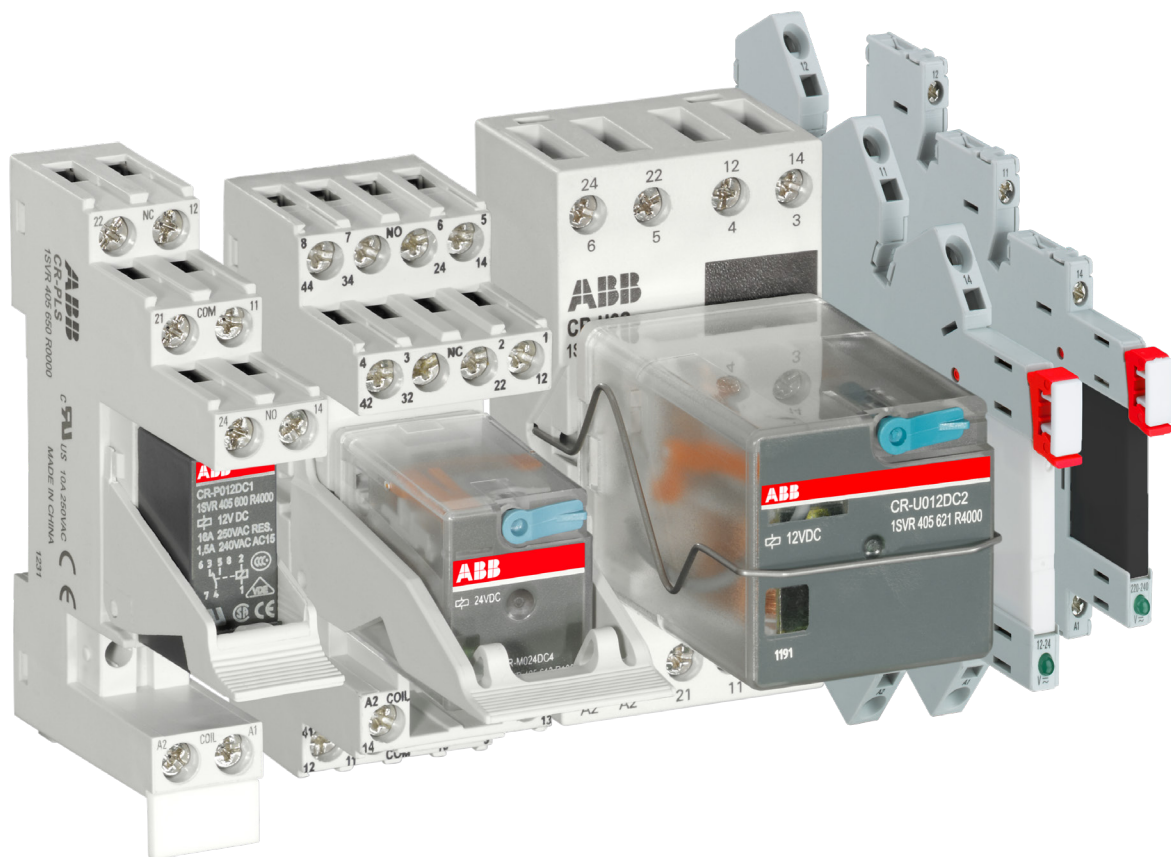

Pluggable interface relays and optocouplers

Table of contents

10	Type selection
24	Benefits and advantages
25	Socket and terminal connection types
26	Relay components
28	Ordering details
28	CR-S range
32	CR-P range
35	CR-M range
38	CR-M range
41	CR-P/M functional modules
42	CR-U range
44	CR-U functional modules
45	Technical data
45	CR-S interface relays
46	CR-S optocouplers
47	CR-S sockets
48	CR-P, CR-M, CR-U
52	CR-P optocouplers
53	Sockets for CR-P and CR-M
54	Sockets for CR-U
55	Technical diagrams

Pluggable interface relays

Type selection CR-S Range

How to use the selection table

Choose the desired control supply voltage from the column "Control voltage" e.g. 5 V DC.

Choose the desired kind of connection terminal from the column "Connection Terminal" e.g. spring.

Choose the desired material of contact from the column "Contact Material" e.g. gold plated.

Control voltage	Connection terminal	Contact material	Socket type	Socket order code	Relay type	Relay order code
5 V DC	screw	standard	CR-S006/024VDC1SS	1SVR405521R1100	CR-S005VDC1R	1SVR405501R1010
		gold plated	CR-S006/024VDC1SS	1SVR405521R1100	CR-S005VDC1RG	1SVR405501R1020
	spring	standard	CR-S006/024VDC1SZ	1SVR405521R1200	CR-S005VDC1R	1SVR405501R1010
		gold plated	CR-S006/024VDC1SZ	1SVR405521R1200	CR-S005VDC1RG	1SVR405501R1020
12 V AC	screw	standard	CR-S012/024VADC1SS	1SVR405521R3100	CR-S012VDC1R	1SVR405501R2010
		gold plated	CR-S012/024VADC1SS	1SVR405521R3100	CR-S012VDC1RG	1SVR405501R2020
	spring	standard	CR-S012/024VADC1SZ	1SVR405521R3200	CR-S012VDC1R	1SVR405501R2010
		gold plated	CR-S012/024VADC1SZ	1SVR405521R3200	CR-S012VDC1RG	1SVR405501R2020

Example: When you have chosen 5 V DC as Control supply voltage, spring connection as Connection Terminal and gold plated as Contact Material the following order codes and type designators are valid:

Socket: CR-S006/024VDC1SZ, 1SVR405521R1200 Relay: CR-S005VDC1RG, 1SVR405501R1020

CR-S range relay assemblies

Control voltage	Connection terminal	Contact material	Socket type	Socket order code	Relay type	Relay order code
5 V DC	screw	standard	CR-S006/024VDC1SS	1SVR405521R1100	CR-S005VDC1R	1SVR405501R1010
		gold plated	CR-S006/024VDC1SS	1SVR405521R1100	CR-S005VDC1RG	1SVR405501R1020
	spring	standard	CR-S006/024VDC1SZ	1SVR405521R1200	CR-S005VDC1R	1SVR405501R1010
		gold plated	CR-S006/024VDC1SZ	1SVR405521R1200	CR-S005VDC1RG	1SVR405501R1020
12 V DC	screw	standard	CR-S006/024VDC1SS or CR-S012/024VADC1SS	1SVR405521R1100 or 1SVR405521R3100	CR-S012VDC1R	1SVR405501R2010
		gold plated	CR-S006/024VDC1SS or CR-S012/024VADC1SS	1SVR405521R1100 or 1SVR405521R3100	CR-S012VDC1RG	1SVR405501R2020
	spring	standard	CR-S006/024VDC1SZ or CR-S012/024VADC1SZ	1SVR405521R1200 or 1SVR405521R3200	CR-S012VDC1R	1SVR405501R2010
		gold plated	CR-S006/024VDC1SZ or CR-S012/024VADC1SZ	1SVR405521R1200 or 1SVR405521R3200	CR-S012VDC1RG	1SVR405501R2020
12 V AC	screw	standard	CR-S012/024VADC1SS	1SVR405521R3100	CR-S012VDC1R	1SVR405501R2010
		gold plated	CR-S012/024VADC1SS	1SVR405521R3100	CR-S012VDC1RG	1SVR405501R2020
	spring	standard	CR-S012/024VADC1SZ	1SVR405521R3200	CR-S012VDC1R	1SVR405501R2010
		gold plated	CR-S012/024VADC1SZ	1SVR405521R3200	CR-S012VDC1RG	1SVR405501R2020
24 V DC	screw	standard	CR-S006/024VDC1SS or CR-S012/024VADC1SS	1SVR405521R1100 or 1SVR405521R3100	CR-S024VDC1R	1SVR405501R3010
		gold plated	CR-S006/024VDC1SS or CR-S012/024VADC1SS	1SVR405521R1100 or 1SVR405521R3100	CR-S024VDC1RG	1SVR405501R3020
	spring	standard	CR-S006/024VDC1SZ or CR-S012/024VADC1SZ	1SVR405521R1200 or 1SVR405521R3200	CR-S024VDC1R	1SVR405501R3010
		gold plated	CR-S006/024VDC1SZ or CR-S012/024VADC1SZ	1SVR405521R1200 or 1SVR405521R3200	CR-S024VDC1RG	1SVR405501R3020
24 V AC	screw	standard	CR-S012/024VADC1SS	1SVR405521R3100	CR-S024VDC1R	1SVR405501R3010
		gold plated	CR-S012/024VADC1SS	1SVR405521R3100	CR-S024VDC1RG	1SVR405501R3020
	spring	standard	CR-S012/024VADC1SZ	1SVR405521R3200	CR-S024VDC1R	1SVR405501R3010
		gold plated	CR-S012/024VADC1SZ	1SVR405521R3200	CR-S024VDC1RG	1SVR405501R3020
48 V AC/DC	screw	standard	CR-S048/060VADC1SS	1SVR405521R5100	CR-S048VDC1R	1SVR405501R4010
		gold plated	CR-S048/060VADC1SS	1SVR405521R5100	CR-S048VDC1RG	1SVR405501R4020
	spring	standard	CR-S048/060VADC1SZ	1SVR405521R5200	CR-S048VDC1R	1SVR405501R4010
		gold plated	CR-S048/060VADC1SZ	1SVR405521R5200	CR-S048VDC1RG	1SVR405501R4020
60 V AC/DC	screw	standard	CR-S048/060VADC1SS	1SVR405521R5100	CR-S060VDC1R	1SVR405501R5010
		gold plated	CR-S048/060VADC1SS	1SVR405521R5100	CR-S060VDC1RG	1SVR405501R5020
	spring	standard	CR-S048/060VADC1SZ	1SVR405521R5200	CR-S060VDC1R	1SVR405501R5010
		gold plated	CR-S048/060VADC1SZ	1SVR405521R5200	CR-S060VDC1RG	1SVR405501R5020
110-125 V AC/DC	screw	standard	CR-S110/125VADC1SS	1SVR405521R6100	CR-S060VDC1R	1SVR405501R5010
		gold plated	CR-S110/125VADC1SS	1SVR405521R6100	CR-S060VDC1RG	1SVR405501R5020
	spring	standard	CR-S110/125VADC1SZ	1SVR405521R6200	CR-S060VDC1R	1SVR405501R5010
		gold plated	CR-S110/125VADC1SZ	1SVR405521R6200	CR-S060VDC1RG	1SVR405501R5020
220-240 V AC/DC	screw	standard	CR-S220/240VADC1SS	1SVR405521R7100	CR-S060VDC1R	1SVR405501R5010
		gold plated	CR-S220/240VADC1SS	1SVR405521R7100	CR-S060VDC1RG	1SVR405501R5020
	spring	standard	CR-S220/240VADC1SZ	1SVR405521R7200	CR-S060VDC1R	1SVR405501R5010
		gold plated	CR-S220/240VADC1SZ	1SVR405521R7200	CR-S060VDC1RG	1SVR405501R5020

CR-S Optocoupler range relay assemblies

Control voltage	Connection terminal	Output characteristics	Socket type	Socket order code	Opto type	Opto order code
24 V DC	screw	Transistor 100 mA - 48 V DC	CR-S012/024VADC1SS	1SVR405521R3100	CR-S024VDC1TRA	1SVR405510R3050
	spring		CR-S012/024VADC1SZ	1SVR405521R3200	CR-S024VDC1TRA	1SVR405510R3050
	screw	MOS-FET 2 A - 24 V DC	CR-S012/024VADC1SS	1SVR405521R3100	CR-S024VDC1MOS	1SVR405510R3060
	spring		CR-S012/024VADC1SZ	1SVR405521R3200	CR-S024VDC1MOS	1SVR405510R3060
	screw	Triac 2 A - 240 V AC	CR-S012/024VADC1SS	1SVR405521R3100	CR-S024VDC1TRI	1SVR405510R3070
	spring		CR-S012/024VADC1SZ	1SVR405521R3200	CR-S024VDC1TRI	1SVR405510R3070

Pluggable interface relays and optocouplers

Type selection CR-P range

CR-P pluggable relays		
	Type	Order code
	CR-P012DC1	1SVR405600R4000
	CR-P024DC1	1SVR405600R1000
	CR-P048DC1	1SVR405600R6000
	CR-P110DC1	1SVR405600R8000
	CR-P024AC1	1SVR405600R0000
	CR-P048AC1	1SVR405600R5000
	CR-P110AC1	1SVR405600R7000
	CR-P120AC1	1SVR405600R2000
	CR-P230AC1	1SVR405600R3000
	CR-P012DC2	1SVR405601R4000
	CR-P024DC2	1SVR405601R1000
	CR-P048DC2	1SVR405601R6000
	CR-P110DC2	1SVR405601R8000
	CR-P012AC2	1SVR405601R0200
	CR-P024AC2	1SVR405601R0000
	CR-P048AC2	1SVR405601R5000
	CR-P110AC2	1SVR405601R7000
	CR-P120AC2	1SVR405601R2000
	CR-P230AC2	1SVR405601R3000
	CR-P024DC2G	1SVR405606R1000
	CR-P024AC2G	1SVR405606R0000
	CR-P110AC2G	1SVR405606R7000
	CR-P230AC2G	1SVR405606R3000
Input voltage		
12 V DC	■	
24 V DC		■
48 V DC		■
110 V DC		■
12 V AC		
24 V AC		■
48 V AC		■
110 V AC		■
120 V AC		■
230 V AC		■
Output rating		
250 V 16 A	■	
250 V 8 A		■
Output contacts		
c/o	1 1 1 1 1 1 1 1 1 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	
Gold plated contacts		■ ■ ■ ■

Pluggable interface relays and optocouplers

Type selection CR-P range

CR-P range complete versions

	Type	Order code
	CR-P012DC1S542V	1SVR405600R4010
	CR-P024DC1S542V	1SVR405600R1010
	CR-P024DC1L42V	1SVR405600R1011
	CR-P024DC1LC62C	1SVR405600R1013
	CR-P110DC1S542CV	1SVR405600R8010
	CR-P024AC1S562CV	1SVR405600R0010
	CR-P120AC1S592CV	1SVR405600R2010
	CR-P230AC1S592CV	1SVR405600R3110
	CR-P230AC1LS	1SVR405600R3011
	CR-P230AC1LC92CV	1SVR405600R3010
	CR-P012DC2S542V	1SVR405601R4010
	CR-P024DC2S542V	1SVR405601R1010
	CR-P024DC2LS42	1SVR405601R1013
	CR-P024DC2LS42V	1SVR405601R1011
	CR-P024DC2LC42	1SVR405601R1012
	CR-P024DC2GLC42V	1SVR405606R1010
	CR-P024DC2GLC62C	1SVR405606R1013
	CR-P024DC2GLC62CV	1SVR405606R1011
	CR-P110DC2S542CV	1SVR405601R8010
	CR-P024AC2S562CV	1SVR405601R0010
	CR-P120AC2S592CV	1SVR405601R2010
	CR-P230AC2S592CV	1SVR405601R3110
	CR-P230AC2LS92CV	1SVR405601R3011
	CR-P230AC2LC92	1SVR405601R3012
	CR-P230AC2GLC92	1SVR405606R3013
	CR-P230AC2GLC92C	1SVR405606R3012
	CR-P230AC2GLC92CV	1SVR405606R3010
Input voltage		
12 V DC	■	
24 V DC	■	■
48 V DC		
110 V DC		■
12 V AC		
24 V AC		■
48 V AC		
110 V AC		
120 V AC		■
230 V AC		■
Output rating		
250 V 16 A	■	■
250 V 8 A	■	■
Output contacts		
c/o	1	1
Gold plated contacts		
Socket type		
Standard socket	■	■
Logical socket		■
Additional features		
LED	■	■
Free-wheeling diode	■	■

Type selection CR-M range

Type	Order code
CR-M012DC2	15VR405611R4000
CR-M024DC2	15VR405611R1000
CR-M048DC2	15VR405611R6000
CR-M060DC2	15VR405611R4200
CR-M110DC2	15VR405611R8000
CR-M125DC2	15VR405611R8200
CR-M220DC2	15VR405611R9000
CR-M024AC2	15VR405611R0000
CR-M048AC2	15VR405611R5000
CR-M110AC2	15VR405611R7000
CR-M120AC2	15VR405611R2000
CR-M230AC2	15VR405611R3000
CR-M012DC3	15VR405612R4000
CR-M024DC3	15VR405612R1000
CR-M048DC3	15VR405612R6000
CR-M060DC3	15VR405612R4200
CR-M110DC3	15VR405612R8000
CR-M125DC3	15VR405612R8200
CR-M220DC3	15VR405612R9000
CR-M024AC3	15VR405612R0000
CR-M048AC3	15VR405612R5000
CR-M060AC3	15VR405612R5200
CR-M110AC3	15VR405612R7000
CR-M120AC3	15VR405612R2000
CR-M230AC3	15VR405612R3000
CR-M012DC4	15VR405613R4000
CR-M024DC4	15VR405613R1000
CR-M048DC4	15VR405613R6000
CR-M060DC4	15VR405613R4200
CR-M110DC4	15VR405613R8000
CR-M125DC4	15VR405613R8200
CR-M220DC4	15VR405613R9000
CR-M024AC4	15VR405613R0000
CR-M048AC4	15VR405613R5000
CR-M110AC4	15VR405613R7000
CR-M120AC4	15VR405613R2000
CR-M230AC4	15VR405613R3000

[illegible][illegible][illegible][illegible]

100

		Type		Order code																																																	
		CR-M012DC4LDGSS	15VR405618R4410	CR-M024DC4SS42V	15VR405613R1010	CR-M024DC4LS42V	15VR405613R1011	CR-M024DC4LC42	15VR405613R1012	CR-M024DC4GSS42V	15VR405618R1011	CR-M024DC4GLC62CV	15VR405618R1010	CR-M024DC4LGLC22	15VR405618R1110	CR-M024DC4LDGSS	15VR405618R1410	CR-M024AC4LS62CV	15VR405613R0010	CR-M230AC4SS92CV	15VR405613R3110	CR-M230AC4LS92CV	15VR405613R3011	CR-M230AC4LC92	15VR405613R3012	CR-M230AC4GSS42CV	15VR405618R3112	CR-M230AC4LGLC	15VR405618R3110	CR-M230AC4LGS5	15VR405618R3111	CR-M230AC4SS42CV	15VR405613R0010																				
Input voltage																																																					
12 V DC		■																																																			
24 V DC			■	■	■	■	■	■	■	■	■	■																																									
48 V DC																																																					
60 V DC																																																					
110 V DC																																																					
125 V DC																																																					
220 V DC																																																					
24 V AC																													■																								
48 V AC																																																					
60 V AC																																																					
110 V AC																																																					
120 V AC																																																					
230 V AC																													■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
Output rating																																																					
250 V 6 A			■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■																			
250 V 10 A																																																					
250 V 12 A																																																					
Output contacts																																																					
c/o			4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4																			
Gold plated contacts			■						■	■	■	■	■													■	■		■	■	■																						
Socket type																																																					
Standard socket			■	■					■					■				■		■						■				■	■	■	■	■																			
Logical socket					■	■				■	■				■					■	■	■				■																											
Additional features																																																					
LED			■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■																			
Free-wheeling diode			■	■	■	■	■					■	■													■					■	■																					

Pluggable interface relays and optocouplers

Type selection CR-M range

CR-M pluggable relays with LED

	Type	Order code
	CR-M012DC2L	1SVR405611R4100
	CR-M012DC2LD	1SVR405611R4400
	CR-M024DC2L	1SVR405611R1100
	CR-M024DC2LD	1SVR405611R1400
	CR-M048DC2L	1SVR405611R6100
	CR-M048DC2LD	1SVR405611R6400
	CR-M060DC2L	1SVR405611R4300
	CR-M110DC2L	1SVR405611R8100
	CR-M110DC2LD	1SVR405611R8400
	CR-M125DC2L	1SVR405611R8300
	CR-M125DC2LD	1SVR405611R8500
	CR-M220DC2L	1SVR405611R9100
	CR-M220DC2LD	1SVR405611R9400
	CR-M012AC2L	1SVR405611R0300
	CR-M024AC2L	1SVR405611R0300
	CR-M048AC2L	1SVR405611R5100
	CR-M110AC2L	1SVR405611R7100
	CR-M120AC2L	1SVR405611R2100
	CR-M230AC2L	1SVR405611R3100
Input voltage		
12 V DC	■	■
24 V DC		■
48 V DC		■
60 V DC		■
110 V DC		■
125 V DC		■
220 V DC		■
12 V AC		■
24 V AC		■
48 V AC		■
60 V AC		■
110 V AC		■
120 V AC		■
230 V AC		■
Output rating		
250 V 6 A		
250 V 10 A		
250 V 12 A	■	■
Output contacts		
c/o	2	2
Gold plated contacts		
Additional features		
LED	■	■
Free-wheeling diode	■	■

Type selection CR-M range

CR-M pluggable relays with LED

		Type	Order code
		CR-M012DC3L	1SVR405612R4100
		CR-M012DC3LD	1SVR405612R4400
		CR-M024DC3L	1SVR405612R1100
		CR-M024DC3LD	1SVR405612R1400
		CR-M048DC3L	1SVR405612R6100
		CR-M048DC3LD	1SVR405612R6400
		CR-M060DC3L	1SVR405612R4300
		CR-M110DC3L	1SVR405612R8100
		CR-M110DC3LD	1SVR405612R8400
		CR-M125DC3L	1SVR405612R8300
		CR-M125DC3LD	1SVR405612R8500
		CR-M220DC3L	1SVR405612R9100
		CR-M220DC3LD	1SVR405612R9400
		CR-M012AC3L	1SVR405612R0300
		CR-M024AC3L	1SVR405612R0100
		CR-M048AC3L	1SVR405612R5100
		CR-M110AC3L	1SVR405612R7100
		CR-M120AC3L	1SVR405612R2100
		CR-M230AC3L	1SVR405612R3100
Input voltage			
12 V DC		■	■
24 V DC			■
48 V DC			■
60 V DC			■
110 V DC			■
125 V DC			■
220 V DC			■
12 V AC			■
24 V AC			■
48 V AC			■
60 V AC			■
110 V AC			■
120 V AC			■
230 V AC			■
Output rating			
250 V 6 A			
250 V 10 A	■	■	■
250 V 12 A			
Output contacts			
c/o	3	3	3
Gold plated contacts			
Additional features			
LED	■	■	■
Free-wheeling diode		■	■

Pluggable interface relays and optocouplers

Type selection CR-M range

CR-M pluggable relays with LED

	Type	Order code
	CR-M012DC4L	1SVR405613R4100
	CR-M012DC4LD	1SVR405613R4400
	CR-M024DC4L	1SVR405613R1100
	CR-M024DC4LD	1SVR405614R1100
	CR-M048DC4L	1SVR405613R6100
	CR-M048DC4LD	1SVR405613R6400
	CR-M060DC4L	1SVR405613R4300
	CR-M110DC4L	1SVR405613R8100
	CR-M110DC4LD	1SVR405613R8400
	CR-M125DC4L	1SVR405613R8300
	CR-M125DC4LD	1SVR405613R8500
	CR-M220DC4L	1SVR405613R9100
	CR-M220DC4LD	1SVR405613R9400
	CR-M012AC4L	1SVR405613R0300
	CR-M024AC4L	1SVR405613R0100
	CR-M048AC4L	1SVR405613R5100
	CR-M110AC4L	1SVR405613R7100
	CR-M120AC4L	1SVR405613R2100
	CR-M230AC4L	1SVR405613R3100

Input voltage	
12 V DC	■ ■
24 V DC	■ ■
48 V DC	■ ■
60 V DC	■ ■
110 V DC	■ ■
125 V DC	■ ■
220 V DC	■ ■
12 V AC	■
24 V AC	■
48 V AC	■
60 V AC	■
110 V AC	■
120 V AC	■
230 V AC	■

Output rating	
250 V 6 A	■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■
250 V 10 A	
250 V 12 A	

Output contacts	
c/o	4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4
Gold plated contacts	

Additional features	
LED	■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■
Free-wheeling diode	■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■

Type selection CR-M range

CR-M pluggable relays with Gold Plated Contacts

	Type	Order code
	CR-M024DC4G	15VR405618R1000
	CR-M024AC4G	15VR405618R0000
	CR-M110AC4G	15VR405618R7000
	CR-M230AC4G	15VR405618R3000
	CR-M230AC4G	15VR405618R3000
	CR-M012DC4LG	15VR405618R4100
	CR-M024DC4LG	15VR405618R1100
	CR-M048DC4LG	15VR405618R6100
	CR-M060DC4LG	15VR405618R4300
	CR-M110DC4LG	15VR405618R8100
	CR-M125DC4LG	15VR405618R8300
	CR-M220DC4LG	15VR405618R9100
	CR-M024AC4LG	15VR405618R0100
	CR-M048AC4LG	15VR405618R5100
	CR-M110AC4LG	15VR405618R7100
	CR-M120AC4LG	15VR405618R2100
	CR-M230AC4LG	15VR405618R3100
	CR-M012DC4LDG	15VR405618R4400
	CR-M024DC4LDG	15VR405618R1400

Input voltage	
12 V DC	
24 V DC	
48 V DC	
60 V DC	
110 V DC	
125 V DC	
220 V DC	
24 V AC	
48 V AC	
60 V AC	
110 V AC	
120 V AC	
230 V AC	

Output rating	
250 V 6 A	
250 V 10 A	
250 V 12 A	

Output contacts	
c/o	
Gold plated contacts	

Additional features	
LED	
Free-wheeling diode	

Pluggable interface relays and optocouplers

Type selection CR-P/M functional modules

CR-P/M functional modules

	Type	Order code
	CR-P/M 22	1SVR405651R0000
	CR-P/M 42	1SVR405652R0000
	CR-P/M 42V	1SVR405652R1000
	CR-P/M 42B	1SVR405652R4000
	CR-P/M 42BV	1SVR405652R4100
	CR-P/M 42C	1SVR405652R9000
	CR-P/M 42CV	1SVR405652R9100
	CR-P/M 52B	1SVR405653R0000
	CR-P/M 52D	1SVR405653R4000
	CR-P/M 52C	1SVR405653R1000
	CR-P/M 62	1SVR405654R0000
	CR-P/M 62V	1SVR405654R1000
	CR-P/M 62E	1SVR405654R4000
	CR-P/M 62EV	1SVR405654R4100
	CR-P/M 92	1SVR405654R0100
	CR-P/M 92V	1SVR405654R1100
	CR-P/M 62C	1SVR405655R0000
	CR-P/M 62CV	1SVR405655R1000
	CR-P/M 62D	1SVR405655R4000
	CR-P/M 62DV	1SVR405655R4100
	CR-P/M 92C	1SVR405655R0100
	CR-P/M 92CV	1SVR405655R1100
	CR-P/M 72	1SVR405656R0000
	CR-P/M 72A	1SVR405656R1000
	CR-P/M 82	1SVR405656R2000

Related control supply voltage	
6-220 V DC	■
6-24 V DC	■ ■
24-60 V DC	■ ■
110 V DC	■ ■
110-230 V DC	■
6-24 V AC	■
24-60 V AC	■
110-230 V AC	■
24 V AC	■ ■
115 V AC	■
230 V AC	■
24-240 V AC/DC	■

Function	
Diode - reverse polarity protection / free-wheeling diode	■
Diode and LED - reverse polarity protection / free-wheeling diode	■ ■ ■ ■ ■ ■
RC element - spark quenching	■ ■ ■
Diode and LED	■ ■ ■ ■ ■ ■
Varistor and LED - overvoltage protection	■ ■ ■ ■ ■ ■
Varistor - overvoltage protection	■ ■ ■ ■ ■ ■
LED red	■ ■ ■ ■ ■ ■
LED green	■ ■ ■ ■ ■ ■

		Type	Order code
		CR-U012DC2	1SVR405621R4000
		CR-U024DC2	1SVR405621R1000
		CR-U048DC2	1SVR405621R6000
		CR-U110DC2	1SVR405621R8000
		CR-U220DC2	1SVR405621R9000
		CR-U024AC2	1SVR405621R0000
		CR-U048AC2	1SVR405621R5000
		CR-U110AC2	1SVR405621R7000
		CR-U120AC2	1SVR405621R2000
		CR-U230AC2	1SVR405621R3000
		CR-U012DC3	1SVR405622R4000
		CR-U024DC3	1SVR405622R1000
		CR-U048DC3	1SVR405622R6000
		CR-U110DC3	1SVR405622R8000
		CR-U125DC3	1SVR405622R8200
		CR-U220DC3	1SVR405622R9000
		CR-U024AC3	1SVR405622R0000
		CR-U048AC3	1SVR405622R5000
		CR-U060AC3	1SVR405622R5200
		CR-U110AC3	1SVR405622R7000
		CR-U120AC3	1SVR405622R2000
		CR-U230AC3	1SVR405622R3000
Input voltage			
12 V DC	■		
24 V DC		■	
48 V DC			■
110 V DC			■
125 V DC			
220 V DC			■
12 V AC			
24 V AC			■
48 V AC			■
60 V AC			
110 V AC			■
120 V AC			
230 V AC			■
Output rating			
250 V 10 A	■	■	■
Output contacts			
c/o	2	2	2
Gold plated contacts			

Type selection CR-U range

		Type	Order code
		CR-U012DC2L	1SVR405621R4100
		CR-U012DC2LD	1SVR405621R4400
		CR-U024DC2L	1SVR405621R1100
		CR-U024DC2LD	1SVR405621R1400
		CR-U048DC2L	1SVR405621R6100
		CR-U048DC2LD	1SVR405621R6400
		CR-U110DC2L	1SVR405621R8100
		CR-U110DC2LD	1SVR405621R8400
		CR-U220DC2L	1SVR405621R9100
		CR-U012AC2L	1SVR405621R0300
		CR-U024AC2L	1SVR405621R0100
		CR-U048AC2L	1SVR405621R5100
		CR-U110AC2L	1SVR405621R7100
		CR-U120AC2L	1SVR405621R2100
		CR-U230AC2L	1SVR405621R3100
		CR-U012DC3L	1SVR405622R4100
		CR-U012DC3LD	1SVR405622R4400
		CR-U024DC3L	1SVR405622R1100
		CR-U024DC3LD	1SVR405623R1100
		CR-U048DC3L	1SVR405622R6100
		CR-U048DC3LD	1SVR405622R6400
		CR-U110DC3L	1SVR405622R8100
		CR-U110DC3LD	1SVR405622R8400
		CR-U220DC3L	1SVR405622R9100
		CR-U012AC3L	1SVR405622R0300
		CR-U024AC3L	1SVR405622R0100
		CR-U048AC3L	1SVR405622R5100
		CR-U110AC3L	1SVR405622R7100
		CR-U120AC3L	1SVR405622R2100
		CR-U230AC3L	1SVR405622R3100

Input voltage	
12 V DC	■
24 V DC	■
48 V DC	■
110 V DC	■
125 V DC	■
220 V DC	■
12 V AC	■
24 V AC	■
48 V AC	■
60 V AC	■
110 V AC	■
120 V AC	■
230 V AC	■

Output rating	
250 V 10 A	■

Output contacts	
c/o	2
Gold plated contacts	

Additional features	
LED	■
Free-wheeling diode	■


	Type	Order code
	CR-U 21	1SVR405661R0000
	CR-U 41	1SVR405662R0000
	CR-U 41V	1SVR405662R1000
	CR-U 41B	1SVR405662R4000
	CR-U 41BV	1SVR405662R4100
	CR-U 41C	1SVR405662R9000
	CR-U 41CV	1SVR405662R9100
	CR-U 51B	1SVR405663R0000
	CR-U 51D	1SVR405663R4000
	CR-U 51C	1SVR405663R1000
	CR-U 61	1SVR405664R0000
	CR-U 61V	1SVR405664R1000
	CR-U 61E	1SVR405664R4000
	CR-U 61EV	1SVR405664R4100
	CR-U 91 -	1SVR405664R0100
	CR-U 91V	1SVR405664R1100
	CR-U 61C	1SVR405665R0000
	CR-U 61CV	1SVR405665R1000
	CR-U 61D	1SVR405665R4000
	CR-U 61DV	1SVR405665R4100
	CR-U 91C	1SVR405665R0100
	CR-U 91CV	1SVR405665R1100
	CR-U 71	1SVR405666R0000
	CR-U 71A	1SVR405666R1000
	CR-U 81	1SVR405666R2000
	CR-U T	1SVR405677R0000

Related control supply voltage	
6-220 V DC	■
6-24 V DC	■
24-60 V DC	■
110 V DC	■
110-230 V DC	■
6-24 V AC	■
24-60 V AC	■
110-230 V AC	■
24 V AC	■
115 V AC	■
230 V AC	■
24-240 V AC/DC	■


Function	
Diode - reverse polarity protection / free wheeling diode	■
Diode and LED - reverse polarity protection / free wheeling diode	■
RC element - spark quenching	■
Diode and LED	■
Varistor and LED - overvoltage protection	■
Varistor - overvoltage protection	■
Multifunctional time module	■
LED red	■
LED green	■

Pluggable interface relays and optocouplers

Benefits and advantages

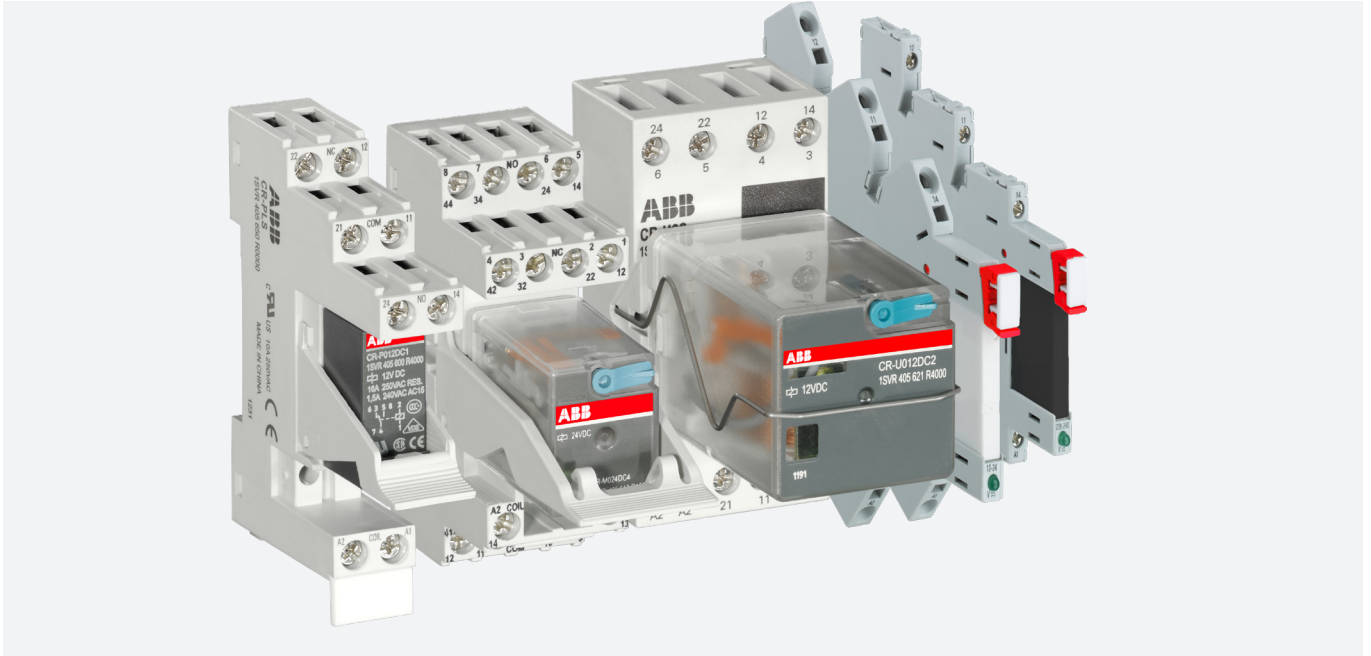

ABB's interface relays and optocouplers ensure a reliable voltage conversion between process peripherals and higher level control systems. These relays ensure reliable signal switching and provide electrical isolation for sensitive electronics such as PLCs. The wide variety of pluggable interface relays with accompanied by standard or logic sockets may be used for switching AC or DC loads. Suitable for extreme environments, ABB's interface relays are offered across a wide spectrum of coil voltages, with a variety of optional functional modules.



Continuous operation

The Interface relay portfolio incorporates a large assortment of relays. It includes both electro-mechanical relays and optocouplers. Optocouplers allow for continuous operation without any mechanical wear-and-tear.



Easy to install

The Interface relay includes both pluggable and non-pluggable relays. The pluggable relays allow for the easy and seamless exchange of relay modules.



Global availability

The ABB Interface Relays and optocouplers are approved for a large variety of applications, comply to the highest global approvals and are available world-wide.

Pluggable interface relays and optocouplers


Socket and terminal connection types

Standard sockets



01 Standard socket CR-P

2CDC291040F0004



02 Standard socket CR-M

2CDC29100950011

Position of connecting terminals:


Coil connection (A1-A2) on lower socket side, all contact connections (common contacts, n/o and n/c contacts) on upper socket side.

Logical sockets



03 Logical socket CR-P

2CDC29100650011




04 Logical socket CR-M

2CDC291042F0004


Position of connecting terminals:

Coil connection (A1-A2) on lower socket side, contact connections (n/o and n/c contacts) on the lower and upper socket side.


Terminal connection types



01 Screw type



02 Spring type




03 Fork type

A variety of sockets are available for interface relays and optocouplers to meet the needs of different applications such as vibration- intensive environments.


Pluggable interface relays and optocouplers

Relay components

CR-S range

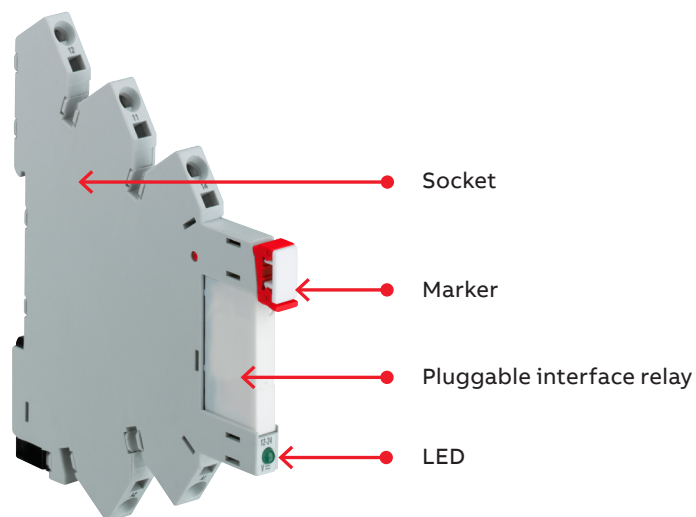


CR-P range

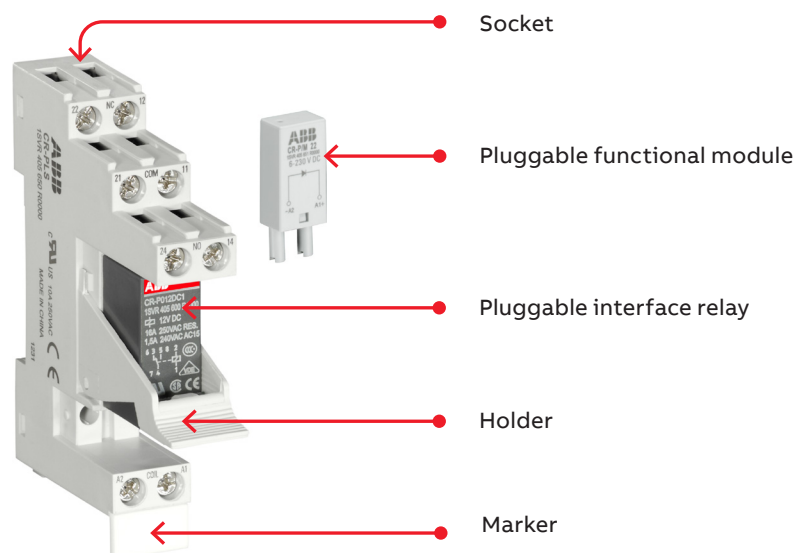


Pluggable interface relays and optocouplers

Relay components

CR-M range

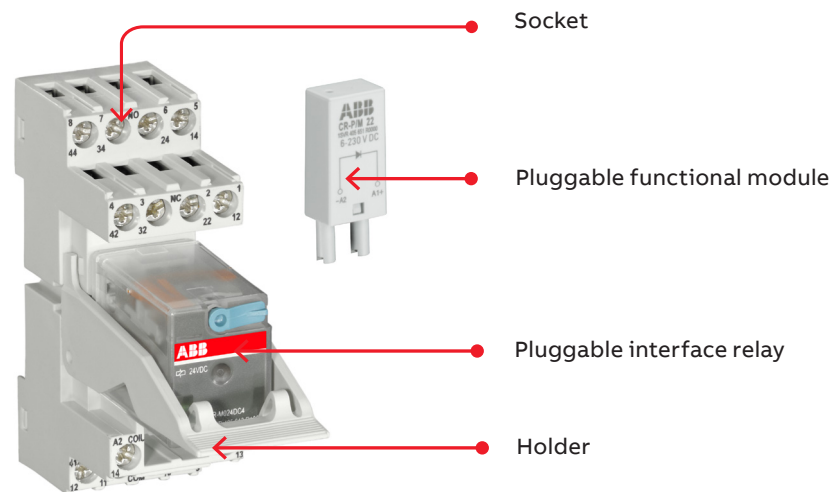

CR-U range

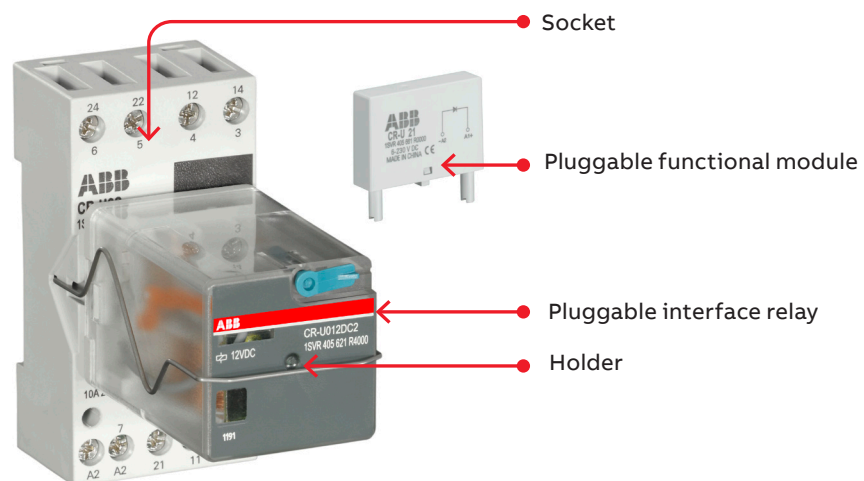

Pluggable interface relays and optocouplers

Ordering details – CR-S range



CR-S Interface relay

2CDC 291 005 5001.4



CR-S Optocoupler

2CDC 291 003 5001.6

The slim pluggable interface relays and optocouplers of the CR-S Range may be used for electrical isolation, amplification and signal matching. The CR-S relays are 6.2 mm wide and therefore allow for the switching high currents on a small footprint.

Ordering details - CR-S range pluggable interface relays

Rated control supply voltage	Outputs	Contact ratings	Type	Order code	Pkg qty	Weight (1 pc.) kg (lb)
5 V DC	1 c/o (SPDT) standard contacts	250 V, 6 A	CR-S005VDC1R	1SVR405501R1010	10	0.005 (0.011)
12 V DC			CR-S012VDC1R	1SVR405501R2010		
24 V DC			CR-S024VDC1R	1SVR405501R3010		
48 V DC			CR-S048VDC1R	1SVR405501R4010		
60 V DC	1 c/o (SPDT) gold plated contacts	12 V, 250 mA (3W) ¹⁾	CR-S060VDC1R	1SVR405501R5010	10	0.005 (0.011)
5 V DC			CR-S005VDC1RG	1SVR405501R1020		
12 V DC			CR-S012VDC1RG	1SVR405501R2020		
24 V DC			CR-S024VDC1RG	1SVR405501R3020		
48 V DC			CR-S048VDC1RG	1SVR405501R4020		
60 V DC			CR-S060VDC1RG	1SVR405501R5020		

Ordering details - CR-S range pluggable optocouplers

Rated control supply voltage	Outputs	Type	Order code	Pkg qty	Weight (1 pc.) kg (lb)
24 V DC	Transistor, 100 mA - 48 V DC	CR-S024VDC1TRA	1SVR405510R3050	10	0.004 (0.009)
	MOS-FET, 2 A - 24 V DC	CR-S024VDC1MOS	1SVR405510R3060		
	Triac, 2 A - 240 V AC	CR-S024VDC1TRI	1SVR405510R3070		


Ordering details - CR-S range complete interface relays (relay + socket)

Rated control supply voltage	Outputs	Contact ratings	Type	Order code	Pkg qty	Weight (1 pc.) kg (lb)
24 V AC/DC	1 c/o (SPDT) standard contacts	250 V, 6 A	CR-S024VADC1CRS	1SVR405541R3110	10	0.03 (0.066)
110 V AC/DC			CR-S024VADC1CRZ	1SVR405541R3210		
			CR-S110VADC1CRS	1SVR405541R6110		
230 V AC/DC			CR-S110VADC1CRZ	1SVR405541R6210		
			CR-S230VADC1CRS	1SVR405541R7110		
24 V AC/DC	1 c/o (SPDT) gold plated contacts	12 V, 250 mA (3W) ¹⁾	CR-S230VADC1CRZ	1SVR405541R7210	10	0.03 (0.066)
24 V AC/DC			CR-S024VADC1CRGS	1SVR405541R3120		
110 V AC/DC			CR-S024VADC1CRGZ	1SVR405541R3220		
			CR-S110VADC1CRGS	1SVR405541R6120		
230 V AC/DC			CR-S110VADC1CRGZ	1SVR405541R6220		
			CR-S230VADC1CRGS	1SVR405541R7120		
			CR-S230VADC1CRGZ	1SVR405541R7220		

¹⁾ If specified maximum values exceeded, the gold plating is destroyed. The maximum values of the standard contacts are then valid.

Pluggable interface relays and optocouplers

Ordering details – CR-S range

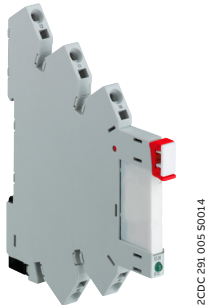

CR-S Interface relay

Ordering details - CR-S range sockets

Rated control supply voltage	Connection type	Type	Order code	Pkg qty	Weight (1 pc.) kg (lb)
6-24 V DC	Screw	CR-S006/024VDC1SS	1SVR405521R1100	10	0.025 (0.055)
	Spring	CR-S006/024VDC1SZ	1SVR405521R1200		
12-24 V AC/DC	Screw	CR-S012/024VADC1SS	1SVR405521R3100		
	Spring	CR-S012/024VADC1SZ	1SVR405521R3200		
48-60 V AC/DC	Screw	CR-S048/060VADC1SS	1SVR405521R5100		
	Spring	CR-S048/060VADC1SZ	1SVR405521R5200		
110-125 V AC/DC	Screw	CR-S110/125VADC1SS	1SVR405521R6100		
	Spring	CR-S110/125VADC1SZ	1SVR405521R6200		
220-240 V AC/DC	Screw	CR-S220/240VADC1SS	1SVR405521R7100		
	Spring	CR-S220/240VADC1SZ	1SVR405521R7200		

Ordering details - CR-S range accessories

Version	Type	Order code	Pkg qty	Weight (1 pc.) kg (lb)
Jumper bar 20 pole, blue color	CR-SJB20-BLUE	1SVR405598R0700	10	0.008 (0.018)
Jumper bar 20 pole, red color	CR-SJB20-RED	1SVR405598R0800		
Jumper bar 20 pole, black color	CR-SJB20-BLACK	1SVR405598R0900		
Separator	CR-SSEP	1SVR405599R0000	10	0.012 (0.026)

Pluggable interface relays and optocouplers

Ordering details – CR-S range

Relay assemblies

Control voltage	Connection terminal	Contact material	Socket type	Socket order code	Relay type	Relay order code
5 V DC	screw	standard	CR-S006/024VDC1SS	1SVR405521R1100	CR-S005VDC1R	1SVR405501R1010
		gold plated	CR-S006/024VDC1SS	1SVR405521R1100	CR-S005VDC1RG	1SVR405501R1020
	spring	standard	CR-S006/024VDC1SZ	1SVR405521R1200	CR-S005VDC1R	1SVR405501R1010
		gold plated	CR-S006/024VDC1SZ	1SVR405521R1200	CR-S005VDC1RG	1SVR405501R1020
12 V DC	screw	standard	CR-S006/024VDC1SS or CR-S012/024VADC1SS	1SVR405521R1100 or 1SVR405521R3100	CR-S012VDC1R	1SVR405501R2010
		gold plated	CR-S006/024VDC1SS or CR-S012/024VADC1SS	1SVR405521R1100 or 1SVR405521R3100	CR-S012VDC1RG	1SVR405501R2020
	spring	standard	CR-S006/024VDC1SZ or CR-S012/024VADC1SZ	1SVR405521R1200 or 1SVR405521R3200	CR-S012VDC1R	1SVR405501R2010
		gold plated	CR-S006/024VDC1SZ or CR-S012/024VADC1SZ	1SVR405521R1200 or 1SVR405521R3200	CR-S012VDC1RG	1SVR405501R2020
12 V AC	screw	standard	CR-S012/024VADC1SS	1SVR405521R3100	CR-S012VDC1R	1SVR405501R2010
		gold plated	CR-S012/024VADC1SS	1SVR405521R3100	CR-S012VDC1RG	1SVR405501R2020
	spring	standard	CR-S012/024VADC1SZ	1SVR405521R3200	CR-S012VDC1R	1SVR405501R2010
		gold plated	CR-S012/024VADC1SZ	1SVR405521R3200	CR-S012VDC1RG	1SVR405501R2020
24 V DC	screw	standard	CR-S006/024VDC1SS or CR-S012/024VADC1SS	1SVR405521R1100 or 1SVR405521R3100	CR-S024VDC1R	1SVR405501R3010
		gold plated	CR-S006/024VDC1SS or CR-S012/024VADC1SS	1SVR405521R1100 or 1SVR405521R3100	CR-S024VDC1RG	1SVR405501R3020
	spring	standard	CR-S006/024VDC1SZ or CR-S012/024VADC1SZ	1SVR405521R1200 or 1SVR405521R3200	CR-S024VDC1R	1SVR405501R3010
		gold plated	CR-S006/024VDC1SZ or CR-S012/024VADC1SZ	1SVR405521R1200 or 1SVR405521R3200	CR-S024VDC1RG	1SVR405501R3020
24 V AC	screw	standard	CR-S012/024VADC1SS	1SVR405521R3100	CR-S024VDC1R	1SVR405501R3010
		gold plated	CR-S012/024VADC1SS	1SVR405521R3100	CR-S024VDC1RG	1SVR405501R3020
	spring	standard	CR-S012/024VADC1SZ	1SVR405521R3200	CR-S024VDC1R	1SVR405501R3010
		gold plated	CR-S012/024VADC1SZ	1SVR405521R3200	CR-S024VDC1RG	1SVR405501R3020
48 V AC/DC	screw	standard	CR-S048/060VADC1SS	1SVR405521R5100	CR-S048VDC1R	1SVR405501R4010
		gold plated	CR-S048/060VADC1SS	1SVR405521R5100	CR-S048VDC1RG	1SVR405501R4020
	spring	standard	CR-S048/060VADC1SZ	1SVR405521R5200	CR-S048VDC1R	1SVR405501R4010
		gold plated	CR-S048/060VADC1SZ	1SVR405521R5200	CR-S048VDC1RG	1SVR405501R4020
60 V AC/DC	screw	standard	CR-S048/060VADC1SS	1SVR405521R5100	CR-S060VDC1R	1SVR405501R5010
		gold plated	CR-S048/060VADC1SS	1SVR405521R5100	CR-S060VDC1RG	1SVR405501R5020
	spring	standard	CR-S048/060VADC1SZ	1SVR405521R5200	CR-S060VDC1R	1SVR405501R5010
		gold plated	CR-S048/060VADC1SZ	1SVR405521R5200	CR-S060VDC1RG	1SVR405501R5020
110-125 V AC/DC	screw	standard	CR-S110/125VADC1SS	1SVR405521R6100	CR-S060VDC1R	1SVR405501R5010
		gold plated	CR-S110/125VADC1SS	1SVR405521R6100	CR-S060VDC1RG	1SVR405501R5020
	spring	standard	CR-S110/125VADC1SZ	1SVR405521R6200	CR-S060VDC1R	1SVR405501R5010
		gold plated	CR-S110/125VADC1SZ	1SVR405521R6200	CR-S060VDC1RG	1SVR405501R5020
220-240 V AC/DC	screw	standard	CR-S220/240VADC1SS	1SVR405521R7100	CR-S060VDC1R	1SVR405501R5010
		gold plated	CR-S220/240VADC1SS	1SVR405521R7100	CR-S060VDC1RG	1SVR405501R5020
	spring	standard	CR-S220/240VADC1SZ	1SVR405521R7200	CR-S060VDC1R	1SVR405501R5010
		gold plated	CR-S220/240VADC1SZ	1SVR405521R7200	CR-S060VDC1RG	1SVR405501R5020

Pluggable interface relays and optocouplers

Ordering details – CR-S range

Optocoupler assemblies

Control voltage	Connection terminal	Output characteristics	Socket type	Socket order code	Opto type	Opto order code
24 V DC	screw	Transistor	CR-S012/024VADC1SS	1SVR405521R3100	CR-S024VDC1TRA	1SVR405510R3050
	spring	100 mA - 48 V DC	CR-S012/024VADC1SZ	1SVR405521R3200	CR-S024VDC1TRA	1SVR405510R3050
	screw	MOS-FET	CR-S012/024VADC1SS	1SVR405521R3100	CR-S024VDC1MOS	1SVR405510R3060
	spring	2 A - 24 V DC	CR-S012/024VADC1SZ	1SVR405521R3200	CR-S024VDC1MOS	1SVR405510R3060
	screw	Triac	CR-S012/024VADC1SS	1SVR405521R3100	CR-S024VDC1TRI	1SVR405510R3070
	spring	2 A - 240 V AC	CR-S012/024VADC1SZ	1SVR405521R3200	CR-S024VDC1TRI	1SVR405510R3070


Pluggable interface relays and optocouplers

Ordering details – CR-P range



CR-P relay

2CDC291 045 F0004




CR-P optocoupler

2CDC291 006 S0016



CR-PLS

2CDC291 006 F0011



CR-PJ

2CDC291 004 F0007

The CR-P range offers the highest current switching in an IP67 rated relay housing. This range comprises of pluggable interface relays and optocouplers offered in 10 different control supply voltages. Additionally, gold plated contacts are available for applications where sensitive signals are to be switched. The CR-P range also includes complete versions consisting of a relay, socket, holder and functional module.

Ordering details - CR-P range relays

Rated control supply voltage	Outputs	Contact ratings	Type	Order code	Pkg	Weight (1 pc.)
					qty	kg (lb)
12 V DC	1 c/o (SPDT)	250 V, 16 A	CR-P012DC1	1SVR405600R4000	10	0.014 (0.031)
24 V DC			CR-P024DC1	1SVR405600R1000		
48 V DC			CR-P048DC1	1SVR405600R6000		
110 V DC			CR-P110DC1	1SVR405600R8000		
24 V AC			CR-P024AC1	1SVR405600R0000		
48 V AC			CR-P048AC1	1SVR405600R5000		
110 V AC			CR-P110AC1	1SVR405600R7000		
120 V AC			CR-P120AC1	1SVR405600R2000		
230 V AC			CR-P230AC1	1SVR405600R3000		
12 V DC	2 c/o (SPDT)	250 V, 8 A	CR-P012DC2	1SVR405601R4000	10	0.014 (0.031)
24 V DC			CR-P024DC2	1SVR405601R1000		
48 V DC			CR-P048DC2	1SVR405601R6000		
110 V DC			CR-P110DC2	1SVR405601R8000		
12 V AC			CR-P012AC2	1SVR405601R0200		
24 V AC			CR-P024AC2	1SVR405601R0000		
48 V AC			CR-P048AC2	1SVR405601R5000		
110 V AC			CR-P110AC2	1SVR405601R7000		
120 V AC			CR-P120AC2	1SVR405601R2000		
230 V AC			CR-P230AC2	1SVR405601R3000		

Ordering details - CR-P range relays with gold contacts


Rated control supply voltage	Outputs	Contact ratings	Type	Order code	Pkg	Weight (1 pc.)
					qty	kg (lb)
24 V DC	2 c/o (SPDT) gold contact	250 V, 8 A	CR-P024DC2G	1SVR405606R1000	10	0.014 (0.031)
24 V AC			CR-P024AC2G	1SVR405606R0000		
110 V AC			CR-P110AC2G	1SVR405606R7000		
230 V AC			CR-P230AC2G	1SVR405606R3000		

Ordering details - CR-P range pluggable optocouplers

Rated control supply voltage (Us)	Outputs	Type	Order code	Pkg	Weight (1 pc.)
				qty	kg (lb)
10-32 V DC	MOS-FET, 5 A - 35 V DC	CR-P024MOS1	1SVR405610R4060	10	0.011 (0.618)
	Triac, 3 A - 275 V AC	CR-P024TRI1	1SVR405610R4070		

Pluggable interface relays and optocouplers

Ordering details – CR-P range



CR-PLSX relay

ZDC29108BF0004



CR-P complete version relay

ZDC291001F0019

Ordering details - Accessories

Version	Connection terminal	Type	Order code	Pkg	Weight (1 pc.)
				qty	kg (lb)
Logical socket with protective separation	screw	CR-PLS	1SVR405650R0000	10	0.045 (0.099)
Logical socket	screw	CR-PLSx	1SVR405650R0100		0.043 (0.095)
	spring	CR-PLC	1SVR405650R0200		0.042 (0.093)
Standard socket	screw	CR-PSS	1SVR405650R1000		0.038 (0.084)
Plastic holder for socket		CR-PH	1SVR405659R0000	10	0.002 (0.004)
Metal holder		CR-PH1	1SVR405659R0100		
Jumper bar for sockets with screw connection		CR-PJ	1SVR405658R5000		0.018 (0.040)
Marker		CR-PM	1SVR405658R0000	10	0.0002 (0.0004)

Ordering details - CR-P range complete versions

Rated control supply voltage	Out-puts	Description	Socket type	Connec-tion terminal	Type	Order code	Pkg	Weight (1 pc.)
							qty	kg (lb)
12 V DC	1 c/o	Reverse polarity protection and freewheeling diode, LED green, Holder	standard	screw	CR-P012DC1SS42V	1SVR405600R4010	10	0.057 (0.126)
24 V DC	1 c/o	Reverse polarity protection and freewheeling diode, LED green, Holder	standard	screw	CR-P024DC1SS42V	1SVR405600R1010	10	0.057 (0.126)
		Reverse polarity protection and freewheeling diode, LED green, Holder	logical	spring	CR-P024DC1LC42V	1SVR405600R1011	10	0.057 (0.126)
		Varistor and LED red, Holder	logical	spring	CR-P024DC1LC62C	1SVR405600R1013	10	0.057 (0.126)
110 V DC	1 c/o	Reverse polarity protection and freewheeling diode, LED green, Holder	standard	screw	CR-P110DC1SS42CV	1SVR405600R8010	10	0.057 (0.126)
24 V AC	1 c/o	Varistor and LED green, Holder	standard	screw	CR-P024AC1SS62CV	1SVR405600R0010	10	0.057 (0.126)
120 V AC	1 c/o	Varistor and LED green, Holder	standard	screw	CR-P120AC1SS92CV	1SVR405600R2010	10	0.057 (0.126)
230 V AC	1 c/o	Reverse polarity protection and freewheeling diode, LED green, Holder	standard	screw	CR-P230AC1SS92CV	1SVR405600R3110	10	0.057 (0.126)
		Holder	logical	screw	CR-P230AC1LS	1SVR405600R3011	10	0.057 (0.126)
		Varistor and LED green, Holder	logical	spring	CR-P230AC1LC92CV	1SVR405600R3010	10	0.057 (0.126)

Pluggable interface relays and optocouplers

Ordering details – CR-P range



CR-P complete version relay

Ordering details - CR-P range complete versions

Rated control supply voltage	Out-puts	Description	Socket type	Conne-ction terminal	Type	Order code	Pkg	Weight (1 pc.)
							qty	kg (lb)
12 V DC	2 c/o	Reverse polarity protection and freewheeling diode, LED green, Holder	standard	screw	CR-P012DC2SS42V	1SVR405601R4010	10	0.057 (0.126)
24 V DC	2 c/o	Reverse polarity protection and freewheeling diode, LED green, Holder	standard	screw	CR-P024DC2SS42V	1SVR405601R1010	10	0.057 (0.126)
		Reverse polarity protection and freewheeling diode, LED red, Holder	logical	screw	CR-P024DC2LS42	1SVR405601R1013	10	0.057 (0.126)
		Reverse polarity protection and freewheeling diode, LED green, Holder	logical	screw	CR-P024DC2LS42V	1SVR405601R1011	10	0.057 (0.126)
		Reverse polarity protection and freewheeling diode, LED red, Holder	logical	spring	CR-P024DC2LC42	1SVR405601R1012	10	0.057 (0.126)
		Reverse polarity protection and freewheeling diode, LED green, Holder	logical	spring	CR-P024DC2GLC42V	1SVR405606R1010	10	0.057 (0.126)
24 V DC	2 c/o gold plated	Varistor and LED red, Holder	logical	spring	CR-P024DC2GLC62C	1SVR405606R1013	10	0.057 (0.126)
		Varistor and LED green, Holder	logical	spring	CR-P024DC2GLC62CV	1SVR405606R1011	10	0.057 (0.126)
		Reverse polarity protection and freewheeling diode, LED green, Holder	standard	screw	CR-P110DC2SS42CV	1SVR405601R8010	10	0.057 (0.126)
24 V AC	2 c/o	Varistor and LED green, Holder	standard	screw	CR-P024AC2SS62CV	1SVR405601R0010	10	0.057 (0.126)
120 V AC	2 c/o	Varistor and LED green, Holder	standard	screw	CR-P120AC2SS92CV	1SVR405601R2010	10	0.057 (0.126)
230 V AC	2 c/o	Reverse polarity protection and freewheeling diode, LED green, Holder	standard	screw	CR-P230AC2SS92CV	1SVR405601R3110	10	0.057 (0.126)
		Varistor and LED green, Holder	logical	screw	CR-P230AC2LS92CV	1SVR405601R3011	10	0.057 (0.126)
		Diode and LED red, Holder	logical	spring	CR-P230AC2LC92	1SVR405601R3012	10	0.057 (0.126)
230 V AC	2 c/o gold plated	Diode and LED red, Holder	logical	spring	CR-P230AC2GLC92	1SVR405606R3013	10	0.057 (0.126)
		Varistor and LED red, Holder	logical	spring	CR-P230AC2GLC92C	1SVR405606R3012	10	0.057 (0.126)
		Varistor and LED green, Holder	logical	spring	CR-P230AC2GLC92CV	1SVR405606R3010	10	0.057 (0.126)

Pluggable interface relays and optocouplers

Ordering details – CR-M range



CR-M

2CDC291.002.F0015

The CR-M range offers the possibility of switching up to 4 different circuits with a single relay. The integrated LED and test button allow for easy testing and commissioning. This range of relays are available at a wide range of different coil voltages and are accompanied by a wide variety of functional modules. The CR-M range also includes complete versions consisting of a relay, socket, holder and functional module.

Ordering details - CR-M range without LED

Rated control supply voltage	Outputs	Contact ratings	Type	Order code	Pkg	Weight (1 pc.)
					qty	kg (lb)
12 V DC	2 c/o (SPDT)	250 V, 12 A	CR-M012DC2	1SVR405611R4000	10	0.033 (0.073)
24 V DC			CR-M024DC2	1SVR405611R1000		
48 V DC			CR-M048DC2	1SVR405611R6000		
60 V DC			CR-M060DC2	1SVR405611R4200		
110 V DC			CR-M110DC2	1SVR405611R8000		
125 V DC			CR-M125DC2	1SVR405611R8200		
220 V DC			CR-M220DC2	1SVR405611R9000		
24 V AC			CR-M024AC2	1SVR405611R0000		
48 V AC			CR-M048AC2	1SVR405611R5000		
110 V AC			CR-M110AC2	1SVR405611R7000		
120 V AC			CR-M120AC2	1SVR405611R2000		
230 V AC			CR-M230AC2	1SVR405611R3000		
12 V DC	3 c/o (SPDT)	250 V, 10 A	CR-M012DC3	1SVR405612R4000	10	0.033 (0.073)
24 V DC			CR-M024DC3	1SVR405612R1000		
48 V DC			CR-M048DC3	1SVR405612R6000		
60 V DC			CR-M060DC3	1SVR405612R4200		
110 V DC			CR-M110DC3	1SVR405612R8000		
125 V DC			CR-M125DC3	1SVR405612R8200		
220 V DC			CR-M220DC3	1SVR405612R9000		
24 V AC			CR-M024AC3	1SVR405612R0000		
48 V AC			CR-M048AC3	1SVR405612R5000		
60 V AC			CR-M060AC3	1SVR405612R5200		
110 V AC			CR-M110AC3	1SVR405612R7000		
120 V AC			CR-M120AC3	1SVR405612R2000		
230 V AC			CR-M230AC3	1SVR405612R3000		
12 V DC	4 c/o (SPDT)	250 V, 6 A	CR-M012DC4	1SVR405613R4000	10	0.033 (0.073)
24 V DC			CR-M024DC4	1SVR405613R1000		
48 V DC			CR-M048DC4	1SVR405613R6000		
60 V DC			CR-M060DC4	1SVR405613R4200		
110 V DC			CR-M110DC4	1SVR405613R8000		
125 V DC			CR-M125DC4	1SVR405613R8200		
220 V DC			CR-M220DC4	1SVR405613R9000		
24 V AC			CR-M024AC4	1SVR405613R0000		
48 V AC			CR-M048AC4	1SVR405613R5000		
110 V AC			CR-M110AC4	1SVR405613R7000		
120 V AC			CR-M120AC4	1SVR405613R2000		
230 V AC			CR-M230AC4	<u>1SVR405613R3000</u>		

Pluggable interface relays and optocouplers

Ordering details – CR-M range



CR-M

2CDC 291 002 F0015

Ordering details - CR-M range with LED

Rated control supply voltage	Outputs	Contact ratings	Type	Order code		Pkg qty	Weight (1 pc.) kg (lb)
12 V DC	2 c/o (SPDT)	250 V, 12 A	CR-M012DC2L	1SVR405611R4100		10	0.033 (0.073)
24 V DC			CR-M024DC2L	1SVR405611R1100			
48 V DC			CR-M048DC2L	1SVR405611R6100			
60 V DC			CR-M060DC2L	1SVR405611R4300			
110 V DC			CR-M110DC2L	1SVR405611R8100			
125 V DC			CR-M125DC2L	1SVR405611R8300			
220 V DC			CR-M220DC2L	1SVR405611R9100			
12 V AC			CR-M012AC2L	1SVR405611R0300			
24 V AC			CR-M024AC2L	1SVR405611R0100			
48 V AC			CR-M048AC2L	1SVR405611R5100			
110 V AC			CR-M110AC2L	1SVR405611R7100			
120 V AC			CR-M120AC2L	1SVR405611R2100			
230 V AC			CR-M230AC2L	1SVR405611R3100			
12 V DC	3 c/o (SPDT)	250 V, 10 A	CR-M012DC3L	1SVR405612R4100		10	0.033 (0.073)
24 V DC			CR-M024DC3L	1SVR405612R1100			
48 V DC			CR-M048DC3L	1SVR405612R6100			
60 V DC			CR-M060DC3L	1SVR405612R4300			
110 V DC			CR-M110DC3L	1SVR405612R8100			
125 V DC			CR-M125DC3L	1SVR405612R8300			
220 V DC			CR-M220DC3L	1SVR405612R9100			
12 V AC			CR-M012AC3L	1SVR405612R0300			
24 V AC			CR-M024AC3L	1SVR405612R0100			
48 V AC			CR-M048AC3L	1SVR405612R5100			
110 V AC			CR-M110AC3L	1SVR405612R7100			
120 V AC			CR-M120AC3L	1SVR405612R2100			
230 V AC			CR-M230AC3L	1SVR405612R3100			
12 V DC	4 c/o (SPDT)	250 V, 6 A	CR-M012DC4L	1SVR405613R4100		10	0.033 (0.073)
24 V DC			CR-M024DC4L	1SVR405613R1100			
48 V DC			CR-M048DC4L	1SVR405613R6100			
60 V DC			CR-M060DC4L	1SVR405613R4300			
110 V DC			CR-M110DC4L	1SVR405613R8100			
125 V DC			CR-M125DC4L	1SVR405613R8300			
220 V DC			CR-M220DC4L	1SVR405613R9100			
12 V AC			CR-M012AC4L	1SVR405613R0300			
24 V AC			CR-M024AC4L	1SVR405613R0100			
48 V AC			CR-M048AC4L	1SVR405613R5100			
110 V AC			CR-M110AC4L	1SVR405613R7100			
120 V AC			CR-M120AC4L	1SVR405613R2100			
230 V AC			CR-M230AC4L	1SVR405613R3100			

Pluggable interface relays and optocouplers

Ordering details – CR-M range

Ordering details - CR-M range with LED and free-wheeling diode

Rated control supply voltage	Outputs	Contact ratings	Type	Order code	Pkg qty	Weight (1 pc.) kg (lb)
12 V DC	2 c/o (SPDT)	250 V, 6 A	CR-M012DC2LD	1SVR405611R4400	10	0.033 (0.073)
24 V DC			CR-M024DC2LD	1SVR405611R1400	10	0.033 (0.073)
48 V DC			CR-M048DC2LD	1SVR405611R6400	10	0.033 (0.073)
110 V DC			CR-M110DC2LD	1SVR405611R8400	10	0.033 (0.073)
125 V DC			CR-M125DC2LD	1SVR405611R8500	10	0.033 (0.073)
220 V DC			CR-M220DC2LD	1SVR405611R9400	10	0.033 (0.073)
12 V DC	3 c/o (SPDT)	250 V, 10 A	CR-M012DC3LD	1SVR405612R4400	10	0.033 (0.073)
24 V DC			CR-M024DC3LD	1SVR405612R1400	10	0.033 (0.073)
48 V DC			CR-M048DC3LD	1SVR405612R6400	10	0.033 (0.073)
110 V DC			CR-M110DC3LD	1SVR405612R8400	10	0.033 (0.073)
125 V DC			CR-M125DC3LD	1SVR405612R8500	10	0.033 (0.073)
220 V DC			CR-M220DC3LD	1SVR405612R9400	10	0.033 (0.073)
12 VDC	4 c/o (SPDT)	250 V, 6 A	CR-M012DC4LD	1SVR405613R4400	10	0.033 (0.073)
24 V DC			CR-M024DC4LD	1SVR405614R1100	10	0.033 (0.073)
48 V DC			CR-M048DC4LD	1SVR405613R6400	10	0.033 (0.073)
110 V DC			CR-M110DC4LD	1SVR405613R8400	10	0.033 (0.073)
125 V DC			CR-M125DC4LD	1SVR405613R8500	10	0.033 (0.073)
220 V DC			CR-M220DC4LD	1SVR405613R9400	10	0.033 (0.073)

Ordering details - CR-M range with gold contacts

Rated control supply voltage	Outputs	Contact ratings	Type	Order code	Price	Pkg qty	Weight (1 pc.) kg (lb)
24 V DC	4 c/o (SPDT)	250 V, 6 A	CR-M024DC4G	1SVR405618R1000		10	0.033 (0.073)
24 V AC			CR-M024AC4G	1SVR405618R0000			
110 V AC			CR-M110AC4G	1SVR405618R7000			
230 V AC			CR-M230AC4G	1SVR405618R3000			

Pluggable interface relays and optocouplers

Ordering details – CR-M range



CR-M

2CDC 291 002 F0015

Ordering details – CR-M range with gold contacts and LED


Rated control supply voltage	Outputs	Contact ratings	Type	Order code	Pkg	Weight (1 pc.)
					qty	kg (lb)
12 V DC	4 c/o (SPDT)	250 V / 6 A	CR-M012DC4LG	1SVR405618R4100	10	0.033 (0.073)
24 V DC			CR-M024DC4LG	1SVR405618R1100		
48 V DC			CR-M048DC4LG	1SVR405618R6100		
60 V DC			CR-M060DC4LG	1SVR405618R4300		
110 V DC			CR-M110DC4LG	1SVR405618R8100		
125 V DC			CR-M125DC4LG	1SVR405618R8300		
220 V DC			CR-M220DC4LG	1SVR405618R9100		
24 V AC			CR-M024AC4LG	1SVR405618R0100	10	0.033 (0.073)
48 V AC			CR-M048AC4LG	1SVR405618R5100		
110 V AC			CR-M110AC4LG	1SVR405618R7100		
120 V AC			CR-M120AC4LG	1SVR405618R2100		
230 V AC			CR-M230AC4LG	1SVR405618R3100		

Ordering details – CR-M range with gold contacts, LED and free-wheeling diode

Rated control supply voltage	Outputs	Contact ratings	Type	Order code	Pkg	Weight (1 pc.)
					qty	kg (lb)
12 V DC	4 c/o (SPDT)	250 V / 6 A	CR-M012DC4LDG	1SVR405618R4400	10	0.033 (0.073)
24 V DC			CR-M024DC4LDG	1SVR405618R1400		

Pluggable interface relays and optocouplers

Ordering details – CR-M range




CR-M complete version relay

Ordering details – CR-M range complete version

Rated control supply voltage	Out-puts	Description	Socket type	Connection terminal	Type	Order code	Pkg qty	Weight (1 pc.) kg (lb)
12 V DC	4 c/o gold-plated	LED red, Holder	standard	screw	CR-M012DC4LDGSS	1SVR405618R4410	10	0.0109 (0.024)
24 V DC	4 c/o	Reverse polarity protection and free-wheeling diode, LED green, Holder	standard	screw	CR-M024DC4SS42V	1SVR405613R1010	10	0.0109 (0.024)
		Reverse polarity protection and free-wheeling diode, LED green, Holder	logical	screw	CR-M024DC4LS42V	1SVR405613R1011	10	0.0109 (0.024)
		Reverse polarity protection and free-wheeling diode, LED red, Holder	logical	spring	CR-M024DC4LC42	1SVR405613R1012	10	0.0109 (0.024)
24 V DC	4 c/o gold-plated	Reverse polarity protection and free-wheeling diode, LED green, Holder	standard	screw	CR-M024DC4GSS42V	1SVR405618R1011	10	0.0109 (0.024)
		Varistor, LED green, Holder	logical	spring	CR-M024DC4GLC62CV	1SVR405618R1010	10	0.0109 (0.024)
		LED, free-wheeling diode, Holder	logical	spring	CR-M024DC4LGLC22	1SVR405618R1110	10	0.0109 (0.024)
		LED red, free-wheeling diode, Holder	standard	screw	CR-M024DC4LDGSS	1SVR405618R1410	10	0.0109 (0.024)
24 V AC	4 c/o	Varistor and LED green, Holder	logical	screw	CR-M024AC4LS62CV	1SVR405613R0010	10	0.0109 (0.024)
		Varistor, LED green, Holder	standard	screw	CR-M230AC4SS92CV	1SVR405613R3110	10	0.0109 (0.024)
		Varistor, LED green, Holder	logical	screw	CR-M230AC4LS92CV	1SVR405613R3011	10	0.0109 (0.024)
		Diode and LED red, Holder	logical	spring	CR-M230AC4LC92	1SVR405613R3012	10	0.0109 (0.024)
230 V AC	4 c/o gold-plated	Reverse polarity protection and free-wheeling diode, LED green, Holder	standard	screw	CR-M230AC4GSS42CV	1SVR405618R3112	10	0.0109 (0.024)
		LED red, Holder	logical	screw	CR-M230AC4LGLC	1SVR405618R3110	10	0.0109 (0.024)
		LED red, Holder	standard	screw	CR-M230AC4LGSS	1SVR405618R3111	10	0.0109 (0.024)

Pluggable interface relays and optocouplers

Ordering details – CR-M range



CR-M4SS

2CDC291009 F0011



CR-MJ

2CDC291005 F0007

Ordering details - Accessories

Version	Connection terminal	Type	Order code	Pkg	Weight (1 pc.)
				qty	kg (lb)
Logical socket for 2 c/o	screw	CR-M2LS	1SVR405651R1100	10	0.055 (0.121)
Logical socket for 3 c/o		CR-M3LS	1SVR405651R2100		0.062 (0.137)
Logical socket for 2/4 c/o		CR-M4LS	1SVR405651R3100		0.066 (0.146)
Logical socket for 2 c/o	spring	CR-M2LC	1SVR405651R1200	10	0.065 (0.143)
Logical socket for 2/4 c/o		CR-M4LC	1SVR405651R3200		0.066 (0.146)
Standard socket for 2 c/o	screw	CR-M2SS	1SVR405651R1000	10	0.066 (0.146)
Standard socket for 3 c/o		CR-M3SS	1SVR405651R2000		0.068 (0.150)
Standard socket for 2/4 c/o		CR-M4SS	1SVR405651R3000		0.070 (0.154)
Standard socket for 2 c/o	fork type	CR-M2SF	1SVR405651R1300	10	0.040 (0.088)
Standard socket for 2/4 c/o		CR-M4SF	1SVR405651R3300		0.048 (0.106)
Plastic holder		CR-MH	1SVR405659R1000	10	0.003 (0.007)
Metal holder		CR-MH1	1SVR405659R1100	10	0.0005 (0.001)
Jumper bar for sockets with screw connection		CR-MJ	1SVR405658R6000	10	0.029 (0.064)
Marker		CR-MM	1SVR405658R1000	10	0.0005 (0.001)
Plug for test button replacement		CR-MP	1SVR405658R2000	100	0.001 (0.002)

Pluggable interface relays and optocouplers

Ordering details – CR-P/M functional modules



Ordering details - CR-P/M range

Rated control supply voltage	Description	Version	Type	Order code	Pkg	Weight (1 pc.)
					qty	kg (lb)
6-220 V DC	Diode - Reverse polarity protection/ free-wheeling diode	A1+, A2-	CR-P/M 22	1SVR405651R0000	10	0.003 (0.007)
6-24 V DC	Diode and LED - Reverse polarity protection/ free-wheeling diode	red, A1+, A2-	CR-P/M 42	1SVR405652R0000	10	0.003 (0.007)
		green, A1+, A2-	CR-P/M 42V	1SVR405652R1000		
24-60 V DC		red, A1+, A2-	CR-P/M 42B	1SVR405652R4000		
		green, A1+, A2-	CR-P/M 42BV	1SVR405652R4100		
110-230 V AC/DC		red, A1+, A2-	CR-P/M 42C	1SVR405652R9000		
		green, A1+, A2-	CR-P/M 42CV	1SVR405652R9100		
6-24 V AC/DC	RC element- Spark quenching		CR-P/M 52B	1SVR405653R0000	10	0.003 (0.007)
24-60 V AC/DC			CR-P/M 52D	1SVR405653R4000		
110 V AC/DC			CR-P/M 52C	1SVR405653R1000		
6-24 V AC/DC	Diode and LED	red, for DC A1+, A2-	CR-P/M 62	1SVR405654R0000	10	0.003 (0.007)
		green, for DC A1+, A2-	CR-P/M 62V	1SVR405654R1000		
24-60 V AC/DC		red, for DC A1+, A2-	CR-P/M 62E	1SVR405654R4000		
		green, for DC A1+, A2-	CR-P/M 62EV	1SVR405654R4100		
110-230 V AC/DC		red, for DC A1+, A2-	CR-P/M 92	1SVR405654R0100		
		green, for DC A1+, A2-	CR-P/M 92V	1SVR405654R1100		
6-24 V AC/DC	Varistor and LED - Over-voltage protection	red, for DC A1+, A2-	CR-P/M 62C	1SVR405655R0000	10	0.003 (0.007)
		green, for DC A1+, A2-	CR-P/M 62CV	1SVR405655R1000		
24-60 V AC/DC		red, for DC A1+, A2-	CR-P/M 62D	1SVR405655R4000		
		green, for DC A1+, A2-	CR-P/M 62DV	1SVR405655R4100		
110-230 V AC/DC		red, for DC A1+, A2-	CR-P/M 92C	1SVR405655R0100		
		green, for DC A1+, A2-	CR-P/M 92CV	1SVR405655R1100		
24 V AC	Varistor - Over-voltage protection		CR-P/M 72	1SVR405656R0000	10	0.002 (0.004)
115 V AC			CR-P/M 72A	1SVR405656R1000		
230 V AC			CR-P/M 82	1SVR405656R2000		

Pluggable interface relays and optocouplers

Ordering details – CR-U range



2CDC 291 047 F0004

CR-U



2CDC 291 007 S0011

CR-U2S

The CR-U range offers up to 3 change over contacts in single relay. The integrated LED and test button allow for easy testing and commissioning. This robust range of relays are available at a wide range of different coil voltages and are accompanied by a wide variety of functional modules.

Ordering details - CR-U range without LED

Rated control supply voltage	Outputs	Contact ratings	Type	Order code	Pkg qty	Weight (1 pc.) kg (lb)
12 V DC	2 c/o (SPDT)	250 V, 10 A	CR-U012DC2	1SVR405621R4000	10	0.083 (0.183)
24 V DC			CR-U024DC2	1SVR405621R1000		
48 V DC			CR-U048DC2	1SVR405621R6000		
110 V DC			CR-U110DC2	1SVR405621R8000		
220 V DC			CR-U220DC2	1SVR405621R9000		
24 V AC			CR-U024AC2	1SVR405621R0000		
48 V AC			CR-U048AC2	1SVR405621R5000		
110 V AC			CR-U110AC2	1SVR405621R7000		
120 V AC			CR-U120AC2	1SVR405621R2000		
230 V AC			CR-U230AC2	1SVR405621R3000		
12 V DC	3 c/o (SPDT)	250 V, 10 A	CR-U012DC3	1SVR405622R4000	10	0.083 (0.183)
24 V DC			CR-U024DC3	1SVR405622R1000		
48 V DC			CR-U048DC3	1SVR405622R6000		
110 V DC			CR-U110DC3	1SVR405622R8000		
125 V DC			CR-U125DC3	1SVR405622R8200		
220 V DC			CR-U220DC3	1SVR405622R9000		
24 V AC			CR-U024AC3	1SVR405622R0000		
48 V AC			CR-U048AC3	1SVR405622R5000		
60 V AC			CR-U060AC3	1SVR405622R5200		
110 V AC			CR-U110AC3	1SVR405622R7000		
120 V AC			CR-U120AC3	1SVR405622R2000		
230 V AC			CR-U230AC3	1SVR405622R3000		

Ordering details - CR-U range with LED

Rated control supply voltage	Outputs	Contact ratings	Type	Order code	Pkg qty	Weight (1 pc.) kg (lb)
12 V DC	2 c/o (SPDT)	250 V, 10 A	CR-U012DC2L	1SVR405621R4100	10	0.083 (0.183)
24 V DC			CR-U024DC2L	1SVR405621R1100		
48 V DC			CR-U048DC2L	1SVR405621R6100		
110 V DC			CR-U110DC2L	1SVR405621R8100		
220 V DC			CR-U220DC2L	1SVR405621R9100		
12 V AC			CR-U012AC2L	1SVR405621R0300		
24 V AC			CR-U024AC2L	1SVR405621R0100		
48 V AC			CR-U048AC2L	1SVR405621R5100		
110 V AC			CR-U110AC2L	1SVR405621R7100		
120 V AC			CR-U120AC2L	1SVR405621R2100		
230 V AC			CR-U230AC2L	1SVR405621R3100		
12 V DC	3 c/o (SPDT)	250 V, 10 A	CR-U012DC3L	1SVR405622R4100	10	0.083 (0.183)
24 V DC			CR-U024DC3L	1SVR405622R1100		
48 V DC			CR-U048DC3L	1SVR405622R6100		
110 V DC			CR-U110DC3L	1SVR405622R8100		
220 V DC			CR-U220DC3L	1SVR405622R9100		
12 V AC			CR-U012AC3L	1SVR405622R0300		
24 V AC			CR-U024AC3L	1SVR405622R0100		
48 V AC			CR-U048AC3L	1SVR405622R5100		
110 V AC			CR-U110AC3L	1SVR405622R7100		
120 V AC			CR-U120AC3L	1SVR405622R2100		
230 V AC			CR-U230AC3L	1SVR405622R3100		

Pluggable interface relays and optocouplers

Ordering details – CR-U range

Ordering details - CR-U range with LED and free-wheeling diode

Rated control supply voltage	Outputs	Contact ratings	Type	Order code	Pkg qty	Weight (1 pc.) kg (lb)
12 V DC	2 c/o (SPDT)	250 V, 10 A	CR-U012DC2LD	1SVR405621R4400	10	0.033 (0.073)
24 V DC			CR-U024DC2LD	1SVR405621R1400	10	0.033 (0.073)
48 V DC			CR-U048DC2LD	1SVR405621R6400	10	0.033 (0.073)
110 V DC			CR-U110DC2LD	1SVR405621R8400	10	0.033 (0.073)
12 V DC	3 c/o (SPDT)		CR-U012DC3LD	1SVR405622R4400	10	0.033 (0.073)
24 V DC			CR-U024DC3LD	1SVR405623R1100	10	0.033 (0.073)
48 V DC			CR-U048DC3LD	1SVR405622R6400	10	0.033 (0.073)
110 V DC			CR-U110DC3LD	1SVR405622R8400	10	0.033 (0.073)

Ordering details - Accessories

Version	Type	Order code	Pkg qty	Weight (1 pc.) kg
Socket for 2 c/o and module	CR-U2S	1SVR405670R0000	10	0.065
Socket for 3 c/o and module	CR-U3S	1SVR405660R0000		0.065
Socket for 3 c/o	CR-U3E	1SVR405660R0100		0.065
Socket small for 2 c/o	CR-U2SM	1SVR405670R1100		0.054
Socket small for 3 c/o	CR-U3SM	1SVR405660R1100		0.058
Holder for CR-U socket	CR-UH	1SVR405669R0000		0.001

Pluggable interface relays and optocouplers

Ordering details – CR-U functional modules



Ordering details - CR-U range

Rated control supply voltage	Description	Version	Type	Order code	Pkg	Weight
					qty	(1 pc.) kg (lb)
6-220 V DC	Diode - Reverse polarity protection/ free wheeling diode	A1+, A2-	CR-U 21	1SVR405661R0000	10	0.007 (0.015)
6-24 V DC	Diode and LED - Reverse polarity protection/ free wheeling diode	red, A1+, A2-	CR-U 41	1SVR405662R0000	10	0.007 (0.015)
		green, A1+, A2-	CR-U 41V	1SVR405662R1000		
24-60 V DC		red, A1+, A2-	CR-U 41B	1SVR405662R4000		
		green, A1+, A2-	CR-U 41BV	1SVR405662R4100		
110 V DC		red, A1+, A2-	CR-U 41C	1SVR405662R9000		
		green, A1+, A2-	CR-U 41CV	1SVR405662R9100		
6-24 V AC/DC			CR-U 51B	1SVR405663R0000	10	0.007 (0.015)
24-60 V AC/DC			CR-U 51D	1SVR405663R4000		
110 V AC/DC			CR-U 51C	1SVR405663R1000		
6-24 V AC/DC	Diode and LED	red, for DC A1+, A2-	CR-U 61	1SVR405664R0000	10	0.007 (0.015)
		green, for DC A1+, A2-	CR-U 61V	1SVR405664R1000		
24-60 V AC/DC		red, for DC A1+, A2-	CR-U 61E	1SVR405664R4000		
		green, for DC A1+, A2-	CR-U 61EV	1SVR405664R4100		
110 V DC		red, for DC A1+, A2-	CR-U 91	1SVR405664R0100		
110-230 V AC		green, for DC A1+, A2-	CR-U 91V	1SVR405664R1100		
6-24 V AC/DC	Varistor and LED Overvoltage protection	red, for DC A1+, A2-	CR-U 61C	1SVR405665R0000	10	0.007 (0.015)
		green, for DC A1+, A2-	CR-U 61CV	1SVR405665R1000		
24-60 V AC/DC		red, for DC A1+, A2-	CR-U 61D	1SVR405665R4000		
		green, for DC A1+, A2-	CR-U 61DV	1SVR405665R4100		
110 V DC		red, for DC A1+, A2-	CR-U 91C	1SVR405665R0100		
110-230 V AC		green, for DC A1+, A2-	CR-U 91CV	1SVR405665R1100		
24 V AC	Overvoltage protection, varistor		CR-U 71	1SVR405666R0000	10	0.007 (0.015)
115 V AC			CR-U 71A	1SVR405666R1000		
230 V AC			CR-U 81	1SVR405666R2000		
24-240 V AC/DC	Multi-function time module	pluggable onto CR-U2S and CR-U3S	CR-U T	1SVR405667R0000	10	0.014 (0.031)

All CR-U modules can be plugged onto sockets CR-U2S and CR-U3S.

Pluggable interface relays and optocouplers

Technical data - CR-S interface relays

	Rated control supply voltage U_s	Make voltage (at 23 °C)	Maxium voltage (at 55 °C)	Break voltage	Rated power	Coil resistance (at 23 °C)	Tolerance of coil resistance
CR-S005VDC1R(G)	5 V DC	3.75 V DC	7.5 V DC	0.25 V DC	170 mW	147 Ω	$\pm 10\%$
CR-S012VDC1R(G)	12 V DC	9 V DC	18 V DC	0.6 V DC	170 mW	848 Ω	$\pm 10\%$
CR-S024VDC1R(G)	24 V DC	18 V DC	36 V DC	1.2 V DC	170 mW	3390 Ω	$\pm 15\%$
CR-S048VDC1R(G)	48 V DC	36 V DC	72 V DC	2.4 V DC	210 mW	10600 Ω	$\pm 15\%$
CR-S060VDC1R(G)	60 V DC	45 V DC	90 V DC	3 V DC	210 mW	16600 Ω	$\pm 15\%$

Output circuits

Output circuits	11-12/14	
Kind of output	1 c/o (SPDT)	
Contact material	AgSnO ₂ / AgSnO ₂ /Au	
Rated operational voltage U_e (IEC/EN 60947-1)	250 V AC	
Minimum switching voltage	5 V at 100 mA (AgSnO ₂) / 5 V at 12 mA (AgSnO ₂ /Au)	
Maximum switching voltage	400 V AC / 250 V DC	
Minimum switching current	10 mA at 10 V (AgSnO ₂) / 3 mA at 20 V (AgSnO ₂ /Au)	
Rated free air thermal current I_{th}	5 A	
Rated operational current (IEC/EN 60947-5-1)	AC12 (resistive)	230 V 6 A
	AC15 (inductive)	230 V 1.5 A
	AC15 (inductive)	120 V 3 A
	DC12 (resistive)	24 V 6 A
	DC13 (inductive)	24 V 1 A
	DC13 (inductive)	120 V 0.22 A
	DC13 (inductive)	250 V 0.11 A
AC rating (UL 508; NEMA ICS-5)	utilization category (pilot duty) (contact rating code designation)	B300
DC rating (UL 508; NEMA ICS-5)	utilization category (pilot duty) (contact rating code designation)	R300
Maximum making (inrush) current	15 A, 240 V AC	
Minimum switching power	100 mA/12 V (AgSnO ₂) / 50 mW (AgSnO ₂ /Au)	
Maximum switching (breaking) power	AC1 (resistive)	1500 VA, 250 V AC
Contact resistance	100 m Ω (at 1 A/ 6 V DC)	
Maximum operating frequency	rated load AC1	360 switching cycles/h
	without load	18000 switching cycles/h
Mechanical lifetime	1 x 10 ⁷ switching cycles	
Electrical lifetime	AC1 (resistive)	(n/c) 3 x 10 ⁴ switching cycles (at +85 °C)
		(n/o) 1 x 10 ⁴ switching cycles (at +85 °C)
Response time	8 ms	
Release time	4 ms	

Isolation data

Rated insulation voltage	250 V AC	
Rated impulse withstand voltage U_{imp}	between coil and contacts	4000 V 1 min
	between open contacts	1000 V 1 min
Clearance	between coil and contacts	5.5 mm (0.217 in)
Creepage distance	between coil and contacts	8 mm (0.315 in)
Overvoltage category	III	
Pollution degree	2	

General data

Dimensions	see 'Dimensional drawings'
Mounting	on socket
Mounting position	any
Degree of protection	RT II and RT III

Electrical connection

Connection	by socket
------------	-----------

Environmental data

Ambient temperature range	operation	-40...+85 °C
	storage	-40...+85 °C
Vibration resistance (10-150 Hz)	n/o contact	10 Hz to 55 Hz 1mm DA
	n/c contact	10 Hz to 55 Hz 1mm DA
Shock resistance	n/o contact	functional 49 m/s ² / destructive 980 m/s ²
	n/c contact	functional 49 m/s ² / destructive 980 m/s ²

Standards/Directives

Standards	IEC/EN 61810-1
RoHS Directive	2011/65/EU

Pluggable interface relays and optocouplers

Technical data - CR-S optocouplers

Input circuits		CR-S024VDC1TRA	CR-S024VDC1MOS	CR-S024VDC1TRI
Input resistance		3400 Ohm		
Rated control voltage		24 V DC*		
Pull-in voltage		15 V DC		
Maximum input voltage		30 V DC		
Nominal input current		7 mA		
Input power		168 mW		
Typical switching-on time		< 40 ms	< 60 ms	< 1/2 cycle
Typical switch-off time		< 600 ms	< 600 ms	< 1/2 cycle
Output				
Output circuits		11 (13+) - 14	11 (13+) - 14	11 (13+) - 14
Kind of output		Transistor	MOS-FET	Triac
Rated operational voltage		48 V DC	24 V DC	240 V AC
Maximum switching voltage		48 V DC	24 V DC	275 V AC
Minimum switching current		50 mA	50 mA	22 mA
Maximum switching current continuously		100 mA	2 A	2 A
Leakage current at maximum switching voltage		<1 mA	<1 mA	< 1.5 mA
Voltage drop at rated current		< 120 mV DC	< 120 mV DC	< 1.6 V AC
Isolation data				
Rated insulation voltage	input/output	2,5 kV		
Insulation class		2		
Clearance	input/output	14 mm		
Creepage distance	input/output	14 mm		
Overvoltage category		III		
Pollution degree		2		
General data				
Dimensions		see 'Dimensional drawings'		
Weight		3.5 g (0.007 lb)		
Mounting		on socket		
Environmental data				
Ambient temperature		operation	-30...+80 °C	
		storage	-40...+100 °C	
Standards/ Directives				
Standards		IEC/EN 62314		
EMC Directive		2014/30/EN		
RoHS Directive		2011/65/EN		

* The output circuit should not exceed 30 m

Pluggable interface relays and optocouplers

Technical data - CR-S sockets

Input circuits	CR-S 6-24 V	CR-S 12-24 V	CR-S 48-60 V	CR-S 110-125 V	CR-S 220-240 V		
Rated control supply voltage U _s	6-24 V DC	12-24 V AC/DC*	48-60 V AC/DC	110-125 V AC/DC	220-240 V AC/DC		
Rated control supply voltage U _s tolerance	(0.8-1.2) U _n	(0.8-1.1) U _n					
Typical current	11-29 mA	11-16 mA	3.6-4.5 mA	3.6 mA	3.6 mA		
Response time	8 ms						
Release time	4 ms						
Status device	green LED						
Protective circuit	yes						
Output circuits							
Output circuits	11-12/14						
Number of poles	1						
Rated voltage	250 V AC						
Rated current	6 A						
General data for CR-S with screw connection terminal							
Dimensions	see 'Dimensional drawings'						
Degree of protection (EN 60529)	Degree of protection (EN 60529) IP20 (terminals)						
Temperature range	operation	-40...+70 °C		-40...+55 °C			
	storage	-40...+85 °C					
Connection type	Screw						
Maximum number of wires per connection terminal	2						
Connecting capacity	rigid	2 x 0.5 - 1.5 mm ² (2 x 20 - 16 AWG)					
	fine-strand						
	with wire end ferule	2 x 0.5 - 1 mm ² (2 x 20 - 18 AWG)					
Tightening torque	0.5 Nm (4.426 lb.in)						
Stripping length	7 mm (0.28 in)						
Mounting (IEC/EN 60715)	DIN rail						
Material	socket	PA6 +GF-V2					
	contacts	CuZn36					
	contact surface	3 μ Ni/Sn					
	terminals	CuZn40, 3 μ Ni					
	combi screw M3	Fe					
General data for CR-S with spring connection terminal							
Dimensions without holder (L x W x H)	see 'Dimensional drawings'						
Degree of protection (EN 60529)	Degree of protection (EN 60529) IP20 (terminals)						
Temperature range	operation	-40...+70 °C		-40...+55 °C			
	storage	-40...+85 °C					
Connection type	Spring						
Maximum number of wires per connection terminal	1						
Connecting capacity	0.75 - 2.5 mm ² (20 - 14 AWG) rigid, fine-strand and with wire end ferrule						
Stripping length	7 mm (0.28 in)						
Mounting (IEC/EN 60715)	DIN rail						
Material	socket	PA6 +GF-V2					
	contacts	CuZn36					
	contact surface	3 μ Ni/Sn					
	spring terminals	SUS301					
	Isolation data						
Isolation between coil and contacts	5000 V AC						
Resistance to shock coil to contact	1000 MΩ						
Clearance and creepage distance	IEC/EN 61984						
Standards/Directives							
Standard	IEC/EN 61984						
Low Voltage Directive	2014/35/EU						
RoHS Directive	2011/65/EU						

* In combination with optocouplers, only DC supply is allowed

Pluggable interface relays and optocouplers

Technical data – CR-P, CR-M, CR-U

Input circuit - coil data

CR-P range

	Rated control supply voltage U_s	Rated frequency	Make voltage (at 20 °C)	Maximum voltage (at 55 °C)	Break voltage	Rated power	Coil resistance (at 20 °C)	Tolerance of coil resistance
DC coils	12 V DC	-	8.4 V DC	30.6 V DC	$\geq 0.1 U_s$	0.4-0.48 W	360 Ω	$\pm 10\%$
	24 V DC	-	16.8 V DC	61.2 V DC	$\geq 0.1 U_s$	0.4-0.48 W	1440 Ω	$\pm 10\%$
	48 V DC	-	33.6 V DC	122.4 V DC	$\geq 0.1 U_s$	0.4-0.48 W	5700 Ω	$\pm 10\%$
	110 V DC	-	77 V DC	280 V DC	$\geq 0.1 U_s$	0.4-0.48 W	25200 Ω	$\pm 10\%$
AC coils	24 V AC	50 / 60 Hz	19.2 V AC	28.8 V AC	$\geq 0.15 U_s$	0.75 VA	400 Ω	$\pm 10\%$
	48 V AC	50 / 60 Hz	38.4 V AC	57.6 V AC	$\geq 0.15 U_s$	0.75 VA	1550 Ω	$\pm 10\%$
	110 V AC	50 / 60 Hz	88 V AC	132 V AC	$\geq 0.15 U_s$	0.75 VA	8900 Ω	$\pm 10\%$
	120 V AC	50 / 60 Hz	96 V AC	144 V AC	$\geq 0.15 U_s$	0.75 VA	10200 Ω	$\pm 10\%$
	230 V AC	50 / 60 Hz	184 V AC	276 V AC	$\geq 0.15 U_s$	0.75 VA	38500 Ω	$\pm 10\%$

CR-M range

	Rated control supply voltage U_s	Rated frequency	Make voltage (at 20 °C)	Maximum voltage (at 55 °C)	Break voltage	Rated power	Coil resistance (at 20 °C)	Tolerance of coil resistance
DC coils	12 V DC	-	9.6 V DC	13.2 V DC	$\geq 0.1 U_s$	0.9 W	160 Ω	$\pm 10\%$
	24 V DC	-	19.2 V DC	26.4 V DC	$\geq 0.1 U_s$	0.9 W	640 Ω	$\pm 10\%$
	48 V DC	-	38.4 V DC	52.8 V DC	$\geq 0.1 U_s$	0.9 W	2600 Ω	$\pm 10\%$
	60 V DC	-	48 V DC	66 V DC	$\geq 0.1 U_s$	0.9 W	4000 Ω	$\pm 10\%$
	110 V DC	-	88 V DC	121 V DC	$\geq 0.1 U_s$	0.9 W	13600 Ω	$\pm 10\%$
	125 V DC	-	100 V DC	137.5 V DC	$\geq 0.1 U_s$	0.9 W	16000 Ω	$\pm 10\%$
	220 V DC	-	176 V DC	242 V DC	$\geq 0.1 U_s$	0.9 W	54000 Ω	$\pm 10\%$
AC coils	24 V AC	50 / 60 Hz	19.2 V AC	26.4 V AC	$\geq 0.2 U_s$	1.6 VA	158 Ω	$\pm 10\%$
	48 V AC	50 / 60 Hz	38.4 V AC	52.8 V AC	$\geq 0.2 U_s$	1.6 VA	640 Ω	$\pm 10\%$
	60 V AC	50 / 60 Hz	48 V AC	66 V AC	$\geq 0.2 U_s$	1.6 VA	930 Ω	$\pm 10\%$
	110 V AC	50 / 60 Hz	88 V AC	121 V AC	$\geq 0.2 U_s$	1.6 VA	3450 Ω	$\pm 10\%$
	120 V AC	50 / 60 Hz	96 V AC	132 V AC	$\geq 0.2 U_s$	1.6 VA	3770 Ω	$\pm 10\%$
	230 V AC	50 / 60 Hz	184 V AC	253 V AC	$\geq 0.2 U_s$	1.6 VA	16100 Ω	$\pm 10\%$

Pluggable interface relays and optocouplers

Technical data – CR-P, CR-M, CR-U

CR-U range

	Rated control supply voltage U_s	Rated frequency	Make voltage (at 20 °C)	Maximum voltage (at 55 °C)	Break voltage	Rated power	Coil resistance (at 20 °C)	Tolerance of coil resistance
DC coils	12 V DC	-	9.6 V DC	13.2 V DC	$\geq 0.1 U_s$	1.5 W	110 Ω	$\pm 10 \%$
	24 V DC	-	19.2 V DC	26.4 V DC	$\geq 0.1 U_s$	1.5 W	430 Ω	$\pm 10 \%$
	48 V DC	-	38.4 V DC	52.8 V DC	$\geq 0.1 U_s$	1.5 W	1750 Ω	$\pm 10 \%$
	110 V DC	-	88.0 V DC	121.0 V DC	$\geq 0.1 U_s$	1.5 W	9200 Ω	$\pm 10 \%$
	125 V DC	-	100 V DC	137.5 V DC	$\geq 0.1 U_s$	1.5 W	11000 Ω	$\pm 10 \%$
	220 V DC	-	176.0 V DC	242.0 V DC	$\geq 0.1 U_s$	1.5 W	37000 Ω	$\pm 10 \%$
AC coils	24 V AC	50 / 60 Hz	19.2 V AC	26.4 V AC	$\geq 0.15 U_s$	2.8 VA (50 Hz) 2.5 VA (60 Hz)	75 Ω	$\pm 10 \%$
	48 V AC	50 / 60 Hz	38.4 V AC	52.8 V AC	$\geq 0.15 U_s$	2.8 VA (50 Hz) 2.5 VA (60 Hz)	305 Ω	$\pm 10 \%$
	60 V AC	50 / 60 Hz	48.0 V AC	66.0 V AC	$\geq 0.15 U_s$	2.8 VA (50 Hz) 2.5 VA (60 Hz)	475 Ω	$\pm 10 \%$
	110 V AC	50 / 60 Hz	88.0 V AC	121.0 V AC	$\geq 0.15 U_s$	2.8 VA (50 Hz) 2.5 VA (60 Hz)	1700 Ω	$\pm 10 \%$
	120 V AC	50 / 60 Hz	96.0 V AC	132.0 V AC	$\geq 0.15 U_s$	2.8 VA (50 Hz) 2.5 VA (60 Hz)	1910 Ω	$\pm 10 \%$
	230 V AC	50 / 60 Hz	184.0 V AC	253.0 V AC	$\geq 0.15 U_s$	2.8 VA (50 Hz) 2.5 VA (60 Hz)	7080 Ω	$\pm 10 \%$

Pluggable interface relays and optocouplers

Technical data – CR-P, CR-M, CR-U

Type		CR-P...1	CR-P...2	CR-M...2	CR-M...3	CR-M...4	CR-U...2	CR-U...3
Output circuit(s)		11-12/14	11-12/14 21-22/24	11-12/14 21-22/24	11-12/14 21-22/24 31-32/34	11-12/14 21-22/24 31-32/34 41-42/44	11-12/14 31-32/34	11-12/14 21-22/24 31-32/34
Kind of output		Relay, 1 c/o	Relay, 2 c/o	Relay, 2 c/o	Relay, 3 c/o	Relay, 4 c/o	Relay, 2 c/o	Relay, 3 c/o
Contact material		AgNi	AgNi AgNi/Au 5 μm	AgNi	AgNi	AgNi AgNi/Au 5 μm	AgNi	
Rated operational voltage U _e (VDE 0110, IEC 60947-1)		250 V						
Minimum switching voltage		5 V		10 V (AgNi); 5 V (AgNi/Au)			10 V	
Maximum switching voltage	DC	300 V DC		250 V DC				
	AC	440 V AC		250 V AC			440 V AC	
Minimum switching current		5 mA (AgNi), 2 mA (AgNi/Au)		5 mA (AgNi)	5 mA (AgNi)	2 mA (AgNi/Au)	5 mA	
Rated free air thermal current I _{th}		16 A	8 A	12 A	10 A	6 A	10 A	
Rated operational current (IEC 60947-5-1)	AC-12 (resistive) 230 V	16 A	8 A	12 A	10 A	6 A	10 A	
	AC-15 (inductive) 230 V	1.5 A	1.5 A	1.5 A	1.5 A	1 A	1.5 A	
	AC-15 (inductive) 120 V	3 A					1.5 A	3 A
	DC-12 (resistive) 24 V	16 A	8 A	12 A	10 A	6 A	10 A	
	DC-13 (inductive) 24 V	2.5 A	2 A	-	2.5 A	2 A	2 A	
	DC-13 (inductive) 120 V	0.22 A						
	DC-13 (inductive) 250 V	0.1 A						
AC rating (UL 508)	utilization category (pilot duty) (contact rating code designation)	B300		B300			B300	
	max. rated operational voltage	300 V AC		300 V AC			300 V AC	
	max. continuous thermal current at utilization category	5 A		5 A	5 A	2.5 A	5 A	
	max. making / breaking apparent power at utilization category	3600 / 360 VA		3600 / 360 VA		1800 / 180 VA	3600/360 VA	
	utilization category (resistive) (CSA22.2 No.14....)	16 A, 250 V AC	8 A, 250 V AC	10 A, 250 V AC 12 A, 150 V AC	6 A, 250 V AC 10 A, 150 V AC	5 A, 250 V AC 10 A, 150 V AC	10 A, 250 V AC (resistive + single-phase)	
DC rating * (UL 508; NEMA ICS-5)	utilization category (pilot duty) (contact rating code designation)	R300						
	max. rated operational voltage	300 V DC						
	max. continuous thermal current at utilization category	1 A						
	max. making / breaking apparent power at utilization category	28 VA						
	utilization category (resistive) (CSA22.2 No.14....)	-	10 A, 24 V DC	-			10 A, 28 V DC	
Maximum making (inrush) current		30 A	15 A	24 A	20 A	12 A	20 A	
Minimum switching power		0.3 W (AgNi), 0.05 W (AgNi/Au)		0.3 W (AgNi), 0.1 W (AgNi/Au)			0.3 W	
Maximum switching (breaking) power	AC1 (resistive)	4000 VA	2000 VA	3000 VA	2500 VA	1500 VA	2500 VA	
Contact resistance		m 100 mΩ						
Maximum operating frequency	rated load AC-1	600 switching cycles/h		1200 switching cycles/h				
	without load	72000 switching cycles/h		18000 switching cycles/h			12000 switching cycles/h	
Mechanical lifetime		> 3 x 10 ⁷ switching cycles		> 2 x 10 ⁷ switching cycles				

Pluggable interface relays and optocouplers

Technical data – CR-P, CR-M, CR-U

Type		CR-P...1	CR-P...2	CR-M...2	CR-M...3	CR-M...4	CR-U...2	CR-U...3
Electrical lifetime	electrical AC1 (resistive)	> 0.7 x 10 ⁵ switching cycles (16 A, 250 V)	> 10 ⁵ switching cycles (8 A, 250 V)	> 10 ⁵ switching cycles (12 A, 250 V) (10 A, 250 V) (6 A, 250 V)			> 10 ⁵ switching cycles (12 A, 250 V)	
	cos φ	see reduction factor F						
Response time		typ. 7 ms		typ. 13 ms (DC),10 ms (AC)			typ. 18 ms (DC), 12 ms (AC)	
Release time		typ. 3 ms		typ. 3 ms (DC), 8 ms (AC)			typ. 7 ms (DC), 10 ms (AC)	
Isolation data								
Rated insulation voltage		400 V AC		250 V AC				
Insulation class		C250 / B400		C250 / B250			C250	
Rated impulse withstand voltage U _{imp}	between coil and contacts	5 kV		2.5 kV				
	between open contacts	1 kV		1.5 kV				
	between c/o (SPDT) contacts	-	2.5 kV	2.5 kV		≥2 kV	2 kV	
Clearance between coil and contacts		≥ 10 mm		≥ 2.5 mm		≥ 1.6 mm	≥ 3 mm	
Creepage distance between coil and contacts		≥ 10 mm		≥ 4 mm		≥ 3.2 mm	≥ 4.2 mm	
Overvoltage category		III		III		II	III	
Pollution degree		3		3		2	3	
General data								
Dimensions		see 'Dimensional drawings'						
Mounting		on socket (see accessories)						
Mounting position		any						
Degree of protection		IP 67		IP 40				
Electrical connection								
Connection		by socket						
Environmental data								
Ambient temperature range	operation	DC: -40...+85 °; AC: -40...+70 °C		DC: -40...+70 °; AC: -40...+55 °C				
	storage	-40 ... +85 °C						
Vibration resistance 10-150 Hz	n/o contact	10 g		5 g			5 g	
	n/c contact	10 g	5 g	5 g			5 g	
Shock resistance	n/o contact	30 g	20 g	10 g			10 g	
	n/c contact	30 g	20 g	5 g			10 g	
Standards/Directives								
Standards		IEC/EN 61810-1						
Low Voltage Directive		-		2014/35/EU				
RoHS Directive		2011/65/EU						

* Those ratings are based on different type tests but they are not covered by the cULus or CSA approvals.

Pluggable interface relays and optocouplers

Technical data, load – CR-P optocouplers

Input circuits		CR-P024MOS1	CR-P024TRI1
Input resistance		2200 Ω	1950 Ω
Rated control voltage		24 V DC	24 V DC
Pull-in voltage		10 V DC	10 V DC
Maximum input voltage		32 V DC	32 V DC
Nominal input current		10 mA	12 mA
Input power		260 mW	295 mW
Typical switching-on time		50 ms	< 1/2 cycle
Typical switch-off time		250 ms	< 1/2 cycle
Output			
Output circuits		11 (13+) - 14	11 (13+) - 14
Kind of output		MOS-FET	Triac
Rated operational voltage		24 V DC	240 V AC
Maximum switching voltage		35 V DC	275 V AC
Minimum switching current		1 mA	50 mA
Maximum switching current continuously		5 A	3,5 A
Leakage current at maximum switching voltage		10 μ A	1 mA
Voltage drop at rated current		300 mV	1.1 V
Isolation data			
Rated insulation voltage	input/output	2.5 kV	2.5 kV
Insulation class		2	2
Clearance	input/output	19 mm	19 mm
Creepage distance	input/output	19 mm	19 mm
Overvoltage category		III	III
Pollution degree		2	2
General data			
Dimensions		see 'Dimensional drawings'	
Weight		11 g (0.618 lbs)	11 g (0.618 lbs)
Mounting		on socket	on socket
Environmental data			
Ambient temperature	operational	-20...+80 °C	-20...+80 °C
	storage	-40...+100 °C	-40...+100 °C
Standards/ Directives			
Standards		IEC/EN 62314	IEC/EN 62314
EMC Directive		2014/30/EU	2014/30/EU
RoHS Directive		2011/65/EU	2011/65/EU

Pluggable interface relays and optocouplers

Technical data - Sockets for CR-P and CR-M

Output circuits		CR-PLS		CR-PLSx	CR-PSS	CR-PLC	CR-MxLS	CR-MxSS	CR-MxSF	CR-MxLC	
Output circuits		11-12/14, 21-22/24					11-12/14, 21-22/24, ...				
Number of poles		2					2, 3 or 4		2 or 4		
Rated voltage		250 V AC	300 V AC	250 V AC		250 V AC				300 V AC	
Rated current		2 x 10 A ¹⁾	2 x 12 A ¹⁾	2 x 10 A ¹⁾		7 A				10 A	
General data											
Dimensions		see 'Dimensional drawings'									
Degree of protection		terminals IP 20 B (EN 60529)									
Temperature range		operation		-40...+70 °C		-40...+85 °C		-40...+70 °C		-25...+85 °C	
		storage		-40...+70 °C		-40...+85 °C		-40...+70 °C			
Connection type		screw connection				spring connection	screw connection		fork type screw	spring connection	
Maximum number of wires per connecting terminal		2				2 (one per connection point)	2		-	2 (one per connection point)	
Connecting capacity		rigid 2 x 0.5 - 2.5 mm² (2 x 20 - 14 AWG)				2 x 0.2 - 1.5 mm² (2 x 24 - 16 AWG)	2 x 0.5 - 2.5 mm² (2 x 20 - 14 AWG)			2 x 0.5 - 1.5 mm² (2 x 20 - 16 AWG)	
		fine-strand									
		with wire end ferrule		2 x 0.5 - 1.5 mm² (2 x 20 - 16 AWG)	2 x 1.5 mm² (2 x 16 AWG)	2 x 0.5 - 1.5 mm² (2 x 20 - 16 AWG)	2 x 1.5 mm² (2 x 16 AWG)	2 x 0.5 - 1.5 mm² (2 x 20 - 16 AWG)		2 x 1.5 mm² (2 x 16 AWG)	
Stripping length		7 mm (0.28 in)				11 mm (0.43 in)	7 mm (0.28 in)			10 mm (0.39 in)	
Tightening torque		0.6 Nm	0.8 Nm	0.6 Nm		0.6 Nm (5.31 lb.in)					
Maximum clamping force		with 0,2 mm²		-	-	-	10 N	-	-	-	10 N
		with 1,5 mm²		-	-	-	40 N	-	-	-	40 N
		with wire end ferrule		-				-	-	-	> 40 N
Mounting		DIN rail (IEC/EN 60715)									
Material		socket PA 6+GF - V2					PA 6+GF - V2				
		contacts CuZn33					CuZn33				
		contact surface		5 µ Ni	5 µ tinned	5 µ Ni		5 µ Ni		6 µ Ni	5 µ tinned
		terminals		8 µ Ni	8 µ galvanized	8 µ Ni	XCrNi Steel	8 µ Ni			CCSC
		combi screw M3		8.8 Steel, 5µ Ni			-	8.8 Steel, 5µ Ni			-
Isolation data											
Insulation voltage		> 5 kV	> 3 kV	> 5 kV		> 3 kV		> 4 kV			
Isolation between coil and contacts		IEC/EN 61984									
Clearance and creepage distance		IEC/EN 61984									
Standards/Directives											
Standards		IEC/EN 61984									
Low Voltage Directive		2014/35/EU									
RoHS Directive		2011/65/EU									

¹⁾ Loads >10 A (>12 A for CR-PLSx) require jumpering of terminal 11 with 21, 12 with 22, and 14 with 24

Pluggable interface relays and optocouplers


Technical data - Sockets for CR-U

Output circuits		CR-U2S	CR-U3S	CR-U3E	CR-UxSM
Output circuits		11-12/14, 21-22/24,...			
Number of poles		2	3		2 or 3
Rated voltage		250 V AC		300 V AC	250 V
Rated current		10 A			
General data					
Dimensions		see 'Dimensional drawings'			
Degree of protection	terminals	IP 20 B (EN 60529)			
Temperature range	operation	-40...+70 °C		-40...+85 °C	-40...+70 °C
	storage	-40...+70 °C		-40...+85 °C	-40...+70 °C
Connecting capacity	rigid	2 x 2 x 0,5 - 2,5 mm² (2 x 20 - 14 AWG)			
	fine-strand				
	with wire end ferrule	2 x 0.5 - 1.5 mm² (2 x 20 - 16 AWG)		2 x 0.5 - 1.5 mm² (2 x 20 - 16 AWG)	2 x 0.5 - 1.5 mm² (2 x 20 - 16 AWG)
Stripping length		7 mm (0.28 in)			
Tightening torque		0.6 Nm		0.8 Nm	0.6 Nm
Mounting		DIN rail (IEC/EN 60715)			
Material	socket	PA 6+GF - V2			
	contacts	CuZn33			
	contact surface	6 μ Ni			3 μ Ni
	terminals	8 μ Ni		8 μ galvanized	10 μ Ni
	combi screw M3	8.8 steel, 5μ Ni			Steel, 8 μ Ni
Isolation data					
Insulation voltage		> 2 kV			
Isolation between coil and contacts		IEC/EN 61984			
Clearance and creepage distance		IEC/EN 61984			
Standards/Directives					
Standards		IEC/EN 61984			
Low Voltage Directive		2014/35/EU			
RoHS Directive		2011/65/EU			







Pluggable interface relays and optocouplers

Technical diagrams



Connection diagrams






CR-P/M 22

CR-P/M 42, CR-P/M 42B,
CR-P/M 42C, CR-P/M 42V,
CR-P/M 42BV, CR-P/M 42CVCR-P/M 52B, CR-P/M 52C
CR-P/M 52D,CR-P/M 62, CR-P/M 62E,
CR-P/M 92, CR-P/M 62V,
CR-P/M 62EV, CR-P/M 92VCR-P/M 62C, CR-P/M 62D,
CR-P/M 92C, CR-P/M 62CV,
CR-P/M 62DV, CR-P/M 92CVCR-P/M 72, CR-P/M 82
CR-P/M 72A,

CR-U 21

CR-U 41, CR-U 41B, CR-U 41C,
CR-U 41V, CR-U 41BV, CR-U 41CV

CR-U 51B, CR-U 51C CR-U 51D


CR-U 61, CR-U 61E, CR-U 91,
CR-U 61V, CR-U 61EV, CR-U 91VCR-U 61C, CR-U 61CV, CR-U 61D,
CR-U 61DV, CR-U 91C, CR-U 91CV

CR-U 71, CR-U 71A, CR-U 81


Pluggable interface relays and optocouplers

Technical diagrams


Connection diagrams




CR-P with 1 c/o contact




CR-M with 2 c/o contacts




CR-M with 3 c/o contacts




CR-U with 2 c/o contacts




CR-P with 2 c/o contacts




CR-M with 4 c/o contacts




CR-S




CR-U with 3 c/o contacts

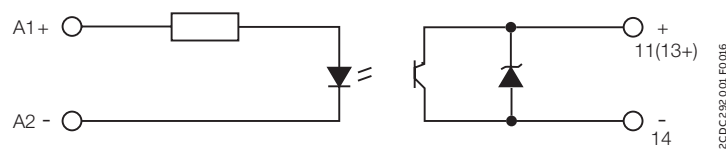

CR-S optocoupler with Transistor

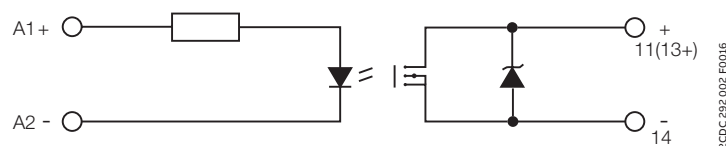

CR-S optocoupler with MOSFET

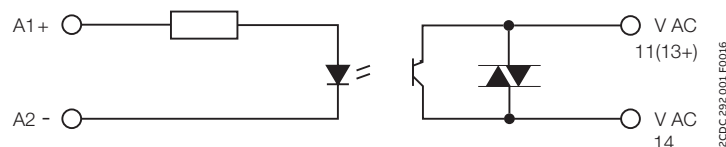


CR-S optocoupler with Triac


Pluggable interface relays and optocouplers

Technical diagrams


Load limit curves CR-P, CR-M and CR-U - Electrical lifetime at resistive AC load

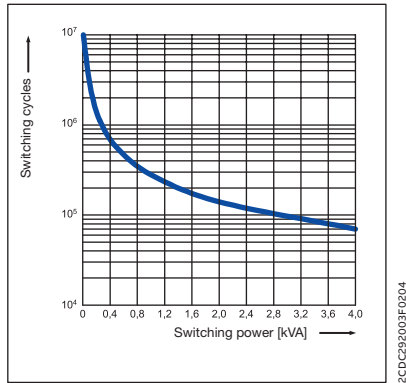


CR-P with 1 c/o contact

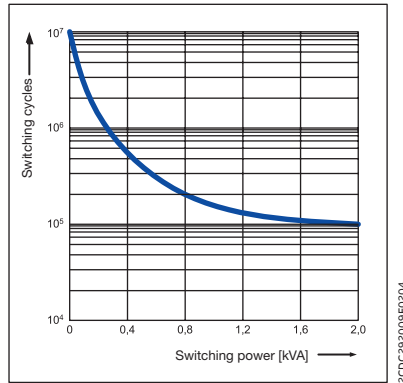


CR-P with 2 c/o contacts

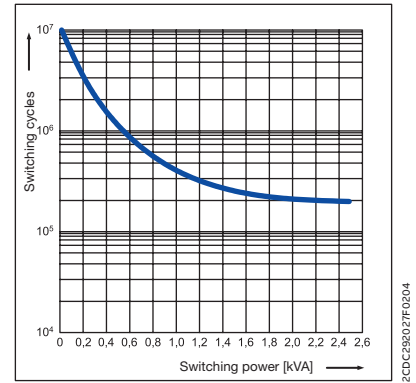


CR-U with 2 and 3 c/o contacts

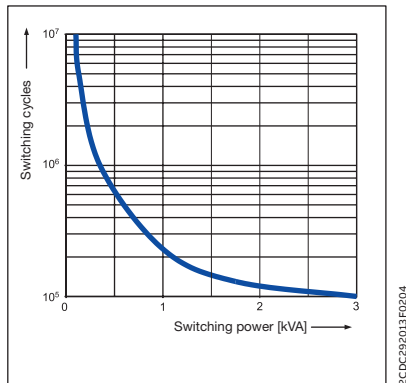

CR-M with 2 c/o contacts

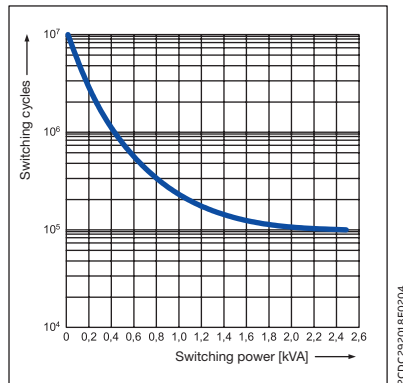


CR-M with 3 c/o contacts

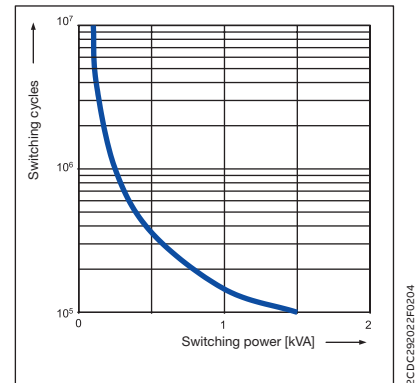


CR-M with 4 c/o contacts

Technical diagrams CR-S interface relays

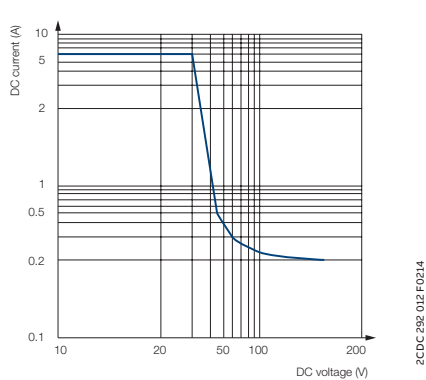

Max. DC load breaking capacity

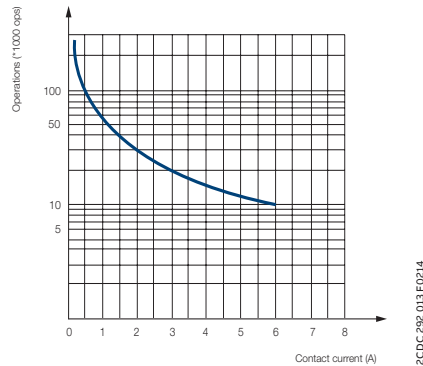


Endurance curve


Pluggable interface relays and optocouplers

Technical diagrams


Load limit curves CR-P, CR-M and CR-U - Maximum switching power at resistive DC load

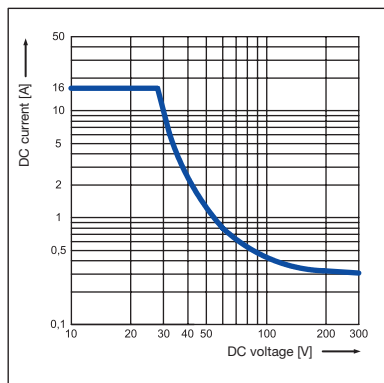


CR-P with 1 c/o contact

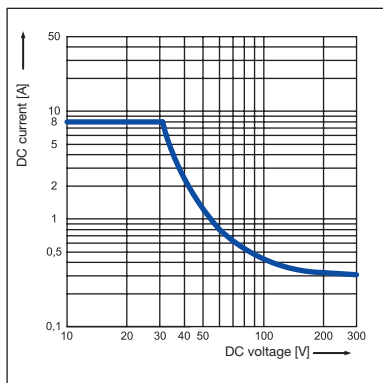


CR-P with 2 c/o contacts

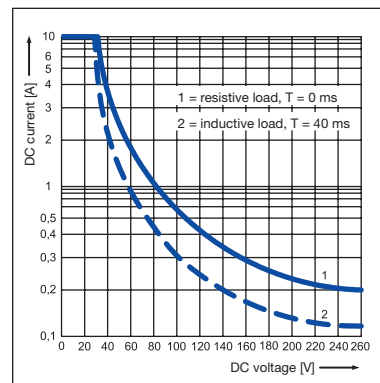


CR-U with 2 and 3 c/o contacts

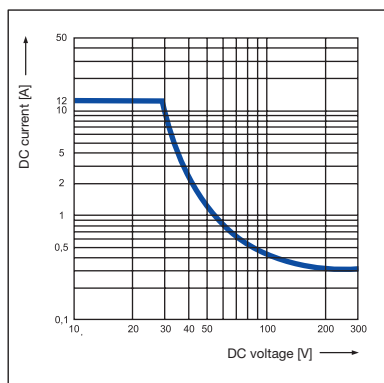

CR-M with 2 c/o contacts

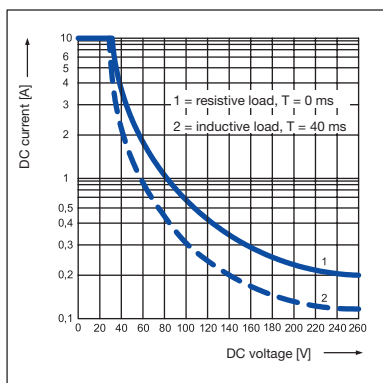


CR-M with 3 c/o contacts

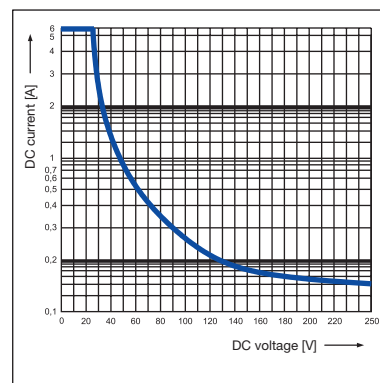


CR-M with 4 c/o contacts


Reduction factor CR-P, CR-M and CR-U – F at inductive AC load

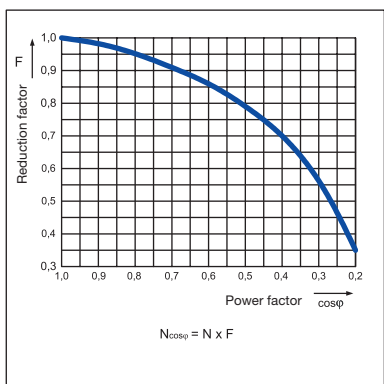

CR-P

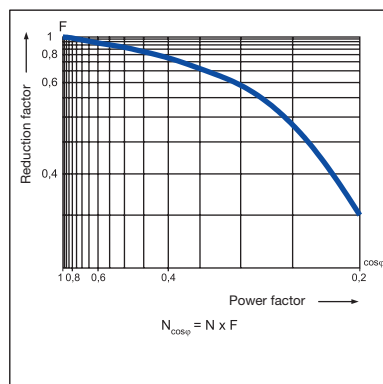

CR-M

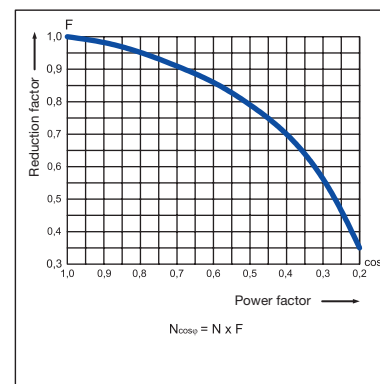


CR-U


Pluggable interface relays and optocouplers

Technical diagrams

Derating curves

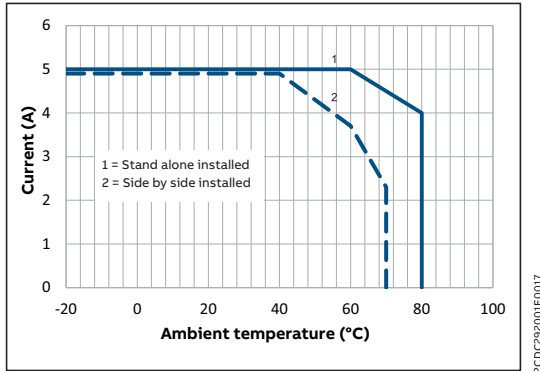


MOS-FET output CR-P

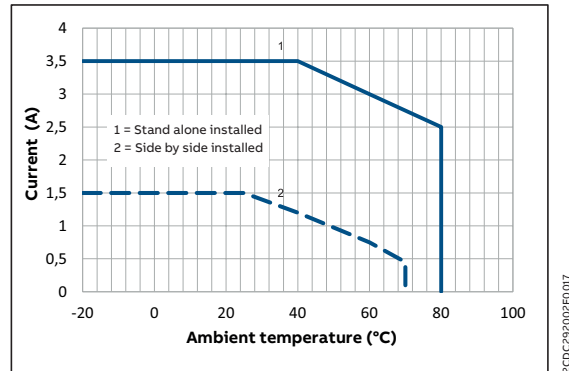


Triac output CR-P


Technical diagrams - CR-S optocouplers

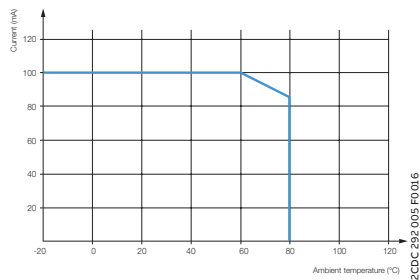

Derating curve Transistor output CR-S

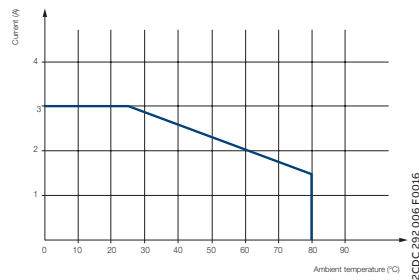

Derating curve MOS-FET output CR-S

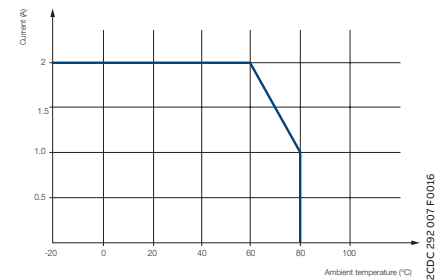


Derating curve Triac output CR-S


Pluggable interface relays and optocouplers

Technical diagrams


Dimensional drawings




CR-P relay

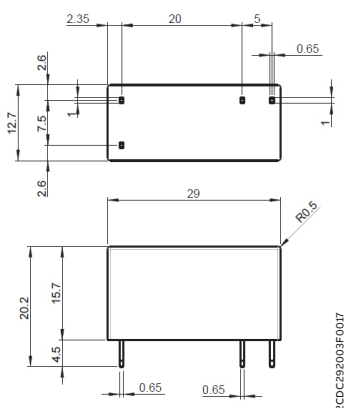


CR-P optocoupler

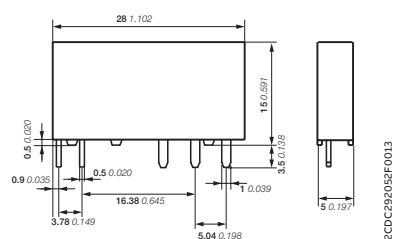


CR-S relay

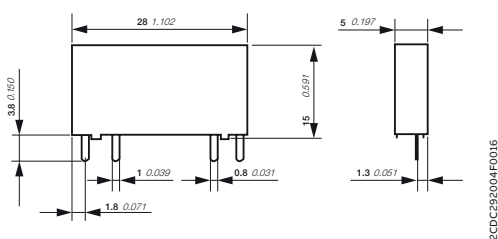


CR-S optocoupler

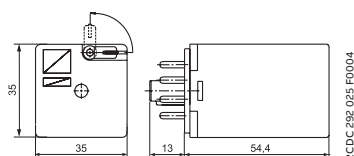


CR-U with 2 c/o contacts

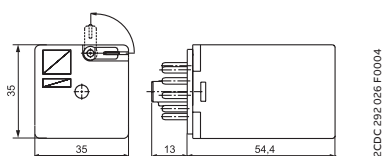


CR-U with 3 c/o contacts

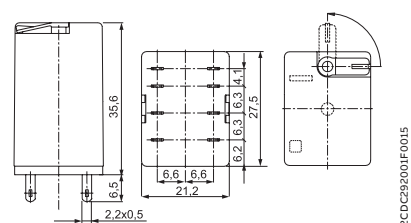

CR-M with 2 c/o contacts

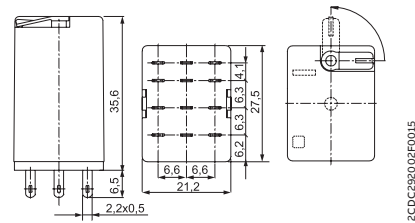

CR-M with 3 c/o contacts

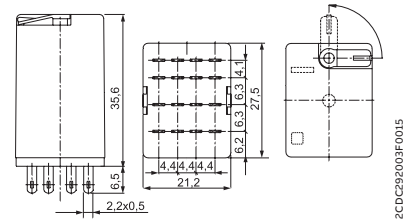


CR-M with 4 c/o contacts


Pluggable interface relays and optocouplers

Technical diagrams


Dimensional drawings

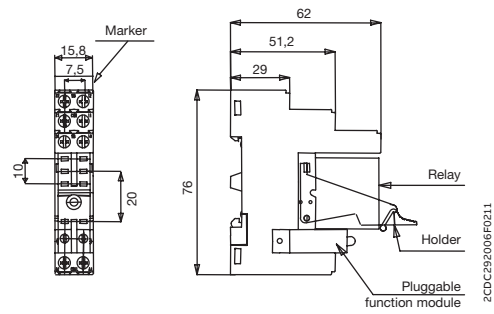


CR-PLS - screw connection

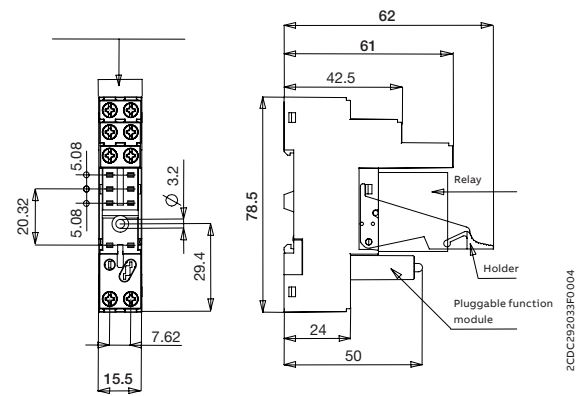


CR-PLSx - screw connection

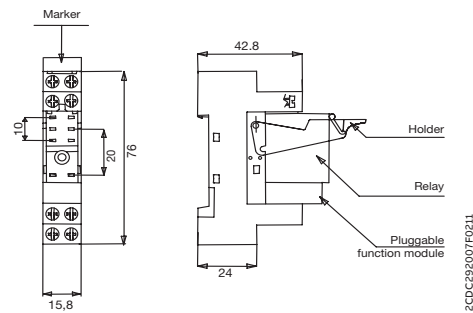

CR-PSS - screw connection

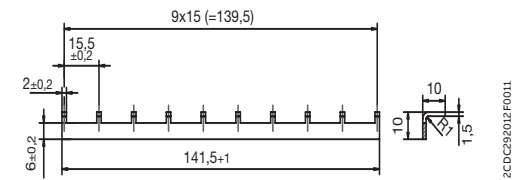

CR-PJ

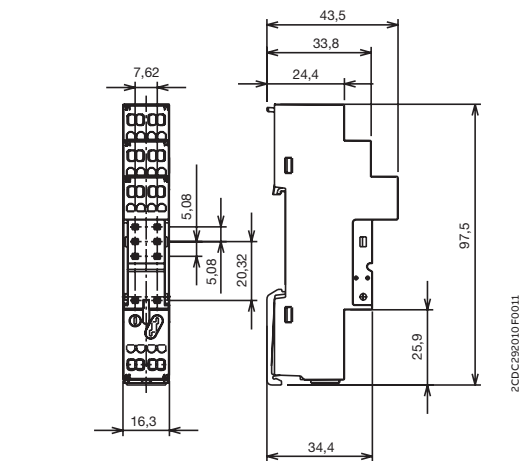


CR-PLC - spring connection


Pluggable interface relays and optocouplers

Technical diagrams


Dimensional drawings

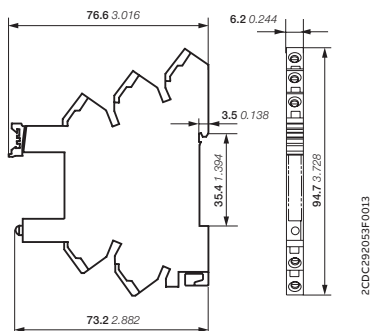

Spring socket for CR-S range interface relays

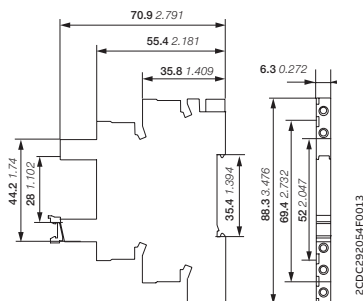


Screw socket for CR-S range interface relays

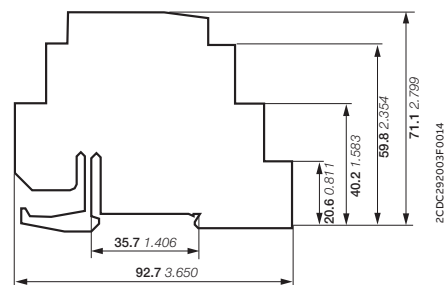


Separator for CR-S


Jumper

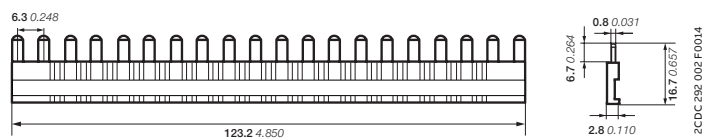


Jumper bar CR-S

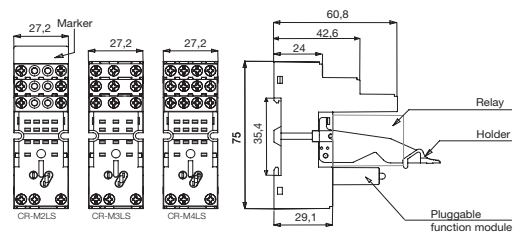


CR-M2LS - CR-M3LS - CR-M4LS - screw connection

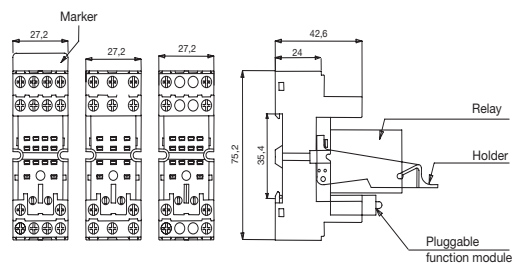


CR-M2SS - CR-M3SS - CR-M4SS - screw connection

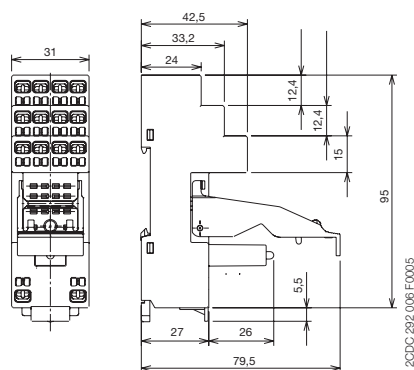

CR-M2LC, CR-M4LC - spring connection

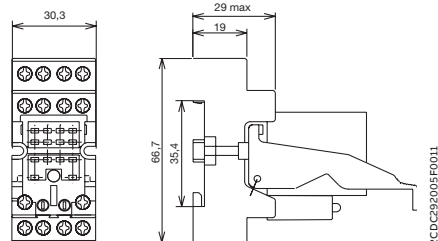

CR-MxSF - screw connection

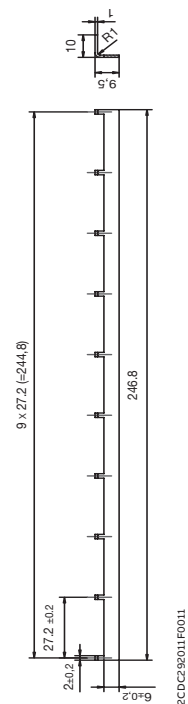


CR-MJ

Pluggable interface relays and optocouplers

Technical diagrams

Dimensional drawings

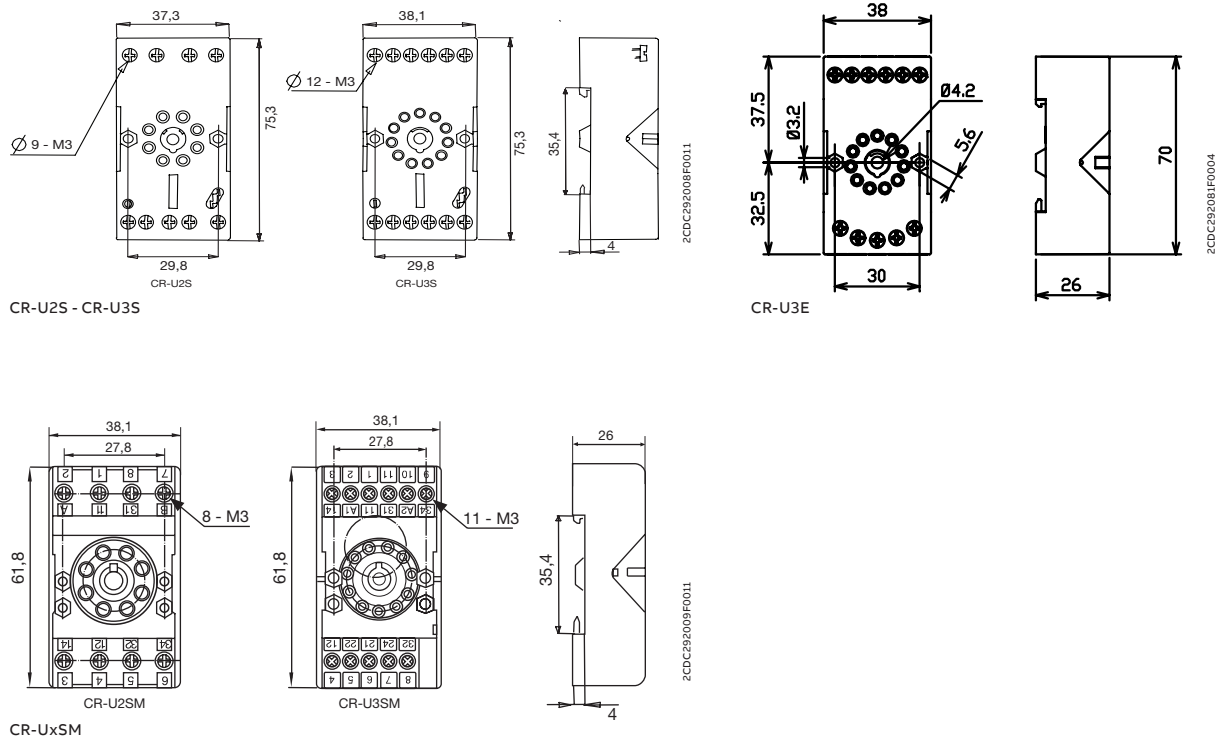




Boxed interface relays and optocouplers R600 range

Table of contents

66	Overview
68	Boxed interface relays R600 range
68	Type selection
70	Ordering details
72	Technical data
76	Technical diagrams
78	Boxed optocouplers R600 range
78	Type selection
79	Ordering details
81	Technical data
84	Technical diagrams

Boxed interface relays and optocouplers R600 range

Overview

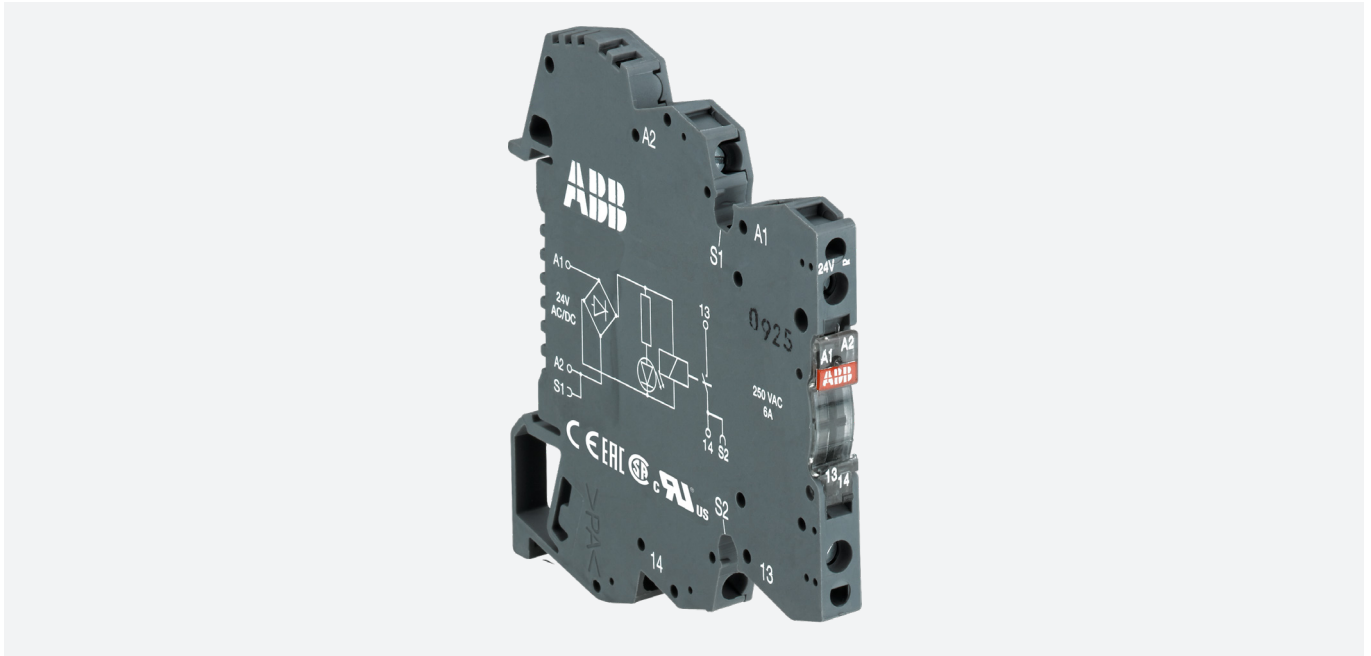


ABB's R600 range may be used in applications where electrical isolation, amplification and signal matching are required. The slim, compact design, incorporated with the variety of terminal connections available allow for the optimization of space within a control panel. This broad portfolio allows for the flexibility of choice and includes both electromagnetic relays and optocouplers.



Continuous operation

The ABB Boxed Interface Relays portfolio incorporates a large assortment of non-pluggable relays. It includes both electro-mechanical relays and optocouplers. The R600 Optocouplers allow for continuous operation without any mechanical wear-and-tear.



Space saving

The 6 mm slim housing of the R600 Boxed Interface Relays provides the possibility of space saving within control cabinets. The 75 mm depth of these relays allows for the use in compact cabinets.




Global availability

The ABB Boxed Interface Relays are approved for a large variety of applications and adhere to highest levels of global approvals (UL, CSA, VDE, CCC).

Boxed interface relays and optocouplers R600 range

Overview

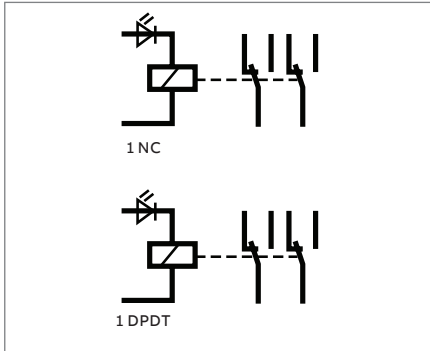


Complete product line

1 n/o, 1 n/c, 1 c/o, 2 c/o output configuration. Standard contact material for switching high current signals as well as gold-plated contacts for reliable switching of low current signals.




Marine certification

The R600 range offers the LR approval, which allows usage of the boxed interface relays and optocouplers in many applications around the marine segment. The performance of the R600 range has been proven by successfully passing tests required for operating under harsh conditions.

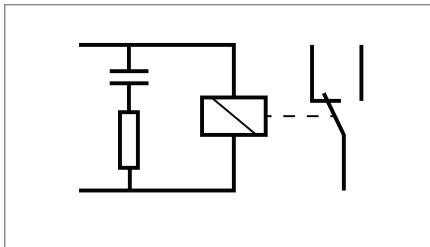


Safe operation

High resistance to vibration and shock thanks to the relay soldered inside of the housing. Wrong relay replacement or relay lose not possible. Devices with immunity to leakage currents.

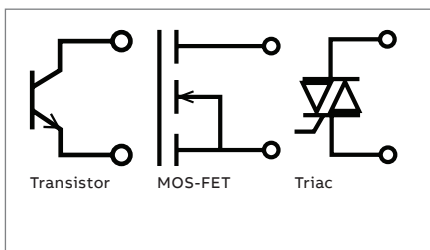

Longevity

Optocoupler with transistor, MOS-FET and Triac output ensure a longer lifetime, higher reliability and quiet operation.

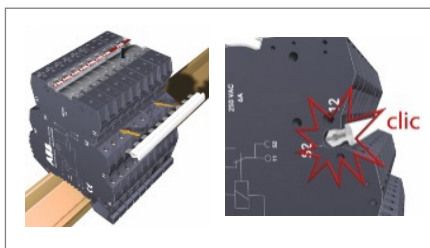

Easy to mount

The R600 interface relays and optocouplers are easy to mount by snapping onto a DIN-rail according to IEC/EN 60715. Time saving wiring thanks to a jumper bar.

Boxed interface relays R600 range

Type selection

	Type	Order number
	RB121P-5VDC	1SNA645034R2300
	RB121PG-5VDC	1SNA645036R2500
	RBR121P-5VDC	1SNA645534R2500
	RB121-12VDC	1SNA645073R0000
	RB121P-12VDC	1SNA645035R2400
	RB121G-12VDC	1SNA645075R0000
	RBR121P-12VDC	1SNA645535R2600
	RB101R-24VUC	1SNA645019R0400
	RBR101R-24VUC	1SNA645519R0600
	RB111-24VUC	1SNA645014R2700
	RB111R-24VUC	1SNA645018R0300
	RBR111R-24VUC	1SNA645518R0500
	RBR111-24VUC	1SNA645514R2100
	RB121-24VUC	1SNA645001R0300
	RB121G-24VUC	1SNA645005R0700
	RBR121-24VUC	1SNA645501R0500
	RB121G-24VUC	1SNA645505R0100
	RBR122G-24VUC	1SNA645012R2500
	RBR122G-24VUC	1SNA645512R2700
	RB121-24VDC	1SNA645071R0000
	RBR121-24VDC	1SNA645571R0000
	RB121G-24VDC	1SNA645072R0000
	RBR121G-24VDC	1SNA645572R0000
	RB121-48-60VUC	1SNA645002R0400
	RB121G-48-60VUC	1SNA645006R0000
Input voltage		
5 V DC	■	■
12 V DC		■
24 V DC		■
48-60 V DC		■
115 V DC		
230 V DC		
60-230 V DC		
24 V AC		■
48-60 V AC		■
115 V AC		
230 V AC		
60-230 V AC		
Output rating		
10 mA - 6 A	■	■
3 mA - 6 A	■	■
1 mA - 8 A		■
Output contacts		
c/o	1	1
n/o		
n/c		
Gold plated contacts	■	■
Terminal type		
Screw	■	■
Spring	■	■

Boxed interface relays R600 range

Type selection

	Type	Order number
	RBR121-48-60VUC	1SNA645502R0600
	RBR121G-48-60VUC	1SNA645506R0200
	RBI22G-48-60VUC	1SNA645040R1500
	RBR122G-48-60VUC	1SNA645540R1700
	RBI21-115VUC	1SNA645003R0500
	RBI21G-115VUC	1SNA645007R0100
	RBI21R-115VUC	1SNA645046R0700
	RBR121-115VUC	1SNA645503R0700
	RBR121G-115VUC	1SNA645507R0300
	RBI22G-115VUC	1SNA645041R0200
	RBR122G-115VUC	1SNA645541R0400
	RBI11-115VUC	1SNA645016R2100
	RBI11-230VUC	1SNA645017R2200
	RBI21-230VUC	1SNA645004R0400
	RBI21G-230VUC	1SNA645008R1200
	RBI21R-230VUC	1SNA645011R2400
	RBR121-230VUC	1SNA645504R0000
	RBR121G-230VUC	1SNA645508R1400
	RBI21R-230VUC	1SNA645511R2600
	RBI22G-230VUC	1SNA645013R2600
	RBR122G-230VUC	1SNA645513R2000
	RBI21-60-230VUC	1SNA645020R0100
	RBR121-60-230VUC	1SNA645520R0300

Input voltage	
5 V DC	
12 V DC	
24 V DC	
48-60 V DC	■ ■ ■ ■
115 V DC	■ ■ ■ ■
230 V DC	■ ■ ■ ■
60-230 V DC	■ ■ ■ ■
24 V AC	
48-60 V AC	■ ■ ■ ■
115 V AC	■ ■ ■ ■
230 V AC	■ ■ ■ ■
60-230 V AC	■ ■ ■ ■

Output rating	
10 mA - 6 A	■ ■
3 mA - 6 A	■ ■
1 mA - 8 A	■ ■

Output contacts	
c/o	1 1 2 2 1 1 1 1 1 2 2 1 1 1 1 1 1 2 2 1 1
n/o	1 1
n/c	
Gold plated contacts	■ ■

Terminal type	
Screw	■ ■
Spring	■ ■

Boxed interface relays R600 range

Ordering details



R600 - 6 mm



R600 - 12 mm

The R600 range comprises of boxed interface relays and optocouplers. In this range, the relay is soldered into device housing, fulfilling the highest vibration requirements. This compact range of relays are 6 mm wide and provide the possibility of switching AC and DC circuits with the same relay. All the sockets in this range are equipped with an indicator LED and available with screw or spring terminals.

1 n/c contact: 250 V, 10 mA - 6 A, width 12 mm

Rated control supply voltage	Connection type	Particularities	Type	Order code	Pkg qty	Weight (1 pc.) kg (lb)
24 V AC/DC	Screw	RC circuit parallel to output contact	RB101R-24VUC	1SNA645019R0400	5	0.04 (0.088)
	Spring		RBR101R-24VUC	1SNA645519R0600		

1 n/o contact: 250 V, 10 mA - 6 A, width 6 mm

Rated control supply voltage	Connection type	Particularities	Type	Order code	Pkg qty	Weight (1 pc.) kg (lb)
24 V AC/DC	Screw		RB111-24VUC	1SNA645014R2700	10	0.02 (0.044)
115 V AC/DC	Screw		RB111-115VUC	1SNA645016R2100		
230 V AC/DC	Screw		RB111-230VUC	1SNA645017R2200		
24 V AC/DC	Spring		RBR111-24VUC	1SNA645514R2100		

1 n/o contact: 250 V, 10 mA - 6 A, width 12 mm

Rated control supply voltage	Connection type	Particularities	Type	Order code	Pkg qty	Weight (1 pc.) kg (lb)
24 V AC/DC	Screw	RC circuit parallel to output contact	RB111R-24VUC	1SNA645018R0300	5	0.04 (0.088)
	Spring		RBR111R-24VUC	1SNA645518R0500		

1 c/o (SPDT) contact: 250 V, 10 mA - 6 A, width 6 mm

Rated control supply voltage	Connection type	Particularities	Type	Order code	Pkg qty	Weight (1 pc.) kg (lb)
5 V DC	Screw	A1-A2 polarized	RB121P-5VDC	1SNA645034R2300	10	0.02 (0.044)
12 V DC	Screw	A1-A2 polarized	RB121P-12VDC	1SNA645035R2400		
12 V DC	Screw		RB121-12VDC	1SNA645073R0000		
24 V DC	Screw		RB121-24VDC	1SNA645071R0000		
24 V AC/DC	Screw		RB121-24VUC	1SNA645001R0300		
48-60 V AC/DC	Screw		RB121-48-60VUC	1SNA645002R0400		
115 V AC/DC	Screw		RB121-115VUC	1SNA645003R0500		
230 V AC/DC	Screw		RB121-230VUC	1SNA645004R0400		
5 V DC	Spring	A1-A2 polarized	RBR121P-5VDC	1SNA645534R2500		
12 V DC	Spring	A1-A2 polarized	RBR121P-12VDC	1SNA645535R2600		
24 V DC	Spring		RBR121-24VDC	1SNA645571R0000		
24 V AC/DC	Spring		RBR121-24VUC	1SNA645501R0500		
48-60 V AC/DC	Spring		RBR121-48-60VUC	1SNA645502R0600		
115 V AC/DC	Spring		RBR121-115VUC	1SNA645503R0700		
230 V AC/DC	Spring		RBR121-230VUC	1SNA645504R0000		

Boxed interface relays R600 range

Ordering details

1 c/o (SPDT) contact: 250 V, 3 mA - 6 A, gold-plated contacts, width 6 mm

Rated control supply voltage	Connection type	Particularities	Type	Order code	Pkg qty	Weight (1 pc.) kg (lb)
5 V DC	Screw	A1-A2 polarized	RB121PG-5VDC	1SNA645036R2500	10	0.02 (0.044)
12 V DC	Screw		RB121G-12VDC	1SNA645075R0000		
24 V DC	Screw		RB121G-24VDC	1SNA645072R0000		
24 V AC/DC	Screw		RB121G-24VUC	1SNA645005R0700		
48-60 V AC/DC	Screw		RB121G-48-60VUC	1SNA645006R0000		
115 V AC/DC	Screw		RB121G-115VUC	1SNA645007R0100		
230 V AC/DC	Screw		RB121G-230VUC	1SNA645008R1200		
24 V DC	Spring		RBR121G-24VDC	1SNA645572R0000		
24 V AC/DC	Spring		RBR121G-24VUC	1SNA645505R0100		
48-60 V AC/DC	Spring		RBR121G-48-60VUC	1SNA645506R0200		
115 V AC/DC	Spring		RBR121G-115VUC	1SNA645507R0300		
230 V AC/DC	Spring		RBR121G-230VUC	1SNA645508R1400		

1 c/o (SPDT) contact: 250 V, 10 mA - 6 A, width 12 mm

Rated control supply voltage	Connection type	Particularities	Type	Order code	Pkg qty	Weight (1 pc.) kg (lb)
60-230 V AC/DC	Screw		RB121-60-230VUC	1SNA645020R0100	5	0.04 (0.088)
115 V AC/DC	Screw	Leakage current protection, RC circuit parallel to input	RB121R-115VUC	1SNA645046R0700		
230 V AC/DC	Screw		RB121R-230VUC	1SNA645011R2400		
60-230 V AC/DC	Spring		RBR121-60-230VUC	1SNA645520R0300		
230 V AC/DC	Spring	Leakage current protection, RC circuit parallel to input	RBR121R-230VUC	1SNA645511R2600		

2 c/o (SPDT) contacts: 250 V, 1 mA - 8 A, gold-plated contacts, width 12 mm

Rated control supply voltage	Connection type	Type	Order code	Pkg qty	Weight (1 pc.) kg (lb)
24 V AC/DC	Screw	RB122G-24VUC	1SNA645012R2500	5	0.04 (0.088)
48-60 V AC/DC	Screw	RB122G-48-60VUC	1SNA645040R1500		
115 V AC/DC	Screw	RB122G-115VUC	1SNA645041R0200		
230 V AC/DC	Screw	RB122G-230VUC	1SNA645013R2600		
24 V AC/DC	Spring	RBR122G-24VUC	1SNA645512R2700		
48-60 V AC/DC	Spring	RBR122G-48-60VUC	1SNA645540R1700		
115 V AC/DC	Spring	RBR122G-115VUC	1SNA645541R0400		
230 V AC/DC	Spring	RBR122G-230VUC	1SNA645513R2000		

Ordering details - Accessories

Description	Type	Order code	Pkg qty	Weight (1 pc.) kg (lb)
Jumper bar, 10 poles * (replacement of BJ612-10 - 1SNA290488R0100)	RB-JB10	1SVR406570R0000	10	0.05 (0.11)
Jumper bar, 20 poles * (replacement of BJ612-20 - 1SNA206754R0000)	RB-JB20	1SVR406580R0000		0.10 (0.22)
Separator end section	SC612	1SNA290474R0200		0.05 (0.11)

* - Before the first and after the last jumpered R600 relay, a separator end section shall be used.

- The sum of the current for jumpered devices shall not exceed 6 A on 6 mm devices and 8 A on 12 mm devices.

Boxed interface relays R600 range

Technical data

		RB(R)101R-		RB(R)111R-	
		24VUC		24VUC	
Input circuit					
Rated control supply voltage U _s		24 V AC/DC			
Rated control supply voltage U _s tolerance		DC	-15 %, +20 %		
		AC	-/+ 10 %		
Rated frequency		50/60 Hz			
Typical power consumption		0.24 W			
Typical current		10 mA			
Drop-out voltage		at 20 °C	4.5 V		
Indication of operational states		green LED	┐ l: control supply voltage applied		
Output circuit					
Kind of output		11-12	relay, 1 n/c contact		-
		13-14	-		relay, 1 n/o contact
Rated operational voltage U _e		250 V AC			
Minimum switching voltage		12 V			
Maximum switching voltage		250 V AC			
Minimum switching current		10 mA			
Rated free air thermal current I _{th}		6 A			
Rated operational current I _e		AC-12 (resistive) 230 V	6 A		
		AC-15 (inductive) 230 V	1.5 A		
		AC-15 (inductive) 120 V	3 A		
		DC-12 (resistive) 24 V	6 A		
		DC-13 (inductive) 24 V	1 A		
		DC-13 (inductive) 110 V	0.2 A		
		DC-13 (inductive) 220 V	0.1 A		
AC rating (UL 508; NEMA ICS-5)		utilization category (pilot duty)	B300		
DC rating (UL 508; NEMA ICS-5)		utilization category (pilot duty)	R300		
Minimum switching power		0.6 W / 0.6 VA			
Mechanical lifetime		1 x 10 ⁷ switching cycles			
Electrical lifetime		at AC-15	1 x 10 ⁵ switching cycles		
Max. fuse rating to achieve short-circuit protection		6 A fast			
Response time		5 ms			
Release time		8 ms			

		RB(R)111-			
		24VUC	115VUC	230VUC	
Input circuit					
Rated control supply voltage U _s		24 V AC/DC		115 V AC/DC	
Rated control supply voltage U _s tolerance		DC	-15 %, +20 %		-15 %, +10 %
		AC	-/+ 10 %		
Rated frequency		50/60 Hz			
Typical power consumption		0.24 W	0.46 W	0.8 W	
Typical current		10 mA	4 mA	3.5 mA	
Drop-out voltage		at 20 °C	4.5 V	17 V	27 V
Indication of operational states		green LED	┐ l: control supply voltage applied		
Output circuit					
Kind of output		13-14	relay, 1 n/o contact		
Rated operational voltage U _e		250 V AC			
Minimum switching voltage		12 V			
Maximum switching voltage		250 V AC			
Minimum switching current		10 mA			
Rated free air thermal current I _{th}		6 A			
Rated operational current I _e		AC-12 (resistive) 230 V	6 A		
		AC-15 (inductive) 230 V	1.5 A		
		AC-15 (inductive) 120 V	3 A		
		DC-12 (resistive) 24 V	6 A		
		DC-13 (inductive) 24 V	1 A		
		DC-13 (inductive) 110 V	0.2 A		
		DC-13 (inductive) 220 V	0.1 A		
AC rating (UL 508; NEMA ICS-5)		utilization category (pilot duty)	B300		
DC rating (UL 508; NEMA ICS-5)		utilization category (pilot duty)	R300		
Minimum switching power		0.6 W / 0.6 VA			
Mechanical lifetime		1 x 10 ⁷ switching cycles			
Electrical lifetime		at AC-15	1 x 10 ⁵ switching cycles		
Max. fuse rating to achieve short-circuit protection		6 A fast			
Response time		5 ms	6 ms	7 ms	
Release time		8 ms	15 ms	15 ms	

Boxed interface relays R600 range

Technical data

		RB(R)121(P)(G)-							
		5VDC	12VDC	24VDC	24VUC	48-60VUC		115VUC	230VUC
Input circuit									
Rated control supply voltage U _s		5 V DC	12 V DC	24 V DC	24 V AC/DC	48 V AC/DC	60 V AC/DC	115 V AC/DC	230 V AC/DC
Rated control supply voltage U _s tolerance		DC	-15 %, +20 %						-15 %, +10 %
		AC	-			-/+ 10 %			
Rated frequency		-			50/60 Hz				
Typical power consumption		0.2 W	0.2 W	0.24 W		0.33 W	0.54 W	0.46 W	0.8 W
Typical current		40 mA	16 mA	10 mA		7 mA	9 mA	4 mA	3.5 mA
Drop-out voltage at 20 °C		1.2 V	2.2 V	4.5 V		8 V	8 V	17 V	27 V
Indication of operational states green LED		V: control supply voltage applied							
Output circuit									
Kind of output 11-12/14		relay, 1 c/o (SPDT) contact							
Rated operational voltage U _e		250 V AC							
Minimum switching voltage		12 V / gold-plated contacts: 5 V							
Maximum switching voltage		250 V AC							
Minimum switching current		10 mA / gold-plated contacts: 3 mA at 20 V							
Rated free air thermal current I _{th}		6 A							
Rated operational current I _e	AC-12 (resistive) 230 V	6 A							
	AC-15 (inductive) 230 V	1.5 A							
	AC-15 (inductive) 120 V	3 A							
	DC-12 (resistive) 24 V	6 A							
	DC-13 (inductive) 24 V	1 A							
	DC-13 (inductive) 110 V	0.2 A							
	DC-13 (inductive) 220 V	0.1 A							
AC rating (UL 508; NEMA ICS-5)	utilization category (pilot duty)	B300							
DC rating (UL 508; NEMA ICS-5)	utilization category (pilot duty)	R300							
Minimum switching power		0.6 W / 0.6 VA; gold plated contacts: 0.06 V / 0.06 VA							
Mechanical lifetime		1 x 10 ⁷ switching cycles							
Electrical lifetime at AC-15		1 x 10 ⁵ switching cycles							
Max. fuse rating to achieve short-circuit protection		6 A fast							
Response time		5 ms	5 ms	5 ms		5 ms	5 ms	6 ms	7 ms
Release time		8 ms	8 ms	8 ms		8 ms	8 ms	15 ms	16 ms

Boxed interface relays R600 range

Technical data

		RB(R)121R-	
		115VUC	230VUC
Input circuit			
Rated control supply voltage U _s		115 V AC/DC	230 V AC/DC
Rated control supply voltage U _s tolerance	DC	-20%, +15%	-10%, +15%
	AC	-/+ 10 %	
Rated frequency		50/60 Hz	
Typical power consumption		2 W	2.8 W
Typical current		18 mA	12 mA
Drop-out voltage at 20 °C		17 V	27 V
Indication of operational states	green LED	 : control supply voltage applied	
Output circuit			
Kind of output		11-12/14	relay, 1 c/o (SPDT) contact
Rated operational voltage U _e		250 V AC	
Minimum switching voltage		12 V	
Maximum switching voltage		250 V AC	
Minimum switching current		10 mA	
Rated free air thermal current I _{th}		6 A	
Rated operational current I _e	AC-12 (resistive) 230 V	6 A	
	AC-15 (inductive) 230 V	1.5 A	
	AC-15 (inductive) 120 V	3 A	
	DC-12 (resistive) 24 V	6 A	
	DC-13 (inductive) 24 V	1 A	
	DC-13 (inductive) 110 V	0.2 A	
	DC-13 (inductive) 220 V	0.1 A	
AC rating (UL 508; NEMA ICS-5)	utilization category (pilot duty)	B300	
DC rating (UL 508; NEMA ICS-5)	utilization category (pilot duty)	R300	
Minimum switching power		0.6 W / 0.6 VA	
Mechanical lifetime		1 x 10 ⁷ switching cycles	
Electrical lifetime at AC-15		1 x 10 ⁵ switching cycles	
Max. fuse rating to achieve short-circuit protection		6 A fast	
Response time		6 ms	7 ms
Release time		15 ms	16 ms

Boxed interface relays R600 range

Technical data

		RB(R)122G				
		24 V UC	48-60 V UC		115 V UC	230 V UC
Input circuit						
Rated control supply voltage U _s		24 V AC/DC	48 V AC/DC	60 V AC/DC	115 V AC/DC	230 V AC/DC
Rated control supply voltage U _s tolerance		DC -15 %, +20 %				-15 %, +10 %
		AC -/+ 10 %				
Rated frequency		50/60 Hz				
Typical power consumption		0.48 W	0.62 W	0.96 W	0.58 W	1.15 W
Typical current		20 mA	13 mA	16 mA	5 mA	5 mA
Drop-out at 20 °C		5.4 V	8.8 V	8.8 V V	20 V	10 V
Indication of operational states green LED		 : control supply voltage applied				
Output circuit						
Kind of output		11-12/14	relay, 1st c/o (SPDT) contact			
		21-22/24	relay, 2nd c/o (SPDT) contact			
Rated operational voltage U _e		250 V AC				
Minimum switching voltage		5 V				
Maximum switching voltage		250 V DC - 250 V AC				
Minimum switching current		1 mA				
Rated free air thermal current I _{th}		8 A				
Rated operational current I _e		AC-12 (resistive) 230 V	8 A			
		AC-15 (inductive) 230 V	1.5 A			
		DC-12 (resistive) 24 V	8 A			
		DC-13 (inductive) 24 V	1 A			
		DC-13 (inductive) 110 V	0.2 A			
		DC-13 (inductive) 220 V	0.1 A			
Minimum switching power		5 mW / 5 mVA				
Mechanical lifetime		2 x 10 ⁷ switching cycles				
Electrical lifetime at AC-15		1 x 10 ⁵ switching cycles				
Max. fuse rating to achieve short-circuit protection		10 A fast				
Response time		6 ms	10 ms	10 ms	6 ms	6 ms
Release time		10 ms	14 ms	14 ms	15 ms	15 ms

General technical data - Interface relays

		RB	RBR
General data			
Material of housing		UL 94 V0	
Mounting		DIN rail	
Degree of protection	housing / terminals	IP20 NEMA1	
Electrical connection		Screw terminal	Spring-type terminal
Connecting capacity	fine-strand	0.22-2.5 mm² (24-14 AWG)	
	rigid	0.2-4 mm² (24-12 AWG)	0.2-2.5 mm² (24-14 AWG)
Stripping length		9 mm (0.354 in)	
Tightening torque		0.4-0.6 Nm (3.5-5.3 lb.in)	n/a
Environmental data			
Ambient temperature ranges	storage	-40...+80 °C (-40...+176 °F)	
	operation	-20...+70 °C (-4...+158 °F) ¹⁾	
Isolation data			
Rated insulation voltage Ui		250 V	
Rated impulse withstand voltage Uimp	input / output	4 kV	
	shock coil / output	4 kV	
	output / output	1 kV	
Overvoltage category		III	
Pollution degree		2	
Standards/Directives			
Standards		IEC/EN 60947-5-1	
Low Voltage Directive		2014/35/EC	
RoHS Directive		2011/65/EC	

¹⁾ Over 55 °C, blocks have to be mounted on horizontal rail with 10 mm spacing between each block. For vertical rail mounting max. operation temperature is 15 °C lower.




Boxed interface relays R600 range


Technical diagrams



Load limit curves

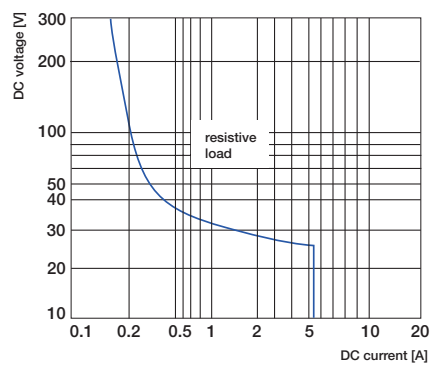


Versions with 1 n/o, 1 n/c or 1 c/o contact

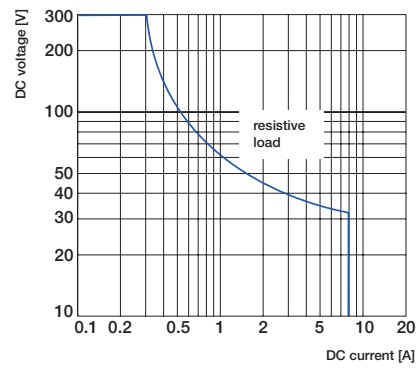


Versions with 2 c/o contacts



Dimensional drawings
in mm and inches

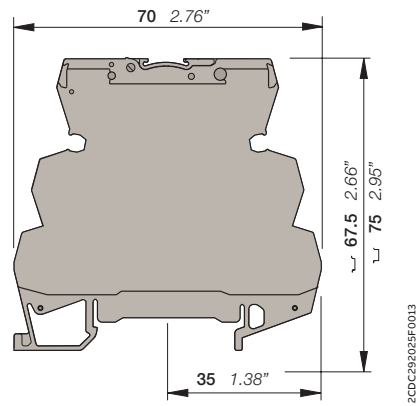

Versions with screw terminals

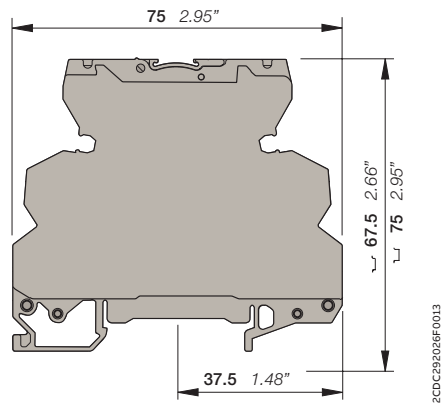


Versions with spring-type terminals


Boxed interface relays R600 range

Technical diagrams


Connection diagrams

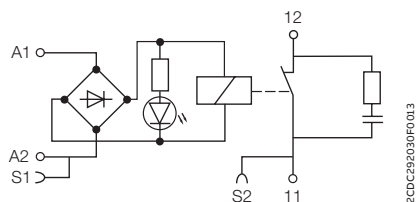


RB(R)101R - 24VUC




RB(R)111-24VUC




RB111-115VUC/230VUC

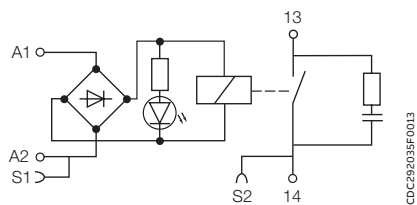


RB(R)111R-24VUC





RB(R)121P(G)-5VDC/12VDC




RB(R)121-12VDC/24VDC

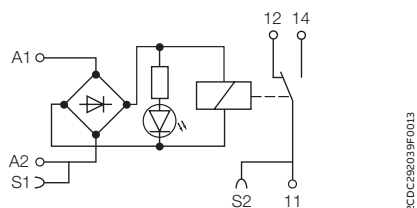


RB(R)121(G)-24VUC

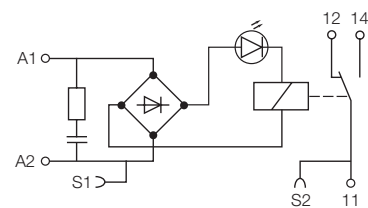RB(R)121(G)-48-60VUC/
115VUC/230VUC/60-230VUC

RB(R)121R-115VUC/230VUC

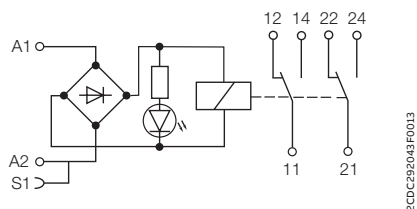

RB(R)122G-24VUC/48-60VUC

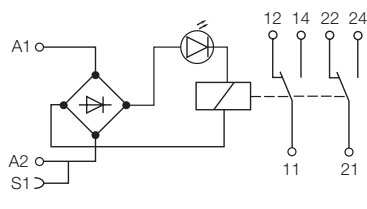

RB(R)122G-115VUC/230VUC

Type selection

	Type	Order number
	OBRIC0100-5-12VDC	1SNA645047R0000
	OBRIC0100-5-12VDC	1SNA645547R0200
	OBRIC0100-24VDC	1SNA645021R2600
	OBRIC0100-24VDC	1SNA645521R2000
	OBRIC0100-48-60VUC	1SNA645049R1200
	OBRIC0100-48-60VUC	1SNA645549R1400
	OBRIC0100-115-230	1SNA645022R2700
	OBRIC0100-115-230	1SNA645522R2100
	OBOC2000-5-12VDC	1SNA645050R1700
	OBOC2000-5-12VDC	1SNA645550R1100
	OBOC2000-24VDC	1SNA645051R0400
	OBOC2000-24VUC	1SNA645025R2200
	OBOC5000-24VDC	1SNA645024R2100
	OBOC2000-24VDC	1SNA645551R0600
	OBOC2000-24VUC	1SNA645525R2400
	OBOC5000-24VDC	1SNA645524R2300
	OBOC2000-48-60VUC	1SNA645053R0600
	OBOC2000-48-60VUC	1SNA645553R0000
	OBOC2000-115VUC	1SNA645054R0700
	OBOC5000-115VUC	1SNA645058R1300
	OBOC2000-230VUC	1SNA645026R2300
	OBOC2000-230VUC	1SNA645526R2500
	OBOC5000-230VUC	1SNA645559R1600
	OBOA1000-24VDC	1SNA645027R2400
	OBOA2000-24VDC	1SNA645029R0600
	OBOA1000-24VDC	1SNA645527R2600
	OBOA2000-24VDC	1SNA645529R0000
	OBOA1000-11 5VUC	1SNA645062R0700
	OBOA1000-230VUC	1SNA645028R0500
Input voltage		
5-12 V DC		
24 V DC		
48-60 V DC		
115-230 V DC		
115 V DC		
230 V DC		
24 V AC		
48-60 V AC		
115-230 V AC		
115 V AC		
230 V AC		
Output rating		
100 mA		
1 A		
2 A		
5 A		
Output voltage		
58 V DC		
230 V AC		
400 V AC		
Terminal type		
Screw		
Spring		
Kind of output		
Transistor		
MOS-FET		
Triac		

Boxed optocouplers R600 range

Ordering details



R600 - 6 mm



R600 - 12 mm

Transistor output, 58 V DC, 100 mA, width 6 mm

Rated control supply voltage	Connection type	Type	Order code	Pkg qty	Weight (1 pc.) kg (lb)
5 - 12 V DC	Screw	OBIC0100-5-12VDC	1SNA645047R0000	10	0.02
24 V DC	Screw	OBIC0100-24VDC	1SNA645021R2600		(0.044)
48 - 60 V AC/DC	Screw	OBIC0100-48-60VUC	1SNA645049R1200		
115 - 230 V AC/DC	Screw	OBIC0100-115-230	1SNA645022R2700		
5 - 12 V DC	Spring	OBRIC0100-5-12VDC	1SNA645547R0200	10	0.02
24 V DC	Spring	OBRIC0100-24VDC	1SNA645521R2000		(0.044)
48 - 60 V AC/DC	Spring	OBRIC0100-48-60VUC	1SNA645549R1400		
115 - 230 V AC/DC	Spring	OBRIC0100-115-230	1SNA645522R2100		

MOS-FET output, 58 V DC, 2 A, width 6 mm

Rated control supply voltage	Connection type	Type	Order code	Pkg qty	Weight (1 pc.) kg (lb)
5 - 12 V DC	Screw	OBOC2000-5-12VDC	1SNA645050R1700	10	0.02
24 V DC	Screw	OBOC2000-24VDC	1SNA645051R0400		(0.044)
24 V AC/DC	Screw	OBOC2000-24VUC	1SNA645025R2200		
48 - 60 V AC/DC	Screw	OBOC2000-48-60VUC	1SNA645053R0600		
115 V AC/DC	Screw	OBOC2000-115VUC	1SNA645054R0700		
230 V AC/DC	Screw	OBOC2000-230VUC	1SNA645026R2300		
5 - 12 V DC	Spring	OBROC2000-5-12VDC	1SNA645550R1100	10	0.02
24 V DC	Spring	OBROC2000-24VDC	1SNA645551R0600		(0.044)
24 V AC/DC	Spring	OBROC2000-24VUC	1SNA645525R2400		
48 - 60 V AC/DC	Spring	OBROC2000-48-60VUC	1SNA645553R0000		
230 V AC/DC	Spring	OBROC2000-230VUC	1SNA645526R2500		

MOS-FET output, 58 V DC, 5 A, width 6 mm

Rated control supply voltage	Connection type	Type	Order code	Pkg qty	Weight (1 pc.) kg (lb)
24 V DC	Screw	OBOC5000-24VDC	1SNA645024R2100	10	0.02
115 V AC/DC	Screw	OBOC5000-115VUC	1SNA645058R1300		(0.044)
24 V DC	Spring	OBROC5000-24VDC	1SNA645524R2300	10	0.02
230 V AC/DC	Spring	OBROC5000-230VUC	1SNA645559R1600		(0.044)

Triac output, 400 V AC, 1 A, width 6 mm

Rated control supply voltage	Connection type	Type	Order code	Pkg qty	Weight (1 pc.) kg (lb)
24 V DC	Screw	OBOA1000-24VDC	1SNA645027R2400	10	0.03
115 V AC/DC	Screw	OBOA1000-115VUC	1SNA645062R0700		(0.066)
230 V AC/DC	Screw	OBOA1000-230VUC	1SNA645028R0500		
24 V DC	Spring	OBROA1000-24VDC	1SNA645527R2600	10	

Triac output, 230 V AC, 2 A, width 12 mm

Rated control supply voltage	Connection type	Type	Order code	Pkg qty	Weight (1 pc.) kg (lb)
24 V DC	Screw	OBOA2000-24VDC	1SNA645029R0600	5	0.03
24 V DC	Spring	OBROA2000-24VDC	1SNA645529R0000	5	(0.066)

Boxed optocouplers R600 range

Ordering details

Ordering details - Accessories

Description	Type	Order code	Pkg qty	Weight (1 pc.) kg (lb)
Jumper bar, 10 poles * (replacement of BJ612-10 - 1SNA290488R0100)	RB-JB10	1SVR406570R0000	10	0.05 (0.11)
Jumper bar, 20 poles * (replacement of BJ612-20 - 1SNA206754R0000)	RB-JB20	1SVR406580R0000		0.10 (0.22)
Separator end section	SC612	1SNA290474R0200		0.05 (0.11)

* - Before the first and after the last jumpered R600 optocoupler, a separator end section shall be used.

- The sum of the current for jumpered devices shall not exceed 6 A on 6 mm devices and 8 A on 12 mm devices.

Technical data

		OB(R)OC2000-...							
		5-12 V DC	24 V DC	24 V UC	48-60 V UC		115 V UC	230 V UC	
Input circuit									
Input voltage		5 V DC	12 V DC	24 V DC	24 V AC/DC	48 V AC/DC	60 V AC/DC	115 V AC/DC	230 V AC/DC
Frequency		-			50/60 Hz				
Input current		5 mA	9 mA	5.4 mA	6.3 mA	4 mA	5.1 mA	4.2 mA	4 mA
Pull-in voltage		4 V		12 V	15 V	27 V		50 V	80 V
Typ. switch-on time		15 μs		30 μs	1 ms	5 ms		500 μs	1 ms
Typ. switch-off time		250 μs		400 μs	7 ms	20 ms		10 ms	15 ms
Operating frequency		2000 Hz		1000 Hz	60 Hz	20 Hz		50 Hz	35 Hz
Permissible leakage current		1 mA		0.8 mA	0.9mA	1 mA		0.3 mA	
Output circuit		11(13+)- 14							
Kind of output		MOS-FET							
Rated operational voltage		4.5-58 V DC							
Minimum switching current		1 mA							
Maximum switching current		2 A							
Leakage current at max. switching voltage		< 50 μA							
Rated operational current I _e	DC-12 (resistive) 58 V	2 A							
Residual voltage	typical	0.1 V							
	maximum	0.5 V							
Max. fuse rating to achieve short-circuit protection		2 A ultra-fast							
Isolation data									
Rated insulation voltage U _i		250 V							
Rated impulse withstand voltage U _{imp}		2.5 kV							
Overvoltage category		II							
Pollution degree		2							

Boxed optocouplers R600 range

Technical data

		OB(R)OC5000-...		
		24 V DC	115 V UC	230 V UC
Input circuit				
Input voltage		24 V DC	115 V AC/DC	230 V AC/DC
Frequency		-	50/60 Hz	
Input current		5.4 mA	4.2 mA	4 mA
Pull-in voltage		12 V	50 V	80 V
Typ. switch-on time		30 μs	500 μs	1 ms
Typ. switch-off time		400 μs	10 ms	15 ms
Operating frequency		1000 Hz	50 Hz	35 Hz
Permissible leakage current		0.8 mA	0.3 mA	0.3 mA
Output circuit		11(13+)- 14		
Kind of output		MOS-FET		
Rated operational voltage		4.5-58 V DC		
Minimum switching current		1 mA		
Maximum switching current		5 A		
Leakage current at max. switching voltage		< 50 μA		
Rated operational current I _e	DC-12 (resistive) 58 V	5 A		
Residual voltage	typical	0.1 V		
	maximum	0.5 V		
Max. fuse rating to achieve short-circuit protection		6 A ultra-fast		
Isolation data				
Rated insulation voltage U _i		250 V		
Rated impulse withstand voltage U _{imp}		2.5 kV		
Overvoltage category		II		
Pollution degree		2		

		OB(R)OA1000-...			OB(R)OA2000-...
		24 V DC	115 V UC	230 V UC	24 V DC
Input circuit					
Input voltage		24 V DC	115 V AC/DC	230 V AC/DC	24 V DC
Frequency		-	50/60 Hz		-
Input current		3.6 mA	4.15 mA	4.6 mA	3.6 mA
Pull-in voltage		14 V	60 V	135 V	14 V
Typ. switch-on time		150 μs	2.2 ms	2.5 ms	150 μs
Typ. switch-off time		1 ms	18 ms	25 ms	1 ms
Operating frequency		500 Hz	25 Hz	20 Hz	500 Hz
Permissible leakage current		1 mA			1 mA
Output circuit		11(13+)- 14			
Kind of output		Triac			Triac
Rated operational voltage		24-400 V AC			10-230 V AC
Minimum switching current		25 mA			25 mA
Maximum switching current		1 A			2 A
Leakage current at max. switching voltage		< 500 μA			< 500 μA
Rated operational current I _e	AC-12 (resistive) 400 V	1 A			-
	AC-12 (resistive) 230 V	-			2A
Residual voltage	typical	1 V			1 V
	maximum	1.6 V			1.6 V
Max. fuse rating to achieve short-circuit protection		4 A ultra-fast			4 A ultra-fast
Isolation data					
Rated insulation voltage U _i		400 V			230 V
Rated impulse withstand voltage U _{imp}		4 kV			4 kV
Overvoltage category		II			II
Pollution degree		2			2

Boxed optocouplers R600 range

Technical data


General technical data - Optocouplers

		OB	OBR
General data			
Material of housing		UL 94 V0	
Mounting		DIN Rail	
Degree of protection	housing / terminals	IP20 NEMA1	
Electrical connection		Screw terminal	Spring-type terminal
Connecting capacity	fine-strand	0.22-2.5 mm² (24-14 AWG)	
	rigid	0.2-4 mm² (24-12 AWG)	0.2-2.5 mm² (24-14 AWG)
Stripping length		9 mm (0.354 in)	
Tightening torque		0.4-0.6 Nm (3.5-5.3 lb.in)	n/a
Environmental data			
Ambient temperature ranges	storage	-40...+80 °C (-40...+176 °F)	
	operation	-20...+70 °C (-4...+158 °F)	
Standards/Directives			
Standards		IEC/EN 60947-5-1	
Low Voltage Directive		2014/35/EU	
RoHS Directive		2011/65/EU	


Boxed optocouplers R600 range

Technical diagrams

Dimensional drawings

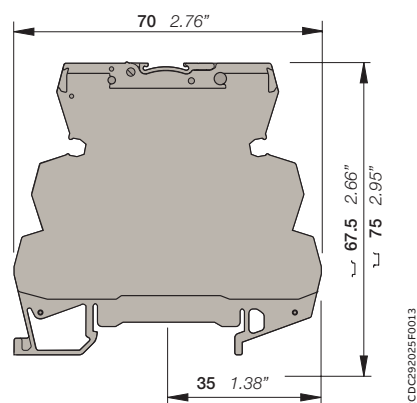


Versions with screw terminals

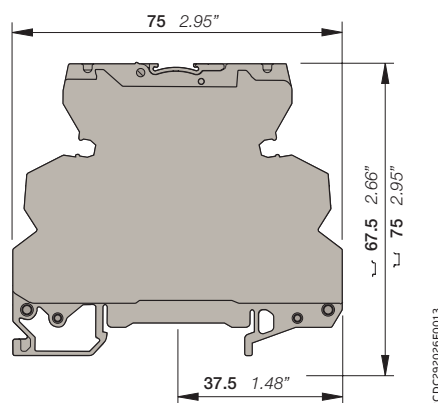


Versions with spring-type terminals

Connection diagrams in mm and inches

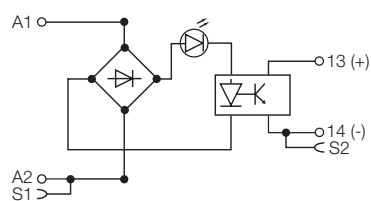


OB(R)OC, OB(R)IC
except 5-12 V DC versions

2CDC292019F0016

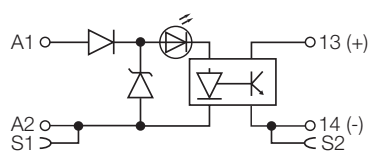

OB(R)IC0100-5-12 V DC
OB(R)OC2000-5-12 V DC

2CDC292017F0016

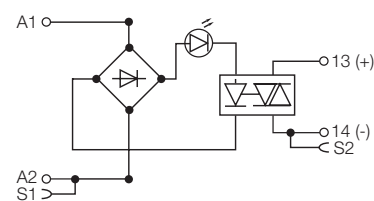

OB(R)OA

2CDC292018F0016

ABB STOTZ-KONTAKT GmbH
Electrification Products Division
Low Voltage Products and Systems

Eppelheimer Strasse 82
69123 Heidelberg
Germany

**You can find the address of your local
sales organization on the ABB homepage**



abb.com/lowvoltage

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB AG does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB AG Copyright© 2019 ABB AG All rights reserved