

## TECHNICAL DATA SHEET

DS0128 rev 24

# CBT-4T4-2U1R



## DESCRIPTION

The CBT-4T4-2U1R is a freely programmable BACnet® Unitary Controller with native MS/TP communications support. The controller is BTL listed as a BACnet Advanced Application Controller (B-AAC) and is ideally suited for the control of Fan Coil Units with ECM motors, Heat Pumps, Unit Ventilators, Unit Heaters, Chilled Ceilings/Beams and custom unitary equipment.

Part of the ABB Cylon® CB Line of BACnet field controllers, the CBT-4T4-2U1R features 4 Uniputs™ with Triac (configurable as inputs OR outputs), 4 Universal Inputs, 2 UniPuts, 1 Digital Output with a high-power relay output and a dedicated input for ABB Cylon® room sensors.

## APPLICATION

The CBT-4T4-2U1R is suitable for controlling a variety of small to medium-sized HVAC equipment such as:

- Fan Coil Units with ECM
- Heat Pumps
- Unit Ventilators
- Chilled Ceilings/Beams
- Unit Heaters
- Exhaust Fans
- Custom Unitary Equipment

The controller accommodates available pre-engineered strategies or can be tailored to custom applications using CXpro<sup>HD</sup> programming software.

### 4 Uniputs with Triac

Configured as analog or digital outputs, or voltage inputs along with Triac functionality that can switch a 24 V AC load

### 4 Universal Inputs

Can be configured as analog or digital inputs with pulse counting on the 4th input

### 2 UniPuts

Can be configured as analog or digital output or voltage inputs

### 1 Digital (Relay) Output

Can switch high inrush loads up to 240 V AC, 8 Amps

### BACnet MS/TP Fieldbus

Supports the following configurable BACnet objects: AI/AO/BI/BO/AV/BV, Trend Logs, and Schedules

### Cylon Intelligent Room Sensor support

### Up to 500 Strategy Blocks

### Up to 6 Trendlogs

### 1024 entries per Trendlog

### Data Security

Strategy and setpoints backed up in Flash

### No Hardware I/O Jumpers

Hardware points are automatically configured by the downloaded strategy

# SPECIFICATIONS

## MECHANICAL

Size (excluding terminal plugs)	5.7 x 5.12 x 1.78" [145 x 130 x 45 mm]
Enclosure	Injection molded, flame retardant ABS plastic
Mounting	DIN rail <ul style="list-style-type: none"> <li>- The housing base is designed for snap-mounting on DIN rails</li> <li>- The controller should not be freely accessible after mounting</li> <li>- Unit must be oriented such that powered relay terminals are at the bottom of unit</li> </ul>

## CONNECTION

**Note:** Use Copper or Copper Clad Aluminum 70 °C (158 °F) conductors only.

Terminals	PCB mounted plug terminal connections
Conductor Area	Max: AWG 12 (3.09 mm <sup>2</sup> ) Min: AWG 22 (0.355 mm <sup>2</sup> )

## ENVIRONMENT

**Note:** This equipment is intended for field installation within an enclosure.

Ambient Temperature	0 °C ... 50 °C [32 °F ... 122 °F] ambient.
Ambient Humidity	0% ... 90% RH non-condensing
Storage Temperature	-30 °C ... +70 °C (-22 °F ... 158 °F)
EMC Immunity	EN 55024, 2010
EMC Emission	EN 55022, 2010 Class A
Approvals	BTL Listed – BACnet Advanced Application Controller (B-AAC) UL Listed (CDN & US) UL916 Energy Management Equipment - File No. E176435
Safety	EN 60730-1:2011 Automatic Action type i.e. Type 1.B.Y CE Approved
Pollution Degree	Class 2 (EN 60730-1)

## ELECTRICAL

Supply Requirements	24 V AC/DC +15 % / -20 % 50/60 Hz
Transformer Rating	12 VA typical, 81 VA max with all external loads
Relay Rating	250 V AC @ 8 A
BACnet Loading	¼ unit load device

## PROCESSOR

Type	STM32 F103ZET6 32bit processor
Clock Speed	8 MHz crystal, 72 MHz internal processor clock rate
System Memory (soldered to PCB not removable)	Internal Flash 512 Kbyte Internal SRAM 64 Kbyte External Flash 16 Mbyte External SRAM 1 Mbyte

## COMMUNICATIONS

Local serial port	USB Micro-B socket (used as service port)
BACnet MS/TP port	RS485 @ 9K6, 19K2, 38K4 or 76K8 Baud (defaults to 38K4) Max cable length 1.2 km
Local Sensor Port	RS485 with a maximum cable length 500 m Supports ABB Cylon® room sensors

## INTERFACE

Engineering Software	CXpro <sup>HD</sup>
----------------------	---------------------

## INPUTS / OUTPUTS

**Note:** Shielded cable is recommended for all input connections.

### UniPuts with Triac



#### When configured as Input:

Analog Input  
Range: 0 ... 10 V @ 40 kΩ  
Resolution: 12 bit  
Digital Volt-Free contact, @ 25 mA not continuous

#### When configured as Output:

Analog Output 0 ... 10 V, 20 mA, 12-bit resolution  
Digital Output 0 ... 10 V, 20 mA  
24 V AC Triac @ 500 mA maximum. Switch live.

### UniPuts



#### When configured as Input:

Analog Input  
Range: 0 ... 10 V @ 40 kΩ  
Resolution: 12 bit  
Current input  
Range: 0 ... 20 mA @ 390 Ω

**Note:** Current Input requires user-supplied external 390 Ω resistance.

Accuracy: depends on user supplied external resistor

Digital Volt-Free contact, @ 25 mA not continuous

#### When configured as Output:

Analog Output 0 ... 10 V, 20 mA, 12-bit resolution  
Digital Output 0 ... 10 V, 20 mA

### Universal Inputs



#### Analog Input

Range: 0 ... 10 V @ 130 kΩ  
Resolution: 12 bit

#### Temperature measurement

Range: 0 °C ... +50 °C (32 °F ... 122 °F)  
Resolution: 12 bit

Passive Input for a large range of temperature sensors. 10K3A1 sensors are recommended.

**Note:** It is not recommended using Sensors with a heating dissipation constant (K factor) < 2 as this will lead to an offset error.

#### Current input

Range: 0 ... 20 mA @ 390 Ω  
Accuracy: ±0.5% full scale [100µA]

#### Digital Volt-Free contact, Dry Contact

**Note:** Only Universal Input 4 supports pulse counting at below 20 Hz and a minimum pulse width of 25 milliseconds.

### Relay Digital Output



Relay Contacts with ability to switch up to 240 V AC  
Maximum Load: 240 V AC / 8 A max

### 24 V AC output terminal

Total current drawn from 24 V AC terminals is limited to 0.9 A.

**Notes:** 1) All inputs and outputs are protected against short circuit, as well as over-voltage up to 24 V AC.

## SOFTWARE FEATURES

Maximum number of Strategy Blocks	500
Maximum number of Trend Log Modules	6
Maximum internal Trend Log capacity (standard)	1024
Data Security	Strategy and Setpoints backed up in Flash


## INTERFACE

Engineering Software


CXpro<sup>HD</sup>




# DIMENSIONS

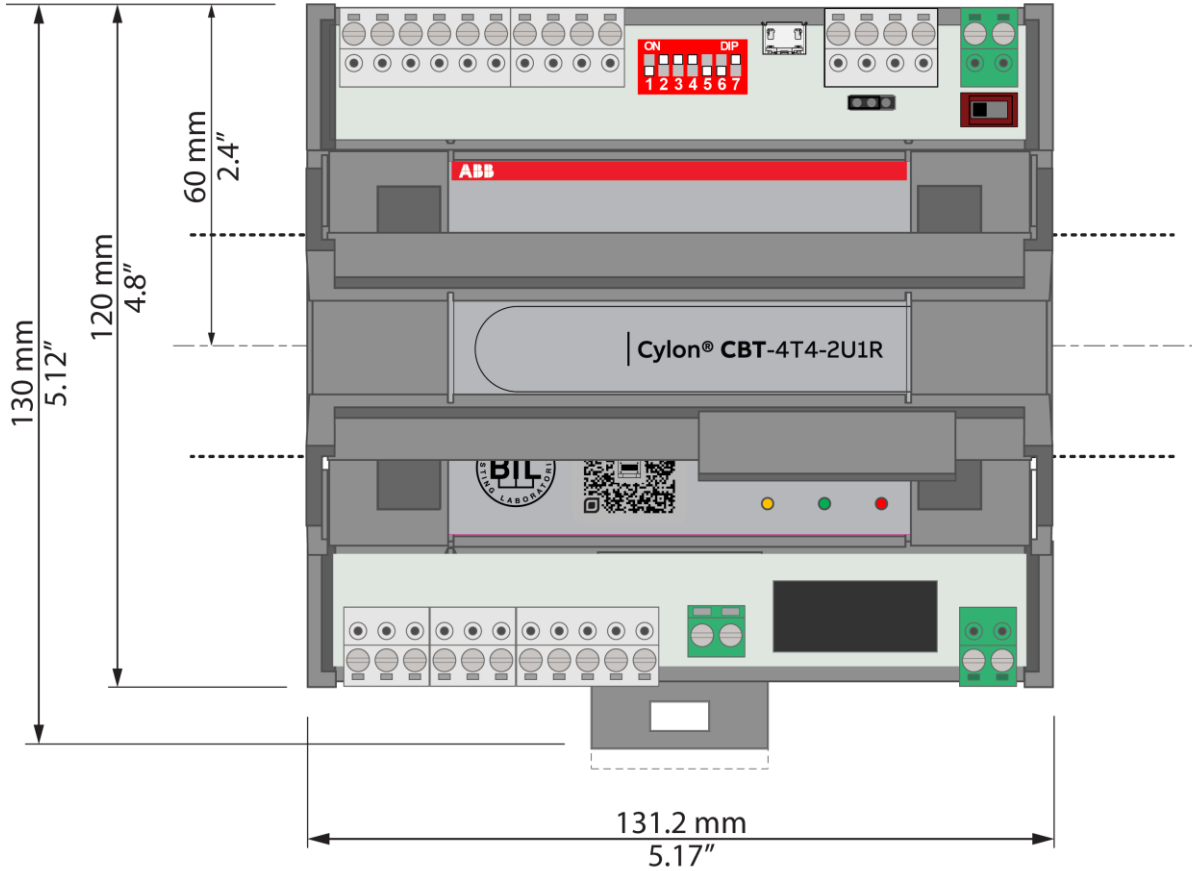

# WIRING

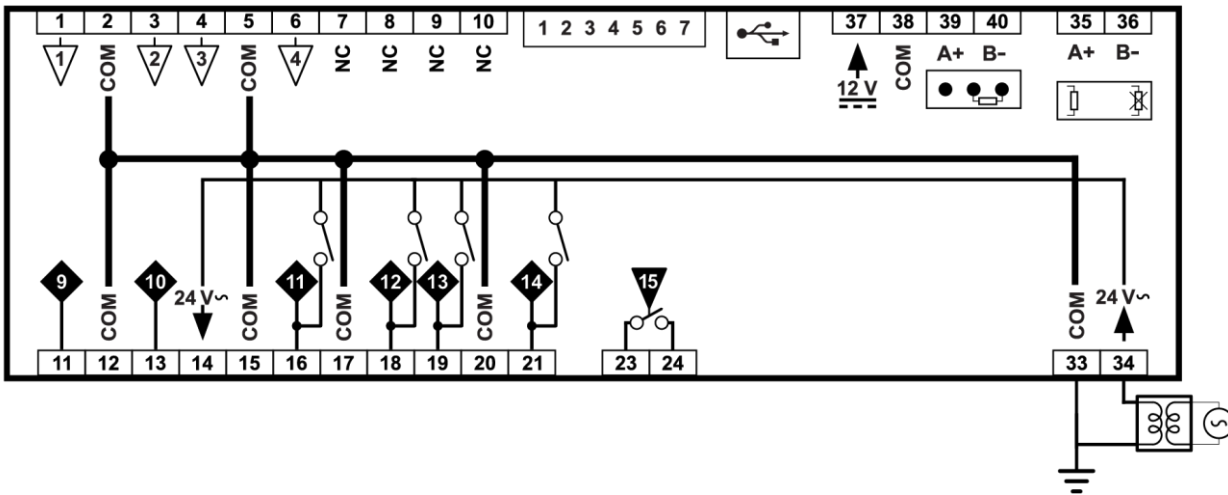

# SYSTEM ARCHITECTURE

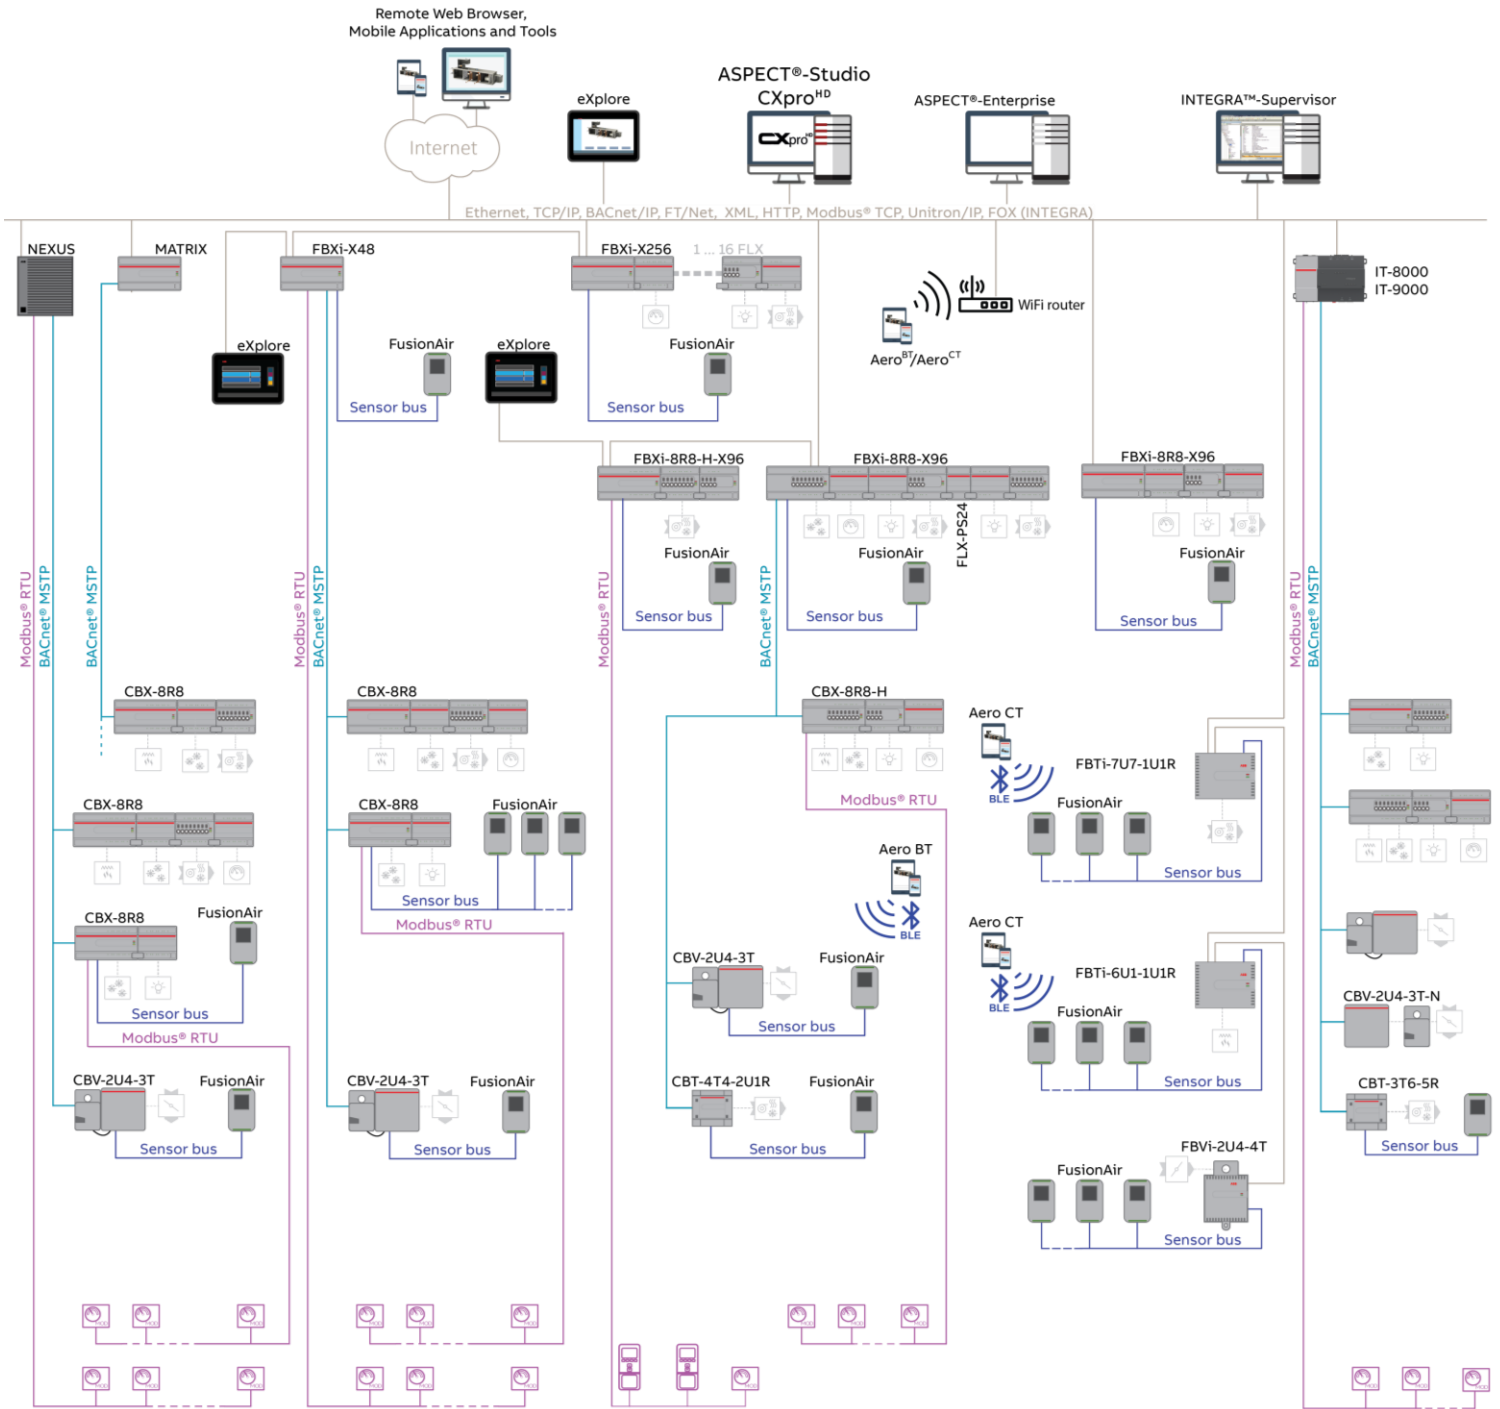

FBXi / CBXi-8R8 / CBX-8R8	FLX-8R8 -H	FBVi-2U4-4T	INTEGRA Series	FusionAir Smart Sensor
CBXi-8R8-H / CBX-8R8-H	FLX-4R4-H	NEXUS Series	eXplore	CBT-STAT
CBV-2U4-3T	FLX-PS24	MATRIX-2 Series		UCU Room Display
FLX-8R8 / FLX-4R4 / FLX-16DI	CBT-4T4-2U1R			