

NOTES:

1. RADIO KEY DELAY MUST BE SET BETWEEN 200 & 250 MS. APPROPRIATE SOFTWARE CONTAINING PROM RAD DELAY MUST BE USED.


2 SWITCH SETTING FOR BAUD RATE

SWITCH 4	SWITCH 5	BAUD RATE
OFF	OFF	9600
OFF	ON	4800
ON	OFF	2400
ON	ON	1200

3 ON FOR 60 SECOND TIME-OUT TIMER


REVISIONS

REV	ACTION	DRAWN	CHECKED	APPROVED	DATE
AA	L4746	KASTNER	KASTNER	HOLLAND	97/10/02
AB	D4979	KASTNER	KASTNER	HOLLAND	97/11/21
AC	D12451	KASTNER	KASTNER	HOLLAND	01/12/17

ASSEMBLY/QUANTITY	ITEM NO.	PART NUMBER	DESCRIPTION	REF/ZONE DESIG MATERIAL	UNIT MEAS
PARTS LIST					
DO NOT SCALE DRAWING	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		PRODUCT LINE TOTALFLOW	LEVEL 3	ABIB TOTALFLOW Products
THIRD ANGLE PROJECTION	TOLERANCES ARE: DECIMAL .XX ± -- ANGULAR ± -- .XXX ± --		DESIGN G. HOLLAND	DATE 97/9	TITLE WIRING INTERCONNECT RNET W/MODEN TO RADIO UCI
	BREAK ALL SHARP CORNERS AND EDGES DIMENSIONS APPLY BEFORE FINISH		DRAWN A. KASTNER	97/9/30	WI
			APPROVED G. HOLLAND	97/10/2	SCALE NONE
					SIZE B
					REV WI
					DRAWING NO. 2017451
					REV AC
					1 OF 3

MODEL

6413
6414
6713
6714
6790
6770

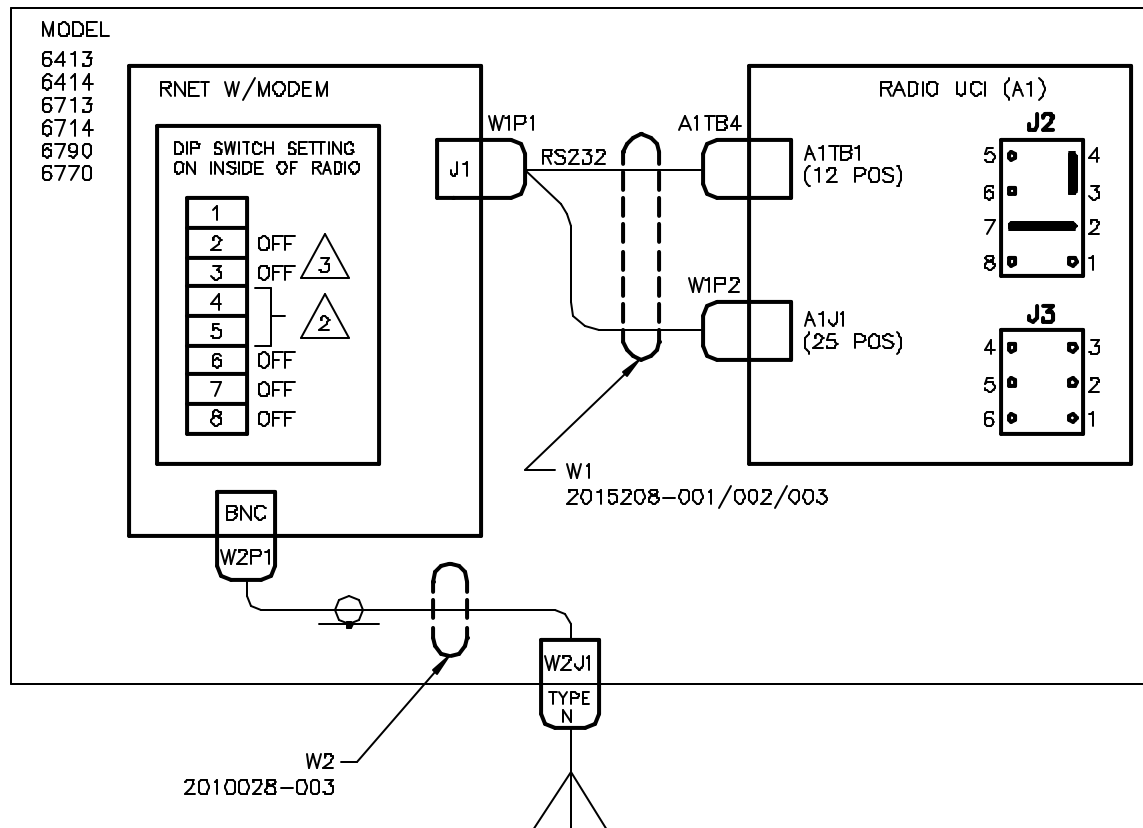

RNET W/MODEM

9	POS	SOC	PIN
		J1	W1P1
GND	5	5	
+VDC	4	4	
RTS	7	7	
RXD	2	2	
TXD	3	3	

BLK

WHT

RED

BRN

GRN

R1
5.1K

RADIO UCI

TB1	12POS
8	GND
9	VOUT
11	KEY2
10	KEY1
1	12 IN
2	GND

J1	25POS
2	TXD
3	RXD

EXTERNAL PWR	
(+)	
(-)	