



Low Voltage Products

## Switches

Rotary cam switches  
Enclosed cam switches

Power and productivity  
for a better world™

**ABB**

**OM  
ON  
OL**

10...315 Amperes rotary cam



# switches



## Rotary cam switches

OM, ON and OL



### Contents:

●	<b>Rotary cam switches</b>	
	Standard cam switches range .....	6 - 7
	Accessories for standard cam switches .....	8 - 9
	Special cam switches .....	10 - 11
	Solutions .....	12 - 15
	Technical data.....	16 - 17
	Ordering details	
	ON-OFF switches.....	18 - 19
	Change-over switches.....	20 - 22
	Bypass switches.....	23
	Multistep switches.....	24 - 27
	Motor control switches.....	28 - 29
	Ventilation switches .....	28
	Reversing switches .....	28
	Star-delta switches .....	28
	Pole-change switches.....	28
	Pumpstart switches .....	29
	Stop switches.....	29
	Start switches.....	29
	Voltmeter switches .....	30
	Ammeter switches .....	31
	Volt-ammeter switches.....	31
	Binary code switches .....	32
	Accessories .....	33 - 38
	Dimension drawings.....	39 - 57
	OM, ON, door mounted .....	39
	ON_M, ON, base mounted .....	40
	OL40 .....	40 - 42
	Door mounted .....	40 - 41
	Base mounted .....	42
	OL63, OL80N, door/base mounted .....	43
	OL125, OL160 .....	44 - 45
	Door mounted .....	44
	Base mounted .....	45
	OL200, door/base mounted .....	46
	Front plates .....	47
	Handles .....	48 - 54
	For OM.....	48
	For ON and OL40...80N.....	48 - 50
	Padlockable handles.....	49 - 52
	Key interlocked handles .....	53
	Push button interlocked handle .....	54
	Pistol and double lever handles .....	54
	Door clutch.....	55
	Double gang drive.....	56
	Triple gang drive .....	57
	<b>Enclosed rotary cam switches</b>	
	Contents .....	59
	Index .....	64-70

# ROTARY CAM SWITCHES

Range OM, ON, OL

10, 25, 40, 63, 80, 125, 160, 200 and 315 (IEC) Amperes

ABB's new OM, ON and OL rotary cam switches offer a complete range of cam switches for control, instrumentation and motor starting applications, maximizing the benefits and optimizing your use of assets. The standard cam switches provide you with a variety of functionalities for the most common mounting types and applications with minimum footprint area.

## A focused standard range covering most applications

ON-OFF switches

Change-over switches

Multi-step switches

Volt-ammeter switches

Ammeter switches

Voltmeter switches

Bypass switches

Closed transition switches

UPS switches

Reversing switches

Pump-start switches

Stop-start switches

Ventilation switches

Binarycode switches

## Standards

IEC/EN 60 947-1, -3

VDE 0660 Teil 107

UL508

CSA C 22.2.x No 14

- Captive plus-minus screws save installation time and the integrated screwdriver guides (available in sizes up to 160 Amps) make the use of motorized screwdrivers easy and stable.



## Quick and easy to install


Captive plus-minus screws save installation time and the integrated screwdriver guides (available in sizes up to 160 Amps) make the use of motorized screwdrivers easy and stable. Lug terminals for connecting cable clamps and crimp lugs are available for the sizes from 125 Amps.

The double cam system shortens the multistep switch and enables the use of shallow enclosures. The sizes up to 40 Amps, including a black handle on a silver front plate, are suitable for snap on door mounting while the sizes from 63 to 200 Amps contain screw-mounted handles for door mounting.

- Self lifting terminal screws for fast cabling



- Complete delivery includes handle and front plate. Snap-on mounting of contact block with interlocking in sizes OM, ON and OL 40. Protected interconnections.

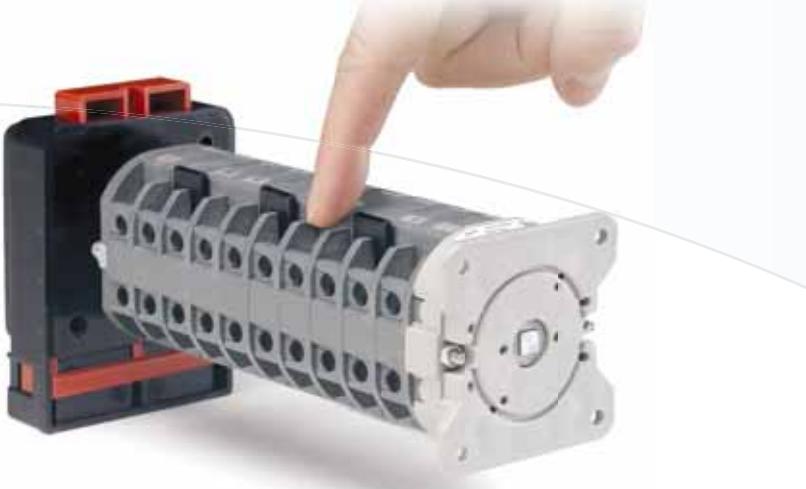

- ▲ Finger-proof tunnel terminals eliminate the risk of touching live parts without adding any protective covers.
- ▼ Versatile selection of high protection degree handles.

## High protection class

Finger-proof tunnel terminals (IP20) up to the size 160 A eliminate the risk of touching live parts without adding any protective covers. This ensures safe operation, protecting people and equipment. Versatile selection of high protection degree handles. The standard handle is IP65 and NEMA 4X protected. The handles with increased protection up to IP67 and IP69K available.

## High performance contacts

The switches provide reliable isolation and stable contact positions with or without overlapping contacts. The well-enclosed contact chamber construction and special design of the OM's contact tip with high contact pressure ensure increased contact reliability and a long life span. Due to the contact design, the switches are also suitable for very low voltages (5 V) and currents (5mA). Gold-plated contacts are available on request.

The switches are designed for resistive and slightly inductive motor loads having a high switching reliability in distinctive environments, providing you with added value. Breaking capacity tests performed, cover AC23 as well as DC categories.

## Special cam switches for distinctive requirements


Special cam switches can be configured on the Internet by the Camweb configurator. The specification and ordering of special cam switches is as easy as selecting standard products!

## What can be specified by Camweb?

Distinctive needs, such as front plate engraving, padlocking in various positions, key operation, key interlocking, auxiliary contacts for low ratings and special timings can be specified with the configuration tool. It is also possible to build switches with different chamber sizes in the same switch. Double and triple gang switches, as well as long cam switches with metallic shaft, can be specified with up to 60 contacts and 12 positions.

### Easy to specify and to order

The user-friendly Camweb configuration tool is very simple to use: it provides a new approach to ordering with easy specifications and a minimized total delivery time. The tool guides the user in order to avoid incompatible/impossible solutions, eliminating mistakes and automatically generating the type and the ordering code. The optional paste and order tool generates the price for immediate ordering. The order handling of the special cam switch is as smooth as for the standard products - the same information goes transparent and unchanged throughout the process.

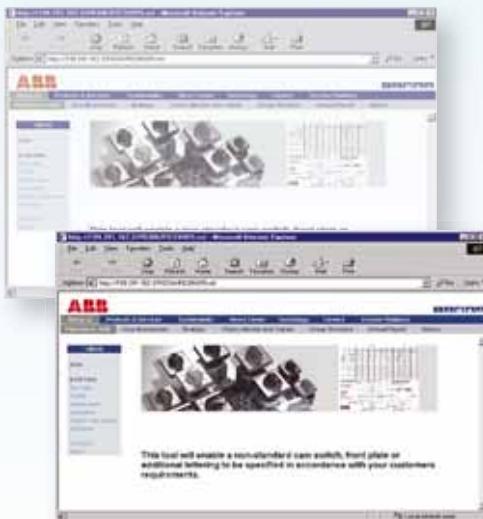

The Camweb configuration tool can be found on the ABB Internet site or directly from the address: [switchselector.com](http://switchselector.com)

## Standard

# CAM SWITCHES RANGE

Black handle and silver front plate with standard text are included.

**Cam switch size**  
 $I_{th}$  / IEC 60947 [A]  
 UL 508 [A]

### Positions

<b>ON-OFF switches</b>	
Rotating angle 90, 0-position: 9 o'clock	
Black handle	1 - 0
Key operated	1 - 0
Rotating angle 90, 0-position: 12 o'clock	
Black handle	1 - 0
Key operated	1 - 0
<b>Change-over switches</b>	
Rotating angle 60 - 0 - 60, with 0-position	
Black handle	1 - 0 - 2
Key operated	1 - 0 - 2
Key operated, with two sided spring return	1 <sub>R</sub> - 0 - 2 <sub>R</sub>
Rotating angle 60 - 60, without 0-position	
With overlapping contacts	1 - 2
With common center position and with overlapping contacts	1 - 1+ 2 - 2
<b>Bypass switches</b>	
Without overlapping, for 3 and 4-pole net	1 - 0 - Bypass
With overlapping, for 3 and 4-pole net	1 - Bypass
<b>Multistep switches</b>	
With 0-position	
2 - step switches	0-1-2
3- step switches	0-1-2-3
4- step switches	0-1-2-3-4
5- step switches	0-1-2-3-4-5
6- step switches	0-1-2-3-4-5-6
7, 8, 9, 10 and 11- step switches	0-1-2-3-4-5-6-7-8...-11
Without 0-position	
3- step switches	1-2-3
4- step switches	1-2-3-4
5- step switches	1-2-3-4-5
6- step switches	1-2-3-4-5-6
7, 8, 9, 10, 11 and 12- step switches	1-2-3-4-5-6-7-8...-12
<b>Motor control switches</b>	
Ventilation switches	A - 0 - 1/2 - 1/1
Reversing switches	1 - 0 - 2
Star-delta switches	0 - Y - Δ
Pole-change switches (Dahlander)	0 - A - AYY
Pumpstart switches	0 - 1
Stop switches	0 <sub>R</sub> - Stop
Start switches	Stop - Start 0 <sub>R</sub> - Start 0 - 1 <sub>R</sub> - Start Start - 1 <sub>R</sub> - 0 - 2 <sub>R</sub> - Start
<b>Voltmeter switches</b>	
4 positions, 3 phase - 3 wire, with 0-position	0, L1-L2, L2-L3, L3-L1
3 positions, 3 phase - 3 wire, without 0-position	L1-L2, L2-L3, L3-L1
6 positions, 3 phase to phase, 3 phase to neutral, without 0-position	L1-L3, L2-L3, L1-L2, L1-N, L2-N, L3-N
7 positions, 3 phase to phase, 3 phase to neutral, with 0-position	L1-L3, L2-L3, L1-L2, 0, L1-N, L2-N, L3-N
7 positions, 3 phase to phase voltages for 2 circuits, with 0-position	L1-L3, L2-L3, L1-L2, 0, L1-L3, L2-L3, L1-L2
<b>Ammeter switches</b>	
For 3 current transformer circuits, with 0-position	0 - 1 - 2 - 3
<b>Volt-ammeter switches</b>	
3 phases and 3 current transformers with common pole	OFF - 1 - 2 - 3
<b>Binarycode switches</b>	
	0-1-2-3-4-5-6-7...-9...-11


**Door mounted**
**DIN rail mounted**

OM	ON	OL40	OL63	OL80N	OL125	OL160	OL200	ON_M
10	25	45	63	80	150	175	315	25
10	25	40	-	-	125	160	200	25

1, 2, 3, 4, 5, 6 and 8- pole 1, 2 and 3- pole	-	1, 2, 3, 4, 6 and 8- pole	-	1, 2, 3 and 6- pole
1, 2, 3, 4, 5 and 6- pole 1, 2 and 3- pole	-	-	-	1, 2, 3 and 6- pole
1, 2, 3 and 4- pole 1 and 3- pole	-	1, 2, 3 and 4- pole	-	1, 2, 3 and 4- pole
1 and 3- pole	1, 2 and 3- pole	1, 2, 3 and 4- pole	-	1- pole
1, 2, 3 and 4- pole	1, 2, 3 and 4- pole	1, 2, 3 and 4- pole	-	1, 2, 3 and 4- pole
1, 2, 3 and 4- pole	3 and 4- pole	3 and 4- pole	-	-
-	3 / 6- pole, 4 / 8- pole	3 / 6- pole, 4 / 8- pole	-	-
-	3 / 6- pole, 4 / 8- pole	3 / 6- pole, 4 / 8- pole	-	-
1, 2, 3 and 4- pole	-	-	-	1- pole
1, 2, 3 and 4- pole	1- pole	1-pole	-	1- pole
1, 2 and 3- pole	-	-	-	-
1 and 2- pole	-	-	-	-
-	1, 2 and 3- pole	-	-	-
-	1- pole	-	-	-
1, 2, 3 and 4- pole	-	-	-	1- pole
1, 2 and 3- pole	-	-	-	-
1 and 2- pole	-	-	-	-
-	1, 2 and 3- pole	-	-	-
-	1- pole	-	-	-
2- pole				1- pole
-	2 and 3- pole	3-pole	-	-
-	3- pole		3- pole	-
-	3- pole		3- pole	-
1- pole	-		-	1- pole
2- pole	-		-	-
-	1- pole	-	-	-
1- pole	-		-	-
1- pole	-		-	1- pole
-	1- pole	-	-	1- pole
3- pole	-	-	-	3- pole
3- pole	-	-	-	3- pole
3- pole	-	-	-	3- pole
3- pole	-	-	-	3- pole
4- pole	-	-	-	-
1- pole	1 and 2- pole	-	-	1- pole
3- pole		-	-	-
-	1 and 2- pole	-	-	-

# ACCESSORIES

## for standard cam switches



► Type\_P\_ or \_R\_



► Type\_P\_ or \_R\_



► Type\_P\_ or \_R\_



► Type\_P\_ or \_R\_



► Type\_R\_



► Type\_X\_



► Type\_R2\_



► Type\_R4\_



► Type\_P2\_ or \_P4\_



► Type\_Z20\_



► Type\_Z331\_B



► Type\_Z331\_RY

### Handles

Snap on handle with front plate without engraving

Size 30x30, black, grey, red, red-yellow

Size 48x48, black, grey, red, red-yellow

Size 64x64, black, grey, red, red-yellow

Screw mounting handle with front plate without engraving

Size 64x64, black, grey, red, red-yellow

Size 90x90, black, grey, red, red-yellow

Size 130x130, black, grey, red, red-yellow

Snap-on handles with round escutcheon plate

Black

Black, nose-type

Low extended handle knob, black, grey

Screw mounting hand grip handle, black, grey, red

Screw mounting ball grip handle

Screw mounting pistol type handle, black, red

Screw mounting double lever handle, black, red

Padlockable handle knob, without front plate, black, red-yellow

Round padlockable handles for snap-on mounting, black, red-yellow

Round padlockable handles for snap-on mounting for increased protection

Round padlockable handles for snap-on mounting with door coupling

Round padlockable handles for screw mounting

Size 66x66, black, red-yellow

Size 90x90, black, red-yellow

### Front plates

Front plate, without engraving

Size 30x30, silver, yellow

Size 48x48, silver, yellow

Size 64x64, silver, yellow

Size 90x90, silver, yellow

Size 130x130, silver, yellow

Size H=45mm, W=54mm, grey

### Additional lettering plates with frame

Lettering plate without engraving

Size 30x30, black or grey frame

Size 48x48, black or grey frame

Size 64x64, black or grey frame

Lettering plate without engraving

### Other accessories

Front ring

Shaft sealing

Spare key

Protective rear cover

Nut spanner tool

Adaptor ring

Base mounting kit

DIN-rail mounting plate

Door coupling kits

Chamber to chamber connection jumpers

Shaft/suitable size [mm]



► Front plates



► Additional lettering plate



Type	Door mounted						DIN-rail mounted
	OM	ON	OL40	OL63...OL80N	OL125...OL160	OL200	ON_M
x							
	x		x				
	x		x				
				x			
					x		
x	x	x	x				
x	x	x	x	x			
x	x	x	x	x			
					x		
					x		
			x				x
		x	x				
	x	x	x				
	x	x	x	x			
x	x	x	x	x			
x	x	x	x	x	x		
x	x	x	x	x	x	x	
x	x	x	x	x	x	x	x
x	x	x	x	x	x	x	x
x	x	x	x	x	x	x	x
-	6	6	6	8	10		



► Front ring



► Spare key



► Protective rear cover



► Nut spanner tool



► Adaptor ring  
22.5/30.5 mm

## Special

# CAM SWITCHES

To be specified by the Camweb  
configuration tool  
[switchselector.com](http://switchselector.com)



### Mounting

#### Door mounted

Snap-on mounted handle

Padlockable

Round, padlockable

Square, padlockable

#### Screw mounted handle

Round, padlockable

Square, padlockable

Round front ring

Key operated handle

Cylinder lock

Push button lock

Pistol type handle

Double lever handle

#### Base mounted

Direct handle

Snap-on mounted handle

Padlockable

Screw mounted handle

Door clutch

### Type of contacts

Normal

Number of contacts

Double gang (Tandem)

Number of contacts

Triple gang

Number of contacts

Long shaft

Number of contacts

### Connections

Standard box (tunnel) terminals

Fast on clips

Double fast on clips

Lug terminals

### Other features

Spring return function

Metallic camshaft

Gold contacts

Enclosed cam switches

Non return rotation





Type	Door mounted						DIN-rail mounted
	OM	ON	OL40	OL63...OL80N	OL125...OL160	OL200	ON_M
	x	x	x				
		x	x				
		x	x				
		x	x				
	x	x	x	x	x	x	
				x	x	x	
				x	x	x	
		x	x				
	x	x					
		x	x	x	x	x	
		x	x	x	x	x	
					x	x	
						x	
	x	x	x				x
		x	x				
	x	x	x				
				x	x	x	
				x	x	x	
		x	x				
		x	x				
max. 16	max. 20	max. 20					max. 6
	max. 40	max. 40					
	max. 60	max. 60					
	max. 60	max. 60					
	x	x	x	x	x		x
	x	x	x				
	x	x	x			x	x
					x	x	
	x	x	x	x	x	x	x
		x	x				
	x	x	x	x	x	x	x
		x	x				



## ► Special cam switches

# SOLUTIONS



## Standard handles

Cam switches up to the size OL40 are delivered with snap-on handles for 22.5 mm door drilling, while the larger handle sizes are screw mounted (4-hole mounting). Screw mounted handles, type \_R\_, are available for all sizes and they can be specified by the Camweb configurator. Protection degree IP65, NEMA4X.



► Type\_P\_

► Type\_R\_

► Type\_M\_

## Special handles for large switches

Grip and pistol type handles are available for ON\_ and OL40...80 N cam switches. Pistol type and double lever handle is available for OL200. Protection degree is the same as for the front plate.



► Type\_S\_

► Type\_H\_

► Type\_I\_

► Type\_R2\_

► Type\_R4\_

► Type\_D2 or D4\_

## Padlockable handles

### Padlockable handle knob, type \_ Z \_

Optional handle for replacing the standard knob handle. Two padlocks with bail diameter of 6 mm or three padlocks with 4 mm bail diameter. Padlocking is possible every 90 degrees at 9, 12, 3 and 6 o'clock positions. Available for the sizes ON...OL40 (6 mm shaft diameter). Suitable for both snap-on and screw mounted handles. Protection degree IP65, NEMA4X.



### Round padlockable handle, type \_ 3 \_

The round padlockable handle can be padlocked at 9 o'clock or when the switch is turned 90 degrees at 12 o'clock. For maximum three padlocks with max. 8 mm bail diameter. Available for sizes ON...OL160 as a snap-on or screw mounted version. Protection degree IP65, NEMA4X.



### Square padlockable handle, type \_ 5 \_

The programmable square handle, with one to four possible padlocking positions at certain angles, can be specified by the Camweb configurator. For maximum three padlocks with max. 6 mm bail diameter for sizes ON...OL40 or 8 mm for sizes OL80...200, screw mounted. Protection degree IP65, IP67, IP69K and NEMA 4X



### Non return rotation mechanism, type \_ N

Allows only clockwise rotation. The additional mechanism increases the switch depth.

## Interlocking solutions

### Key operated cam switches, type \_ K \_

Key switches are operated by the key, which functions as the operating handle. Special key codes can be selected in camweb. The standard key removal is possible at every 90 degrees 12, 3, 6 and 9 o'clock or every 60 degrees from 1 o'clock onwards by Camweb only. The delivery contains two keys. In non-standard switches the key removal positions and keynumber can be specified by the Camweb configurator. The key switch is available for the sizes OM...OL40, also enclosed switches. Protection degree IP54.



### Key interlocked cam switches with cylinder interlock, type \_ Q \_


The operation of the cam switch is interlocked with the cylinder lock below the switch. The interlocking is possible in one to four selected positions by the key. The possible interlocking positions are specified by the Camweb configurator. The delivery contains two keys. Available for the sizes ON...OL160. Protection degree IP65, NEMA 4X. Special key codes can be selected by camweb.



### Push button interlock, type \_ U \_

The push button releases the cam switch in one or several positions specified by the Camweb configurator. Auxiliary contacts are possible to operate with the push button.



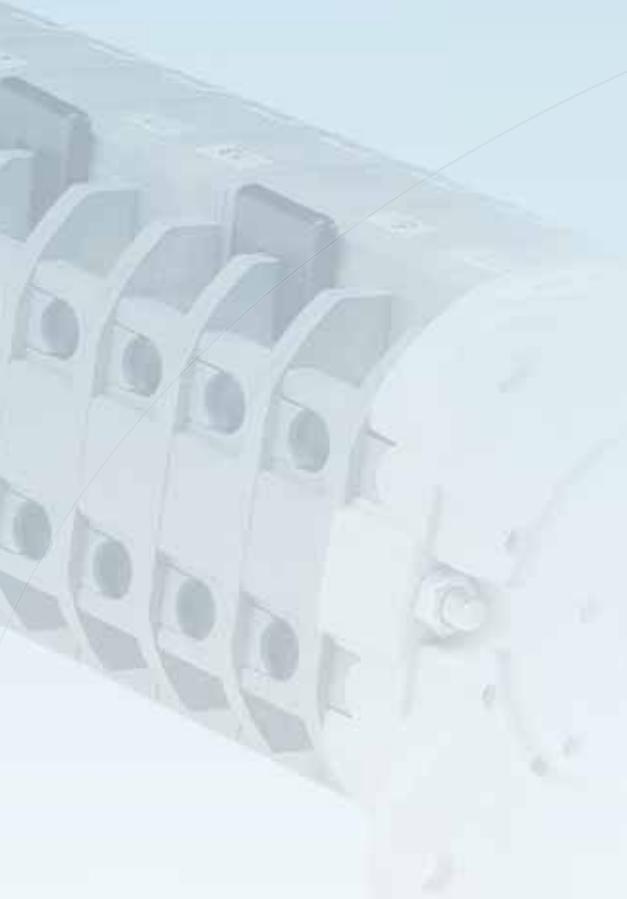

## Base mounted switches

### Modular cam switches, type \_ M \_

Modular cam switches are available for up to 6 contacts according to the DIN-rail component standard. Clip-on mounting on DIN-rail. Protection degree IP20.



### Base mounted cam switches, type \_ B \_

Base mounted cam switches are recommended to be specified for the desired shaft length or panel depth by the Camweb configurator. The shaft can be specified with the door clutch, which locks the door in the ON-position. Mounting kit type ONZ74 for door-mounted ON cam switches can be ordered as optional extra with shaft length 200 mm and DIN rail

Base mounted cam switches, type \_ I \_ with direct mounted handles are available as special cam switches. The standard or padlockable handle is fixed on the cam switch.



► Base mounted cam switch with direct handle



▲ Base mounted cam switch with handle on the door



▲ Base mounted cam switch and door clutch

## Cam switches with high number of contacts

**Double and triple gang switches, types \_ 2S \_ or \_ 3S \_**

Double and triple gang switches ( $2 \times 20$  or  $3 \times 20$  contacts) are specified by the Camweb configurator for door and base mounting with the handle size from 64 mm. Grip handle, type H, as standard. Padlocking with square padlockable handles available too. Screw mounting.



**Metallic shaft, type \_ T \_**

ON cam switches are available with metallic shafts allowing max. 60 contacts to be assembled in one long cam switch. Specification by the Camweb configurator.

## Spring return

The spring return movement is always 30 degrees. The next step of the static position of spring return needs to be 90 degrees if not symmetrical design.



## Round front ring

The round front ring replaces the square escutcheon plate. The assembly do not include position indications. The round front ring is available as standard switch and as special switch configurated by the Camweb. Type \_ X \_.



## Terminations

**Quick connects, types \_ F \_ or \_ D \_**

Cam switches are available with quick connects 6.3 x 0.8 or double FASTON-quick connects 2 x 3.15. Specification by the Camweb configurator.



**Lug terminals, type \_ L \_**

The OL125...160 cam switches are normally provided with protected box type termination. Lug terminals for cable lugs are specified by the Camweb configurator.



**Gold contacts, type \_ G \_**

The OM and ON switches can be supplied with gold contacts. Specification recommended by the Camweb configurator. See technical data.



### Ratings according to IEC60947-3

		<b>Size</b>	<b>OM</b>	<b>ON</b>	<b>OL40</b>	<b>OL63</b>	<b>OL80N</b>	<b>OL125</b>	<b>OL160</b>	<b>OL200</b>
Impuls withstand voltage	<b>U<sub>imp</sub></b>	kV	2.5	4	6	6	6	6	6	6
Rated insulation voltage		V	500	690	690	690	690	690	690	690
Rated operational voltage	<b>U<sub>e</sub></b>	V	250	400	690	690	690	690	690	690
Rated thermal current <b>I<sub>th</sub></b>		A	10	25	45	63	80	150	175	315
Rated conditional short circuit current	<b>I<sub>p</sub></b> (r.m.s.)	kA	1	7	10	10	10	10	10	10
Max back-up fuse link		A	10	25	40	63	80	160	200	315
Rated short time withstand current (r.m.s)	3s	A		100	360	630	800	1280	1280	1600
	10s	A		60	200	300	400	700	700	1000
	30s	A		32	120	200	250	400	400	600
	60s	A		30	80	100	150	280	280	400
Rated operational current	<b>I<sub>e</sub></b>	A	10	25	45	63	80	150	160	250
	AC1 400V	A	10	25	45	63	80	150	170	250
	AC21 400V	A	10	25	45	63	80	150	170	250
	AC11 220-240V	A	2.5	5.5	14	15	20	45	45	80
	380-440V	A	-	3.5	6.0	10	15	45	45	80
	500V	A	-	4.5	7.0	12	18	40	40	70
	AC22 220-500V	A	10	20	40	63	80	150	170	250
	660-690V	A	-	20	40	63	80	100	100	125
Rated operational current	Time constant 0...1ms									
1-contact in series	DC21 24V	A	10	20	40	63	80	130	150	250
1-contact in series	48V	A	10	20	40	63	80	130	150	250
2-contact in series	60V	A	10	20	40	63	80	130	150	250
3-contact in series	110V	A	10	20	40	63	80	130	150	250
5-contact in series	220V	A	10	20	40	63	80	130	150	250
9-contact in series	440V	A	10	20	40			130	150	250
10-contact in series	600V	A		16	25					
Rated operational current	Time constant 1...50 ms									
1-contact in series	DC22 24V	A	6	10	32	32	40	115	130	200
1-contact in series	30V	A	3	4.5	11	32	40	36	40	50
1-contact in series	40V	A	3	4.5	11	32	40	36	40	50
2-contact in series	60V	A	3	4.5	11	32	40	36	40	50
3-contact in series	110V	A	3	4.5	11	32	40	36	40	50
5-contact in series	220V	A	3	4.5	11	32	40	36	40	50
Rated operational power										
AC23 3 ph.	220-240V	kW	1.8	2.6	7.5	12	14.5	37	37	56
	380-440V	kW	3	7.5	15	18	22.5	75	75	75
	500V	kW	-	4.8	15	22	25	75	90	85
	660-690V	kW	-	4.8	15	17	23	50	55	90
AC23 1 ph.	110V	kW	0.37	0.5	2.5	3	3.6	9	11	14
	220-240V	kW	0.75	0.9	4	6	7.2	20	22	30
	400V	kW	1.1	1.5	7.5	9	12.5	35	37	45
Rated operational power										
AC2 3 ph.	220-240V	kW	2.5	3.5	11	16	18	35	37	70
	380-440V	kW	-	6	18.5	24	30	50	55	95
	500V	kW	-	6	18.5	24	33	65	75	103
	660-690V	kW	-	6	18.5	26	35	65	55	110
AC3 3 ph.	220-240V	kW	1.8	2.2	7.5	10	12	20	22	47
	380-440V	kW	2.2	5.5	11	15	19	35	37	64
	500V	kW	-	4	11	15	22	35	37	82
	660-690V	kW	-	4	11	17	23	30	30	88



## Rotary cam switches

### Technical data

#### Ratings according to IEC60947-3

	Size	OM	ON	OL40	OL63	OL80N	OL125	OL160	OL200
AC3 1 ph.	110V kW	0.3	0.4	2.5	2.5	3	6	6	12
	220-240V kW	0.55	0.75	4.0	5	6	11	11	24
	400V kW	0.75	1.3	5.5	7.5	9	19	19	40

#### Terminals

	Size	OM	ON	OL40	OL63	OL80N	OL125	OL160	OL200
Connecting screws	M	2.5	3.5	5	5	5	5	5	10
Max cable cross section, solid/stranded	mm <sup>2</sup>	1.5	4	6	16	16	70	70	150
	AWG	14	14-12	14-8	10-6	10-6	12-2/0	12-2/0	kcmil 300

#### Contacts


	Size	OM	ON	OL40	OL63	OL80N	OL125	OL160	OL200
Minimum voltage AC/DC	V	5	5	5	5	5	5	5	5
Minimum current AC/DC	mA	5	5	5	5	5	5	5	5
Standard butt contact with plain contact tip			x	x	x	x	x	x	x
Butt contact with peak type contact tip		x							
Gold contacts (special)		x	x	x	x				
Storing temperature	°C	-40...+80	-40...+80	-40...+80	-40...+80	-40...+80	-40...+80	-40...+80	-40...+80
Operational temperature <sup>1)</sup>	°C	-30...+70	-30...+70	-30...+70	-30...+70	-30...+70	-30...+70	-30...+70	-30...+70

<sup>1)</sup> At 40°C, derating 0%  
At 70°C, derating 30%  
Current peaks up to 60°C, derating 0%

#### Ratings according to UL and CSA

	Size	OM	ON	OL40	OL63	OL80*	OL125	OL160	OL200
Maximum operating voltage	V	300	600	600		600	600	600	600
	Pilot duty category	CSA/UL VAC	A300	A600	A600	A600	A600	A600	A600
Ampere rating	General use	CSA A	10	25	40	80	125	170	200
	at 600VAC	UL A	10	25	40	80	125	170	200
Rated power	3-phase	120V HP	1	1	5	8	15	15	32
		240V HP	1	2	10	16	40	40	64
		480V HP	-	5	20	28	40	50	120
		600V HP	-	5	20	31	40	50	120
1-phase	120V HP	0.33	1	2	4	10	10	-	-
		240V HP	1	1	3	8	20	20	-
		480V HP	-	2	10	-	-	-	-
		600V HP	-	3	10	-	-	-	10
Short circuit ratings									
Maximum prospective fault current		kA	1	10	10	10	10	10	10
Maximum fuse size		A	16	35(RK5)	50(RK3)	80(RK5)	150(RK5)	200(RK5)	250(RK5)
Switching frequency		cycles/hour	150	150	150	150	150	150	150

<sup>1)</sup> The ratings for the older type OL80, see ON1GB 07\_03 catalogue

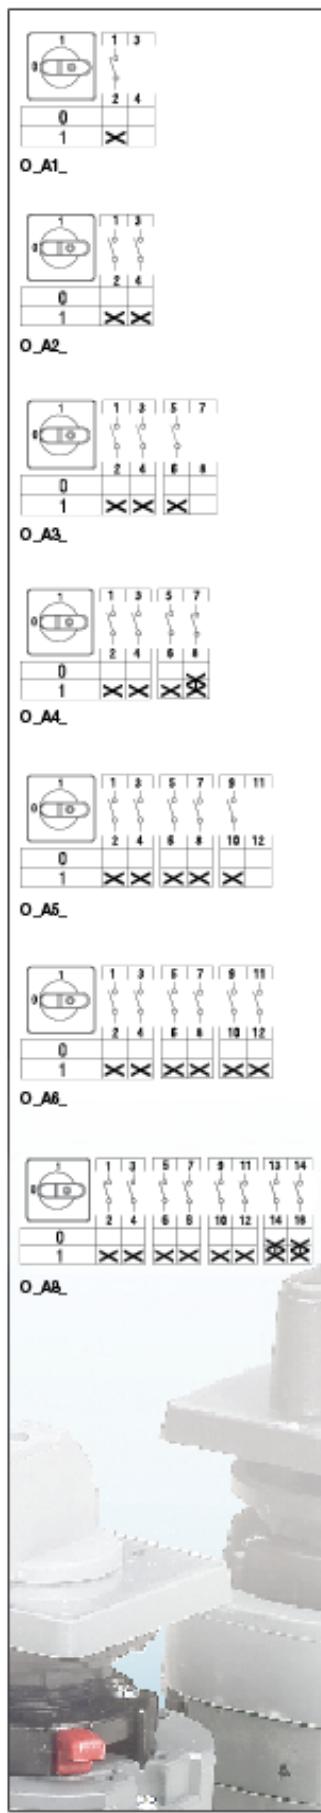


### ON - OFF switches

Black handle and front plate with position indication are included.  
The type and the ordering number are for one piece.

Function	Number of poles	Rated thermal current I <sub>th</sub> [A]	Type	Order number	Delivery batch [pcs]	Weight unit [kg]
<b>O-position: 9 o'clock, step angle 90°</b>						
Door mounted, snap-on mounted handle						
0 - 1	1	10	OMA1PB	1SCA022531R3950	10	0.04
	2	10	OMA2PB	1SCA022531R4090	10	0.04
	3	10	OMA3PB	1SCA022531R4170	10	0.05
	4	10	OMA4PB	1SCA022531R4330	10	0.05
	5	10	OMA5PB	1SCA022531R4410	10	0.06
	6	10	OMA6PB	1SCA022531R4500	10	0.06
0 - 1	1	25	ONA1PB	1SCA022531R4920	10	0.08
	2	25	ONA2PB	1SCA022531R5060	10	0.09
	3	25	ONA3PB	1SCA022531R5140	10	0.10
	4	25	ONA4PB	1SCA022531R5220	10	0.11
	5	25	ONA5PB	1SCA022531R5310	10	0.12
	6	25	ONA6PB	1SCA022531R5490	10	0.12
	8	25	ONA8PB	1SCA022684R5230	10	
0 - 1	1	45	OL40A1PB	1SCA022755R7140	10	0.13
	2	45	OL40A2PB	1SCA022755R7220	10	0.17
	3	45	OL40A3PB	1SCA022755R7310	10	0.21
	4 <sup>1)</sup>	45	OL40A4PB	1SCA022755R7490	10	0.25
	6	45	OL40A6PB	1SCA022755R7650	10	0.33
	8 <sup>2)</sup>	45	OL40A8PB	1SCA022755R7810	10	0.41
Door mounted, screw mounted handle						
0 - 1	1	25	ONA1RB	1SCA100196R1001	10	0.08
	2	25	ONA2RB	1SCA100206R1001	10	0.09
	3	25	ONA3RB	1SCA100209R1001	10	0.10
	4	25	ONA4RB	1SCA100214R1001	10	0.11
0 - 1	1	40	OL40A1RB	1SCA100297R1001	10	0.13
	2	40	OL40A2RB	1SCA100298R1001	10	0.17
	3	40	OL40A3RB	1SCA100305R1001	10	0.21
	4	40	OL40A4RB	1SCA100306R1001	10	0.25
0 - 1	1	63	OL63A1RB	1SCA111537R1001	1	0.30
	2	63	OL63A2RB	1SCA111538R1001	1	0.34
	3	63	OL63A3RB	1SCA111539R1001	1	0.41
	4	63	OL63A4RB	1SCA111540R1001	1	0.45
	6	63	OL63A6RB	1SCA111541R1001	1	0.56
	8	63	OL63A8RB	1SCA111542R1001	1	0.67
0 - 1	1	80	OL80NA1RB	1SCA111624R1001	1	0.30
	2	80	OL80NA2RB	1SCA111625R1001	1	0.34
	3	80	OL80NA3RB	1SCA111626R1001	1	0.41
	4	80	OL80NA4RB	1SCA111627R1001	1	0.45
	6	80	OL80NA6RB	1SCA111628R1001	1	0.56
	8	80	OL80NA8RB	1SCA111629R1001	1	0.67
0 - 1	1	150	OL125A1RB	1SCA022790R1370	1	0.30
	2	150	OL125A2RB	1SCA022790R1450	1	0.34
	3	150	OL125A3RB	1SCA022790R1530	1	0.41
	4	150	OL125A4RB	1SCA022790R1610	1	0.45
	6	150	OL125A6RB	1SCA022790R1700	1	0.56
	8	150	OL125A8RB	1SCA022790R1880	1	0.67
0 - 1	1	175	OL160A1RB	1SCA022790R5010	1	0.13
	2	175	OL160A2RB	1SCA022790R5100	1	0.17
	3	175	OL160A3RB	1SCA022790R5280	1	0.21
	4	175	OL160A4RB	1SCA022790R5360	1	0.25
	6	175	OL160A6RB	1SCA022790R5440	1	0.33
	8	175	OL160A8RB	1SCA022790R5520	1	0.41
0 - 1	1	315	OL200A1RB	1SCA022790R5610	1	1.60
	2	315	OL200A2RB	1SCA022790R5790	1	2.00
	3	315	OL200A3RB	1SCA022790R5870	1	2.40
	4	315	OL200A4RB	1SCA022790R5950	1	3.10
	6	315	OL200A6RB	1SCA022790R6090	1	4.20
	8	315	OL200A8RB	1SCA022790R6170	1	5.30

<sup>1)</sup> 4th pole early make, late break in A4\_ and A8\_ types  
<sup>2)</sup> 7th and 8th pole early make, late break

Packing sizes for 10 pcs: OM 130 x 100 x 120 [mm]  
ON, OL40 250 x 100 x 110 [mm]

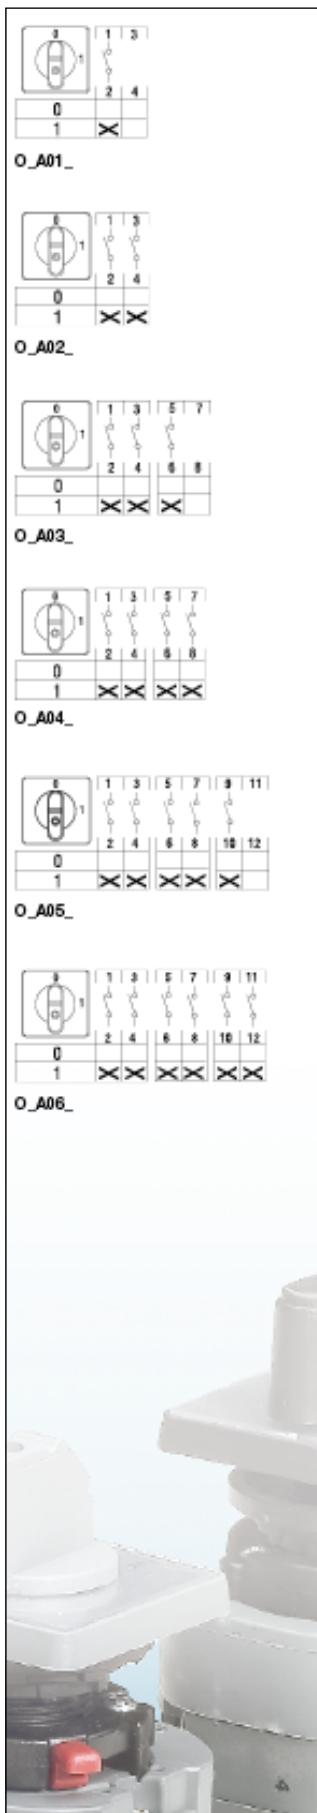

### ON - OFF switches

Black handle and front plate with position indication are included.  
The type and the ordering number are for one piece.

Function	Number of poles	Rated thermal current I <sub>th</sub> [A]	Type	Order number	Delivery batch [pcs]	Weight/unit [kg]
----------	-----------------	---	------	--------------	----------------------	------------------

#### O-position: 9 o'clock, step angle 90°

See the O\_A1\_ - A6\_ function charts on the previous page

##### Door mounted, round front ring

0 - 1	1	25	ONA1XB	1SCA022708R3920	10	0.08
	2	25	ONA2XB	1SCA022708R5540	10	0.09
	3	25	ONA3XB	1SCA022708R5620	10	0.10
	4	25	ONA4XB	1SCA022708R5710	10	0.11

##### Door mounted, key operated, withdrawable in both positions

0 - 1	1	10	OMA1KB	1SCA022531R4760	10	0.06
	3	10	OMA3KB	1SCA022531R4840	10	0.07
0 - 1	1	25	ONA1KB	1SCA022531R5570	10	0.11
	3	25	ONA3KB	1SCA022531R5650	10	0.13

##### Door mounted, key operated, round front ring

0 - 1	1	25	ONA1KXB	1SCA022708R7830	10	0.11
	2	25	ONA2KXB	1SCA100325R1001	10	0.12
	3	25	ONA3KXB	1SCA022708R7910	10	0.13

##### DIN-rail mounted

0 - 1	1	25	ONA1M	1SCA022531R6030	10	0.09
	2	25	ONA2M	1SCA022531R6110	10	0.10
	3	25	ONA3M	1SCA022531R6200	10	0.11
	6	25	ONA6M	1SCA022545R3020	10	0.12

#### O-position: 12 o'clock, step angle 90°

##### Door mounted, snap-on mounted handle

0 - 1	1	10	OMA01PB	1SCA022570R6680	10	0.04
	2	10	OMA02PB	1SCA022570R6760	10	0.04
	3	10	OMA03PB	1SCA022570R6840	10	0.05
	4	10	OMA04PB	1SCA022570R6920	10	0.05
	5	10	OMA05PB	1SCA022570R7060	10	0.06
	6	10	OMA06PB	1SCA022570R7140	10	0.06
0 - 1	1	25	ONA01PB	1SCA022570R7220	10	0.08
	2	25	ONA02PB	1SCA022570R7310	10	0.09
	3	25	ONA03PB	1SCA022570R7490	10	
	4 <sup>1)</sup>	25	ONA04PB	1SCA022570R7570	10	0.11
	5	25	ONA05PB	1SCA022570R7650	10	0.12
	6	25	ONA06PB	1SCA022570R7730	10	0.12

##### Door mounted, key operated, withdrawable in both positions


0 - 1	1	10	OMA01KB	1SCA022570R7810	10	0.06
	3	10	OMA03KB	1SCA022570R7900	10	0.07
0 - 1	1	25	ONA01KB	1SCA022570R8030	10	0.11
	3	25	ONA03KB	1SCA022570R8110	10	0.13

##### DIN-rail mounted

0 - 1	1	25	ONA01M	1SCA022572R5630	10	0.09
	2	25	ONA02M	1SCA022572R5710	10	0.10
	3	25	ONA03M	1SCA022572R5800	10	0.11
	6	25	ONA06M	1SCA022572R5980	10	0.12

Packing sizes for 10 pcs: OM 130 x 100 x 120 [mm]  
ON, OL40 250 x 100 x 110 [mm]

<sup>1)</sup> 4th pole with early make, late break  
AO\_types with simultaneous contacts

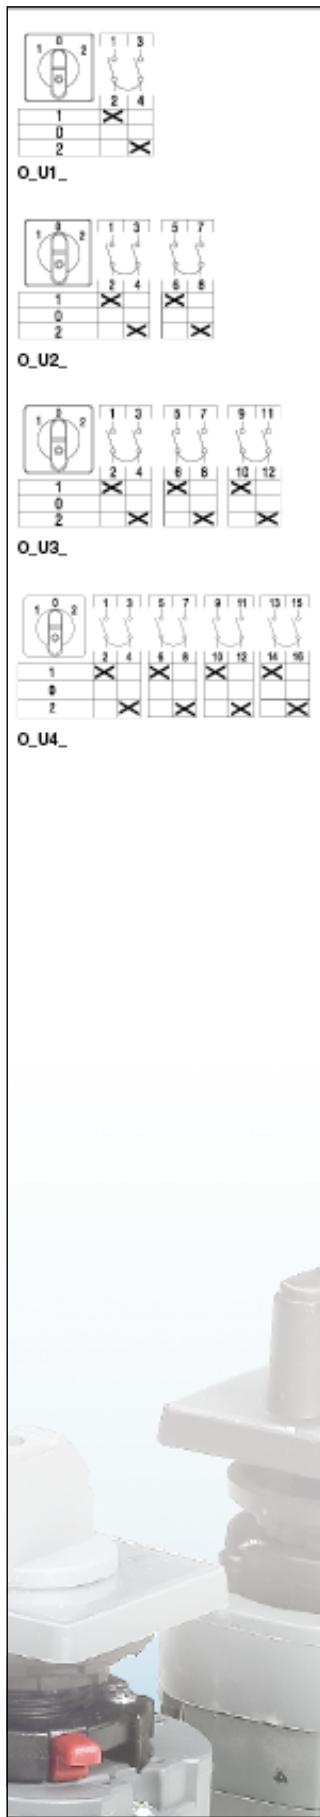


### Change-over switches

Black handle and front plate with position indication are included.  
The type and the ordering number are for one piece.

Function	Number of poles	Rated thermal current I <sub>th</sub> [A]	Type	Order number	Delivery batch [pcs]	Weight unit [kg]
<b>With 0-position, step angle 60°</b>						
<b>Door mounted, snap-on mounted handle</b>						
1 - 0 - 2	1	10	OMU1PB	1SCA022532R5960	10	0.09
	2	10	OMU2PB	1SCA022532R6000	10	0.11
	3	10	OMU3PB	1SCA022532R6180	10	0.13
	4	10	OMU4PB	1SCA022532R6260	10	0.14
1 - 0 - 2	1	25	ONU1PB	1SCA022532R7310	10	0.09
	2	25	ONU2PB	1SCA022532R7400	10	0.11
	3	25	ONU3PB	1SCA022532R7580	10	0.13
	4	25	ONU4PB	1SCA022532R7660	10	0.14
1 - 0 - 2	1	45	OL40U1PB	1SCA022761R0990	10	0.17
	2	45	OL40U2PB	1SCA022761R1020	10	0.25
	3	45	OL40U3PB	1SCA022761R1110	10	0.33
	4	45	OL40U4PB	1SCA022761R1290	10	0.41
<b>Door mounted, screw mounted handle</b>						
1 - 0 - 2	1	25	ONU1RB	1SCA100216R1001	10	0.09
	2	25	ONU2RB	1SCA100219R1001	10	0.11
	3	25	ONU3RB	1SCA100220R1001	10	0.13
	4	25	ONU4RB	1SCA100222R1001	10	0.14
1 - 0 - 2	1	40	OL40U1RB	1SCA100307R1001	10	0.17
	2	40	OL40U2RB	1SCA100308R1001	10	0.25
	3	40	OL40U3RB	1SCA100309R1001	10	0.33
	4	40	OL40U4RB	1SCA100311R1001	10	0.41
1 - 0 - 2	1	63	OL63U1RB	1SCA110936R1001	1	0.34
	2	63	OL63U2RB	1SCA110937R1001	1	0.45
	3	63	OL63U3RB	1SCA111543R1001	1	0.56
	4	63	OL63U4RB	1SCA111544R1001	1	0.67
1 - 0 - 2	1	80	OL80NU1RB	1SCA111643R1001	1	0.34
	2	80	OL80NU2RB	1SCA111630R1001	1	0.45
	3	80	OL80NU3RB	1SCA111631R1001	1	0.56
	4	80	OL80NU4RB	1SCA111632R1001	1	0.67
1 - 0 - 2	1	150	OL125U1RB	1SCA022790R1960	1	0.34
	2	150	OL125U2RB	1SCA022790R2000	1	0.45
	3	150	OL125U3RB	1SCA022790R2180	1	0.56
	4	150	OL125U4RB	1SCA022790R2260	1	0.67
1 - 0 - 2	1	175	OL160U1RB	1SCA022790R6840	1	0.34
	2	175	OL160U2RB	1SCA022790R6920	1	0.45
	3	175	OL160U3RB	1SCA022790R7060	1	0.56
	4	175	OL160U4RB	1SCA022790R7140	1	0.67
1 - 0 - 2	1	315	OL200U1RB	1SCA022790R7220	1	2.00
	2	315	OL200U2RB	1SCA022790R7310	1	3.10
	3	315	OL200U3RB	1SCA022790R7490	1	4.20
	4	315	OL200U4RB	1SCA022790R7570	1	5.30
<b>Door mounted, round front ring</b>						
1 - 0 - 2	1	25	ONU1XB	1SCA022708R9370	10	0.09
	2	25	ONU2XB	1SCA022708R9450	10	0.11
	3	25	ONU3XB	1SCA022708R9530	10	0.13
	4	25	ONU4XB	1SCA022708R9610	10	0.14
<b>Door mounted, key operated, withdrawable in all positions</b>						
1 - 0 - 2	1	10	OMU1KB	1SCA022532R6340	10	0.07
	3	10	OMU3KB	1SCA022532R6420	10	0.08
1 - 0 - 2	1	25	ONU1KB	1SCA022532R7740	10	0.12
	3	25	ONU3KB	1SCA022532R7820	10	0.13
<b>DIN-rail mounted</b>						
1 - 0 - 2	1	25	ONU1M	1SCA022532R8210	10	0.09
	2	25	ONU2M	1SCA022532R8390	10	0.11
	3	25	ONU3M	1SCA022532R8470	10	0.13
	4	25	ONU4M	1SCA022534R2710	10	0.14

Packing sizes for 10 pcs: OM 130 x 100 x 120 [mm]  
ON, OL40 250 x 100 x 110 [mm]

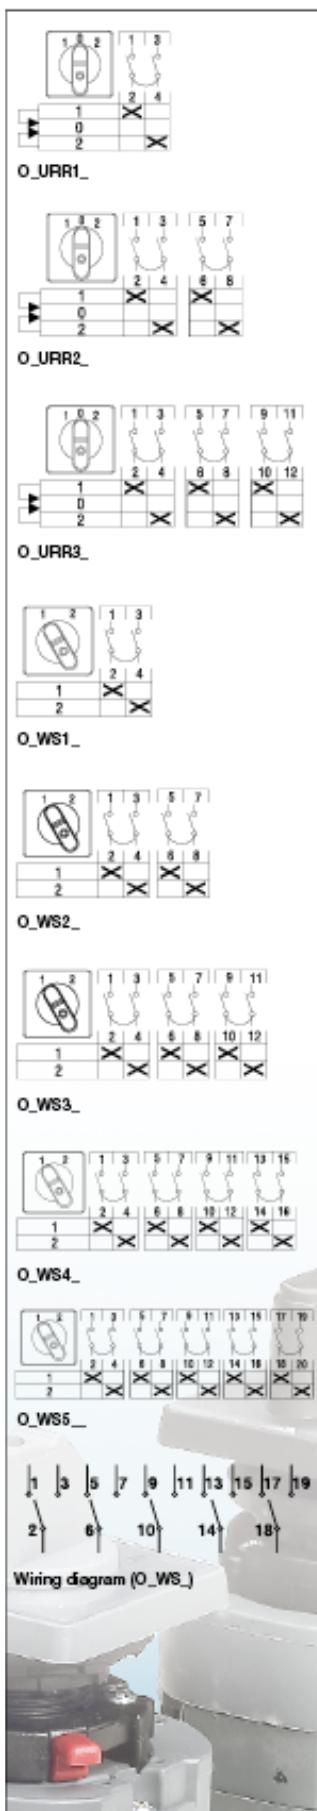


### Change-over switches

Black handle and front plate with position indication are included.  
The type and the ordering number are for one piece.

Function	Number of poles	Rated thermal current I <sub>th</sub> [A]	Type	Order number	Delivery batch [pcs]	Weight unit [kg]
<b>With 0-position, with two sided spring return, step angle 60°</b>						
<b>Door mounted, snap-on mounted handle</b>						
1 <sub>R</sub> - 0 - 2 <sub>R</sub>	1	10	OMURR1PB	1SCA022532R6510	10	0.05
	3	10	OMURR3PB	1SCA022532R6690	10	0.06
1 <sub>R</sub> - 0 - 2 <sub>R</sub>	1	25	ONURR1PB	1SCA022532R7910	10	0.09
	2	25	ONURR2PB	1SCA022558R4040	10	0.11
	3	25	ONURR3PB	1SCA022532R8040	10	0.12
1 <sub>R</sub> - 0 - 2 <sub>R</sub>	1	45	OL40URR1PB	1SCA022761R1370	10	0.17
	2	45	OL40URR2PB	1SCA022761R1450	10	0.25
	3	45	OL40URR3PB	1SCA022761R1530	10	0.33
<b>Door mounted, screw mounted handle</b>						
1 <sub>R</sub> - 0 - 2 <sub>R</sub>	2	25	ONURR2RB	1SCA100223R1001	10	0.11
<b>Door mounted, round front ring</b>						
1 <sub>R</sub> - 0 - 2 <sub>R</sub>	2	25	ONURR2XB	1SCA022709R0620	10	0.11
<b>DIN-rail mounted</b>						
1 <sub>R</sub> - 0 - 2 <sub>R</sub>	1	25	ONURR1M	1SCA022568R3530	10	0.09
<b>Without 0-position, step angle 60°</b>						
<b>Door mounted, snap-on mounted handle</b>						
1 - 2	1	10	OMWS1PB	1SCA022532R6770	10	0.09
	2	10	OMWS2PB	1SCA022532R6850	10	0.11
	3	10	OMWS3PB	1SCA022533R0610	10	0.13
	4	10	OMWS4PB	1SCA022533R0700	10	0.14
1 - 2	1	25	ONWS1PB	1SCA022532R8120	10	0.09
	2	25	ONWS2PB	1SCA022532R9360	10	0.11
	3	25	ONWS3PB	1SCA022532R9440	10	0.13
	4	25	ONWS4PB	1SCA022532R9520	10	0.14
	5	25	ONWS5PB	1SCA022624R6440	10	
1 - 2	1	45	OL40WS1PB	1SCA022761R1610	10	0.17
	2	45	OL40WS2PB	1SCA022761R1700	10	0.25
	3	45	OL40WS3PB	1SCA022761R1880	10	0.33
	4	45	OL40WS4PB	1SCA022761R1960	10	0.41
<b>Door mounted, screw mounted handle</b>						
1 - 2	1	25	ONWS1RB	1SCA100236R1001	10	0.09
	2	25	ONWS2RB	1SCA100240R1001	10	0.11
	3	25	ONWS3RB	1SCA022874R9180	10	0.13
	4	25	ONWS4RB	1SCA100254R1001	10	0.14
1 - 2	1	40	OL40WS1RB	1SCA100316R1001	10	0.17
	2	40	OL40WS2RB	1SCA100319R1001	10	0.25
	3	40	OL40WS3RB	1SCA100320R1001	10	0.33
	4	40	OL40WS4RB	1SCA100321R1001	10	0.41
1 - 2	1	63	OL63WS1RB	1SCA022790R0990	1	0.34
	2	63	OL63WS2RB	1SCA022790R1020	1	0.45
	3	63	OL63WS3RB	1SCA022790R1110	1	0.56
	4	63	OL63WS4RB	1SCA022790R1290	1	0.67
1 - 2	1	80	OL80NWS1RB	1SCA111647R1001	1	0.34
	2	80	OL80NWS2RB	1SCA111633R1001	1	0.45
	3	80	OL80NWS3RB	1SCA111634R1001	1	0.56
	4	80	OL80NWS4RB	1SCA111635R1001	1	0.67
1 - 2	1	150	OL125WS1RB	1SCA022790R2340	1	0.34
	2	150	OL125WS2RB	1SCA022790R2420	1	0.45
	3	150	OL125WS3RB	1SCA022790R2510	1	0.56
	4	150	OL125WS4RB	1SCA022790R2690	1	0.67
1 - 2	1	175	OL160WS1RB	1SCA022790R8030	1	0.34
	2	175	OL160WS2RB	1SCA022790R8110	1	0.45
	3	175	OL160WS3RB	1SCA022790R8200	1	0.56
	4	175	OL160WS4RB	1SCA022790R8380	1	0.67
1 - 2	1	315	OL200WS1RB	1SCA022790R8460	1	2.00
	2	315	OL200WS2RB	1SCA022790R8540	1	3.10
	3	315	OL200WS3RB	1SCA022790R8620	1	4.20
	4	315	OL200WS4RB	1SCA022790R8710	1	5.30

Packing sizes for 10 pcs: OM 130 x 100 x 120 [mm]  
ON, OL40 250 x 100 x 110 [mm]

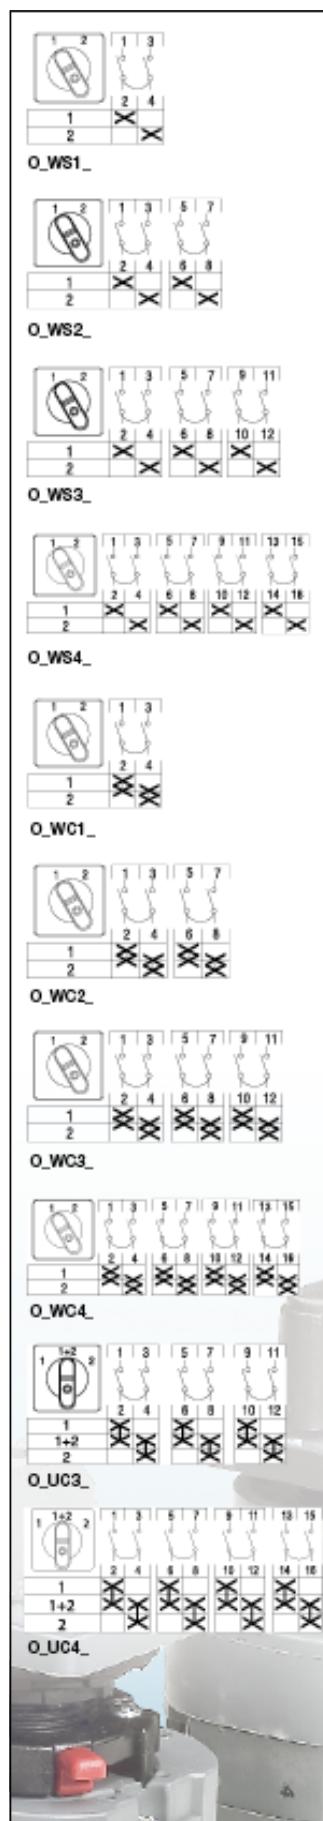


### Change-over switches

Black handle and front plate with position indication are included.  
The type and the ordering number are for one piece.

Function	Number of poles	Rated thermal current I <sub>th</sub> [A]	Type	Order number	Delivery batch [pcs]	Weight/unit [kg]
<b>Without 0-position, step angle 60°</b>						
Door mounted, round front ring						
1 - 2	1	25	ONWS1XB	1SCA022709R1270	10	0.09
	2	25	ONWS2XB	1SCA022709R1350	10	0.11
	3	25	ONWS3XB	1SCA022709R1430	10	0.13
	4	25	ONWS4XB	1SCA022709R1510	10	0.14
DIN-rail mounted						
1 - 2	1	25	ONWS1M	1SCA022532R8710	10	0.09
	2	25	ONWS2M	1SCA022532R8800	10	0.11
	3	25	ONWS3M	1SCA022532R8980	10	0.13
	4	25	ONWS4M	1SCA022532R9010	10	0.14
<b>With overlapping contacts</b>						
Door mounted, snap-on mounted handle						
1 - 2	1	10	OMWC1PB	1SCA022799R8270	10	0.09
	2	10	OMWC2PB	1SCA022799R8600	10	0.11
	3	10	OMWC3PB	1SCA022799R9080	10	0.13
	4	10	OMWC4PB	1SCA022799R9160	10	0.14
1 - 2	1	25	ONWC1PB	1SCA022799R8350	10	0.09
	2	25	ONWC2PB	1SCA022799R8780	10	0.11
	3	25	ONWC3PB	1SCA022799R9240	10	0.13
	4	25	ONWC4PB	1SCA022799R9320	10	0.14
1 - 2	1	45	OL40WC1PB	1SCA022799R8430	10	0.17
	2	45	OL40WC2PB	1SCA022799R8860	10	0.25
	3	45	OL40WC3PB	1SCA022799R9410	10	0.33
	4	45	OL40WC4PB	1SCA022799R9590	10	0.41
Door mounted, screw mounted handle						
1 - 2	1	63	OL63WC1RB	1SCA111596R1001	1	0.34
	2	63	OL63WC2RB	1SCA111597R1001	1	0.45
	3	63	OL63WC3RB	1SCA111598R1001	1	0.56
	4	63	OL63WC4RB	1SCA111599R1001	1	0.67
1 - 2	1	80	OL80NWC1RB	1SCA111648R1001	1	0.34
	2	80	OL80NWC2RB	1SCA111649R1001	1	0.45
	3	80	OL80NWC3RB	1SCA111650R1001	1	0.56
	4	80	OL80NWC4RB	1SCA111651R1001	1	0.67
<b>With common center position and with overlapping contacts</b>						
Door mounted, snap-on mounted handle						
1 - (1 + 2) - 2	3	25	ONUC3PB	1SCA022791R0360	10	0.13
	4	25	ONUC4PB	1SCA022791R0280	10	0.14
1 - (1 + 2) - 2	3	45	OL40UC3PB	1SCA022791R0870	10	0.13
	4	45	OL40UC4PB	1SCA022791R0950	10	0.14
Door mounted, screw mounted handle						
1 - (1 + 2) - 2	3	63	OL63UC3RB	1SCA111593R1001	1	0.56
	4	63	OL63UC4RB	1SCA111594R1001	1	0.67
1 - (1 + 2) - 2	3	80	OL80NUC3RB	1SCA111645R1001	1	0.56
	4	80	OL80NUC4RB	1SCA111646R1001	1	0.67
1 - (1 + 2) - 2	3	150	OL125UC3RB	1SCA022791R1500	1	0.56
	4	150	OL125UC4RB	1SCA022791R2060	1	0.67
1 - (1 + 2) - 2	3	175	OL160UC3RB	1SCA022791R1680	1	0.56
	4	175	OL160UC4RB	1SCA022791R2140	1	0.67
1 - (1 + 2) - 2	3	315	OL200UC3RB	1SCA022791R1760	1	4.20
	4	315	OL200UC4RB	1SCA022791R2220	1	5.30

Wiring diagram (O\_WS\_, O\_WC\_, O\_UC\_)



Packing sizes for 10 pcs: OM 130 x 100 x 120 [mm]  
ON, OL40 250 x 100 x 110 [mm]



### Bypass switches

Black handle and front plate with position indication are included.  
The type and the ordering number are for one piece.

Function	Number of poles	Rated thermal current I <sub>th</sub> [A]	Type	Order number	Delivery batch [pcs]	Weight/unit [kg]
----------	-----------------	---	------	--------------	----------------------	------------------

#### With 0-position, step angle 60°, without overlapping, 3 and 4-pole network

Door mounted, snap-on mounted handle

1 - 0 - Bypass	3 / 6	25	ONWS36PB	1SCA022791R0440	10	0.17
	4 / 8	25	ONWS48PB	1SCA022791R0520	10	0.19
1 - 0 - Bypass	3 / 6	45	OL40WS36PB	1SCA022791R1090	10	0.21
	4 / 8	45	OL40WS48PB	1SCA022791R1170	10	0.31

Door mounted, screw mounted handle

1 - 0 - Bypass	3 / 6	63	OL63WS36RB	1SCA111600R1001	1	0.78
	4 / 8	63	OL63WS48RB	1SCA111601R1001	1	0.89
1 - 0 - Bypass	3 / 6	80	OL80NWS36RB	1SCA111652R1001	1	0.78
	4 / 8	80	OL80NWS48RB	1SCA111653R1001	1	0.89
1 - 0 - Bypass	3 / 6	150	OL125WS36RB	1SCA022791R2570	1	0.78
	4 / 8	150	OL125WS48RB	1SCA022791R3030	1	0.89
1 - 0 - Bypass	3 / 6	175	OL160WS36RB	1SCA022791R2650	1	0.78
	4 / 8	175	OL160WS48RB	1SCA022791R3110	1	0.89
1 - 0 - Bypass	3 / 6	315	OL200WS36RB	1SCA022791R2730	1	6.40
	4 / 8	315	OL200WS48RB	1SCA022791R3200	1	7.50

#### Without 0-position, step angle 60°, with overlapping, 3 and 4-pole network


Door mounted, snap-on mounted handle

1 - Bypass	3 / 6	25	ONPW36PB	1SCA022791R0610	10	0.17
	4 / 8	25	ONPW48PB	1SCA022791R0790	10	0.19
1 - Bypass	3 / 6	45	OL40PW36PB	1SCA022791R1250	10	0.21
	4 / 8	45	OL40PW48PB	1SCA022791R1330	10	0.31


Door mounted, screw mounted handle

1 - Bypass	3 / 6	63	OL63PW36RB	1SCA111591R1001	1	0.78
	4 / 8	63	OL63PW48RB	1SCA111592R1001	1	0.89
1 - Bypass	3 / 6	80	OL80NPW36RB	1SCA111641R1001	1	0.78
	4 / 8	80	OL80NPW48RB	1SCA111642R1001	1	0.89
1 - Bypass	3 / 6	150	OL125PW36RB	1SCA022791R3540	1	0.78
	4 / 8	150	OL125PW48RB	1SCA022791R4010	1	0.89
1 - Bypass	3 / 6	175	OL160PW36RB	1SCA022791R3620	1	0.78
	4 / 8	175	OL160PW48RB	1SCA022791R4190	1	0.89
1 - Bypass	3 / 6	315	OL200PW36RB	1SCA022791R3710	1	6.40
	4 / 8	315	OL200PW48RB	1SCA022791R4270	1	7.50

### Wiring diagram, bypass switches

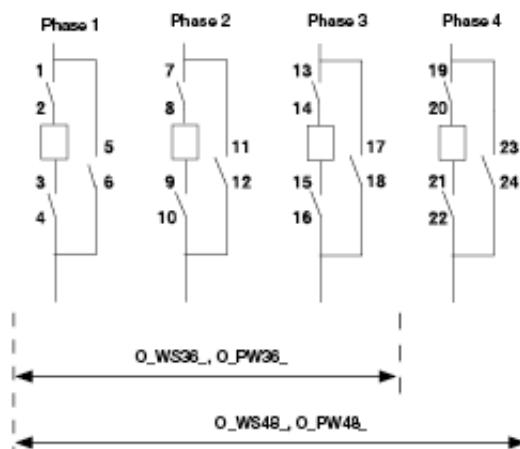

Packing sizes for 10 pcs: OM  
ON, OL40 130 x 100 x 120 [mm]  
250 x 100 x 110 [mm]

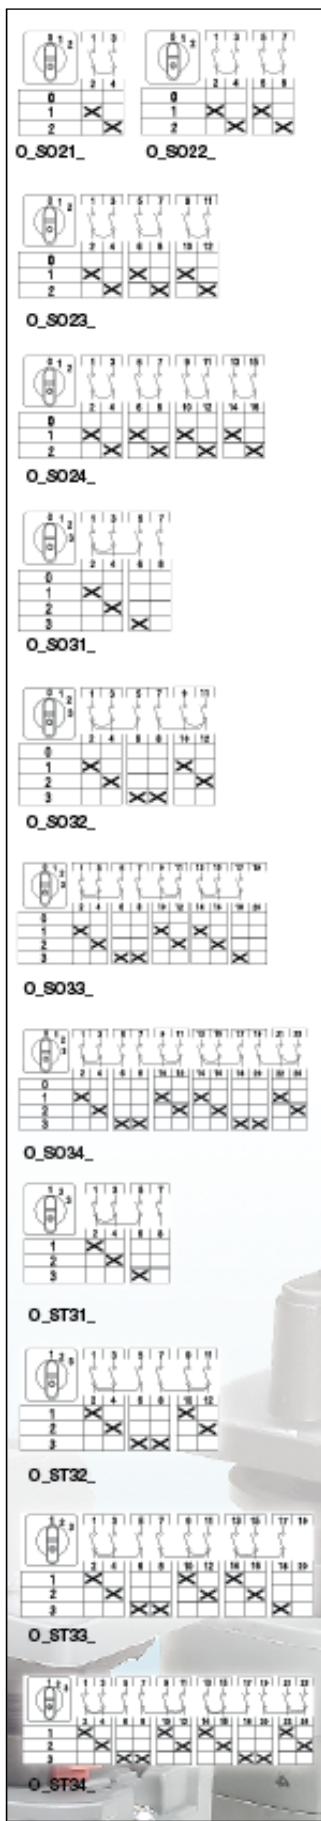

### Multistep switches


Black handle and front plate with position indication are included.

The type and the ordering number are for one piece.

Step angle 30°

Function	Number of poles	Rated thermal current I <sub>th</sub> [A]	Type	Order number	Delivery batch [pcs]	Weight/unit [kg]
<b>2- step, with O-position</b>						
<b>Door mounted, snap-on mounted handle</b>						
0 - 1 - 2	1	10	OMSO21PB	1SCA022533R0880	10	0.04
	2	10	OMSO22PB	1SCA022533R0960	10	0.05
	3	10	OMSO23PB	1SCA022533R1000	10	0.06
	4	10	OMSO24PB	1SCA022533R1180	10	0.07
0 - 1 - 2	1	25	ONSO21PB	1SCA022532R9610	10	0.10
	2	25	ONSO22PB	1SCA022532R9790	10	0.12
	3	25	ONSO23PB	1SCA022532R9870	10	0.13
	4	25	ONSO24PB	1SCA022532R9950	10	0.14
<b>Door mounted, screw mounted handle</b>						
0 - 1 - 2	1	25	ONSO21RB	1SCA100283R1001	10	0.10
	2	25	ONSO22RB	1SCA100285R1001	10	0.12
<b>Door mounted, round front ring</b>						
0 - 1 - 2	1	25	ONSO21XB	1SCA022709R2080	10	0.10
	2	25	ONSO22XB	1SCA022709R2160	10	0.12
<b>DIN-Rail mounted</b>						
0 - 1 - 2	1	25	ONSO21M	1SCA022532R9100	10	0.10
<b>3- step, with O-position</b>						
<b>Door mounted, snap-on mounted handle</b>						
0 - 1 - 2 - 3	1	10	OMSO31PB	1SCA022545R3110	10	0.05
	2	10	OMSO32PB	1SCA022533R1420	10	0.06
	3	10	OMSO33PB	1SCA022533R1510	10	0.07
	4	10	OMSO34PB	1SCA022533R1690	10	0.08
0 - 1 - 2 - 3	1	25	ONSO31PB	1SCA022533R0020	10	0.10
	2	25	ONSO32PB	1SCA022533R0110	10	0.12
	3	25	ONSO33PB	1SCA022533R0290	10	0.13
	4	25	ONSO34PB	1SCA022533R0370	10	0.14
0 - 1 - 2 - 3	1	45	OL40SO31PB	1SCA022758R7810	10	0.41
<b>Door mounted, screw mounted handle</b>						
0 - 1 - 2 - 3	1	25	ONSO31RB	1SCA100286R1001	10	0.10
0 - 1 - 2 - 3	1	63	OL63SO31RB	1SCA111603R1001	1	0.41
	1	80	OL80NSO31RB	1SCA111655R1001	1	0.41
	1	150	OL125SO31RB	1SCA022791R4510	1	0.41
	1	175	OL160SO31RB	1SCA022791R4600	1	0.41
	1	315	OL200SO31RB	1SCA022791R4780	1	1.75
<b>Door mounted, round front ring</b>						
0 - 1 - 2 - 3	1	25	ONSO31XB	1SCA022709R2830	10	0.10
<b>DIN-rail mounted</b>						
0 - 1 - 2 - 3	1	25	ONSO31M	1SCA022532R9280	10	0.11

Packing sizes for 10 pcs: OM  
ON, OL40      130 x 100 x 120 [mm]  
                  250 x 100 x 110 [mm]

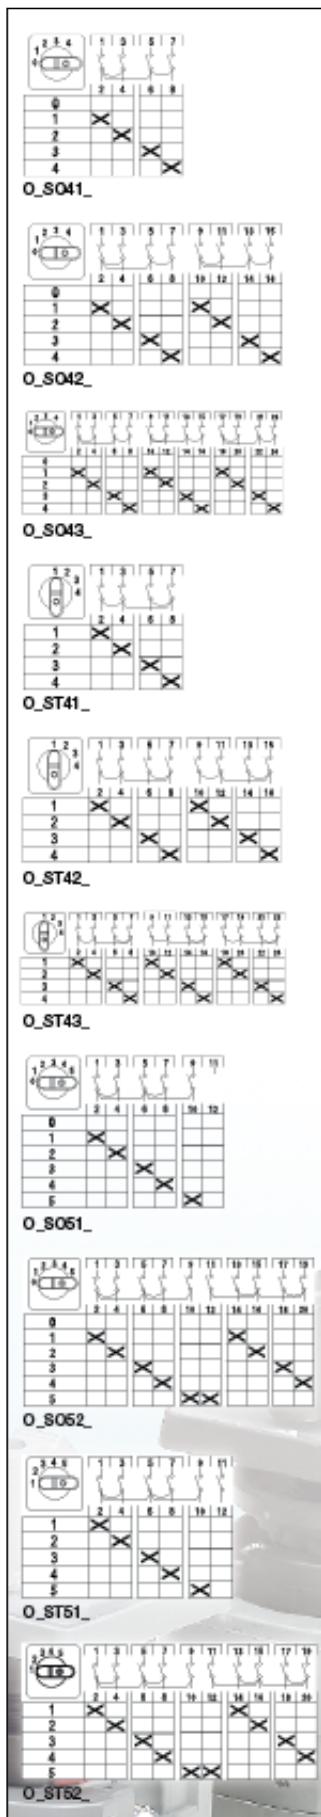

### Multistep switches

Black handle and front plate with position indication are included.  
The type and the ordering number are for one piece.

Step angle 30°

Function	Number of poles	Rated thermal current I <sub>th</sub> [A]	Type	Order number	Delivery batch [pcs]	Weight/unit [kg]
----------	-----------------	---	------	--------------	----------------------	------------------

#### 3-step, without O-position

See the O\_ST31\_- - 34\_ function charts on the previous page

##### Door mounted, snap-on mounted handle

1 - 2 - 3	1	10	OMST31PB	1SCA022533R2580	10	0.05
	2	10	OMST32PB	1SCA022533R4010	10	0.06
	3	10	OMST33PB	1SCA022533R4100	10	0.07
	4	10	OMST34PB	1SCA022533R4280	10	0.08
1 - 2 - 3	1	25	ONST31PB	1SCA022533R2740	10	0.10
	2	25	ONST32PB	1SCA022533R2820	10	0.12
	3	25	ONST33PB	1SCA022533R2910	10	0.13
	4	25	ONST34PB	1SCA022533R3040	10	0.14

##### Door mounted, screw mounted handle

1 - 2 - 3	1	25	ONST31RB	1SCA100287R1001	10	0.10
-----------	---	----	----------	-----------------	----	------

##### Door mounted, round front ring

1 - 2 - 3	1	25	ONST31XB	1SCA022709R4610	10	0.10
-----------	---	----	----------	-----------------	----	------

##### DIN-rail mounted

1 - 2 - 3	1	25	ONST31M	1SCA022533R2070	10	0.10
-----------	---	----	---------	-----------------	----	------

#### 4-step, with O-position

##### Door mounted, snap-on mounted handle

0 - 1 - 2 - 3 - 4	1	10	OMSO41PB	1SCA022533R1770	10	0.05
	2	10	OMSO42PB	1SCA022533R1850	10	0.06
	3	10	OMSO43PB	1SCA022533R3710	10	0.07
0 - 1 - 2 - 3 - 4	1	25	ONSO41PB	1SCA022533R0450	10	0.11
	2	25	ONSO42PB	1SCA022533R0530	10	0.12
	3	25	ONSO43PB	1SCA022533R2230	10	0.13

#### 4-step, without O-position

##### Door mounted, snap-on mounted handle

1 - 2 - 3 - 4	1	10	OMST41PB	1SCA022533R4440	10	0.05
	2	10	OMST42PB	1SCA022533R4610	10	0.06
	3	10	OMST43PB	1SCA022533R4790	10	0.07
1 - 2 - 3 - 4	1	25	ONST41PB	1SCA022533R3210	10	0.11
	2	25	ONST42PB	1SCA022533R3390	10	0.12
	3	25	ONST43PB	1SCA022533R3470	10	0.13

##### Door mounted, screw mounted handle

1 - 2 - 3 - 4	1	25	ONST41RB	1SCA100288R1001	10	0.11
---------------	---	----	----------	-----------------	----	------

##### Door mounted, round front ring

1 - 2 - 3 - 4	1	25	ONST41XB	1SCA022709R5420	10	0.11
---------------	---	----	----------	-----------------	----	------

#### 5-step, with O-position

##### Door mounted, snap-on mounted handle


0 - 1 - 2 - 3 - 4 - 5	1	10	OMSO51PB	1SCA022533R3800	10	0.06
	2	10	OMSO52PB	1SCA022533R3980	10	0.08
0 - 1 - 2 - 3 - 4 - 5	1	25	ONSO51PB	1SCA022533R2310	10	0.12
	2	25	ONSO52PB	1SCA022533R2400	10	0.14

#### 5-step, without O-position

##### Door mounted, snap-on mounted handle

1 - 2 - 3 - 4 - 5	1	10	OMST51PB	1SCA022533R4870	10	0.06
	2	10	OMST52PB	1SCA022533R5090	10	0.08
1 - 2 - 3 - 4 - 5	1	25	ONST51PB	1SCA022533R3550	10	0.12
	2	25	ONST52PB	1SCA022533R3630	10	0.14

Packing sizes for 10 pcs: OM 130 x 100 x 120 [mm]  
ON, OL40 250 x 100 x 110 [mm]

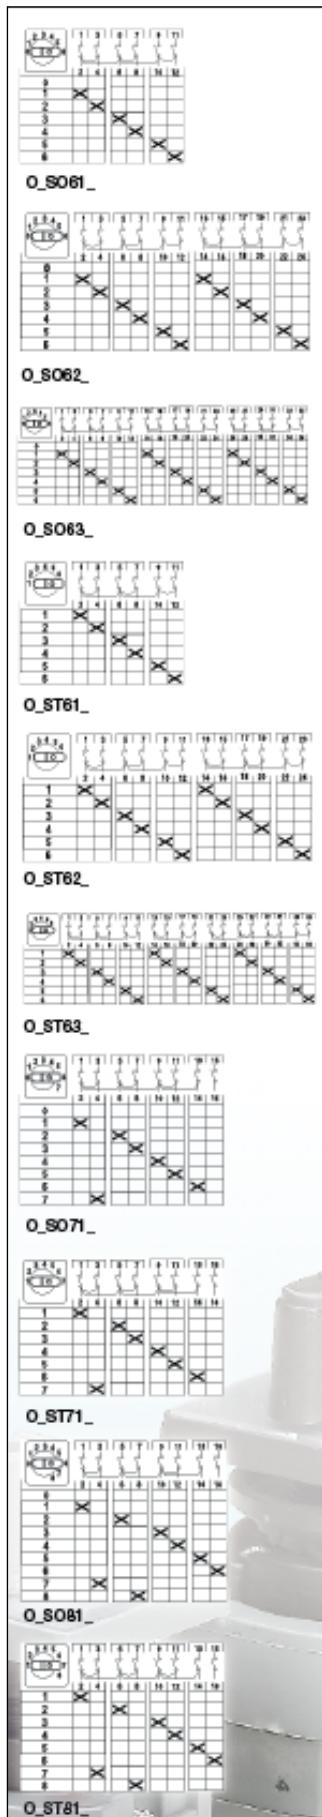

### Multistep switches

Black handle and front plate with position indication are included.

The type and the ordering number are for one piece.

Step angle 30°

Function	Number of poles	Rated thermal current I <sub>th</sub> [A]	Type	Order number	Delivery batch [pcs]	Weight unit [kg]
----------	-----------------	---	------	--------------	----------------------	------------------

#### 6-step, with 0-position

Door mounted, snap-on mounted handle

0-1-2-3-4-5-6	1	25	ONSO61PB	1SCA022776R1180	10	0.115
	2	25	ONSO62PB	1SCA022776R1260	10	0.190
	3	25	ONSO63PB	1SCA022776R1340	10	0.265
0-1-2-3-4-5-6	1	45	OL40SO61PB	1SCA022776R1420	10	0.185
	2	45	OL40SO62PB	1SCA022776R1510	10	0.305
	3	45	OL40SO63PB	1SCA022776R1690	10	0.425

#### 6-step, without 0-position

Door mounted, snap-on mounted handle

1-2-3-4-5-6	1	25	ONST61PB	1SCA022761R6760	10	0.115
	2	25	ONST62PB	1SCA022761R1770	10	0.190
	3	25	ONST63PB	1SCA022761R1850	10	0.265
1-2-3-4-5-6	1	45	OL40ST61PB	1SCA022775R1380	10	0.185
	2	45	OL40ST62PB	1SCA022776R1930	10	0.305
	3	45	OL40ST63PB	1SCA022776R2070	10	0.425

#### 7-step, with 0-position

Door mounted, snap-on mounted handle

0-1-2-3-4-5-6-7	1	25	ONSO71PB	1SCA022691R8480	10	0.14
	1	45	OL40SO71PB	1SCA022773R3300	10	0.30

#### 7-step, without 0-position

Door mounted, snap-on mounted handle

1-2-3-4-5-6-7	1	25	ONST71PB	1SCA022776R2150	10	0.14
	1	45	OL40ST71PB	1SCA022776R2230	10	0.30

#### 8-step, with 0-position

Door mounted, snap-on mounted handle


0-1-2-3-4-5-6-7-8	1	25	ONSO81PB	1SCA022661R9730	10	0.145
	1	45	OL40SO81PB	1SCA022773R3480	10	0.148

#### 8-step, without 0-position

Door mounted, snap-on mounted handle

1-2-3-4-5-6-7-8	1	25	ONST81PB	1SCA022685R7320	10	0.145
	1	45	OL40ST81PB	1SCA022773R4960	10	0.148

Packing sizes for 10 pcs: OM 130 x 100 x 120 [mm]  
ON, OL40 250 x 100 x 110 [mm]

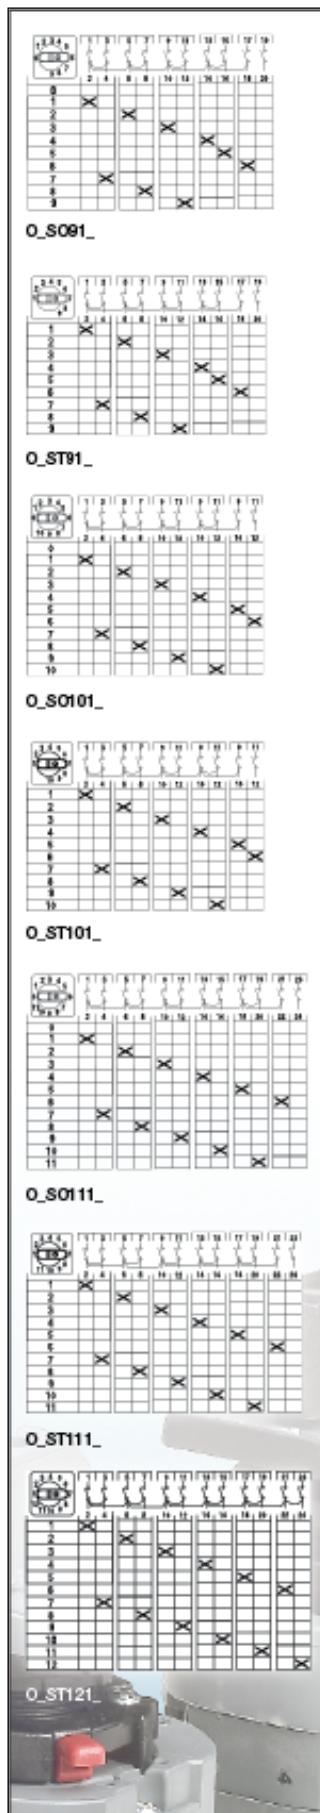

### Multistep switches

Black handle and front plate with position indication are included.  
The type and the ordering number are for one piece.


Step angle 30°

Function	Number of poles $n_{th}$ [A]	Rated thermal current $I_{th}$ [A]	Type	Order number	Delivery batch [pcs]	Weight/unit [kg]
<b>9-step, with 0-position</b>						
Door mounted, snap-on mounted handle						
0-1-2-3-4-5-6-7-8-9	1	25	ONSO91PB	1SCA022776R2310	5	0.165
	1	45	OL40SO91PB	1SCA022776R2400	5	0.265
<b>9-step, without 0-position</b>						
Door mounted, snap-on mounted handle						
1-2-3-4-5-6-7-8-9	1	25	ONST91PB	1SCA022775R1710	5	0.165
	1	45	OL40ST91PB	1SCA022775R1460	5	0.265
<b>10-step, with 0-position</b>						
Door mounted, snap-on mounted handle						
0-1-2-3-4-5-6-7-8-9-10	1	25	ONSO101PB	1SCA022776R2580	5	0.17
	1	45	OL40SO101PB	1SCA022776R2660	5	0.27
<b>10-step, without 0-position</b>						
Door mounted, snap-on mounted handle						
1-2-3-4-5-6-7-8-9-10	1	25	ONST101PB	1SCA022775R1540	5	0.17
	1	45	OL40ST101PB	1SCA022775R1110	5	0.27
<b>11-step, with 0-position</b>						
Door mounted, snap-on mounted handle						
0-1-2-3-4-5-6-7-8-9-10-11	1	25	ONSO111PB	1SCA022776R2740	5	0.19
	1	45	OL40SO111PB	1SCA022776R2820	5	0.305
<b>11-step, without 0-position</b>						
Door mounted, snap-on mounted handle						
1-2-3-4-5-6-7-8-9-10-11	1	25	ONST111PB	1SCA022776R2910	5	0.19
	1	45	OL40ST111PB	1SCA022776R3040	5	0.305
<b>12-step, without 0-position</b>						
Door mounted, snap-on mounted handle						
1-2-3-4-5-6-7-8-9-10-11-12	1	25	ONST121PB	1SCA022775R1620	5	0.195
	1	45	OL40ST121PB	1SCA022775R1200	5	0.31

Packing sizes for 10 pcs: OM 130 x 100 x 120 [mm]  
ON, OL40 250 x 100 x 110 [mm]

# Rotary cam switches

## Ordering details

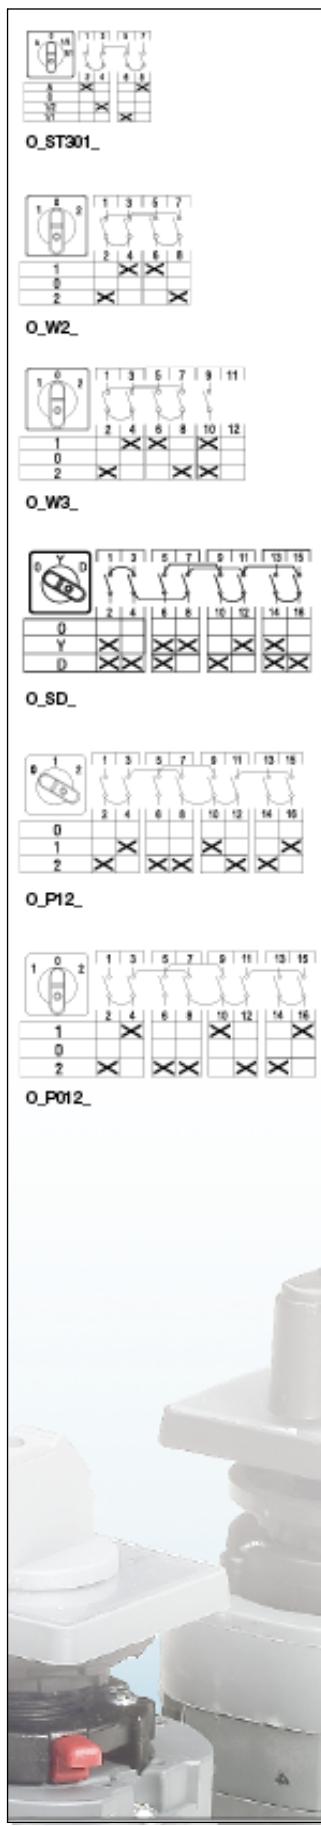

### Motor control switches

Black handle and front plate with position indication are included.  
The type and the ordering number are for one piece.

Step angle 60°

Function	Number of poles	Rated thermal current I <sub>th</sub> [A]	Motor rating AC23/400V [kW]	Type	Order number	Delivery batch [pcs]	Weight unit [kg]
----------	-----------------	---	-----------------------------	------	--------------	----------------------	------------------

### Ventilation switches

Door mounted, snap-on mounted handle

A - 0 - 1/2 - 1/1	2	10	3.0	OMST301PB	1SCA022533R4360	10	0.06
	2	25	7.5	ONST301PB	1SCA022533R3120	10	0.11
	2	40	15	OL40ST301PB	1SCA022761R6680	10	0.21

DIN-rail mounted

A - 0 - 1/2 - 1/1	2	25	7.5	ONST301M	1SCA022533R2150	10	0.11
-------------------	---	----	-----	----------	-----------------	----	------

### Reversing switches

Door mounted, snap-on mounted handle

1 - 0 - 2	2	25	7.5	ONW2PB	1SCA022586R8230	10	0.09
	2	40	15	OL40W2PB	1SCA022757R5550	10	0.15
1 - 0 - 2	3	25	7.5	ONW3PB	1SCA022553R8790	10	0.10
	3	40	15	OL40W3PB	1SCA022757R5630	10	0.21

Door mounted, screw mounted handle

1 - 0 - 2	2	63	18	OL63W2RB	1SCA111588R1001	1	0.45
	2	80	22.5	OL80NW2RB	1SCA111638R1001	1	0.45

### Star-delta switches

Door mounted, snap-on mounted handle

0 - Y - Δ	3	25	7.5	ONSDPB	1SCA022579R1420	10	0.12
	3	40	15	OL40SDPB	1SCA022756R3110	10	0.21

Door mounted, screw mounted handle

0 - Y - Δ	3	63	18	OL63SDRB	1SCA111586R1001	1	0.67
	3	80	22.5	OL80NSDRB	1SCA111636R1001	1	0.67
	3	150	75	OL125SDRB	1SCA022791R5080	1	0.67
	3	175	75	OL160SDRB	1SCA022791R5160	1	0.67
	3	315	75	OL200SDRB	1SCA022791R5240	1	5.30

### Pole-change switches (Dahlander)

Winding for 2 speeds, one direction, 0 - A - AYY

Door mounted, snap-on mounted handle

0 - 1 - 2	3	25	7.5	ONP12PB	1SCA022576R6740	10	0.12
	3	40	15	OL40P12PB	1SCA022756R3380	10	0.25

Door mounted, screw mounted handle

1 - 0 - 2	3	63	18	OL63P012RB	1SCA111587R1001	1	0.67
	3	80	22.5	OL80NP012RB	1SCA111637R1001	1	0.67
	3	150	75	OL125P012RB	1SCA022791R5590	1	0.67
	3	175	75	OL160P012RB	1SCA022791R5670	1	0.67
	3	315	75	OL200P012RB	1SCA022791R5750	1	5.30



O\_ST301




O\_W2\_



O\_W3\_



O\_SD\_









O\_P12\_



O\_P012\_

Packing sizes for 10 pcs: OM 130 x 100 x 120 [mm]  
ON, OL40 250 x 100 x 110 [mm]



### Motor control switches

Black handle and front plate with position indication are included.  
The type and the ordering number are for one piece.

Function	Number of poles	Rated thermal current I <sub>th</sub> [A]	Type	Order number	Delivery batch [pcs]	Weight/unit [kg]
----------	-----------------	---	------	--------------	----------------------	------------------

### Pumpstart switches

Step angle 60°

#### Door mounted, snap-on mounted handle

0 - 1	1	10	OMSE158PB	1SCA022545R4930	10	0.04
	1	25	ONSE158PB	1SCA022534R2540	10	0.09

#### DIN-rail mounted

0 - 1	1	25	ONSE158M	1SCA022565R5830	10	0.09
-------	---	----	----------	-----------------	----	------

### Stop switches

Step angle 30°, with spring return, contacts N.C.

#### Door mounted, snap-on mounted handle

0 <sub>R</sub> - Stop	2	10	OMSA2PB	1SCA022531R6380	10	0.04
	2	25	ONSA2PB	1SCA022531R6710	10	0.09

### Start switches

Step angle 30°, OMSE2\_ with spring return.

#### Door mounted, snap-on mounted handle

Stop - Start	1	25	ONSEA1PB	1SCA022605R8610	10	0.04
0 <sub>R</sub> - Start	1	10	OMSE2PB	1SCA022531R6460	10	0.04
	1	25	ONSE2PB	1SCA022563R6290	10	0.04

Step angle 90°- 30°, with spring return

#### Door mounted, snap-on mounted handle

0 - 1 <sub>R</sub> - Start	1	10	OMSEA10PB	1SCA022531R6540	10	0.05
	1	25	ONSEA10PB	1SCA022531R6890	10	0.09
Start - 1 <sub>R</sub> - 0 - 2 <sub>R</sub> - Start	1	25	ONUR139PB	1SCA022531R6970	10	0.09

#### Door mounted, screw mounted handle

0 - 1 <sub>R</sub> - Start	1	25	ONSEA10RB	1SCA100296R1001	10	0.09
----------------------------	---	----	-----------	-----------------	----	------

#### Door mounted, round front ring


0 - 1 <sub>R</sub> - Start	1	25	ONSEA10XB	1SCA022708R9290	10	0.09
----------------------------	---	----	-----------	-----------------	----	------

#### DIN-rail mounted

0 - 1 <sub>R</sub> - Start	1	25	ONSEA10M	1SCA022565R5750	10	0.09
Start - 1 <sub>R</sub> - 0 - 2 <sub>R</sub> - Start	1	25	ONUR139M	1SCA022568R3370	10	0.09

Packing sizes for 10 pcs: OM 130 x 100 x 120 [mm]  
ON, OL40 250 x 100 x 110 [mm]




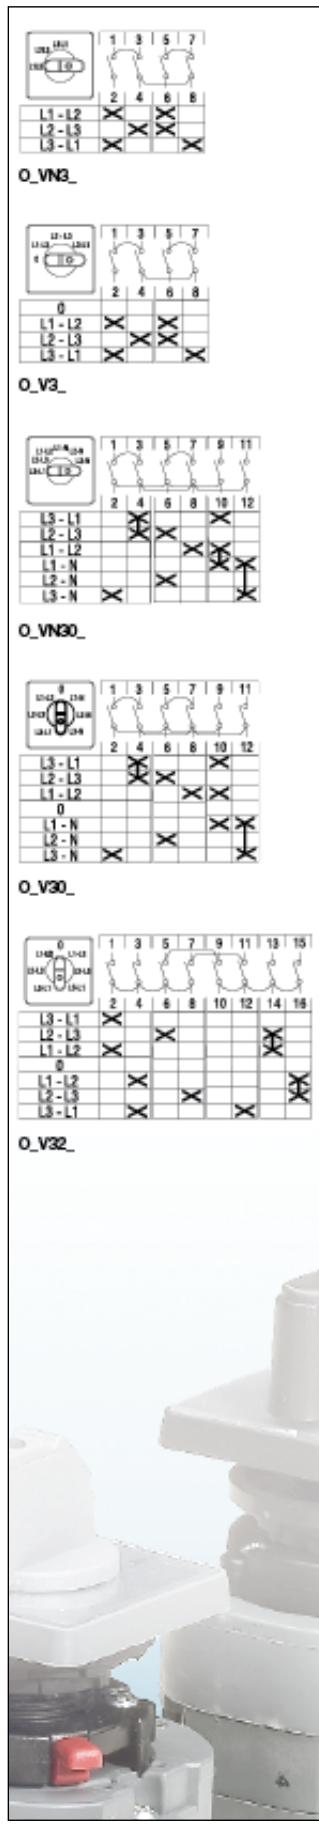


### Voltmeter switches

Black handle and front plate with position indication are included.  
The type and the ordering number are for one piece.

Function	Number of poles	Rated thermal current I <sub>th</sub> [A]	Type	Order number	Delivery batch [pcs]	Weight/unit [kg]
<b>3 Positions, 3 phase -3 wire, without 0-position, step angle 45°</b>						
Door mounted, snap-on mounted handle						
L1-L2, L2-L3, L3-L1	2 2	10 25	OMVN3PB ONVN3PB	1SCA022558R4470 1SCA022558R4630	10 10	0.06 0.11
<b>DIN-rail mounted</b>						
L1-L2, L2-L3, L3-L1	2	25	ONVN3M	1SCA022558R4800	10	0.11
<b>4 Positions, 3 phase -3 wire, with 0-position, step angle 45°</b>						
Door mounted, snap-on mounted handle						
0, L1-L2, L2-L3, L3-L1	2 2	10 25	OMV3PB ONV3PB	1SCA022533R5250 1SCA022533R5680	10 10	0.06 0.11
<b>Door mounted, screw mounted handle</b>						
0, L1-L2, L2-L3, L3-L1	2	25	ONV3RB	1SCA100323R1001	10	0.11
<b>Door mounted, round front ring</b>						
0, L1-L2, L2-L3, L3-L1	2	25	ONV3XB	1SCA022709R6580	10	0.13
<b>DIN-rail mounted</b>						
0, L1-L2, L2-L3, L3-L1	2	25	ONV3M	1SCA022549R9280	10	0.11
<b>6 Positions, 3 phase to phase 3 phase to neutral, without 0-position, step angle 30°</b>						
Door mounted, snap-on mounted handle						
L3-L1, L2-L3, L1-L2, L1-N, L2-N, L3-N	3 3	10 25	OMVN30PB ONVN30PB	1SCA022533R5330 1SCA022533R5760	10 10	0.08 0.12
<b>DIN-rail mounted</b>						
L3-L1, L2-L3, L1-L2, L1-N, L2-N, L3-N	3	25	ONVN30M	1SCA022549R9010	10	0.12
<b>7 Positions, 3 phase to phase 3 phase to neutral, with 0-position, step angle 45°</b>						
Door mounted, snap-on mounted handle						
L3-L1, L2-L3, L1-L2, 0, L1-N, L2-N, L3-N	3 3	10 25	OMV30PB ONV30PB	1SCA022533R5170 1SCA022533R5500	10 10	0.12 0.12
<b>Door mounted, screw mounted handle</b>						
L3-L1, L2-L3, L1-L2, 0, L1-N, L2-N, L3-N	3	25	ONV30RB	1SCA100263R1001	10	0.12
<b>Door mounted, round front ring</b>						
L3-L1, L2-L3, L1-L2, 0, L1-N, L2-N, L3-N	3	25	ONV30XB	1SCA022709R7120	10	0.15
<b>DIN-rail mounted</b>						
L3-L1, L2-L3, L1-L2, 0, L1-N, L2-N, L3-N	3	25	ONV30M	1SCA022549R9100	10	0.12
<b>7 Positions, 3 phase to phase voltages for 2 circuits, with 0 position, step angle 45°</b>						
Door mounted, snap-on mounted handle						
L3-L1, L2-L3, L1-L2, 0, L1-L2, L2-L3, L3-L1	4 4	10 25	OMV32PB ONV32PB	1SCA022549R7740 1SCA022549R7820	10 10	0.14 0.14

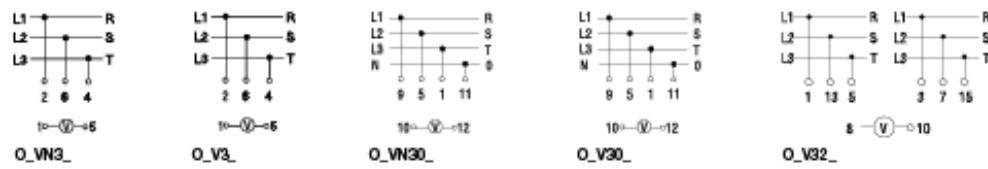

Packing sizes for 10 pcs: OM 130 x 100 x 120 [mm]  
ON, OL40 250 x 100 x 110 [mm]

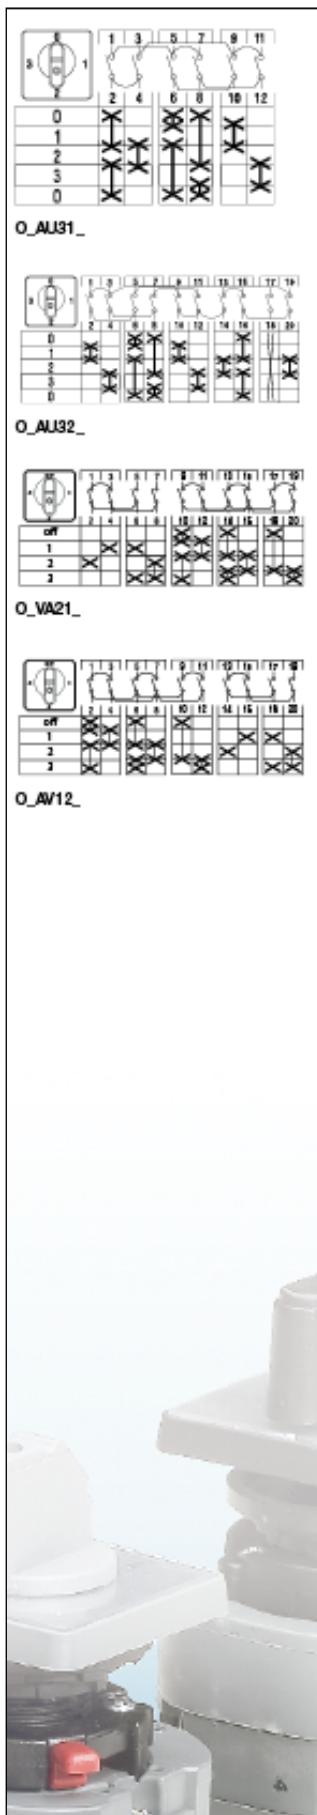

### Ammeter switches


Black handle and front plate with position indication are included.  
The type and the ordering number are for one piece.

Function	Rated thermal current I <sub>th</sub> [A]	Type	Order number	Delivery batch [pcs]	Weight/unit [kg]
<b>For 3 current transformer circuits, with 0-position, step angle 90°</b>					
Single pole					
<b>Door mounted, snap-on mounted handle</b>					
0-1-2-3	10	OMAU31PB	1SCA022533R5410	10	0.12
	25	ONAU31PB	1SCA022533R5840	10	0.12
<b>Door mounted, screw mounted handle</b>					
0-1-2-3	25	ONAU31RB	1SCA100324R1001	10	0.12
0-1-2-3	40	OL40AU31RB	1SCA100322R1001	10	0.17
<b>Door mounted, round front ring</b>					
0-1-2-3	25	ONAU31XB	1SCA022709R7550	10	0.14
<b>DIN-rail mounted</b>					
0-1-2-3	25	ONAU31M	1SCA022549R9360	10	0.12
2 pole or direct measurement in 3 phases					
<b>Door mounted, snap-on mounted handle</b>					
0-1-2-3	25	ONAU32PB	1SCA022558R4210	10	0.15


### Volt-ammeter switches

Black handle and frontplate with position indication are included.  
The type and the ordering number are for one piece.


Function	Rated thermal current I <sub>th</sub> [A]	Type	Order number	Delivery batch [pcs]	Weight/unit [kg]
<b>Measuring between phases and 3 current transformers with common pole, step angle 90°</b>					
<b>Door mounted, snap-on mounted handle</b>					
OFF-1-2-3	25	ONVA21PB	1SCA022803R4170	10	0.17
	25	ONAV12PB	1SCA022803R4250	10	0.17




O\_AU31\_



O\_AU32\_





O\_VA



O\_AV

Packing sizes for 10 pcs: OM 130 x 100 x 120 [mm]  
ON, OL40 250 x 100 x 110 [mm]



### Binarycode switches

Black handle and front plate with position indication are included.  
The type and the ordering number are for one piece.

Function	Number of poles	Rated thermal current I <sub>th</sub> [A]	Type	Order number	Delivery batch [pcs]	Weight/unit [kg]
<b>With 0-position, step angle 30°</b>						
Door mounted, snap-on mounted handle						
0-1-2-3-4-5-6-7	1	25	ONBC070PB	1SCA022803R3360	10	0.05
	1	25	ONBC071PB	1SCA022803R3440	10	0.05
	2	25	ONBC072PB	1SCA022803R3520	10	0.13
0-1-2-3-4-5-6-7-8-9	1	25	ONBC090PB	1SCA022803R3610	10	0.05
	1	25	ONBC091PB	1SCA022803R3790	10	0.05
	2	25	ONBC092PB	1SCA022803R3870	10	0.14
0-1-2-3-4-5-6-7-8-9 -10-11	1	25	ONBC0110PB	1SCA022803R3950	10	0.05
	2	25	ONBC0112PB	1SCA022803R4090	10	0.14

Packing sizes for 10 pcs: OM 130 x 100 x 120 [mm]  
ON, OL40 250 x 100 x 110 [mm]



OMPB1



OMPG1



ONPB1



ONPG1



ONPLB1



OLR1B



OLR2B



OLR3B



OMXB1



ONXB1



ONX30

### Handles

The type and the ordering number are for one piece.

Colour	For cam switches	Type	Order number	Delivery batch [pcs]	Weight/ unit [kg]
<b>Snap on handle with front plate without engraving</b>					
(The black handle is included in the standard delivery in types OM, ON, and OL40)					
<b>Size 30x30</b>					
Black	OM	OMPB1	1SCA022553R7470	5	0.05
Grey	OM	OMPG1	1SCA022553R8010	5	0.05
Red	OM	OMPR1	1SCA022796R2830	5	0.05
Red-yellow	OM	OPRY1	1SCA022796R2910	5	0.05
<b>Size 48x48</b>					
Black	ON_PB, OL40	ONPB1	1SCA022553R7550	5	0.08
Grey	ON_PB, OL40	ONPG1	1SCA022553R7630	5	0.08
Red	ON_PB, OL40	ONPR1	1SCA022796R3050	5	0.08
Red-yellow	ON_PB, OL40	OPRY1	1SCA022796R3130	5	0.08

### Snap on handle with large front plate without engraving

#### Size 64x64

Black	ON_PB, OL40	ONPLB1	1SCA022776R5680	5	0.10
Grey	ON_PB, OL40	ONPLG1	1SCA022776R5760	5	0.10
Red	ON_PB, OL40	ONPLR1	1SCA022776R5840	5	0.10
Red-yellow	ON_PB, OL40	ONPLRY1	1SCA022796R3130	5	0.10

### Screw mounting handle with front plate without engraving

(The black handle is included in the standard delivery in types OL 80...200)

#### Size 64x64

Black	OL63, OL80N	OLR1B	1SCA111831R1001	10	0.10
Grey	OL63, OL80N	OLR1G	1SCA111833R1001	10	0.10
Red	OL63, OL80N	OLR1R	1SCA111834R1001	10	0.10

#### Size 90x90

Black	OL125, OL160	OLR2B	1SCA022796R3720	10	0.10
Grey	OL125, OL160	OLR2G	1SCA022796R3810	10	0.10
Red	OL125, OL160	OLR2R	1SCA022796R3990	10	0.10

#### Size 130x130

Black	OL200	OLR3B	1SCA022796R4110	10	0.10
Grey	OL200	OLR3G	1SCA022796R4290	10	0.10
Red	OL200	OLR3R	1SCA022796R4370	10	0.10

### Snap on handle with round escutcheon plate

Black	OM	OMXB1	1SCA022629R7270	5	0.02
Black, nose-type	OM	OMXNB1	1SCA022577R9810	5	0.02
Black	ON_PB, OL40	ONXB1	1SCA022629R7350	5	0.02

### Adaptor ring

For fixing the snap-on handles in the 30 mm door drilling.

Black	ON	ONX30	1SCA022643R8510	10	0.01
-------	----	-------	-----------------	----	------

More cam switches with padlockable handles can be configured on Internet by the Camweb configurator tool.



ONSB1



OLHSD1



OLISD1



OLZ2RB



OLZ3RB



OLZ3DB

## Optional handles

The type and the ordering number are for one piece.

Colour	For cam switches	Type	Order number	Delivery batch [pcs]	Weight/unit [kg]
<b>Low extended handle knob</b>					
Black	ON_, OL40_	ONSB1	1SCA00878R1001	5	0.02
Grey	ON_, OL40_	ONSG1	1SCA00879R1001	5	0.02

### Hand grip handle, screw mounting

Suitable for 6 mm shaft, replaces the standard handle.

Black	ON_, OL40_, OL63_, OL80N_	OLHSD1	1SCA022765R2480	1	0.38
Grey	ON_, OL40_, OL63_, OL80N_	OLHGD1	1SCA022765R2560	1	0.38
Red	ON_, OL40_, OL63_, OL80N_	OLHRD1	1SCA022765R2640	1	0.38

### Ball grip handle, screw mounting

Suitable for 6 mm shaft, replaces the standard handle.

Black	ON_, OL40_, OL63_, OL80N_	OLISD1	1SCA022820R3380	1	0.25
Grey	ON_, OL40_, OL63_, OL80N_	OLIGD1	1SCA022820R3460	1	0.25
Red	ON_, OL40_, OL63_, OL80N_	OLIRD1	1SCA022820R3540	1	0.25

### Pistol type handle, screw mounting

Suitable for 8 mm shaft, replaces the standard handle.

Black	OL125, OL160	OLZ2RB	1SCA022796R4530	10	0.10
Red	OL125, OL160	OLZ2RR	1SCA022796R4610	10	0.10

Suitable for 10 mm shaft, replaces the standard handle.

Black	OL200	OLZ3RB	1SCA022796R4700	10	0.20
Red	OL200	OLZ3RR	1SCA022796R4880	10	0.20

### Double lever handle, screw mounting

Suitable for 10 mm shaft, replaces the standard handle.

Black	OL200	OLZ3DB	1SCA022796R4960	1	0.30
Red	OL200	OLZ3DR	1SCA022796R5000	1	0.30

More cam switches with padlockable handles can be configured on Internet by the Camweb configurator tool.



ONZ20B



ONZ20RY



OLZ20RB



OZ331\_B



OZ331\_RY



OZ371PB



OLZ332RB



OLZ332RRY



OZG71

### Padlockable optional handles

The type and the ordering number are for one piece.

Colour	For cam switches	Type	Order number	Delivery batch [pcs]	Weight/ unit [kg]
--------	------------------	------	--------------	-------------------------	-------------------------

#### Padlockable handle knob, optional extra for standard handle

The padlockable handle knob and the locking ring replace the handle knob of the standard handle. Standard padlocking in the OFF-position at 9 o'clock. Padlocking in the ON-position (12 o'clock) by turning the control piece 180 degrees. Padlocking in both OFF-and ON-positions by removing a precut in the yellow locking ring.

For max 2 padlocks of 6 mm hasp diameter.

Black	ON_PB, ON_M, OL40	ONZ20B	1SCA022621R1810	5	0.06
Red-yellow	ON_PB, ON_M, OL40	ONZ20RY	1SCA022621R1900	5	0.06

For max 3 padlocks of 6 mm hasp diameter

Black	ON_PL_, OL40_PL_	OLZ20PB	1SCA112522R1001	10	0.2
Red-yellow	ON_PL_, OL40_PL_	OLZ20PRY	1SCA112523R1001	10	0.2
Black	ON_RL_, OL40...80N_	OLZ20RB	1SCA112524R1001	10	0.2
Red-yellow	ON_RL_, OL40...80N_	OLZ20RRY	1SCA112525R1001	10	0.2

#### Round padlockable handles

For max 3 padlocks with max 8 mm hasp diameter. Locking position (O, OFF) 9 o'clock or 12 o'clock when rotating. More locking possibilities with programmable square handle type \_ 5 \_ can be specified by the Camweb configurator tool. The moving angle 90 degrees.

Snap on mounting handle

IP65, NEMA 4X outdoor, size 66x66, suitable for 6 mm shaft (one-hole mounting)

Black	ON_PB, OL40_PB	OZ331PB	1SCA100657R1001	10	0.04
Red-yellow	ON_PB, OL40_PB	OZ331PRY	1SCA100664R1001	10	0.04

#### One hole on mounting handle with short shaft adaptor for low enclosures base mounting

IP65, NEMA 4X outdoor, size 66x66, suitable for 6 mm shaft

Black	ON_, OL40_B, OT16...80F	OZ331SPB	1SCA112983R1001	10	0.05
Red-yellow	ON_, OL40_B, OT16...80F	OZ331SPRY	1SCA113097R1001	10	0.05

#### Snap on mounting handle for increased protection

IP67, IP69K, NEMA 4X outdoor, size 66x66, suitable for 6 mm shaft (one-hole mounting)

Black	ON_PB, OL40_PB	OZ331P67B	1SCA111427R1001	10	0.04
Red-yellow	ON_PB, OL40_PB	OZ331P67RY	1SCA111429R1001	10	0.04

#### Snap on mounting handle with door coupling

Door coupling in ON-position without by-passing, IP65, NEMA 4X outdoor, size 66x66, suitable for 6 mm shaft (one-hole mounting), for base mounting only

Black	ON_PB, OL40_PB	OZ371PB	1SCA111684R1001	10	0.05
Red-yellow	ON_PB, OL40_PB	OZ371PRY	1SCA111685R1001	10	0.05

#### Screw mounting handles

IP65, NEMA 4X outdoor, size 66x66, suitable for 6 mm shaft (four-hole mounting)

Black	ON_RB, OL40_RB, OL63, OL80N	OZ331RB	1SCA100702R1001	10	0.04
Red-yellow	ON_RB, OL40_RB, OL63, OL80N	OZ331RRY	1SCA100678R1001	10	0.04

#### IP65, NEMA 4X outdoor, size 90x90, suitable for 8 mm shaft (four-hole mounting)

Black	OL125, OL160	OLZ332RB	1SCA022794R7790	10	0.10
Red-yellow	OL125, OL160	OLZ332RRY	1SCA022794R7870	10	0.10

#### Shaft guide for OZ371P\_ handle

For base mounting switches with 6 mm shaft

Black	ON_PB, OL40_PB	OZG71	1SCA111686R1001	10	0.05
-------	----------------	-------	-----------------	----	------



OMF101	ONF101
ONF64	OLF90
ONFM101	
OMFB72	ONFB72
OLFB64	
OMF72	ONF72
OLF72	
OZB372	
OMX99	ONX99

### Front plates

The type and the ordering number are for one piece.

Colour	For cam switches/ handle size	Type	Order number	Delivery batch [pcs]	Weight/ unit [kg]
<b>Front plates, without engraving</b>					
The text can be specified with Camweb tool.					
<b>Size 30x30</b>					
Silver	OM / OMP_1	OMF101	1SCA022540R4590	10	0.003
Yellow	OM / OMPR_1	OMFY101	1SCA022796R3210	10	0.003
<b>Size 48x48</b>					
Silver	ON_P_, OL40_P_ / ONP_1	ONF101	1SCA022540R6290	10	0.003
Silver	ON_R_, OL40_R_	ONRF101	1SCA106725R1001	10	0.003
Yellow	ON_P_, OL40_P_ / ONPR_1	ONFY101	1SCA022716R4250	10	0.003
Yellow	ON_R_, OL40_R_	ONRFY101	1SCA106726R1001	10	0.003
<b>Size 64x64</b>					
Silver	ON_P_, ON_R_, OL40...80N_, ON_L_, OL40_L <sup>(1)</sup> / ONPL_1	OLF64	1SCA022798R6260	10	0.003
Yellow	ON_P_, ON_R_, OL40...80N_, ON_L_, OL40_L <sup>(1)</sup> / ONPLR_1	OLFY64	1SCA022798R6340	10	0.003
<b>Size 90x90</b>					
Silver	OL125, OL160 / OLR2_	OLF90	1SCA022796R5180	10	0.01
Yellow	OL125, OL160 / OLR2_	OLFY90	1SCA022796R5260	10	0.01
<b>Size 130x130</b>					
Silver	OL200 / OLR3_	OLF130	1SCA022796R5420	10	0.01
Yellow	OL200 / OLR3R	OLFY130	1SCA022796R5340	10	0.01
<b>Size H=45mm, W=54mm</b>					
Grey	ON_M	ONFM101	1SCA022553R8520	10	0.01

### Additional lettering plates with frame without engraving for standard handles

Including the lettering plate and the frame. The text can be specified with Camweb tool.

<b>Size 30x30</b>					
Black frame	OM	OMFB72	1SCA022555R4990	5	0.01
Grey frame	OM	OMFG72	1SCA022556R1850	5	0.01
<b>Size 48x48</b>					
Black frame	ON_PB, OL 40	ONFB72	1SCA022555R5020	5	0.01
Grey frame	ON_PB, OL 40	ONFG72	1SCA022556R1930	5	0.01
<b>Size 64x64</b>					
Black frame	ON_PB, OL 40...80N, ON_L_, OL40_L <sup>(1)</sup>	OLFB64	1SCA022796R3300	10	0.01
Grey frame	ON_PB, OL 40...80N, ON_L_, OL40_L <sup>(1)</sup>	OLFG64	1SCA022796R3480	10	0.01

### Lettering plates, brushed aluminium, without frame

Without engraving. The text can be specified with Camweb tool.

Width 30	OM	OMF72	1SCA111687R1001	5	0.003
Width 48	ON, OL 40	ONF72	1SCA111688R1001	5	0.003
Width 64	ON, OL 40...80N, ON_L_, OL40_L <sup>(1)</sup>	OLF72	1SCA111689R1001	5	0.003

### Lettering plates for round padlockable handle types

Including the lettering plate and the frame

For OZ33_ and OZ371	OZB372	1SCA113098R1001	5	0.006
---------------------	--------	-----------------	---	-------

### Front ring


Black	OM	OMX99	1SCA022553R8100	10	0.01
Black	ON_PB, OL40	ONX99	1SCA022553R7710	10	0.01

### Shaft sealing

To prevent dust and moisture penetrating along the switch shaft when no handle is installed.  
Protection to IP65 from the front. Door drilling 16...17 mm.

ON, OL40...80N OL 125...160	ONZ11 OLZ12	1SCA022807R0300 1SCA022807R0560	10	0.01
--------------------------------	----------------	------------------------------------	----	------

<sup>(1)</sup> The type generated by Camweb configuration tool for the cam switch with large front plate, for example the cam switch type ON5PB is wanted with special size handle 64x64, the Camweb will generate the new cam switch type ON5PLB.

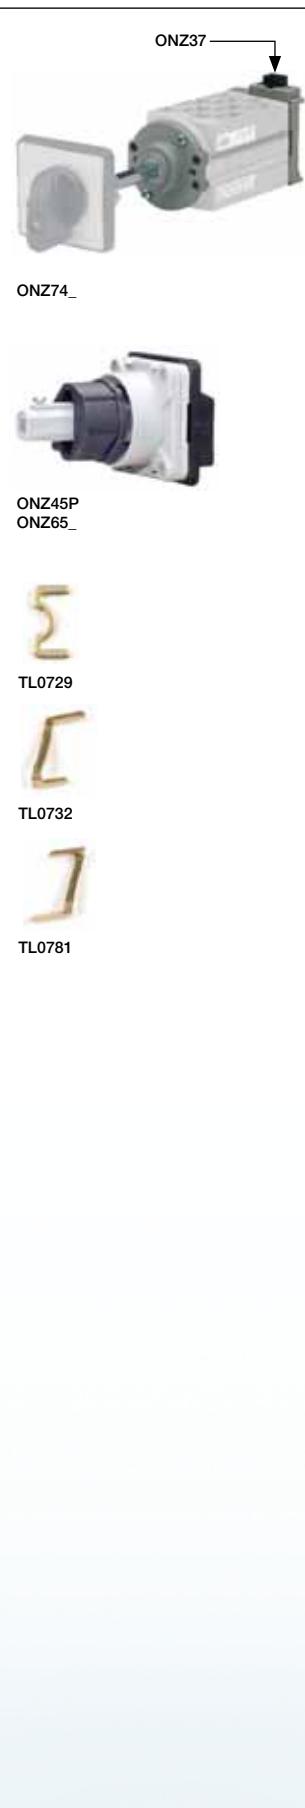

### Other accessories

The type and the ordering number are for one piece.

#### Base mounting kit

Includes base for DIN-rail mounting, shaft adaptor and 200 mm shaft for cutting up to 250 mm panel depth.

Depth [mm]	For cam switches	Type	Order number	Delivery batch [pcs]	Weight/ unit [kg]
250	ON	ONZ74	1SCA022757R3510	1	0.05

#### DIN-rail mounting plate

Includes base for DIN-rail mounting.

ON, OL40	ONZ37	1SCA022789R8810	1	0.02
----------	-------	-----------------	---	------

#### Door coupling kits for base mounting switches

REMARK: Round padlockable handle with door coupling (the complete package), see page 35.

ON, OL40...80N	ONZ45P	1SCA022819R5850	1	0.01
OL125...160	OLZ652	1SCA022819R5930	1	0.02
OL200	OLZ653	1SCA022819R6070	1	0.02

#### Chamber to chamber connection jumpers

Provide IP20 protection with ON\_.

Jumper shape	For cam switches	Type	Order number	Delivery batch [pcs]	Weight/ unit [kg]
M -shape, ON_ axial interchamber		TL.0729	1SCA022704R2310		
Z -shape, ON_ cross-axial interchamber		TL.0732	1SCA022704R2220		
S -shape, ON_ cross-axial interchamber		TL.0781	1SCA022704R2140		



O\_K95



ONZ10L\_



OMNX80

### Other accessories

The type and the ordering number are for one piece.

#### Spare key

The key number has to be mentioned when ordering. For key-operated cam switches.

Number of keys included	Lock type	Type	Order number	Delivery batch [pcs]	Weight unit [kg]
2 pcs	Ronis 203	OMK95	1SCA022553R8360	2	0.01
2 pcs	Eurolock 405	ONK95	1SCA022553R7980	2	0.01

#### Protective rear cover

Transparent, IP 42 protection


Number of chambers	Number of contacts	For cam switches	Type	Order number	Delivery batch [pcs]	Weight unit [kg]
1-2	2-4	ON	ONZ10L2	1SCA022621R1570	1	0.02
3-4	6-8	ON	ONZ10L4	1SCA022621R1650	1	0.04
5-6	10-12	ON	ONZ10L6	1SCA022621R1730	1	0.06
2		OL40	OLZ401L2	1SCA022805R9910	1	0.05
4		OL40	OLZ401L4	1SCA022806R0090	1	0.07
6		OL40	OLZ401L6	1SCA022806R0170	1	0.10
2		OL63...160	OLZ1601L2	1SCA022806R0250	1	0.10
4		OL63...160	OLZ1601L4	1SCA022806R0330	1	0.15
6		OL63...160	OLZ1601L6	1SCA022806R0410	1	0.20
2		OL200	OLZ63D34	1SCA022785R6720	1	0.15
4		OL200	OLZ63D36	1SCA022785R6810	1	0.20
6		OL200	OLZ63D38	1SCA022785R6990	1	0.25

#### Nut spanner tool


For proper tightening the nut of snap-on mounted handle

Colour	For cam switches	Type	Order number	Delivery batch [pcs]	Weight unit [kg]
Black	OM, ON, OL40_P	OMNX80	1SCA022553R8440	1	0.02

### OM

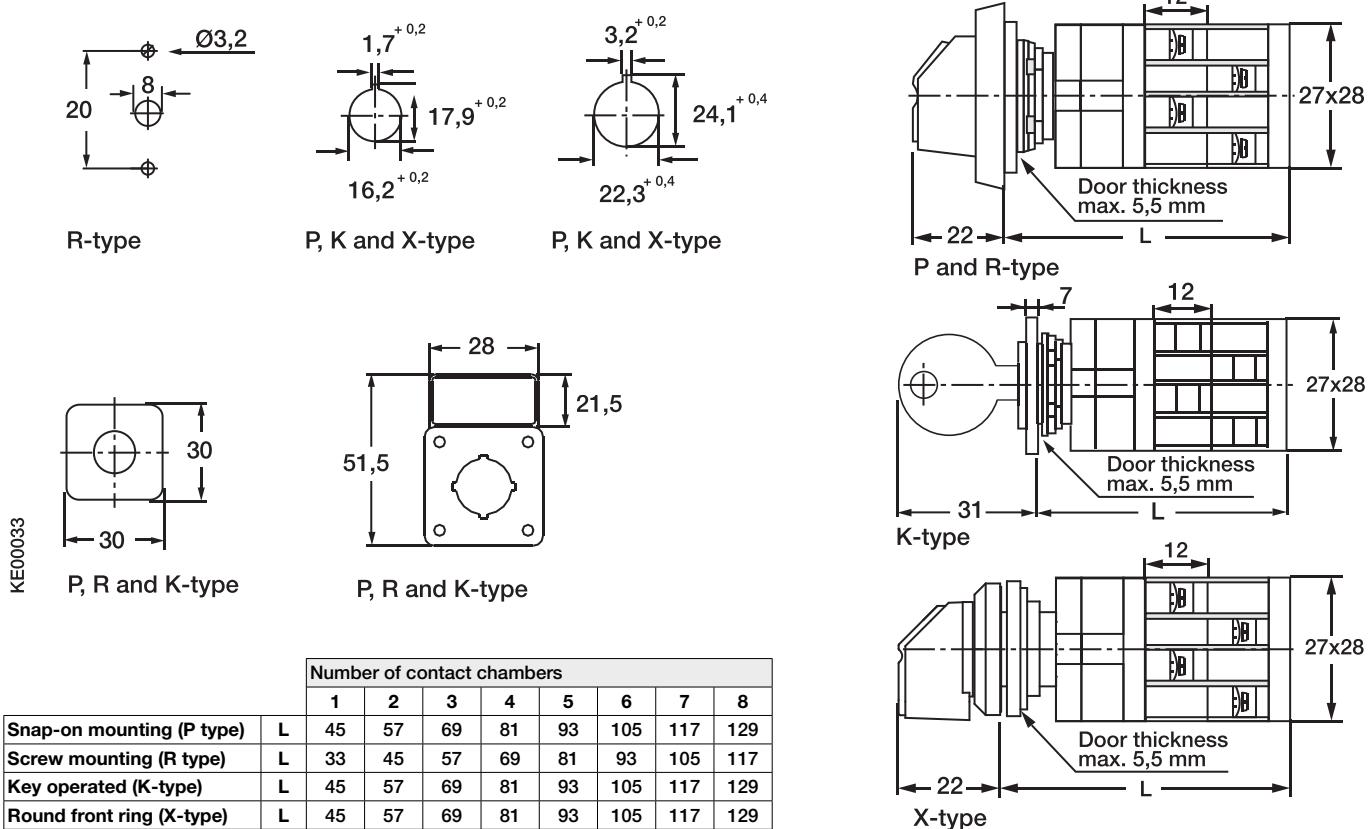


### ON

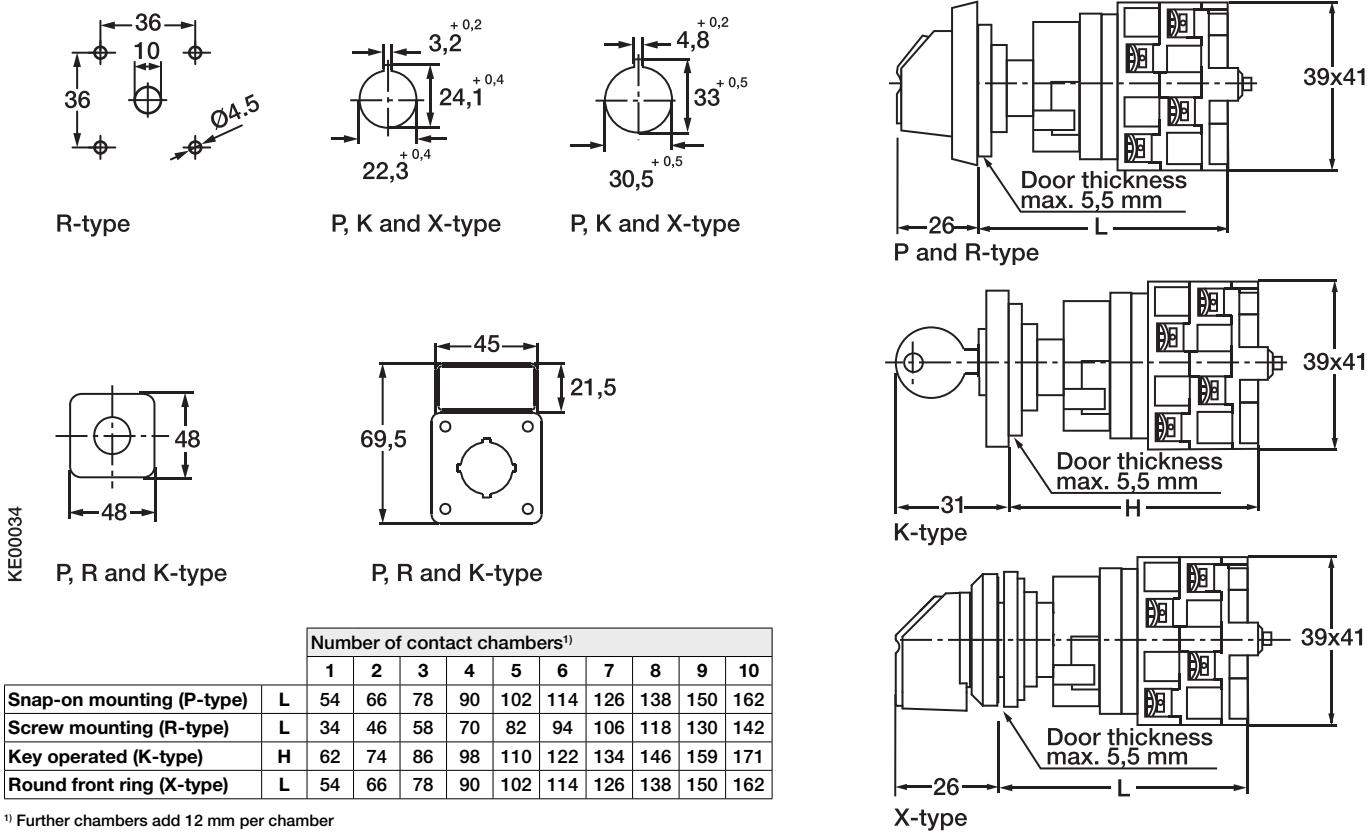


<sup>1)</sup> Further chambers add 12 mm per chamber


### ON\_M

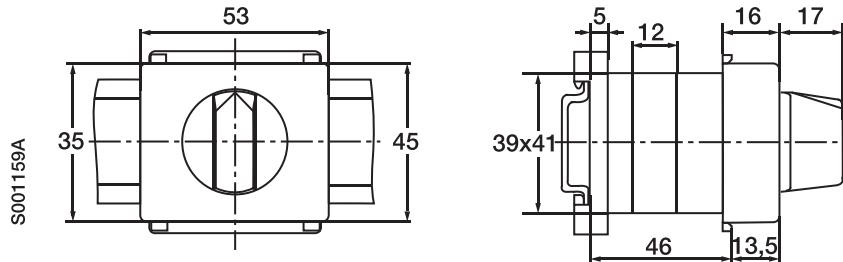

### ON with base mounting, type \_ B \_ - to be specified by Camweb configurator

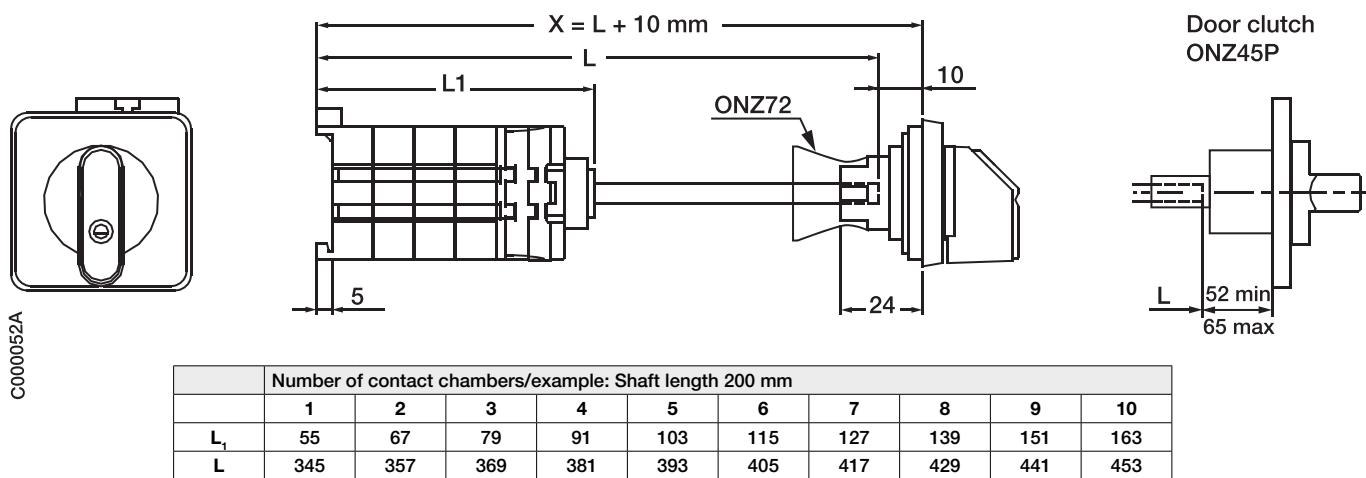


### OL40, door mounted with snap-on mounting handle, type \_ P\_ , \_PL\_ and round front ring, type \_ X\_

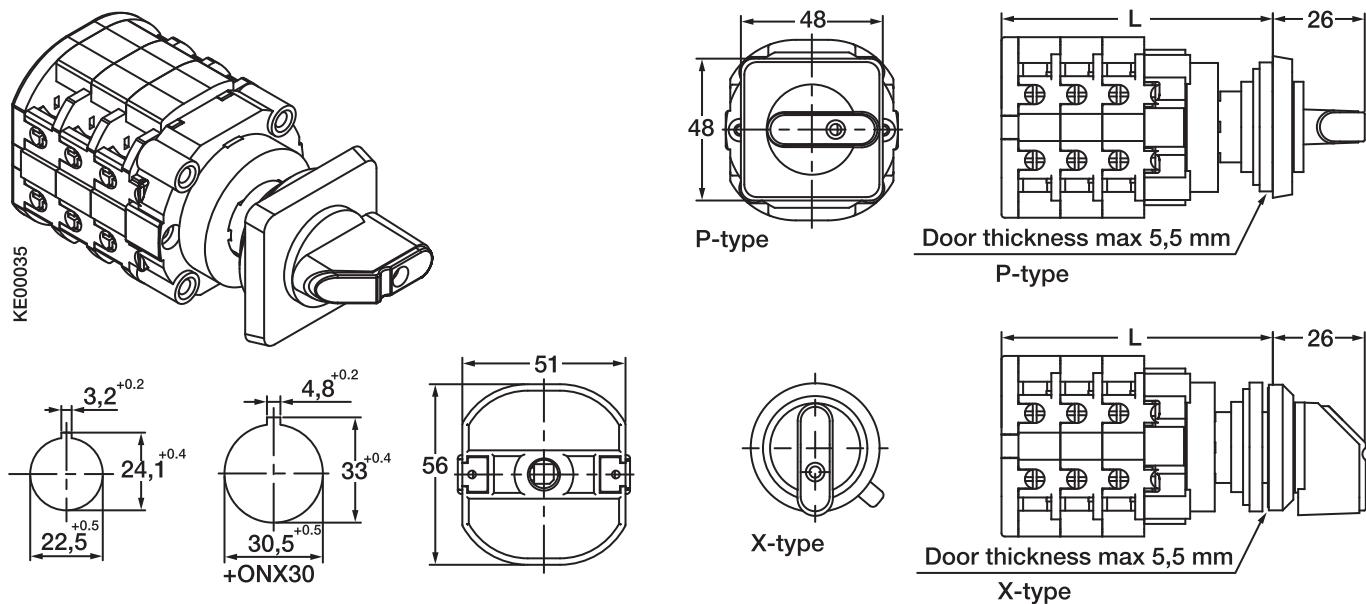


<sup>1)</sup> Further chambers add 13 mm per chamber




OL40, door mounted with screw mounting handle, type \_R\_, front plate size 48x48




C000027A




Door thickness max 5,5 mm






OL40, door mounted with screw mounting handle, type \_RL\_, front plate size 64x64  
- to be specified by Camweb configurator



C000028A








Door thickness max 5,5 mm








	Number of contact chambers									
L	1	2	3	4	5	6	7	8	9	10
	39	52	65	78	91	104	117	130	143	156

**OL40, base mounted, front plate size 48x48 - to be specified by Camweb configurator**

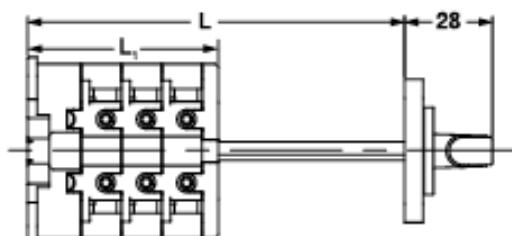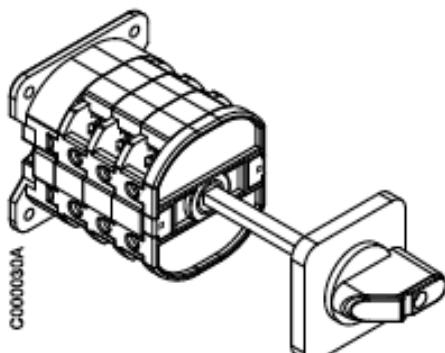


	Number of contact chambers/example: shaft length 200 mm									
	1	2	3	4	5	6	7	8	9	10
L <sub>1</sub>	36	49	62	75	88	101	114	127	140	153
L	237	249	262	275	288	301	314	327	340	353

**OL40, base mounted, front plate size 64x64 - to be specified by Camweb configurator**

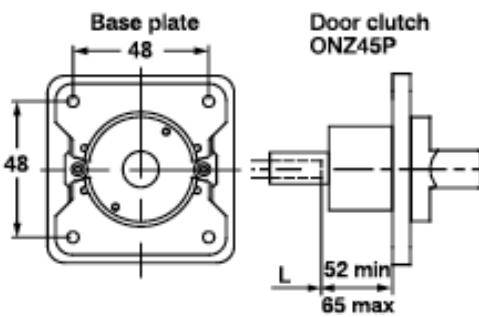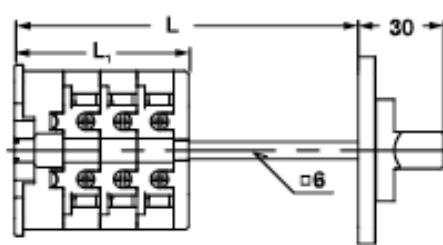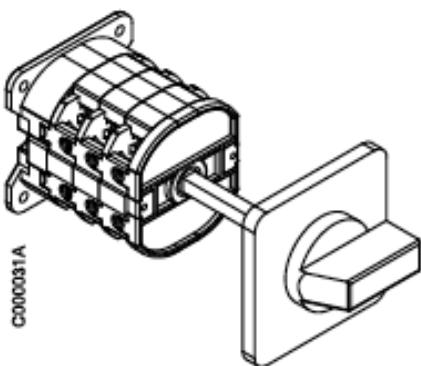


Door clutch  
ONZ45P




	Number of contact chambers/example: shaft length 200 mm									
	1	2	3	4	5	6	7	8	9	10
L <sub>1</sub>	37	49	62	75	88	101	114	127	140	153
L	237	249	262	275	288	301	314	327	340	353

### OL63, OL80N door mounted

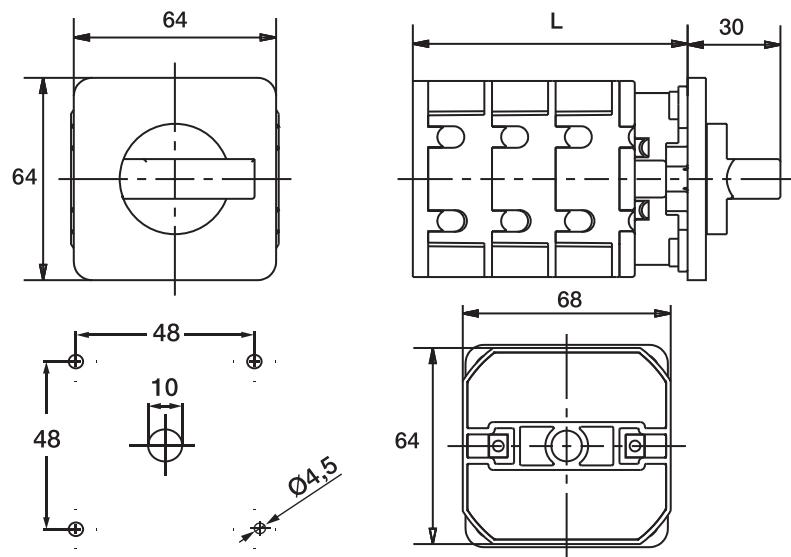


	Number of contact chambers									
	1	2	3	4	5	6	7	8	9	10
M04000	49	69,5	90	110,5	131	151,5	172	192,5	213	233,5

### OL63, OL80N base mounted




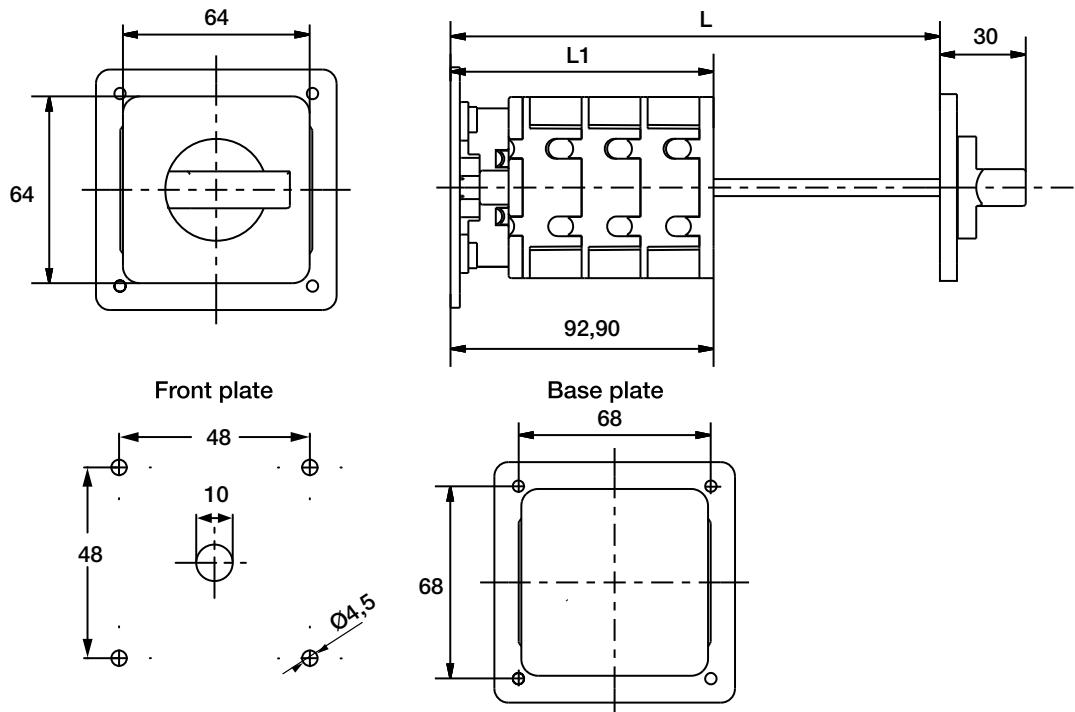


	Number of contact chambers									
	1	2	3	4	5	6	7	8	9	10
M04001	52	72,5	93	113,5	134	154,5	175	195,5	216	236,5
L	252	272,5	293	313,5	334	354,5	375	395,5	416	436,5

**OL125, OL160 door mounted**




C000038A







	Number of contact chambers									
	1	2	3	4	5	6	7	8	9	10
L	66	97	128	159	190	221	252	283	314	345

**OL125, OL160 door mounted, lug terminals - to be specified by Camweb configurator**

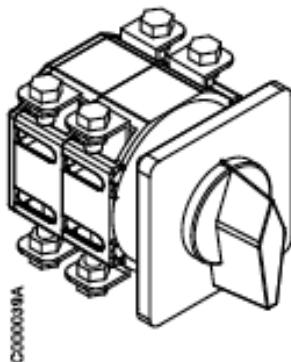


C000038A




	Number of contact chambers									
	1	2	3	4	5	6	7	8	9	10
L	66	97	128	159	190	221	252	283	314	345

**OL125, OL160 base mounted - to be specified by Camweb configurator**

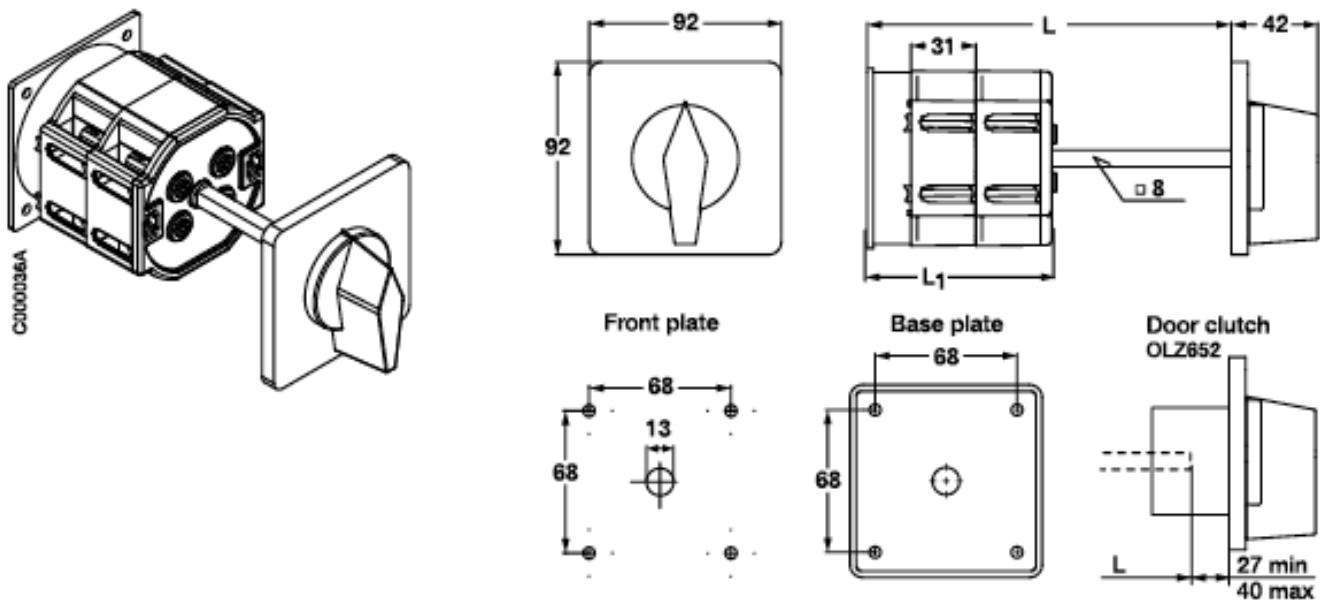



	Number of contact chambers/Shaft length 100 mm									
	1	2	3	4	5	6	7	8	9	10
$L_1$	65	96	127	158	189	220	251	282	313	344
L	165	196	227	258	289	320	351	382	413	444

**OL125, OL160 base mounted, lug terminals - to be specified by Camweb configurator**

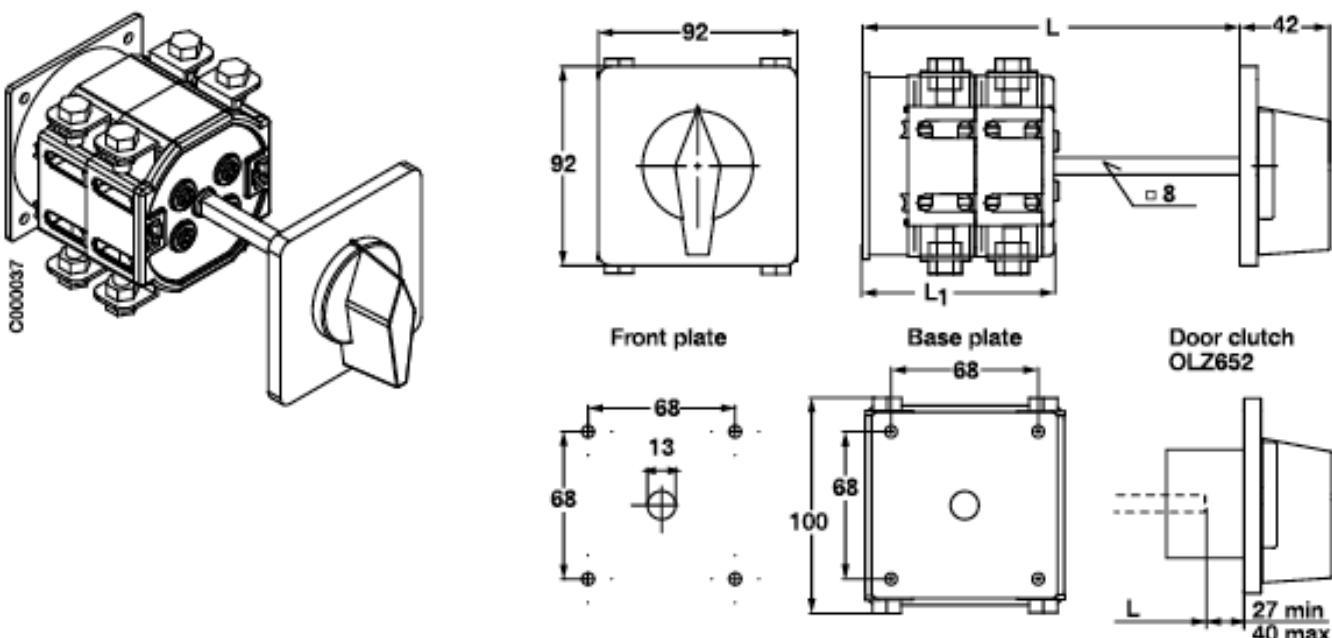



	Number of contact chambers/Shaft length 100 mm									
	1	2	3	4	5	6	7	8	9	10
$L_1$	65	96	127	158	189	220	251	282	313	344
L	165	196	227	258	289	320	351	382	413	444

### OL200 door mounted

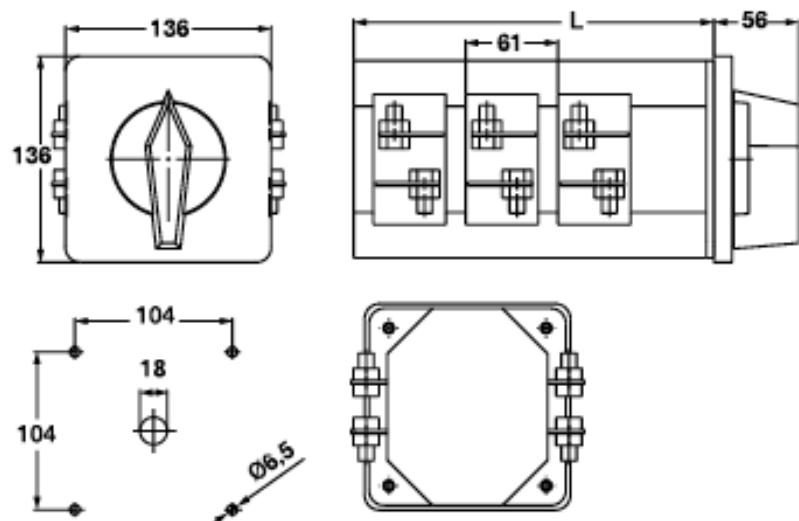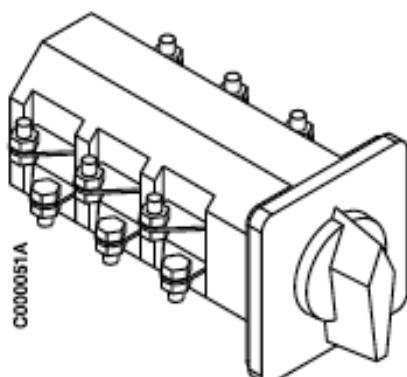

	Number of contact chambers									
L	1	2	3	4	5	6	7	8	9	10
	120	181	242	303	364	425	486	547	608	669






### OL200 base mounted - to be specified by Camweb configurator

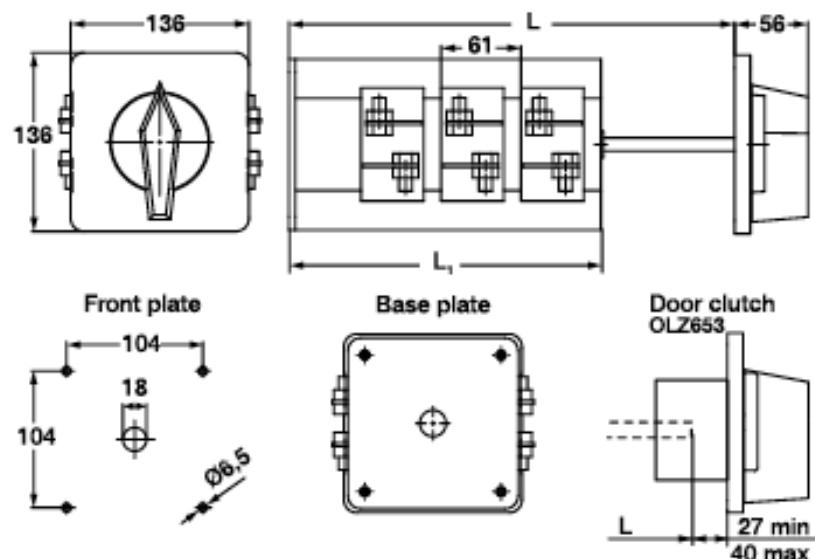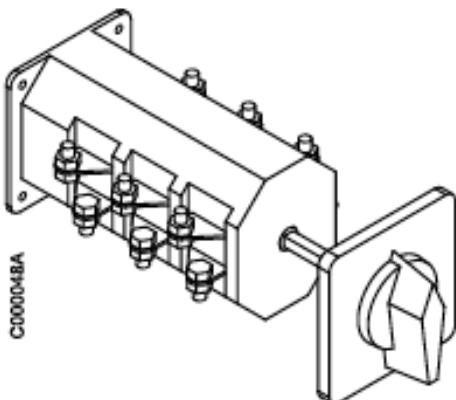


	Number of contact chambers/example: Shaft length 100 mm									
L <sub>1</sub>	1	2	3	4	5	6	7	8	9	10
	120	181	242	303	364	425	486	547	608	669




L	220	281	342	403	464	525	586	647	708	769
	220	281	342	403	464	525	586	647	708	769

**Front plates, sizes and door drillings**

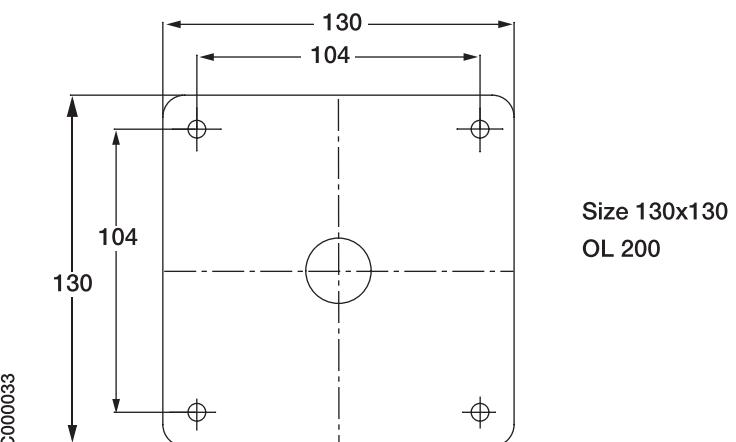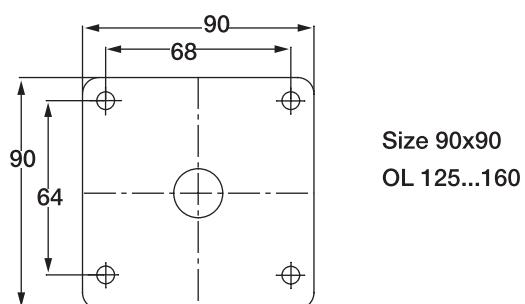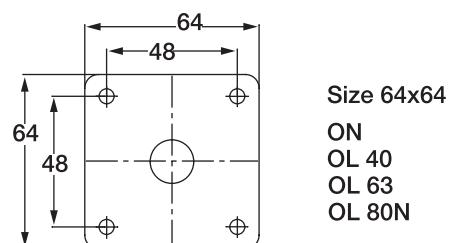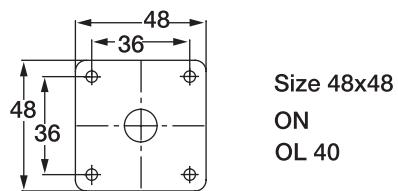Snap-on handle for OM, type OMP\_






C000018A




Snap-on key operated handle for OM - to be specified by Camweb configurator





C000025A



Round front ring OMX\_ for OM - to be specified by Camweb configurator







C000029






Screw mounted handle ON and OL40 - to be specified by Camweb configurator






C000017A



Snap-on key operated handle for ON - to be specified by Camweb configurator






Screw mounted large handle option for ON, OL40, OL63 and OL 80N (type \_ RL \_ )  
- to be specified by Camweb configurator








$\varnothing 4.5$


Round front ring ONX\_ for ON, OL40, OL63 and OL80N (type \_ X\_ )







Padlockable handle knob for ON, OL40, OL63 and OL80N type ONZ20\_  
(also suitable for 64x64 handle)



Round padlockable snap-on mounted handle for ON, OL40, OL63 and OL80N, type OZ331P\_ , OZ331SP\_ and door coupling OZ371\_ - to be specified by Camweb configurator (Type \_P3\_)




KE00031







	OZ331P_	OZ331SP_	OZ371_
A	24	15	21
B	3...19	8...10	4...5


Round padlockable screw mounted handle for ON, OL40, OL63 and OL80N type OZ331R\_ - to be specified by Camweb configurator (Type \_R3\_)






KE00032



Round padlockable screw mounted handle for OL125 and OL160, type OLZ332R  
- Type R3 to be specified by the Camweb configurator




C000021A




Shaft size 8 mm


Square padlockable handle for ON, OL40, OL63 and OL80N  
- to be specified by Camweb configurator (Type R5)

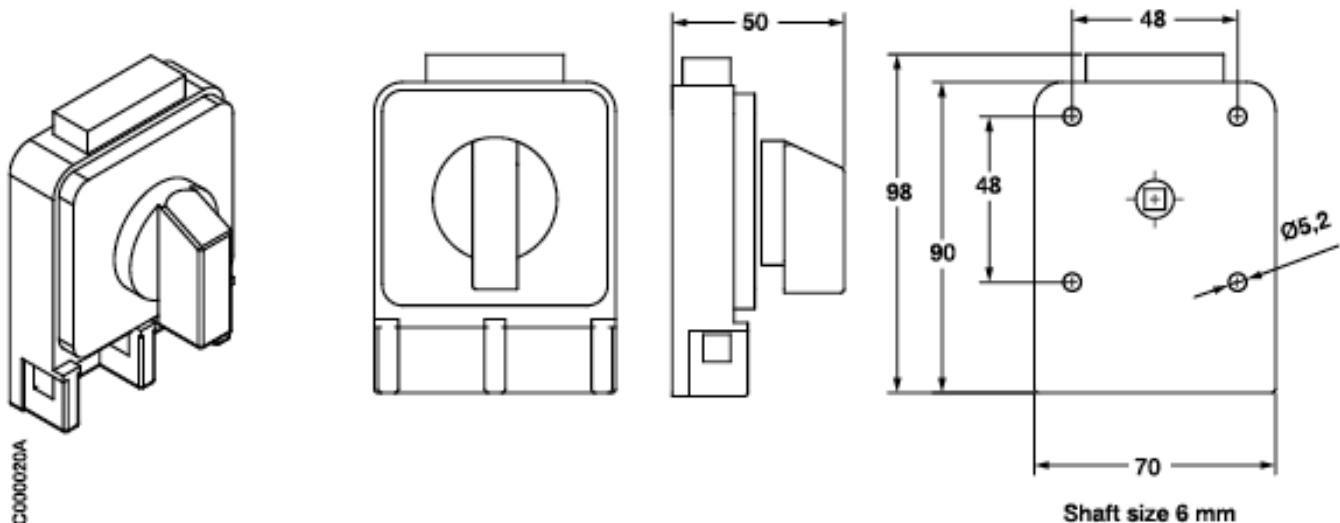





Square padlockable handle for OL125 and OL160  
- to be specified by Camweb configurator (Type R5)

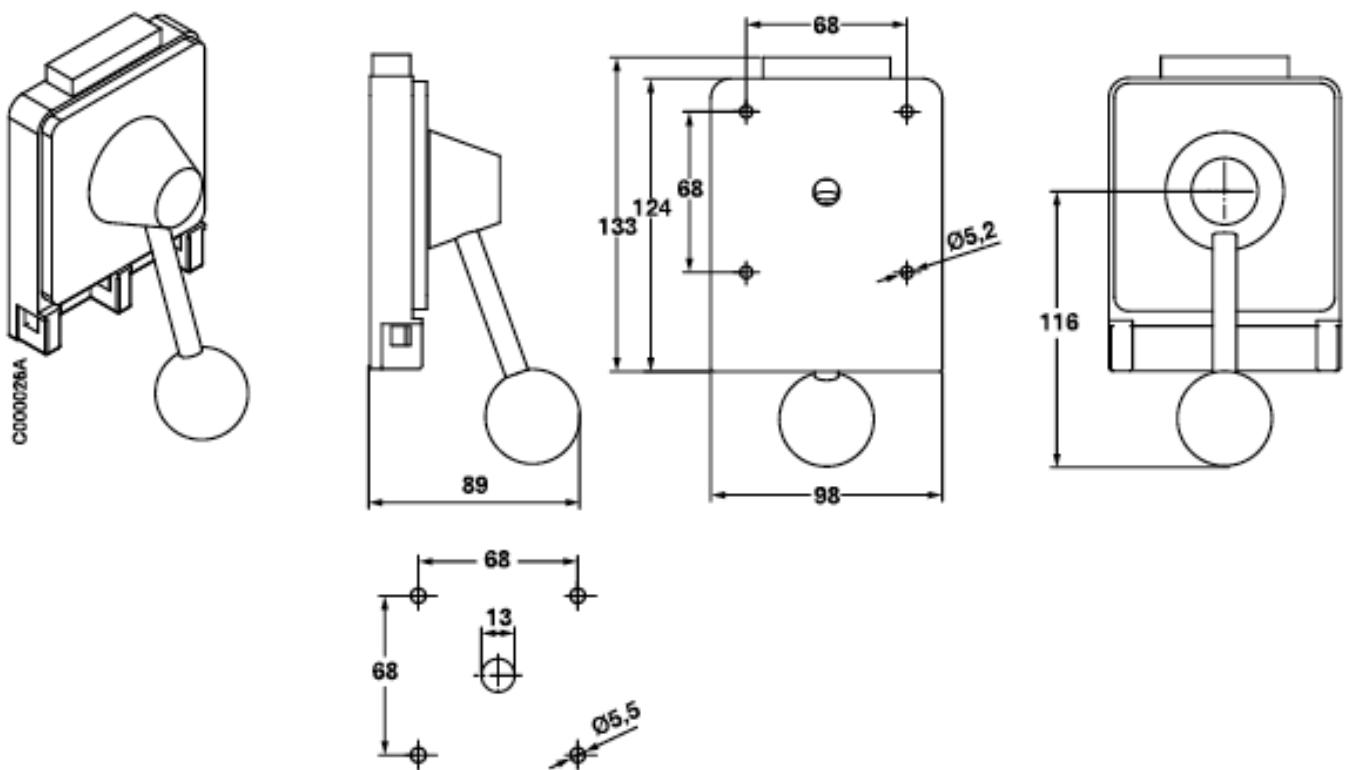


**Key interlocked handle for ON front plate size 48x48, vertical**  
- to be specified by Camweb configurator (Type Q)

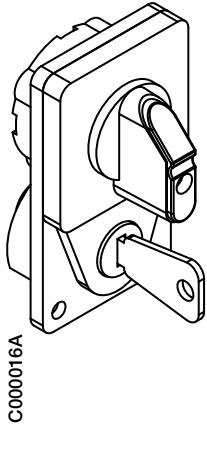





C000016A

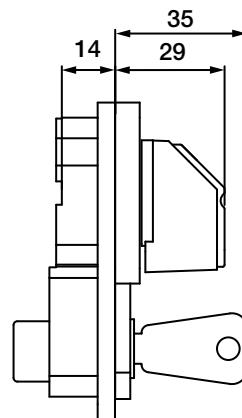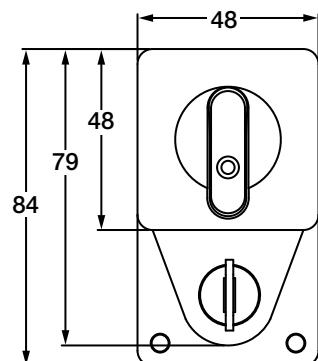


**Key interlocked handle for ON, OL40, OL63 and OL80N, front plate size 64x64, vertical**  
- to be specified by Camweb configurator (Type Q)

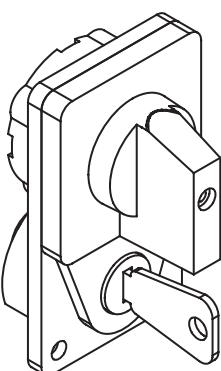





C000040A

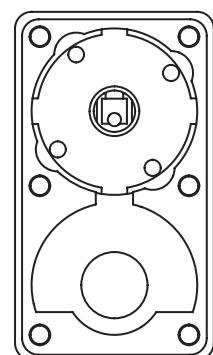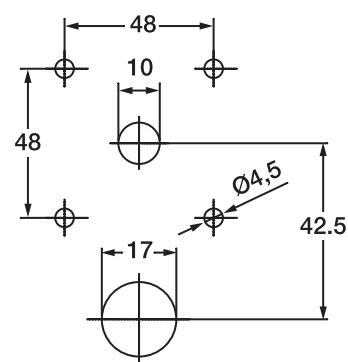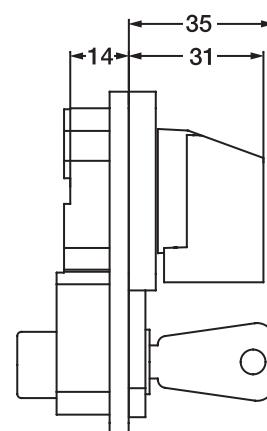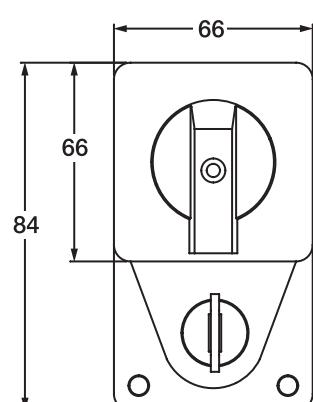

**Push button interlock handle for ON, OL40, OL63 and OL80N**  
 - to be specified by Camweb configurator (Type U)




C000015A

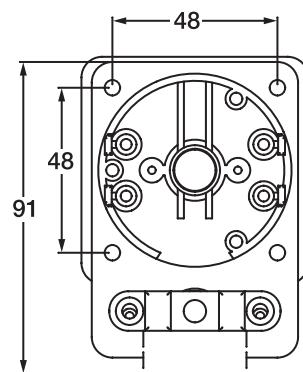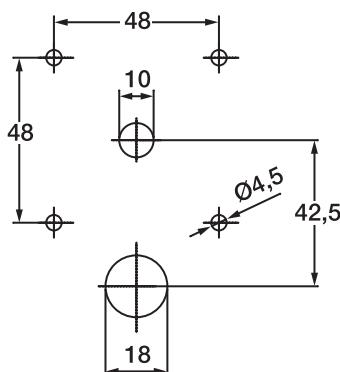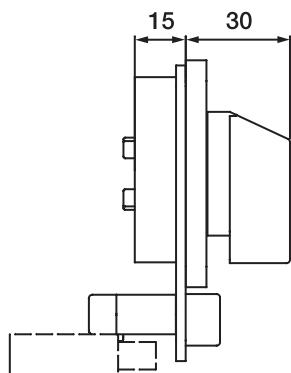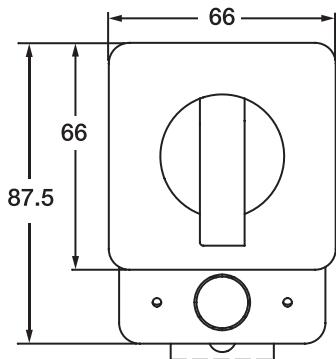


### Pistol and double lever handles

OLZ2R\_, OLZ3R

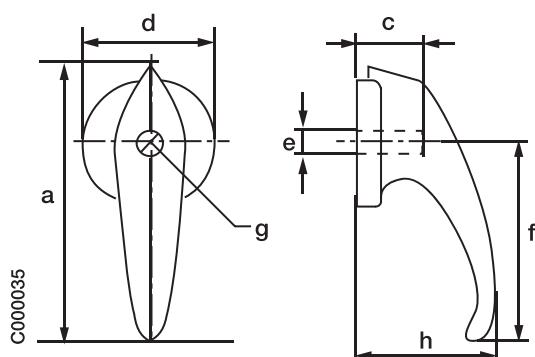

C000035

OLZ3D\_




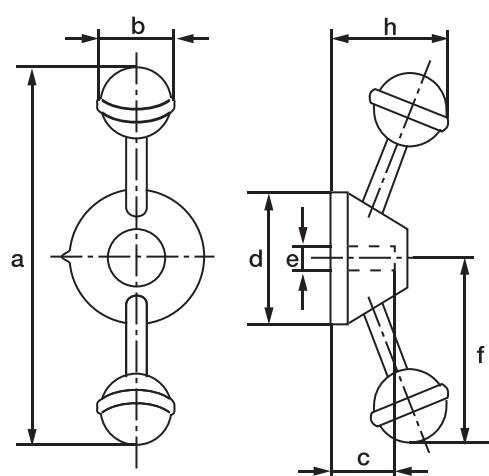


	a	b	c	d	e	f	g	h	y
<b>OLZ2R_</b>	112	40	21	50	8 <sup>7</sup>	80	114	50	9
<b>OLZ3R_</b>	141	54	26	77	10 <sup>7</sup>	145	145	66	14
<b>OLZ3D_</b>	252	40	28	77	10 <sup>7</sup>	126	-	56	10

**Door clutch, interlock for hinged door, for ON, OL40, OL63 and OL80N, (ONZ45P)**

- to be specified by Camweb configurator

- to lock the panel when the switch is in on position


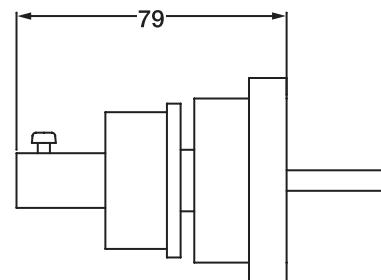




Shaft size 6mm

**Door clutch, interlock for hinged door, for OL40, OL63 and OL80N, (ONZ45P)**

- to be specified by Camweb configurator

- to lock the panel when the switch is in on position







Shaft size 6mm

**Door clutch, interlock for hinged door, for OL125, OL160 (OLZ652)**


**and for OL200 (OLZ653) - to be specified by Camweb configurator**

- to lock the panel when the switch is in on position



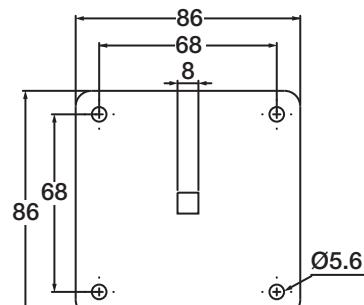



Shaft size 8mm


**Double gang (Tandem) drive for ON, standard handle**  
- to be specified by Camweb configurator

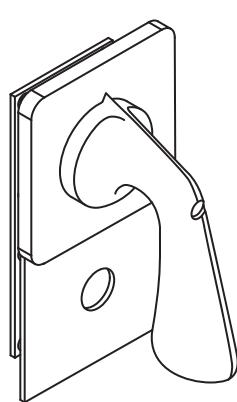





C00041A

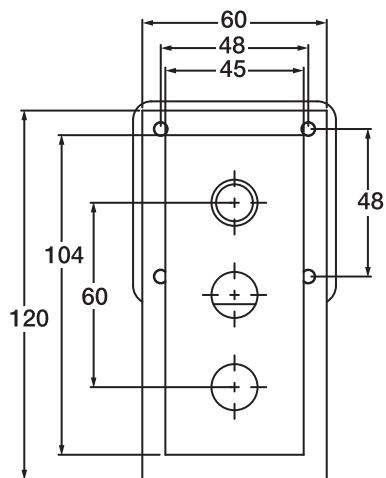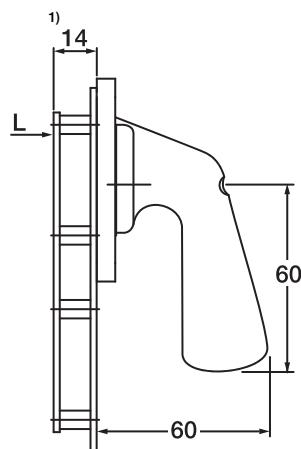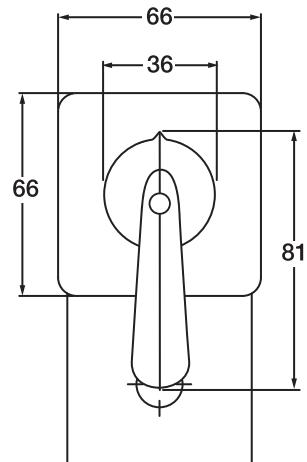

**Double gang (Tandem) drive for OL40, OL63 and OL80 N, standard handle**  
- to be specified by Camweb configurator

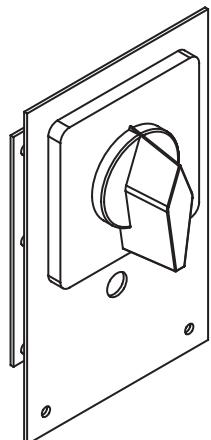


C00042A

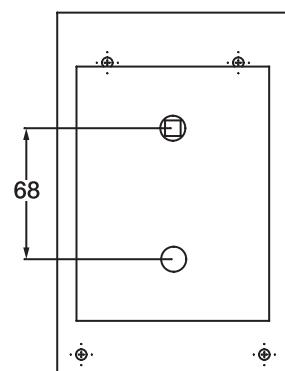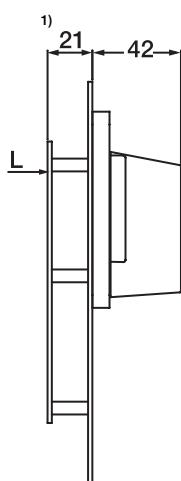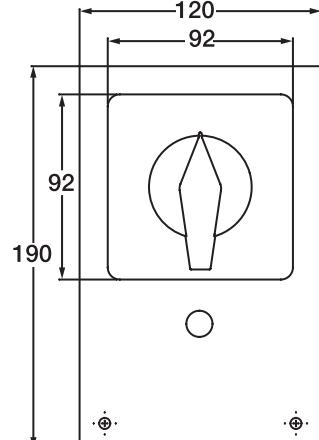


<sup>1)</sup> Add the dimension L of the screw mounted cam switch for the total depth. (page 39)

**Triple gang drive for ON, standard handle - to be specified by Camweb configurator**

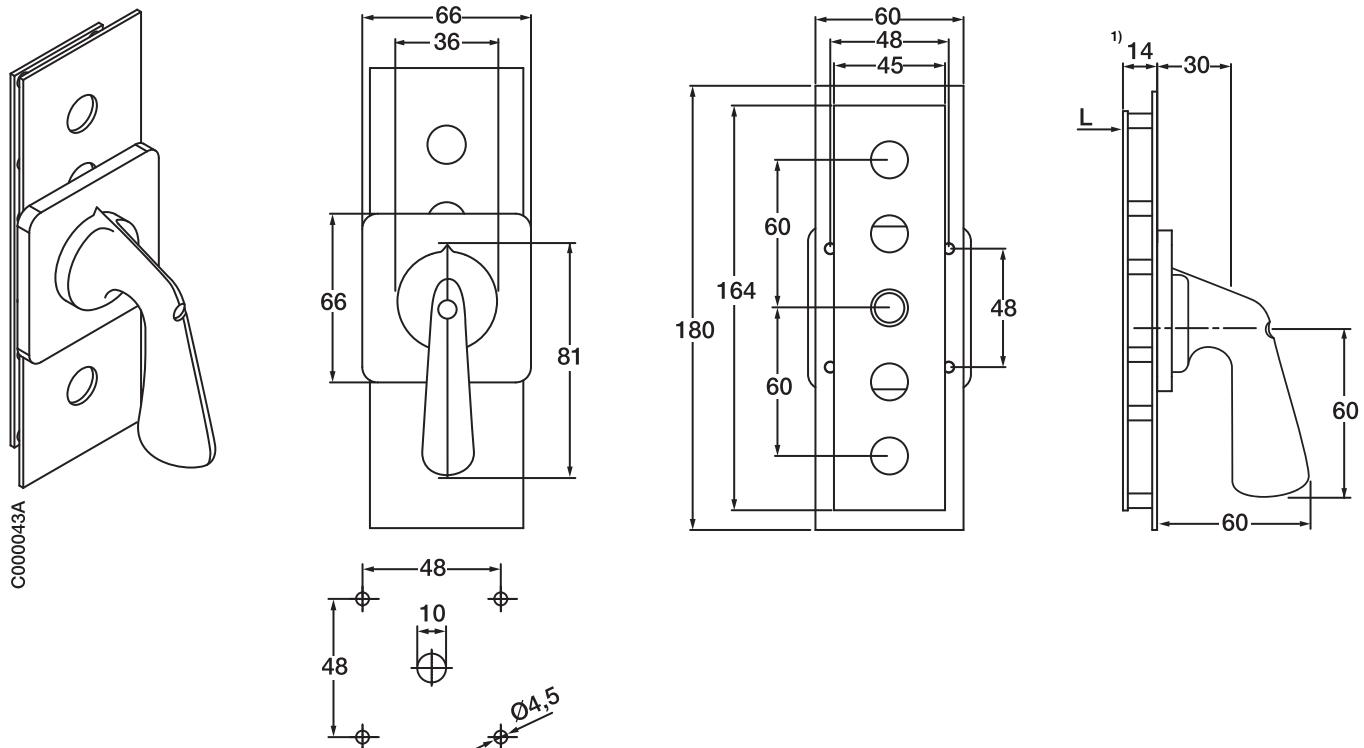

**Triple gang drive for OL40, OL63 and OL80N, standard handle  
- to be specified by cam web configurator**

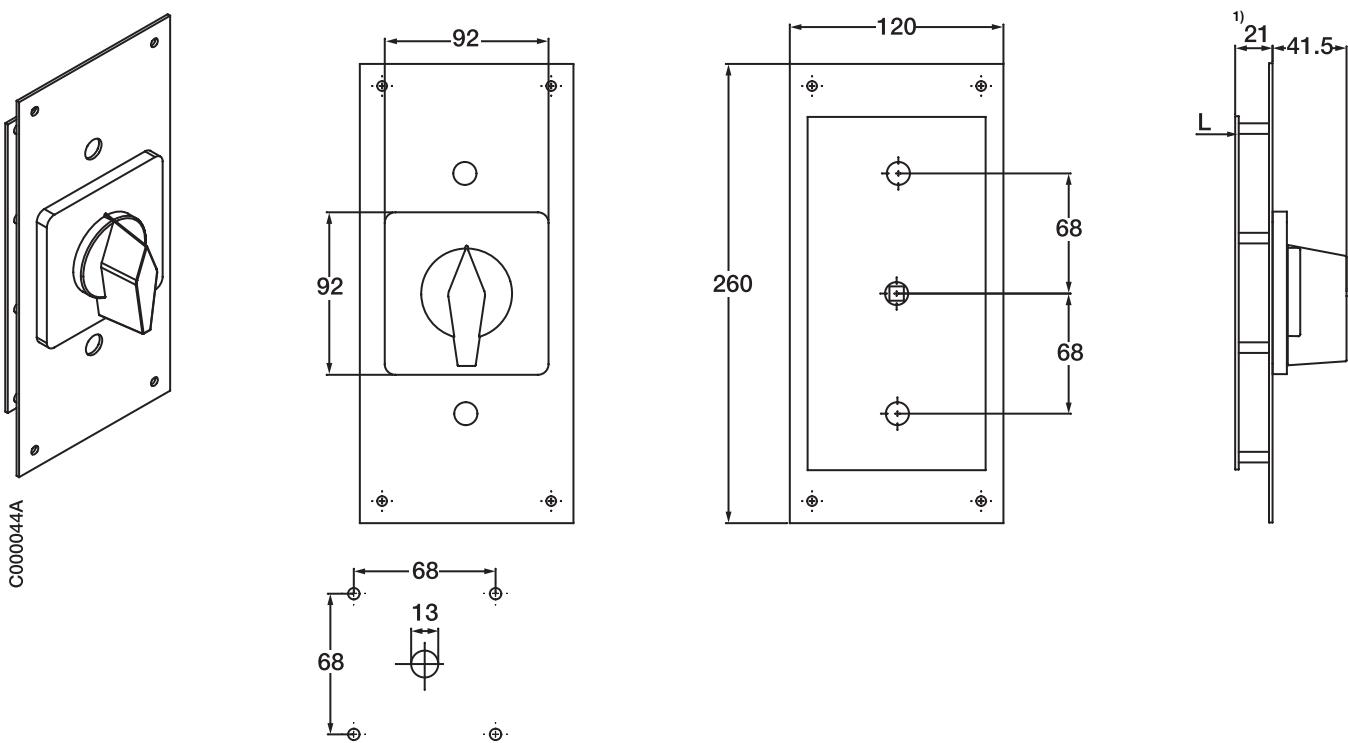

<sup>1)</sup> Add the dimension L of the screw mounted cam switch for the total depth. (page 39)

## Enclosures

### Square enclosures



- 4 for door mounting and click on base mounting with circlip
- 4 include earth and neutral terminals, 6 mm<sup>2</sup>
- 4 one or four hole mounting handle
- 4 grey enclosure
- 4 M25 knock-outs



### Rectangular enclosures



- 4 for door and DIN-rail mounting
- 4 include earth and neutral terminals, 6 mm<sup>2</sup>
- 4 one or four hole mounting handle
- 4 grey enclosure
- 4 M25 knock-outs



- 4 for door and DIN-rail mounting
- 4 include earth and neutral terminals, 16 mm<sup>2</sup>
- 4 one or four hole mounting handle
- 4 grey enclosure
- 4 M32/40 knock-outs



## Cam switches OM\_, ON\_, OL\_ /, Switch-disconnectors OT\_

### Door mounted



- 4 OM\_/ON, OL40, OL63, OL80

### Base / DIN-rail mounted



- 4 OM\_/ON, OL40, OL63



- 4 OT16...80F\_

### Shafts



- 4 OX6X\_
- 4 6 mm

## Handles



- 4 Basic -type



- 4 Key -type

## Enclosed switches

- 4 Control switches
- 4 ON-OFF switches
- 4 Change-over switches
- 4 Motor control switches:
  - 4 Reversing switches,
  - 4 Star delta switches,
  - 4 Pole change switches (Dahlander)

- 4 Special switches
- 4 Key switches



- **Contents:**

- **Enclosed rotary cam switches**

- Ordering information

●	Enclosed cam switches.....	60
●	Enclosures.....	61
●	Shafts .....	61
●	Dimension drawings.....	62 - 63



▲ Round padlockable -type





ONA\_EPB



ONA\_EZ3PRY



ONA3EK



ONSDEPB

### Enclosed cam switches

The type and the ordering number are for one piece. Neutral and earth terminals, 6mm<sup>2</sup>, included.

#### ON-OFF switches

Number of poles	Function	Size of <sup>1)</sup> enclosure	Type	Order number	Delivery batch [pcs]	Weight unit [kg]
<b>Basic handle, protection class IP65</b>						
2	0 - 1	96x96x70	ONA2EPB	1SCA022662R3410	4	0.3
3	0 - 1	96x96x70	ONA3EPB	1SCA022662R3500	4	0.3
4	0 - 1	96x96x70	ONA4EPB	1SCA022662R3680	4	0.3
5	0 - 1	96x96x85	ONA5EPB	1SCA022755R1020	4	0.3
6	0 - 1	96x96x85	ONA6EPB	1SCA022755R1110	4	0.3
8	0 - 1	96x96x108	ONA8EPB	1SCA022755R1290	4	0.3
9	0 - 1	96x96x138	ONA9EPB	1SCA022761R4710	4	0.3
<b>Padlockable red-yellow handle, protection class IP65</b>						
2	0 - 1	96x96x70	ONA2EZ3PRY	1SCA112514R1001	4	0.3
3	0 - 1	96x96x70	ONA3EZ3PRY	1SCA112515R1001	4	0.3
4	0 - 1	96x96x70	ONA4EZ3PRY	1SCA112516R1001	4	0.3
5	0 - 1	96x96x85	ONA5EZ3PRY	1SCA112517R1001	4	0.3
6	0 - 1	96x96x85	ONA6EZ3PRY	1SCA112518R1001	4	0.3
8	0 - 1	96x96x108	ONA8EZ3PRY	1SCA112520R1001	4	0.3
9	0 - 1	96x96x138	ONA9EZ3PRY	1SCA112521R1001	4	0.3
<b>Key type, protection class IP54</b>						
3	0 - 1	96x96x100	ONA3EKB	1SCA022755R2260	4	0.3

#### Change-over switches

##### Protection class IP65

1	1 - 0 - 2	96x96x108	ONU1EPB	1SCA022755R2850	4	0.3
---	-----------	-----------	---------	-----------------	---	-----

#### Motor control switches


##### Protection class IP65

##### Reversing switches

3	1 - 0 - 2	96x96x108	ONW3EPB	1SCA022755R2930	4	0.3
3	1 - 0 - 2	96x96x138	OL40W3EPB	1SCA022849R0180	4	0.4

I <sub>b</sub> [A]	Function	Size of <sup>1)</sup> enclosure	Type	Order number	Delivery batch [pcs]	Weight unit [kg]
<b>Star delta switches</b>						
25	0 - Y - ΔΔ	161x100x80	ONSDEPB	1SCA022662R4140	4	0.3
45	0 - Y - ΔΔ	305x215x185	OL40SDEPB	1SCA022755R3230	4	0.4
<b>Pole change switches (Dahlander)</b>						
25	0 - 1 - 2	305x215x185	ONP12EPB	1SCA022849R0260	1	0.3
40	0 - 1 - 2	305x215x185	OL40P12EPB	1SCA022849R0340	1	0.4

<sup>1)</sup> The height without handle.  
Special enclosed cam switches configurated by the Camweb tool.

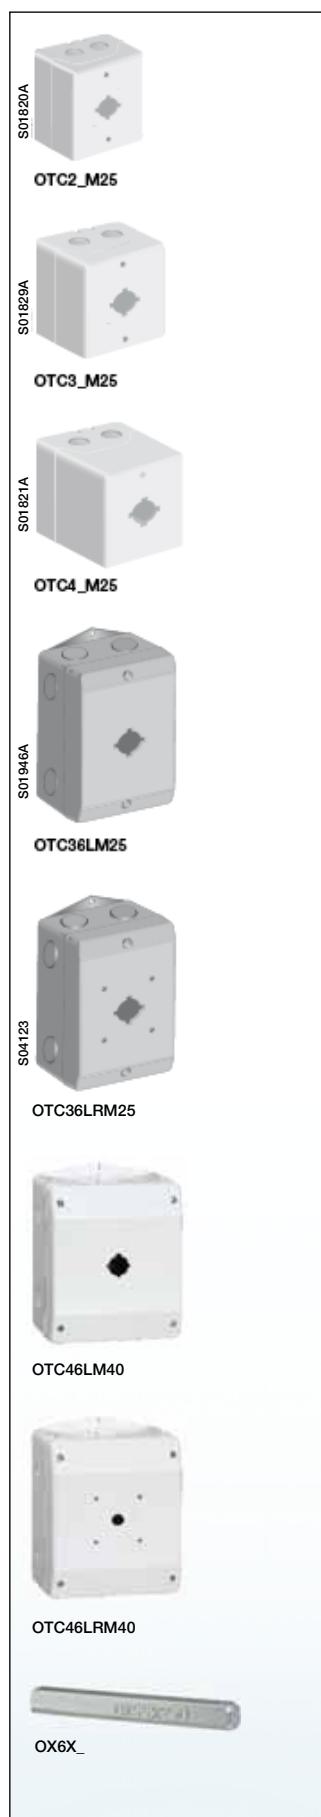

### Enclosures

The enclosures can accommodate cam switches and switch-disconnectors.

#### Square enclosures

Suitable for door mounting and click-on base mounting with circlip. Neutral and earth terminals, 6mm<sup>2</sup>, included. Enclosure colour: light grey.

Handle mounting <sup>1)</sup>	Protection class	Size of enclosure	Type	Order number	Delivery batch [pcs]	Weight unit [kg]
<b>Suitable for switch types: OM_ /ON_R: up to 4 contacts, OL40_R: 2 contacts, OT16F_: 3 to 4 poles</b>						
One hole	IP 54	96x96x70	OTC25M25	1SCA022745R4500	20	0.2
One hole	IP 65	96x96x70	OTC26M25	1SCA022745R4680	20	0.2
<b>Suitable for switch types: OM_ /ON_P: up to 6 contacts, OL40_P: 4 contacts, OT16F_: 3 to 4 poles</b>						
Four holes	IP 54	96x96x70	OTC25RM25	1SCA112815R1001	20	0.2
Four holes	IP 65	96x96x70	OTC26RM25	1SCA112822R1001	20	0.2
<b>Suitable for switch types: OM_ /ON_P: up to 6 contacts, OL40_P: 4 contacts, OT16F_: 3 to 4 poles</b>						
One hole	IP54	96x96x84.5	OTC35M25	1SCA022757R6440	10	0.2
One hole	IP65	96x96x84.5	OTC36M25	1SCA022757R6520	10	0.2
<b>Suitable for switch types: OM_ /ON_P: up to 10 contacts, OL40_P: 6 contacts</b>						
One hole	IP 54	96x96x108	OTC45M25	1SCA022745R4760	10	0.2
One hole	IP 65	96x96x108	OTC46M25	1SCA027745R4840	10	0.2

#### Rectangular enclosures

Suitable for door or DIN-rail mounting, protection class IP65. Neutral and earth terminals included. Enclosure colour: light grey. The DIN-rail is including in the enclosures.

Handle mounting <sup>1)</sup>	Size of earth/neutral terminal [mm <sup>2</sup> ]	Size of enclosure	Type	Order number	Delivery batch [pcs]	Weight unit [kg]
<b>Suitable for switch types:</b>						
One hole	6	161x100x80	OTC36LM25	1SCA022761R4980	20	0.2
One hole	16	175x145x110	OTC46LM40	1SCA112832R1001	10	0.3
<b>Suitable for switch types:</b>						
<b>OM_ /ON_R: up to 6 contacts, OL40_R: 4 contacts, OT16...45F_: 3 and 4 pole</b>						
Four holes	6	161x100x80	OTC36LR6M25	1SCA112828R1001	20	0.2
Four holes	16	175x145x110	OTC46LRM40	1SCA112838R1001	10	0.3


### Shafts

Shafts for 3 and 4-pole OT-switches with the handle type OZ331SP\_-, see page 35.


Shaft length unit [mm]	Suitable for enclosure/with switch	Type	Order number	Delivery batch [pcs]	Weight unit [kg]
48	OTC36M25/OT16F_	OX6X48	1SCA113442R1001	10	0.02
40	OTC36LM25/OT16...25F_ OTC46LM40/OT63F_	OX6X40	1SCA112994R1001	10	0.02
60	OTC46LM40/OT40F_	OX6X60	1SCA111459R1001	10	0.02

<sup>1)</sup> One hole (snap on mounting handle), Four holes (screw mounted handle)


**OTC\_**

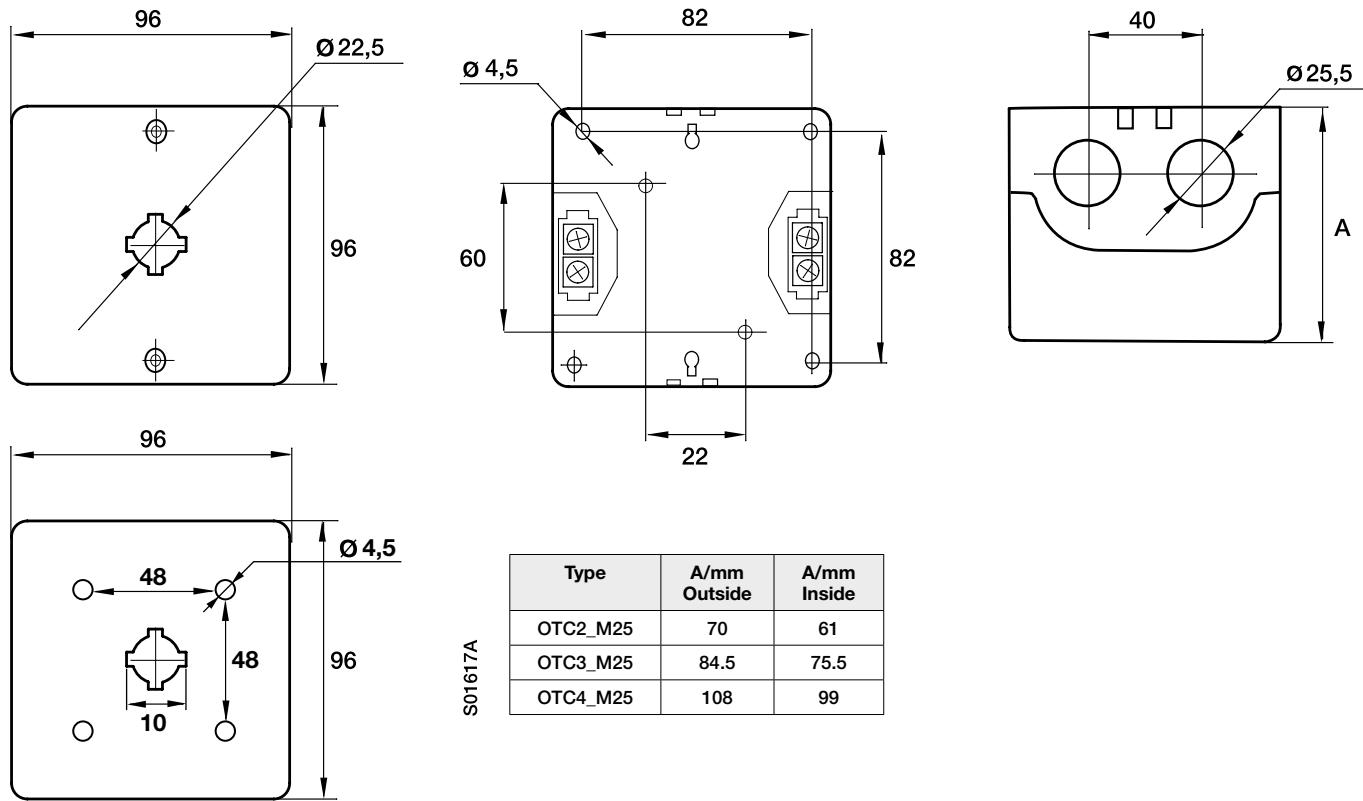

**OTC36LM25, OTC36LRM25**

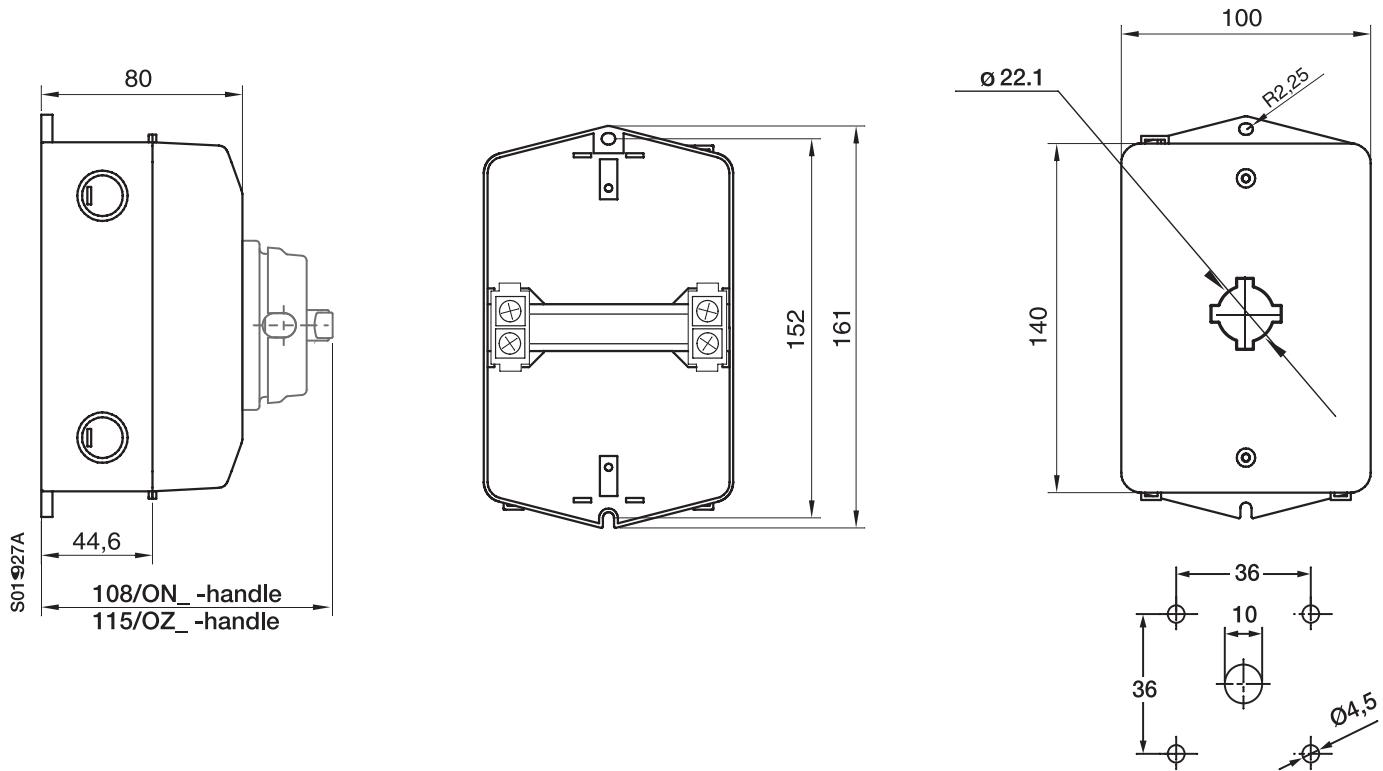

**OTC\_46LM40, OTC46LRM40**

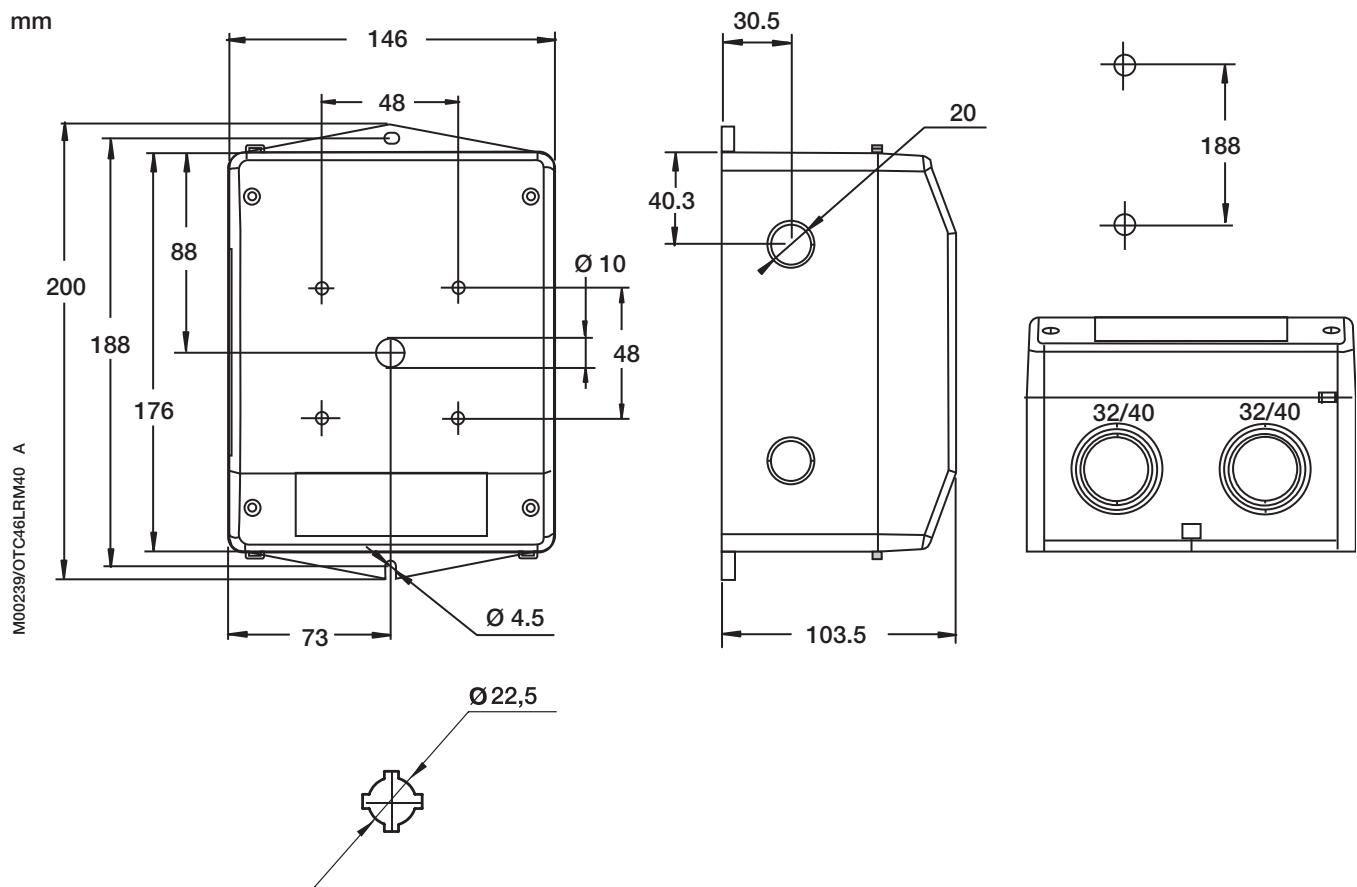



# Index

Type	Order number	Page	Description	Type	Order number	Page	Description
OL125A1RB	ISCA022790R1370	18	ON - OFF switch	OL40A4RB	ISCA100306R1001	18	ON - OFF switch
OL125A2RB	ISCA022790R1450	18	ON - OFF switch	OL40A6PB	ISCA022755R7650	18	ON - OFF switch
OL125A3RB	ISCA022790R1530	18	ON - OFF switch	OL40A8PB	ISCA022755R7810	18	ON - OFF switch
OL125A4RB	ISCA022790R1610	18	ON - OFF switch	OL40AU31RB	ISCA100322R1001	31	Ammeter switch
OL125A6RB	ISCA022790R1700	18	ON - OFF switch	OL40P12EPB	ISCA022849R0340	60	Enclosed pole change switch
OL125A8RB	ISCA022790R1880	18	ON - OFF switch	OL40P12PB	ISCA022756R3380	28	Pole-change switch
OL125P012RB	ISCA022791R5590	28	Pole-change switch	OL40PW36PB	ISCA022791R1250	23	Bypass switch
OL125PW36RB	ISCA022791R3540	23	Bypass switch	OL40PW48PB	ISCA022791R1330	23	Bypass switch
OL125PW48RB	ISCA022791R4010	23	Bypass switch	OL40SDEPB	ISCA022755R3230	60	Enclosed star delta switch
OL125SDRB	ISCA022791R5080	28	Star-delta switch	OL40SDPB	ISCA022756R3110	28	Star-delta switch
OL125SO31RB	ISCA022791R4510	24	Multistep switch	OL40SO101PB	ISCA022776R2660	27	Multistep switch
OL125U1RB	ISCA022790R1960	20	Change-over switch	OL40SO111PB	ISCA022776R2820	27	Multistep switch
OL125U2RB	ISCA022790R2000	20	Change-over switch	OL40SO31PB	ISCA022758R7810	24	Multistep switch
OL125U3RB	ISCA022790R2180	20	Change-over switch	OL40SO61PB	ISCA022776R1420	26	Multistep switch
OL125U4RB	ISCA022790R2260	20	Change-over switch	OL40SO62PB	ISCA022776R1510	26	Multistep switch
OL125UC3RB	ISCA022791R1500	22	Change-over switch	OL40SO63PB	ISCA022776R1690	26	Multistep switch
OL125UC4RB	ISCA022791R2060	22	Change-over switch	OL40SO71PB	ISCA022773R3300	26	Multistep switch
OL125WS1RB	ISCA022790R2340	21	Change-over switch	OL40SO81PB	ISCA022773R3480	26	Multistep switch
OL125WS2RB	ISCA022790R2420	21	Change-over switch	OL40SO91PB	ISCA022776R2400	27	Multistep switch
OL125WS36RB	ISCA022791R2570	23	Bypass switch	OL40ST101PB	ISCA022775R1110	27	Multistep switch
OL125WS3RB	ISCA022790R2510	21	Change-over switch	OL40ST111PB	ISCA022776R3040	27	Multistep switch
OL125WS48RB	ISCA022791R3030	23	Bypass switch	OL40ST121PB	ISCA022775R1200	27	Multistep switch
OL125WS4RB	ISCA022790R2690	21	Change-over switch	OL40ST301PB	ISCA022761R6680	28	Ventilation switch
OL160A1RB	ISCA022790R5010	18	ON - OFF switch	OL40ST61PB	ISCA022775R1380	26	Multistep switch
OL160A2RB	ISCA022790R5100	18	ON - OFF switch	OL40ST62PB	ISCA022776R1930	26	Multistep switch
OL160A3RB	ISCA022790R5280	18	ON - OFF switch	OL40ST63PB	ISCA022776R2070	26	Multistep switch
OL160A4RB	ISCA022790R5360	18	ON - OFF switch	OL40ST71PB	ISCA022776R2230	26	Multistep switch
OL160A6RB	ISCA022790R5440	18	ON - OFF switch	OL40ST81PB	ISCA022773R4960	26	Multistep switch
OL160A8RB	ISCA022790R5520	18	ON - OFF switch	OL40ST91PB	ISCA022775R1460	27	Multistep switch
OL160P012RB	ISCA022791R5670	28	Pole-change switch	OL40U1PB	ISCA022761R0990	20	Change-over switch
OL160PW36RB	ISCA022791R3620	23	Bypass switch	OL40U1RB	ISCA100307R1001	20	Change-over switch
OL160PW48RB	ISCA022791R4190	23	Bypass switch	OL40U2PB	ISCA022761R1020	20	Change-over switch
OL160SDRB	ISCA022791R5160	28	Star-delta switch	OL40U2RB	ISCA100308R1001	20	Change-over switch
OL160SO31RB	ISCA022791R4600	24	Multistep switch	OL40U3PB	ISCA022761R1110	20	Change-over switch
OL160U1RB	ISCA022790R6840	20	Change-over switch	OL40U3RB	ISCA100309R1001	20	Change-over switch
OL160U2RB	ISCA022790R6920	20	Change-over switch	OL40U4PB	ISCA022761R1290	20	Change-over switch
OL160U3RB	ISCA022790R7060	20	Change-over switch	OL40U4RB	ISCA100311R1001	20	Change-over switch
OL160U4RB	ISCA022790R7140	20	Change-over switch	OL40UC3PB	ISCA022791R0870	22	Change-over switch
OL160UC3RB	ISCA022791R1680	22	Change-over switch	OL40UC4PB	ISCA022791R0950	22	Change-over switch
OL160UC4RB	ISCA022791R2140	22	Change-over switch	OL40URR1PB	ISCA022761R1370	21	Change-over switch
OL160WS1RB	ISCA022790R8030	21	Change-over switch	OL40URR2PB	ISCA022761R1450	21	Change-over switch
OL160WS2RB	ISCA022790R8110	21	Change-over switch	OL40URR3PB	ISCA022761R1530	21	Change-over switch
OL160WS36RB	ISCA022791R2650	23	Bypass switch	OL40W2PB	ISCA022757R5550	28	Reversing switch
OL160WS3RB	ISCA022790R8200	21	Change-over switch	OL40W3EPB	ISCA022849R180	60	Enclosed reversing switch
OL160WS48RB	ISCA022791R3110	23	Bypass switch	OL40W3PB	ISCA022757R5630	28	Reversing switch
OL160WS4RB	ISCA022790R8380	21	Change-over switch	OL40WC1PB	ISCA022799R8430	22	Change-over switch
OL200A1RB	ISCA022790R5610	18	ON - OFF switch	OL40WC2PB	ISCA022799R8860	22	Change-over switch
OL200A2RB	ISCA022790R5790	18	ON - OFF switch	OL40WC3PB	ISCA022799R9410	22	Change-over switch
OL200A3RB	ISCA022790R5870	18	ON - OFF switch	OL40WC4PB	ISCA022799R9590	22	Change-over switch
OL200A4RB	ISCA022790R5950	18	ON - OFF switch	OL40WS1PB	ISCA022761R1610	21	Change-over switch
OL200A6RB	ISCA022790R6090	18	ON - OFF switch	OL40WS1RB	ISCA100316R1001	21	Change-over switch
OL200A8RB	ISCA022790R6170	18	ON - OFF switch	OL40WS2PB	ISCA022761R1700	21	Change-over switch
OL200P012RB	ISCA022791R5750	28	Pole-change switch	OL40WS2RB	ISCA100319R1001	21	Change-over switch
OL200PW36RB	ISCA022791R3710	23	Bypass switch	OL40WS36PB	ISCA022791R1090	23	Bypass switch
OL200PW48RB	ISCA022791R4270	23	Bypass switch	OL40WS3PB	ISCA022761R1880	21	Change-over switch
OL200SDRB	ISCA022791R5240	28	Star-delta switch	OL40WS3RB	ISCA100320R1001	21	Change-over switch
OL200SO31RB	ISCA022791R4780	24	Multistep switch	OL40WS48PB	ISCA022791R1170	23	Bypass switch
OL200U1RB	ISCA022790R7220	20	Change-over switch	OL40WS4PB	ISCA022761R1960	21	Change-over switch
OL200U2RB	ISCA022790R7310	20	Change-over switch	OL40WS4RB	ISCA100321R1001	21	Change-over switch
OL200U3RB	ISCA022790R7490	20	Change-over switch	OL63A1RB	ISCA111537R1001	18	ON - OFF switch
OL200U4RB	ISCA022790R7570	20	Change-over switch	OL63A2RB	ISCA111538R1001	18	ON - OFF switch
OL200UC3RB	ISCA022791R1760	22	Change-over switch	OL63A3RB	ISCA111539R1001	18	ON - OFF switch
OL200UC4RB	ISCA022791R2220	22	Change-over switch	OL63A4RB	ISCA111540R1001	18	ON - OFF switch
OL200WS1RB	ISCA022790R8460	21	Change-over switch	OL63A6RB	ISCA111541R1001	18	ON - OFF switch
OL200WS2RB	ISCA022790R8540	21	Change-over switch	OL63A8RB	ISCA111542R1001	18	ON - OFF switch
OL200WS36RB	ISCA022791R2730	23	Bypass switch	OL63P012RB	ISCA111587R1001	28	Pole-change switch
OL200WS3RB	ISCA022790R8620	21	Change-over switch	OL63PW36RB	ISCA111591R1001	23	Bypass switch
OL200WS48RB	ISCA022791R3200	23	Bypass switch	OL63PW48RB	ISCA111592R1001	23	Bypass switch
OL200WS4RB	ISCA022790R8710	21	Change-over switch	OL63SDRB	ISCA111586R1001	28	Star-delta switch
OL40A1PB	ISCA022755R7140	18	ON - OFF switch	OL63SO31RB	ISCA111603R1001	24	Multistep switch
OL40A1RB	ISCA100297R1001	18	ON - OFF switch	OL63U1RB	ISCA110936R1001	20	Change-over switch
OL40A2PB	ISCA022755R7220	18	ON - OFF switch	OL63U2RB	ISCA110937R1001	20	Change-over switch
OL40A2RB	ISCA100298R1001	18	ON - OFF switch	OL63U3RB	ISCA111543R1001	20	Change-over switch
OL40A3PB	ISCA022755R7310	18	ON - OFF switch	OL63U4RB	ISCA111544R1001	20	Change-over switch
OL40A3RB	ISCA100305R1001	18	ON - OFF switch	OL63UC3RB	ISCA111593R1001	22	Change-over switch
OL40A4PB	ISCA022755R7490	18	ON - OFF switch	OL63UC4RB	ISCA111594R1001	22	Change-over switch



# Index

Type	Order number	Page	Description	Type	Order number	Page	Description
OL63W2RB	1SCA111588R1001	28	Reversing switch	OLZ3DR	1SCA022796R5000	34	Double lever handle
OL63WC1RB	1SCA111596R1001	22	Change-over switch	OLZ3RB	1SCA022796R4700	34	Pistol type handle
OL63WC2RB	1SCA111597R1001	22	Change-over switch	OLZ3RR	1SCA022796R4880	34	Pistol type handle
OL63WC3RB	1SCA111598R1001	22	Change-over switch	OLZ401L2	1SCA022805R9910	38	Protective rear cover
OL63WC4RB	1SCA111599R1001	22	Change-over switch	OLZ401L4	1SCA022806R0090	38	Protective rear cover
OL63WS1RB	1SCA022790R0990	21	Change-over switch	OLZ401L6	1SCA022806R0170	38	Protective rear cover
OL63WS2RB	1SCA022790R1020	21	Change-over switch	OLZ63D34	1SCA022785R6720	38	Protective rear cover
OL63WS36RB	1SCA111600R1001	23	Bypass switch	OLZ63D36	1SCA022785R6810	38	Protective rear cover
OL63WS3RB	1SCA022790R1110	21	Change-over switch	OLZ63D38	1SCA022785R6990	38	Protective rear cover
OL63WS48RB	1SCA111601R1001	23	Bypass switch	OLZ652	1SCA022819R5930	37	Door coupling kit
OL63WS4RB	1SCA022790R1290	21	Change-over switch	OLZ653	1SCA022819R6070	37	Door coupling kit
OL80NA1RB	1SCA111624R1001	18	ON - OFF switch	OMA01KB	1SCA022570R7810	19	ON - OFF switch
OL80NA2RB	1SCA111625R1001	18	ON - OFF switch	OMA01PB	1SCA022570R6680	19	ON - OFF switch
OL80NA3RB	1SCA111626R1001	18	ON - OFF switch	OMA02PB	1SCA022570R6760	19	ON - OFF switch
OL80NA4RB	1SCA111627R1001	18	ON - OFF switch	OMA03KB	1SCA022570R7900	19	ON - OFF switch
OL80NA6RB	1SCA111628R1001	18	ON - OFF switch	OMA03PB	1SCA022570R6840	19	ON - OFF switch
OL80NA8RB	1SCA111629R1001	18	ON - OFF switch	OMA04PB	1SCA022570R6920	19	ON - OFF switch
OL80NP012RB	1SCA111637R1001	28	Pole-change switch	OMA05PB	1SCA022570R7060	19	ON - OFF switch
OL80NPW36RB	1SCA111641R1001	23	Bypass switch	OMA06PB	1SCA022570R7140	19	ON - OFF switch
OL80NPW48RB	1SCA111642R1001	23	Bypass switch	OMA1KB	1SCA022531R4760	19	ON - OFF switch
OL80NSDRB	1SCA111636R1001	28	Star-delta switch	OMA1PB	1SCA022531R3950	18	ON - OFF switch
OL80NSO31RB	1SCA111655R1001	24	Multistep switch	OMA2PB	1SCA022531R4090	18	ON - OFF switch
OL80NU1RB	1SCA111643R1001	20	Change-over switch	OMA3KB	1SCA022531R4840	19	ON - OFF switch
OL80NU2RB	1SCA111630R1001	20	Change-over switch	OMA3PB	1SCA022531R4170	18	ON - OFF switch
OL80NU3RB	1SCA111631R1001	20	Change-over switch	OMA4PB	1SCA022531R4330	18	ON - OFF switch
OL80NU4RB	1SCA111632R1001	20	Change-over switch	OMA5PB	1SCA022531R4410	18	ON - OFF switch
OL80NUC3RB	1SCA111645R1001	22	Change-over switch	OMA6PB	1SCA022531R4500	18	ON - OFF switch
OL80NUC4RB	1SCA111646R1001	22	Change-over switch	OMAU31PB	1SCA022533R5410	31	Ammeter switch
OL80NW2RB	1SCA111638R1001	28	Reversing switch	OMF101	1SCA022540R4590	36	Front plate
OL80WC1RB	1SCA111648R1001	22	Change-over switch	OMF72	1SCA111687R1001	36	Lettering plate
OL80WC2RB	1SCA111649R1001	22	Change-over switch	OMFB72	1SCA022555R4990	36	Lettering plate
OL80WC3RB	1SCA111650R1001	22	Change-over switch	OMFG72	1SCA022556R1850	36	Lettering plate
OL80WC4RB	1SCA111651R1001	22	Change-over switch	OMFY101	1SCA022796R3210	36	Front plate
OL80NWS1RB	1SCA111647R1001	21	Change-over switch	OMK95	1SCA022553R8360	38	Spare key
OL80NWS2RB	1SCA111633R1001	21	Change-over switch	OMNX80	1SCA022553R8440	38	Nut spanner tool
OL80NWS36RB	1SCA111652R1001	23	Bypass switch	OMPB1	1SCA022553R7470	33	Handle
OL80NWS3RB	1SCA111634R1001	21	Change-over switch	OMPG1	1SCA022553R8010	33	Handle
OL80NWS4RB	1SCA111653R1001	23	Bypass switch	OMPR1	1SCA022796R2830	33	Handle
OL80NWS4RB	1SCA111635R1001	21	Change-over switch	OMPRY1	1SCA022796R2910	33	Handle
OLF130	1SCA022796R5420	36	Front plate	OMSA2PB	1SCA022531R6380	29	Stop switch
OLF64	1SCA022798R6260	36	Front plate	OMSE158PB	1SCA022545R4930	29	Pumpstart switch
OLF72	1SCA111689R1001	36	Lettering plate	OMSE2PB	1SCA022531R6460	29	Start switch
OLF90	1SCA022796R5180	36	Front plate	OMSEA10PB	1SCA022531R6540	29	Start switch
OLFB64	1SCA022796R3300	36	Lettering plate	OMSO21PB	1SCA022533R0880	24	Multistep switch
OLFG64	1SCA022796R3480	36	Lettering plate	OMSO22PB	1SCA022533R0960	24	Multistep switch
OLFY130	1SCA022796R5340	36	Front plate	OMSO23PB	1SCA022533R1000	24	Multistep switch
OLFY64	1SCA022798R6340	36	Front plate	OMSO24PB	1SCA022533R1180	24	Multistep switch
OLFY90	1SCA022796R5260	36	Front plate	OMSO31PB	1SCA022545R3110	24	Multistep switch
OLHGD1	1SCA022765R2560	34	Hand grip handle	OMSO32PB	1SCA022533R1420	24	Multistep switch
OLHRD1	1SCA022765R2640	34	Hand grip handle	OMSO33PB	1SCA022533R1510	24	Multistep switch
OLHSD1	1SCA022765R2480	34	Hand grip handle	OMSO34PB	1SCA022533R1690	24	Multistep switch
OLIGD1	1SCA022820R3460	34	Ball grip handle	OMSO41PB	1SCA022533R1770	25	Multistep switch
OLIRD1	1SCA022820R3540	34	Ball grip handle	OMSO42PB	1SCA022533R1850	25	Multistep switch
OLISD1	1SCA022820R3380	34	Ball grip handle	OMSO43PB	1SCA022533R3710	25	Multistep switch
OLR1B	1SCA111831R1001	33	Handle	OMSO51PB	1SCA022533R3800	25	Multistep switch
OLR1G	1SCA111833R1001	33	Handle	OMSO52PB	1SCA022533R3980	25	Multistep switch
OLR1R	1SCA111834R1001	33	Handle	OMST301PB	1SCA022533R4360	28	Ventilation switch
OLR2B	1SCA022796R3720	33	Handle	OMST31PB	1SCA022533R2580	25	Multistep switch
OLR2G	1SCA022796R3810	33	Handle	OMST32PB	1SCA022533R4010	25	Multistep switch
OLR2R	1SCA022796R3990	33	Handle	OMST33PB	1SCA022533R4100	25	Multistep switch
OLR3B	1SCA022796R4110	33	Handle	OMST34PB	1SCA022533R4280	25	Multistep switch
OLR3G	1SCA022796R4290	33	Handle	OMST41PB	1SCA022533R4440	25	Multistep switch
OLR3R	1SCA022796R4370	33	Handle	OMST42PB	1SCA022533R4610	25	Multistep switch
OLZ12	1SCA022807R0560	36	Shaft sealing	OMST43PB	1SCA022533R4790	25	Multistep switch
OLZ1601L2	1SCA022806R0250	38	Protective rear cover	OMST51PB	1SCA022533R4870	25	Multistep switch
OLZ1601L4	1SCA022806R0330	38	Protective rear cover	OMST52PB	1SCA022533R5090	25	Multistep switch
OLZ1601L6	1SCA022806R0410	38	Protective rear cover	OMU1KB	1SCA022532R6340	20	Change-over switch
OLZ20PB	1SCA112522R1001	35	Padlockable handle knob	OMU1PB	1SCA022532R5960	20	Change-over switch
OLZ20PRY	1SCA112523R1001	35	Padlockable handle knob	OMU2PB	1SCA022532R6000	20	Change-over switch
OLZ20RB	1SCA112524R1001	35	Padlockable handle knob	OMU3KB	1SCA022532R6420	20	Change-over switch
OLZ20RRY	1SCA112525R1001	35	Padlockable handle knob	OMU3PB	1SCA022532R6180	20	Change-over switch
OLZ2RB	1SCA022796R4530	34	Pistol type handle	OMU4PB	1SCA022532R6260	20	Change-over switch
OLZ2RR	1SCA022796R4610	34	Pistol type handle	OMURR1PB	1SCA022532R6510	21	Change-over switch
OLZ332RB	1SCA022794R7790	35	Round padlockable handle	OMURR3PB	1SCA022532R6690	21	Change-over switch
OLZ332RRY	1SCA022794R7870	35	Round padlockable handle	OMV30PB	1SCA022533R5170	30	Voltmeter switch
OLZ3DB	1SCA022796R4960	34	Double lever handle	OMV32PB	1SCA022549R7740	30	Voltmeter switch



# Index

Type	Order number	Page	Description	Type	Order number	Page	Description
OMV3PB	1SCA022533R5250	30	Voltmeter switch	ONBC090PB	1SCA022803R3610	32	Binarycode switch
OMVN30PB	1SCA022533R5330	30	Voltmeter switch	ONBC091PB	1SCA022803R3790	32	Binarycode switch
OMVN3PB	1SCA022558R4470	30	Voltmeter switch	ONBC092PB	1SCA022803R3870	32	Binarycode switch
OMWC1PB	1SCA022799R8270	22	Change-over switch	ONF101	1SCA022540R6290	36	Front plate
OMWC2PB	1SCA022799R8600	22	Change-over switch	ONF72	1SCA111688R1001	36	Lettering plate
OMWC3PB	1SCA022799R9080	22	Change-over switch	ONFB72	1SCA022555R5020	36	Lettering plate
OMWC4PB	1SCA022799R9160	22	Change-over switch	ONFG72	1SCA022556R1930	36	Lettering plate
OMWS1PB	1SCA022532R6770	21	Change-over switch	ONFM101	1SCA022553R8520	36	Front plate
OMWS2PB	1SCA022532R6850	21	Change-over switch	ONFY101	1SCA022716R4250	36	Front plate
OMWS3PB	1SCA022533R0610	21	Change-over switch	ONP12EPB	1SCA022849R0260	60	Enclosed pole change switch
OMWS4PB	1SCA022533R0700	21	Change-over switch	ONP12PB	1SCA022576R6740	28	Pole-change switch
OMX99	1SCA022553R8100	36	Lettering plate	ONPB1	1SCA022553R7550	33	Handle
OMXB1	1SCA022629R7270	33	Handle	ONPG1	1SCA022553R7630	33	Handle
OMXNB1	1SCA022577R9810	33	Handle	ONPLB1	1SCA022776R5680	33	Handle
ONA01KB	1SCA022570R8030	19	ON - OFF switch	ONPLG1	1SCA022776R5760	33	Handle
ONA01M	1SCA022572R5630	19	ON - OFF switch	ONPLR1	1SCA022776R5840	33	Handle
ONA01PB	1SCA022570R7220	19	ON - OFF switch	ONPLRY1	1SCA022796R3130	33	Handle
ONA02M	1SCA022572R5710	19	ON - OFF switch	ONPR1	1SCA022796R3050	33	Handle
ONA02PB	1SCA022570R7310	19	ON - OFF switch	ONPRY1	1SCA022796R3130	33	Handle
ONA03KB	1SCA022570R8110	19	ON - OFF switch	ONPW36PB	1SCA022791R0610	23	Bypass switch
ONA03M	1SCA022572R5800	19	ON - OFF switch	ONPW48PB	1SCA022791R0790	23	Bypass switch
ONA03PB	1SCA022570R7490	19	ON - OFF switch	ONRF101	1SCA106725R1001	36	Front plate
ONA04PB	1SCA022570R7570	19	ON - OFF switch	ONRFY101	1SCA106726R1001	36	Front plate
ONA05PB	1SCA022570R7650	19	ON - OFF switch	ONSA2PB	1SCA022531R6710	29	Stop switch
ONA06M	1SCA022572R5980	19	ON - OFF switch	ONSB1	1SCA100878R1001	34	Low extended handle knob
ONA06PB	1SCA022570R7730	19	ON - OFF switch	ONSDEPB	1SCA022662R4140	60	Enclosed star delta switch
ONA1KB	1SCA022531R5570	19	ON - OFF switch	ONSDPB	1SCA022579R1420	28	Star-delta switch
ONA1KXB	1SCA022708R7830	19	ON - OFF switch	ONSE158M	1SCA022565R5830	29	Pumpstart switch
ONA1M	1SCA022531R6030	19	ON - OFF switch	ONSE158PB	1SCA022534R2540	29	Pumpstart switch
ONA1PB	1SCA022531R4920	18	ON - OFF switch	ONSE2PB	1SCA022563R6290	29	Start switch
ONA1RB	1SCA100196R1001	18	ON - OFF switch	ONSE10M	1SCA022565R5750	29	Start switch
ONA1XB	1SCA022708R3920	19	ON - OFF switch	ONSEA10PB	1SCA022531R6890	29	Start switch
ONA2EPB	1SCA022662R3410	60	Enclosed ON-OFF switch	ONSEA10RB	1SCA100296R1001	29	Start switch
ONA2EZ3PRY	1SCA112514R1001	60	Enclosed ON-OFF switch	ONSEA10XB	1SCA022708R9290	29	Start switch
ONA2KXB	1SCA100325R1001	19	ON - OFF switch	ONSEA1PB	1SCA022605R8610	29	Start switch
ONA2M	1SCA022531R6110	19	ON - OFF switch	ONGS1	1SCA100879R1001	34	Low extended handle knob
ONA2PB	1SCA022531R5060	18	ON - OFF switch	ONSO101PB	1SCA022776R2580	27	Multistep switch
ONA2RB	1SCA100206R1001	18	ON - OFF switch	ONSO111PB	1SCA022776R2740	27	Multistep switch
ONA2XB	1SCA022708R5540	19	ON - OFF switch	ONSO21M	1SCA022532R9100	24	Multistep switch
ONA3EKB	1SCA022755R2260	60	Enclosed ON-OFF switch	ONSO21PB	1SCA022532R9610	24	Multistep switch
ONA3EPB	1SCA022662R3500	60	Enclosed ON-OFF switch	ONSO21RB	1SCA100283R1001	24	Multistep switch
ONA3EZ3PRY	1SCA112515R1001	60	Enclosed ON-OFF switch	ONSO21XB	1SCA022709R2080	24	Multistep switch
ONA3KB	1SCA022531R5650	19	ON - OFF switch	ONSO22PB	1SCA022532R9790	24	Multistep switch
ONA3KXB	1SCA022708R7910	19	ON - OFF switch	ONSO22RB	1SCA100285R1001	24	Multistep switch
ONA3M	1SCA022531R6200	19	ON - OFF switch	ONSO22XB	1SCA022709R2160	24	Multistep switch
ONA3PB	1SCA022531R5140	18	ON - OFF switch	ONSO23PB	1SCA022532R9870	24	Multistep switch
ONA3RB	1SCA100209R1001	18	ON - OFF switch	ONSO24PB	1SCA022532R9950	24	Multistep switch
ONA3XB	1SCA022708R5620	19	ON - OFF switch	ONSO31M	1SCA022532R9280	24	Multistep switch
ONA4EPB	1SCA022662R3680	60	Enclosed ON-OFF switch	ONSO31PB	1SCA022533R0020	24	Multistep switch
ONA4EZ3PRY	1SCA112516R1001	60	Enclosed ON-OFF switch	ONSO31RB	1SCA100286R1001	24	Multistep switch
ONA4PB	1SCA022531R5220	18	ON - OFF switch	ONSO31XB	1SCA022709R2830	24	Multistep switch
ONA4RB	1SCA100214R1001	18	ON - OFF switch	ONSO32PB	1SCA022533R0110	24	Multistep switch
ONA4XB	1SCA022708R5710	19	ON - OFF switch	ONSO33PB	1SCA022533R0290	24	Multistep switch
ONA5EPB	1SCA022755R1020	60	Enclosed ON-OFF switch	ONSO34PB	1SCA022533R0370	24	Multistep switch
ONA5EZ3PRY	1SCA112517R1001	60	Enclosed ON-OFF switch	ONSO41PB	1SCA022533R0450	25	Multistep switch
ONA5PB	1SCA022531R5310	18	ON - OFF switch	ONSO42PB	1SCA022533R0530	25	Multistep switch
ONA6EPB	1SCA022755R1110	60	Enclosed ON-OFF switch	ONSO43PB	1SCA022533R2230	25	Multistep switch
ONA6EZ3PRY	1SCA112518R1001	60	Enclosed ON-OFF switch	ONSO51PB	1SCA022533R2310	25	Multistep switch
ONA6M	1SCA022545R3020	19	ON - OFF switch	ONSO52PB	1SCA022533R2400	25	Multistep switch
ONA6PB	1SCA022531R5490	18	ON - OFF switch	ONSO61PB	1SCA022776R1180	26	Multistep switch
ONA8EPB	1SCA022755R1290	60	Enclosed ON-OFF switch	ONSO62PB	1SCA022776R1260	26	Multistep switch
ONA8EZ3PRY	1SCA112520R1001	60	Enclosed ON-OFF switch	ONSO63PB	1SCA022776R1340	26	Multistep switch
ONA8PB	1SCA022684R5230	18	ON - OFF switch	ONSO71PB	1SCA022691R8480	26	Multistep switch
ONA9EPB	1SCA022761R4710	60	Enclosed ON-OFF switch	ONSO81PB	1SCA022661R9730	26	Multistep switch
ONA9EZ3PRY	1SCA112521R1001	60	Enclosed ON-OFF switch	ONSO91PB	1SCA022776R2310	27	Multistep switch
ONAU31M	1SCA022549R9360	31	Ammeter switch	ONST101PB	1SCA022775R1540	27	Multistep switch
ONAU31PB	1SCA022533R5840	31	Ammeter switch	ONST111PB	1SCA022776R2910	27	Multistep switch
ONAU31RB	1SCA100324R1001	31	Ammeter switch	ONST121PB	1SCA022775R1620	27	Multistep switch
ONAU31XB	1SCA022709R7550	31	Ammeter switch	ONST301M	1SCA022533R2150	28	Ventilation switch
ONAU32PB	1SCA022558R4210	31	Ammeter switch	ONST301PB	1SCA022533R3120	28	Ventilation switch
ONAV12PB	1SCA022803R4250	31	Volt-ammeter switch	ONST31M	1SCA022533R2070	25	Multistep switch
ONBC0110PB	1SCA022803R3950	32	Binarycode switch	ONST31PB	1SCA022533R2740	25	Multistep switch
ONBC0112PB	1SCA022803R4090	32	Binarycode switch	ONST31RB	1SCA100287R1001	25	Multistep switch
ONBC070PB	1SCA022803R3360	32	Binarycode switch	ONST31XB	1SCA022776R4610	25	Multistep switch
ONBC071PB	1SCA022803R3440	32	Binarycode switch	ONST32PB	1SCA022533R2820	25	Multistep switch
ONBC072PB	1SCA022803R3520	32	Binarycode switch	ONST33PB	1SCA022533R2910	25	Multistep switch



# Index

Type	Order number	Page	Description	Type	Order number	Page	Description
ONST34PB	1SCA022533R3040	25	Multistep switch	ONWS3XB	1SCA022709R1430	22	Change-over switch
ONST41PB	1SCA022533R3210	25	Multistep switch	ONWS4PB	1SCA022791R0520	23	Bypass switch
ONST41RB	1SCA100288R1001	25	Multistep switch	ONWS4M	1SCA022532R9010	22	Change-over switch
ONST41XB	1SCA022709R5420	25	Multistep switch	ONWS4PB	1SCA022532R9520	21	Change-over switch
ONST42PB	1SCA022533R3390	25	Multistep switch	ONWS4RB	1SCA100254R1001	21	Change-over switch
ONST43PB	1SCA022533R3470	25	Multistep switch	ONWS4XB	1SCA022709R1510	22	Change-over switch
ONST51PB	1SCA022533R3550	25	Multistep switch	ONWS5PB	1SCA022624R6440	21	Change-over switch
ONST52PB	1SCA022533R3630	25	Multistep switch	ONX30	1SCA022643R8510	33	Adaptor ring
ONST61PB	1SCA022761R6760	26	Multistep switch	ONX99	1SCA022553R7710	36	Lettering plate
ONST62PB	1SCA022776R1770	26	Multistep switch	ONXB1	1SCA022629R7350	33	Handle
ONST63PB	1SCA022776R1850	26	Multistep switch	ONZ10L2	1SCA022621R1570	38	Protective rear cover
ONST71PB	1SCA022776R2150	26	Multistep switch	ONZ10L4	1SCA022621R1650	38	Protective rear cover
ONST81PB	1SCA022685R7320	26	Multistep switch	ONZ10L6	1SCA022621R1730	38	Protective rear cover
ONST91PB	1SCA022775R1710	27	Multistep switch	ONZ11	1SCA022807R0300	36	Shaft sealing
ONU1EPB	1SCA022755R2850	60	Enclosed change-over switch	ONZ20B	1SCA022621R1810	35	Padlockable handle knob
ONU1KB	1SCA022532R7740	20	Change-over switch	ONZ20RY	1SCA022621R1900	35	Padlockable handle knob
ONU1M	1SCA022532R8210	20	Change-over switch	ONZ37	1SCA022789R8810	37	DIN-rail mounting plate
ONU1PB	1SCA022532R7310	20	Change-over switch	ONZ45P	1SCA022819R5850	37	Door coupling kit
ONU1RB	1SCA100216R1001	20	Change-over switch	ONZ74	1SCA022757R3510	37	Base mounting kit
ONU1XB	1SCA022708R9370	20	Change-over switch	OTC25M25	1SCA022745R4500	61	Enclosure
ONU2M	1SCA022532R8390	20	Change-over switch	OTC25RM25	1SCA112815R1001	61	Enclosure
ONU2PB	1SCA022532R7400	20	Change-over switch	OTC26M25	1SCA022745R4680	61	Enclosure
ONU2RB	1SCA100219R1001	20	Change-over switch	OTC26RM25	1SCA112822R1001	61	Enclosure
ONU2XB	1SCA022708R9450	20	Change-over switch	OTC35M25	1SCA022757R6440	61	Enclosure
ONU3KB	1SCA022532R7820	20	Change-over switch	OTC36LM25	1SCA022761R4980	61	Enclosure
ONU3M	1SCA022532R8470	20	Change-over switch	OTC36LR6M25	1SCA112828R1001	61	Enclosure
ONU3PB	1SCA022532R7580	20	Change-over switch	OTC36M25	1SCA022757R6520	61	Enclosure
ONU3RB	1SCA100220R1001	20	Change-over switch	OTC45M25	1SCA022745R4760	61	Enclosure
ONU3XB	1SCA022708R9530	20	Change-over switch	OTC46LM40	1SCA112832R1001	61	Enclosure
ONU4M	1SCA022534R2710	20	Change-over switch	OTC46LRM40	1SCA112838R1001	61	Enclosure
ONU4PB	1SCA022532R7660	20	Change-over switch	OTC46M25	1SCA027745R4840	61	Enclosure
ONU4RB	1SCA100222R1001	20	Change-over switch	OX6X40	1SCA112994R1001	61	Shaft
ONU4XB	1SCA022708R9610	20	Change-over switch	OX6X48	1SCA113442R1001	61	Shaft
ONUC3PB	1SCA022791R0360	22	Change-over switch	OX6X60	1SCA111459R1001	61	Shaft
ONUC4PB	1SCA022791R0280	22	Change-over switch	OZ331P67B	1SCA111427R1001	35	Round padlockable handle for increased protection
ONUR139M	1SCA022568R3370	29	Start switch	OZ331P67RY	1SCA111429R1001	35	Round padlockable handle for increased protection
ONUR139PB	1SCA022531R6970	29	Start switch	OZ331PB	1SCA100657R1001	35	Round padlockable handle
ONUR1M	1SCA022568R3530	21	Change-over switch	OZ331PRY	1SCA100664R1001	35	Round padlockable handle
ONUR1PB	1SCA022532R7910	21	Change-over switch	OZ331SPB	1SCA112983R1001	35	Round padlockable handle
ONURR2PB	1SCA022558R4040	21	Change-over switch	OZ331SPRY	1SCA113097R1001	35	Round padlockable handle
ONURR2RB	1SCA100223R1001	21	Change-over switch	OZ331RB	1SCA100702R1001	35	Round padlockable handle
ONURR2XB	1SCA022709R0620	21	Change-over switch	OZ331RRY	1SCA100678R1001	35	Round padlockable handle
ONURR3PB	1SCA022532R8040	21	Change-over switch	OZ371PB	1SCA111684R1001	35	Round padlockable handle with door coupling
ONV30M	1SCA022549R9100	30	Voltmeter switch	OZ371PRY	1SCA111685R1001	35	Round padlockable handle with door coupling
ONV30PB	1SCA022533R5500	30	Voltmeter switch	OZB372	1SCA113098R1001	36	Lettering plate
ONV30RB	1SCA100263R1001	30	Voltmeter switch	OZG71	1SCA111686R1001	35	Shaft guide for OZ371P_ handle
ONV30XB	1SCA022709R7120	30	Voltmeter switch	TL.0729	1SCA022704R2310	37	Chamber to chamber connection jumper
ONV32PB	1SCA022549R7820	30	Voltmeter switch	TL.0732	1SCA022704R2220	37	Chamber to chamber connection jumper
ONV3M	1SCA022549R9280	30	Voltmeter switch	TL.0781	1SCA022704R2140	37	Chamber to chamber connection jumper
ONV3PB	1SCA022533R5680	30	Voltmeter switch				
ONV3RB	1SCA100232R1001	30	Voltmeter switch				
ONV3XB	1SCA022709R6580	30	Voltmeter switch				
ONVA21PB	1SCA022803R4170	31	Volt-ammeter switch				
ONVN30M	1SCA022549R9010	30	Voltmeter switch				
ONVN30PB	1SCA022533R5760	30	Voltmeter switch				
ONVN3M	1SCA022558R4800	30	Voltmeter switch				
ONVN3PB	1SCA022558R4630	30	Voltmeter switch				
ONW2PB	1SCA022586R8230	28	Reversing switch				
ONW3EPB	1SCA022755R2930	60	Enclosed reversing switch				
ONW3PB	1SCA022553R8790	28	Reversing switch				
ONWC1PB	1SCA022799R8350	22	Change-over switch				
ONWC2PB	1SCA022799R8780	22	Change-over switch				
ONWC3PB	1SCA022799R9240	22	Change-over switch				
ONWC4PB	1SCA022799R9320	22	Change-over switch				
ONWS1M	1SCA022532R8710	22	Change-over switch				
ONWS1PB	1SCA022532R8120	21	Change-over switch				
ONWS1RB	1SCA100236R1001	21	Change-over switch				
ONWS1XB	1SCA022709R1270	22	Change-over switch				
ONWS2M	1SCA022532R8800	22	Change-over switch				
ONWS2PB	1SCA022532R9360	21	Change-over switch				
ONWS2RB	1SCA100240R1001	21	Change-over switch				
ONWS2XB	1SCA022709R1350	22	Change-over switch				
ONWS36PB	1SCA022791R0440	23	Bypass switch				
ONWS3M	1SCA022532R8980	22	Change-over switch				
ONWS3PB	1SCA022532R9440	21	Change-over switch				
ONWS3RB	1SCA022874R9180	21	Change-over switch				

# Contact us

**ABB Oy**  
**Low Voltage Products**  
P.O. Box 622  
FI-65101 Vaasa, Finland  
Phone: +358 10 22 11  
Fax: +358 22 45708  
E-Mail: [firstname.surname@fi.abb.com](mailto:firstname.surname@fi.abb.com)

[www.abb.com](http://www.abb.com)

The technical data and dimensions are valid at the time of printing.  
We reserve the right to subsequent alterations.

Catalogue ON1GB 09-03, 1SCC302003C0201

Produced by: KATANN Document Factory Oy, Vaasa, Finland

Power and productivity  
for a better world™

