


On-load tap-changer type UCGR./C, VUCGR./C, 19 tap positions, plus/minus switching.
 Max. effective No. of turns in pos. 1.
 The tap-changer is delivered set in pos. 10,
 the preceding pos. was 9.

Lindningskopplare typ UCGR./C, VUCGR./C, 19 lägen,
 plus/minus koppling.
 Max antal effektiva varv i läge 1.
 Lindningskopplaren levereras inställd i läge 10,
 föregående läge var 9.

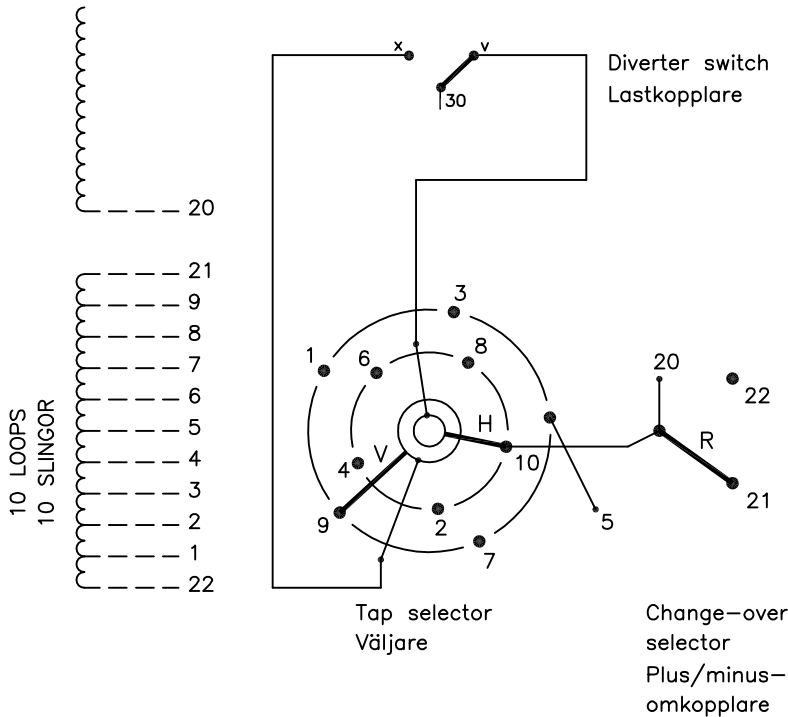

Pos. Läge	R connects in direction R förbinder i riktning	Tap selector and diverter switch connect Väljaren och lastkopplaren förbinder
1	↓	1-V-x
2		2-H-v
3		3-V-x
4		4-H-v
5		20-21
6		20-21
7		20-21
8		20-21
9		20-21
10		↑
11	↓	1-V-x
12		2-H-v
13		3-V-x
14		4-H-v
15		20-22
16		20-22
17		20-22
18		20-22
19		20-22

We reserve all rights in this document and in the information contained therein. Reproduction, use or disclosure to third parties without express authority is strictly forbidden. © ABB 19

The tap-changer is shown in pos. 10,
 the preceding pos. was 9.
 The tap selector and the change-over selector
 are seen from above.
 Contact arm V is located above contact arm H.

Lindningskopplaren visad i läge 10,
 föregående läge var 9.
 Väljaren och plus/minus-omkopplaren sedda uppifrån.
 Kontaktarm V ligger över kontaktarm H.

Continuous lines show leads included in the
 tap-changer. Dashed lines show leads belonging
 to the cleats and leads.

Heldragna linjer visar ledare som ingår i
 lindningskopplaren. Streckade linjer visar
 ledare som tillhör anslutningsdonet.

Sheet	Cont		
Year	Week		
Dept			
Rev Ind	Revision	Appd	Year Week
1	VUCG Added.	TOLA	07 47
Accepted by qual control R.Yngvesson		Accepted for prod by	
Description (English) CONNECTION DIAGRAM		DATA ORIGINAL	
Design checked by B-O.Stenestam		Description (own language) KOPPLINGSSCHEMA	
Drawn by L.Bergman		File name 0374-5	
Drawing checked by M.Hedlund		Lang Sheet 1	
Issued by Dept Year Week COM/TKO 97 17		Rev Ind Cont -	
Asea Brown Boveri		5492 0374-5	