



RESIDENTIAL SOLUTIONS

PowerMark Gold™ Meter Socket Load Center

8/16 Feed-thru, 300A



Florida Meter Group approved
(FP&L, TECO, and MEG)

UL Listed “suitable for use as service
equipment” (Panelboard No. 67 and
Meter Sockets No. 414)

NEMA 3R enclosure

Key technical features

- 300 amp service entrance
- 150 amp main breaker feeds an 8/16 load center with feed-thru lugs factory installed
- 150 amp second main breaker factory installed
- Copper bus
- 22kAIC main breaker
- Surface mount enclosure
- Hub provision for top exit of load conductors


PowerMark Gold™ Meter
Socket Load Center

300 Amp Meter Socket Load Center with feed thru lugs


22kAIC RMS Symmetrical (optional 10kAIC determined by field installed second MCB) MEG approved

Catalog number	TSDR830USCU (Surface Type 3R)
Main amp rating	300 Amp
Maximum spaces	1" THQL: (8) 1-pole, (4) 2-pole 1/2" THQP: (16) 1-pole, (6) 2-pole
Main breaker	(2) A2N150TW-2
Feed, UL only	UG (Underground feed only)
Main wire size	Landing studs for utility or customer supplied compression or mechanical lugs
Ringless socket type	Lever bypass
Weight	95 lbs.

Wire ranges

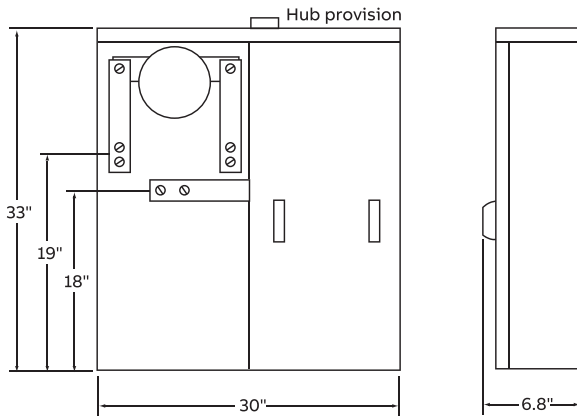

Knockout configurations

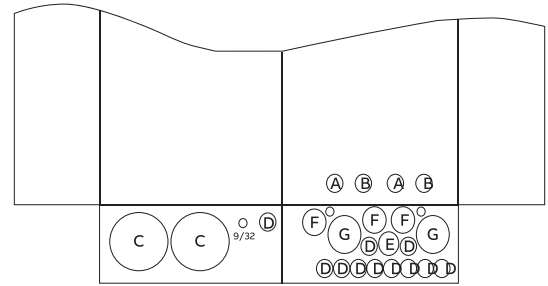

Connector	Copper		Aluminum	
	Solid	Stranded	Solid	Stranded
Neutral-N1	-	1-300	-	1-300
Neutral-N2	6-2/0	6-2/0	14-1/0	14-1/0
Neutral-N3	14-4	14-4	12-4	12-4
Load 1	-	1-300	-	1-300
Ground	6-2/0	6-2/0	6-2/0	6-2/0

Symbol	A	B	C	D	E	F	G
Conduit size in inches	1/2	1/2	-	1/2	1/2	-	-
	3/4	3/4	-	3/4	3/4	3/4	-
	-	-	-	-	1	1	-
	1 1/4	1 1/4	-	-	-	1 1/4	-
	1 1/2	1 1/4	-	-	-	1 1/2	1 1/4
	2"	2"	-	-	-	-	2"
	-	2 1/2	2 1/2	-	-	-	2 1/2
	-	-	3	-	-	-	-
	-	-	3 1/2	-	-	-	-
	-	-	4	-	-	-	-

ABB Inc.
305 Gregson Drive
Cary, NC 27511
United States

electrification.us.abb.com

GE is a trademark of GE.
Manufactured by ABB Inc. under license
from General Electric Company.

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB Inc. does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB Inc. © 2022 ABB. All rights reserved.