

Technical catalogue

Distribution switchgear General catalogue

1STC007003D0201



ABB

Distribution switchgear

General Catalogue

Presentation of the range

1

Gemini switchboards

2

ArTu L modular structures

3

ArTu M monobloc structures

4

ArTu K modular structures

5

In-depth technical information

6

Selection and design tools

7

Overall dimensions

8

Ordering codes

9

Gemini. Something completely different in switchboards



Gemini. Quality and safety.

ABB's Gemini is designed and built in compliance with reference Standards that define its constructional and functional characteristics. In particular, the IP66 degree certifies that Gemini is totally protected against the infiltration of solid bodies and is resistant to the penetration of jets of water similar to sea waves.

Absolute protection is provided by double insulation even in the event of indirect contact. Even in very difficult application circumstances, Gemini gives high-level performances, with resistance to fire and abnormal heat up to a temperature of 750 °C and a functioning temperature from -25 °C to 100 °C.





Gemini. Fit for all application.

There are as many configurations as there are ABB devices for low voltage automation and distribution: moulded-case circuit breakers, modular circuit breakers, monitoring, control and signaling devices, wiring ducts and electrical connection systems.

All of these components give the "Gemini system" an enormous range of ad hoc solutions that are easy to assemble with the snap-on system.



ArTu. Go ahead and select the switchgear you need.



ArTu. A great offer, really high performances.

ABB proposes three series of switchgear with different characteristics thought up to make it possible to select the most suitable switchgear for the installation requirements. Different sizes for optimal use of the spaces available. Great savings in storage space is ensured by the rapid assembly kit containing so few pieces that skilled personnel is not required.

IP degrees of protection for all types of application up IP65 - the only switchgear to reach such a high value. Extremely sturdy and flexible, it is made for plants up to 4000A.





ArTu. Born certified.

Fully checked and certified (IEC 60439-1 Standard) by an external independent organisation (Acae Lovag), the ArTu switchgear is a synonym of safety and quality. The certification is the fruit of severe tests carried out on the whole configuration, consisting of metalwork structures, circuit-breakers and busbar system.

ArTu. A long experience through many projects.

The ArTu switchgear was born from an innovative project, created around the needs of all the professional figures involved in building and installing switchgear. This is constantly updated on the basis of the numerous projects which over these past years have had the ArTu series of switchgear as their leading player (Airports, underground railways,

hospitals, industrial complexes, residential complexes, ports, tunnels, stretches of railways, theatres, etc.).



ArTu L. Everything you need simply and conveniently.



ArTu L. Why complicate your life?

Up to 800A you have a series of both wall-mounted and floor-mounted switchgear available, able to ensure a high standard of quality along with maximum simplicity of selection and assembly.


Fitted with a structure, which is completely open at the sides, means you can carry out cabling very conveniently, with the switchgear placed horizontally on two trestles. And, if we are talking about cabling, there is nothing which simplifies and speeds it up better





than the Unifix H or L wiring system, created by ABB for its modular and moulded-case circuit-breakers.

The cable riser container is available in a width of 300mm to take different busbar systems, and, furthermore, with a convenient box placed above the switchgear, increases the space available for the incoming cables.

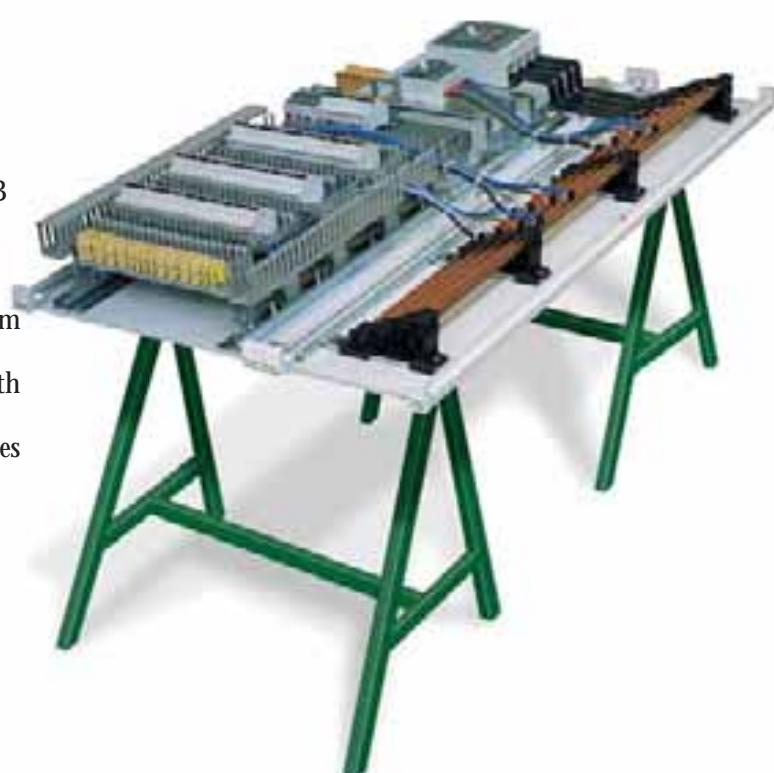

ArTu M. Top level functionality and protection.



ArTu M. Maximum protection up to 630A.

The ArTu M series switchgear is ideal for terminal wall-mounted switchgear with modular circuit-breakers and floor-mounted secondary distribution switchgear with moulded-case circuit-breakers up to 630A.

Many versions are available, for wall-mounted installation with depths of 150 and 200mm and for floor-mounted installation, with a depth of 250mm.

The degree of protection is at top market levels, reaching up to IP65, thanks to an innovative design and advanced construction systems.





The switchgear is available in 600mm useful width, with the possibility of installing 24 DIN modules in one row, and 800mm width choosing between installation of 24 DIN modules in one row plus the cable riser, or 36 DIN modules in one row.



ArTu K. New horizons up to 4000A.



ArTu. High performances?
No problem.

The ArTu K series switchgear is ideal for primary distribution switchgear (Power Center type) with air and moulded-case circuit-breakers and any internal segregations up to Form 4, and for floor-mounted secondary distribution switchgear with moulded-case and modular circuit-breakers.

The ArTu K series consists of modular switchgear for floor-mounted installation with depths

of 150, 225, 300, 500, 700 and 900mm, with IP31, IP41 and IP65 degrees of protection - the highest value available on the market.

Within the ArTu K series switchgear, like all the series in the range, it is possible to install ABB apparatus (System Pro M modular cir-





cuit-breakers, Tmax moulded-case circuit-breakers and Emax air circuit-breakers) with an excellent and certified level of integration. The switchgear is available in three functional widths (390, 600 and 800mm) and in two functional heights (1800 and 2000mm), which allow installation of 9 and 10 modules 200mm in height respectively.

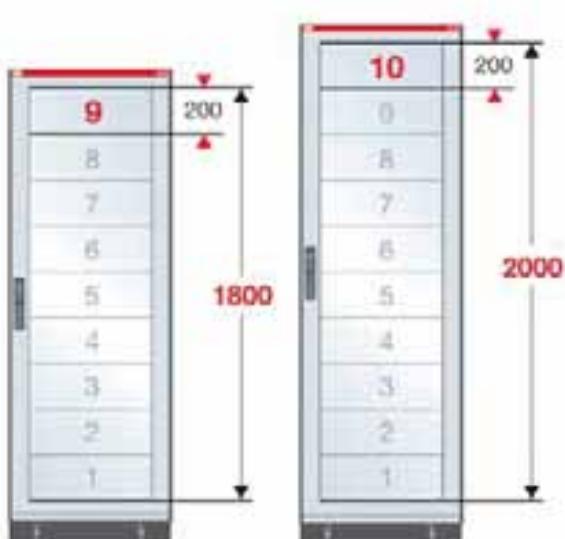




ABB SACE and its commitment to protecting the environment

ENVIRONMENTAL MANAGEMENT
SYSTEM CERTIFIED



ABB SACE is one of the forerunners among the companies in the Group in dedicating considerable resources towards reaching its objectives of sustainable development and environmental protection. This is confirmed by the fact that all the company manufacturing sites have been awarded ISO 9001 quality certification, ISO 14001 environmental management system certification and the majority of these have also obtained the Quality, Environment and Safety integrated management system certification.

All the company sectors are, in fact, actively involved in continuing the policy of improving environmental management by rationalizing the consumption of raw materials and energy, preventing pollution, respecting water and air, reducing noise levels to a minimum, reducing waste from production processes and carrying out periodic environmental checks at the main suppliers' premises.

By using analysis tools such as LCA (Life Cycle Analysis), right from the initial stages, ABB SACE design activities already include assessment and improvement of the environmental performance of its products throughout their entire life cycle in order to guarantee maximum efficiency in technical and energy performance during service, control and reduce environmental impact in the manufacturing stage and define end-of-life management procedures.

All these goals and activities are the result of far-sightedness in adopting ecological policies and methods for reducing environmental impact and, here too, ABB SACE is a leader on the Italian company scene, as it already is for the quality of its products.



Index

Characteristics of Gemini switchboards	1/2
Characteristics of ArTu switchgears	1/4
Composition of the series	1/8

Presentation of the range

Gemini is the result of design work conducted by ABB with the direct collaboration of switchboard manufacturers, installers and designers who considered versatility to be the discriminating element when purchasing a switchboard, equally as important as sturdiness and reliability.

Gemini fulfils this requirement by providing a product that can be used for three different purposes: in addition to the basic configuration it also provides the components necessary for equipping it as an automation switchboard or as a distribution and mixed switchboard.

1

In all applications, compatibility with ABB protection, control and monitoring products means that a real system of integrated and complementary functions can be configured.

Typical examples of some Gemini applications can be seen in installations in industrial production departments and on board machines, in galvanization plants and varnishing cabins, in petrol stations and car-washing plants, boiler-rooms, car parks, shopping malls and in any other environments where distribution and automation demand specific safety requirements and service continuity.

Gemini also has flexible measurements, with six different box sizes and internal space to accommodate from 24 to 216 DIN modules.

To respect safety standards, all the switchboard's components can be fixed to the base plate or to the box frame without having to use any tools; wiring is carried out from the front followed by snapping the base plate or the frame onto the box. The patented frame is fitted with the cable duct incorporated in the uprights.

In its design, Gemini repeats the shapes and RAL 7035 grey color of the ArTu switchboards with which it can be configured as a main protection switchboard.



Presentation of the range

Characteristics of Gemini switchboards

1

In the basic configuration, Gemini switchboards are composed of boxes in six different sizes ranging from 335x400x210 mm to 840x1005x360 mm (WxHxD, external measurements) and with opaque or transparent doors.

In both versions, the doors are reversible and clip onto the hinges without the need to use tools; the fact that they open at an angle of more than 180° means that it is easy to work on the components installed inside the switchboard. The seal applied by extrusion along the sides of the doors guarantees IP66 degree of protection.

Access to the inside of the switchboard is protected by a standard double bit lock that can be replaced by locks of another type available in the accessories.

Boxes and doors can be requested either separately or as combined "box + door" codes, to make filling out the order form more flexible.

Inside the packages, the door is always wrapped separately and inserted inside a pocket that protects it from accidental damage until wiring is completed and the switchboard is installed.

Hole-cover plugs to guarantee IP protection and double insulation for wall mounting are also supplied with the pack together with the instruction sheet.



No tools are needed for installation.
The doors hook onto the hinges with
special hinge pins and are reversible.



Fixing hooks and feet allow the frame
to be snap-mounted inside the box.

Gemini is made in a thermoplastic material that has a very low halogen content and is 100% recyclable.

The environmental compatibility of Gemini is an important objective right from the design phase where the Life Cycle Assessment (LCA) procedure, defined in 1990 during the Society of Environmental Toxicology and Chemistry Conference (Vermont, USA), is followed. Life Cycle Assessment is an objective method for analyzing the energy and environmental loads relating to a product, process or activity, carried out by identifying and quantifying energy, the materials used and emissions released into the environment. Divided into four phases, the assessment covers the entire life cycle of the product, process or activity, from the extraction and transformation of raw materials to manufacturing and distribution, and from usage to recycling and decommissioning.

Presentation of the range

Characteristics of ArTu switchgears

The range of ABB SACE ArTu distribution switchgear provides a complete and integrated offer of monobloc metalwork structures and kit systems for main and sub low voltage distribution switchgear, which satisfy all plant requirements depending on the type of installation, degree of protection required, and electrical and mechanical characteristics.



1STC80209F0001

The range of ArTu enclosure structures allows construction of numerous switchgear configurations

Starting from simple assembly kits, the ArTu switchgear allows numerous switchgear configurations:

- for Power Center type main distribution, with a prevalence of air circuit-breaker and moulded-case circuit-breakers and any internal segregations up to Form 4;
- for floor-mounted secondary distribution, equipped with moulded-case and modular circuit-breakers;
- for wall-mounted end distribution, with just modular circuit-breakers.

The user of ABB SACE circuit-breakers can therefore have a complete system of enclosures, in accordance with the reference standards, which guarantees absolute compatibility between the various elements (enclosures, circuit-breakers and distribution systems), together with maximum assembly and cabling facility. Special consideration has been given to cabling requirements, foreseeing dimensions of the structure, but also providing special seats for fixing the plastic cabling duct horizontally and vertically.

The ArTu switchgear is noted for the following features:

- integrated range of modular metalwork structures up to 4000 A with common accessories;
- possibility of fulfilling all application requirements in terms of installation (wall-mounting, floor-standing, monobloc, corner versions and cabinet kits) and degree of protection (IP31, IP41, IP43, IP65);
- maximum integration with modular apparatus and the moulded-case and air circuit-breakers, so that additional drilling or adaptations are not required;
- minimum switchgear assembly times, thanks to the simplicity of the kits, standardisation of the small assembly items, self-supporting elements and the presence of clear reference points for assembly of the plates and panels;
- segregations in kits up to Form 4;
- use of the Unifix rapid cabling system.



1STC80204F0001

The ArTu switchgear allows segregations up to Form 4 to be made

Presentation of the range

Characteristics of ArTu switchgears

The use and installation of the kits according to the instructions provided means that assembly and cabling times can be reduced to a minimum, for example thanks to the reference points for positioning the panels and plates, and that respect of the insulation distances and the rated characteristics of the circuit-breakers are guaranteed.

The ArTu range includes three different series of switchgear, which are completed with the same accessories:

ArTu L series

This consists of a range of modular switchgear kits, with a capacity of 36 modules per row and IP31 degree of protection (without door) or IP43 (basic version with door). Installation can be either wall or floor-standing:

- Wall-mounted ArTu L, with 600, 800, 1000, and 1200mm (useful) heights, 165mm depth, 600mm width. It allows installation of the modular System pro *M* apparatus, and moulded-case Tmax T1-T2-T3 circuit-breakers;
- Floor-standing ArTu L, with 1400, 1600, 1800, 2000mm (useful) heights, 195 mm depth, 600mm width. It allows installation of the modular System pro *M* apparatus and moulded-case Tmax T1...T6 800A circuit-breakers (fixed version with front terminals).

ArTu M series

This consists of a range of monobloc switchgear for wall-mounted installation (with depths of 115 and 165mm and with IP65 degree of protection) or floor-standing installation (with depth of 195 mm and IP31 or IP65 degree of protection), where it is possible to mount System Pro *M* modular apparatus and Tmax T1, T2 and T3, moulded-case circuit-breakers on a DIN rail.

In the wall-mounted versions ($D = 165$ mm), the Tmax moulded-case circuit-breakers up to 250 A can be installed, whereas in the floor-mounted versions, the moulded-case Tmax up to T6 circuit-breakers can be installed.

ArTu K series

This consists of a range of modular switchgear kits for floor-standing installation with six different (useful) depths: 150, 225, 300, 500, 700 and 900 mm, and with IP31 degree of protection (without front door), IP41 (with front door and side ventilated panels) and up to IP65 (with front door and blind side panels). It is possible to install System Pro *M* modular apparatus, the ranges of Tmax and Isomax circuit-breakers in all their possible configurations, and Emax X1, E1, E2, E3 and E4 air circuit-breakers.



Use and installation of the kits, according to the instructions provided, allow assembly and cabling times to be reduced to a minimum.



Presentation of the range

Characteristics of ArTu switchgears

The ArTu switchgear has the following functional widths:

- 390 mm, for installation of moulded-case circuit-breakers up to 1600 A (T7);
- 600 mm, which is the basic dimension for installation of all the apparatus;
- 800 mm, for making the lateral cable container inside the structure of floor-mounted switchgear or to use panels with 36 DIN modules in one row.

The panels for Tmax, and Emax circuit-breakers have 100 mm modularity.

The useful inside height space varies from 600 mm (L wall-mounted series) to 2000 mm (L and M floor-standing series and K series), offering optimisation and automatically reducing the spaces taken up by the switchgear.



1STC802003F0001

The panels for Tmax, and Emax circuit-breakers have 100mm modularity



1STC802006F0001

With the shaped section busbar system, ArTu switchgear for low voltage power distribution further enhance perfect integration with the apparatus and, in full conformity with the IEC 60439 Standard, can be certified by carrying out only the individual tests.

Using Artu enclosures and relative accessories together with modular apparatus and moulded-case and air circuit-breakers, it is therefore possible to build AS or ANS type switchgear without carrying out further type tests, simply respecting the selection criteria and the assembly instructions for the various components.

The ArTu distribution system consists of:

- shaped section copper busbars with capacity from 400 A to 3200A;
- flat copper busbars up to 4000A;
- busbar holders and relative crosspieces for short-circuit withstand up to 105kA;
- flexible busbars for connection of the moulded-case circuit-breakers and screws and hammer for connection of the latter to the shaped section busbars.



1STC802243F0001

The ABB SACE busbar system and accessories for installation in the distribution switchgear

Presentation of the range

Characteristics of ArTu switchgears

1

A peculiarity of the shaped section busbar system is its extremely compact dimensions, which allow it to be assembled directly inside the cable container, on the back or on the side of the structure, keeping front access. This is possible thanks to the scaled or linear type busbar holders, which also allow assembly in the L or M floor-mounted series of switchgear, with reduced dimensions.

The ABB SACE busbar and accessories system prepared for installation in ArTu distribution switchgear undergoes the short-circuit withstand tests with a value of I_{in} up to 4000 A and I_{cw} up to 105 kA (1s) according to the IEC 60439-1 Standard, in ABB laboratories recognised by ACAE/LOVAG.

The Unifix rapid cabling system, which allows simple, rapid and safe cabling of all the ABB SACE apparatus, completes the switchgear. Unifix is available in two versions: the Unifix H series, suitable for structured cabling of moulded-case circuit-breakers up to 250A (up to Tmax T3) and modular System Pro-M circuit-breakers, and the Unifix L series, specifically for rapid cabling of modular System Pro-M circuit-breakers.

A fundamental characteristic of these systems is the possibility of combining different types of circuits (single-phase/three-phase/auxiliary) within a single module.

Unifix also allows bench cabling to be carried out, and to then only install it in the switchgear at a later time, without any limitation of the types or combinations of apparatus which can be installed. This way cabling times are considerably reduced, making realisation of the power supply by means of cables superfluous, as the rigid coupled connectors - standardised for the different types of apparatus - do, in fact, see to this.



The Unifix rapid cabling system


1STC460003F0001



Presentation of the range

Composition of the series


ArTu L

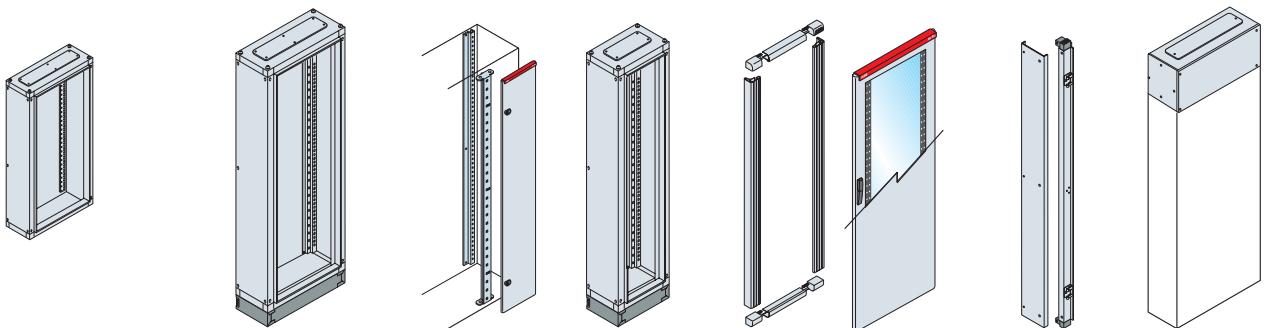

Wall structures Functional dimensions ⁽¹⁾ (mm) Height Width Depth			Floor structures Functional dimensions ⁽¹⁾ (mm) Height Width Depth			Internal cable container Width 200mm	Additional cable container Width 300mm	Front covers IP31	IP43	Removable side panels	Cable connection box
600	600	165					•	•	•		
800	600	165					•	•	•		
1000	600	165					•	•	•		
1200	600	165					•	•	•		
	1400	600	195				•	•	•	•	•
	1600	600	195				•	•	•	•	•
	1800	600	195				•	•	•	•	•
	2000	600	195				•	•	•	•	•
	1400	800	195				•	•	•	•	•
	1600	800	195				•	•	•	•	•
	1800	800	195				•	•	•	•	•
	2000	800	195				•	•	•	•	•

⁽¹⁾ External dimensions available on page 8/6.

ArTu M

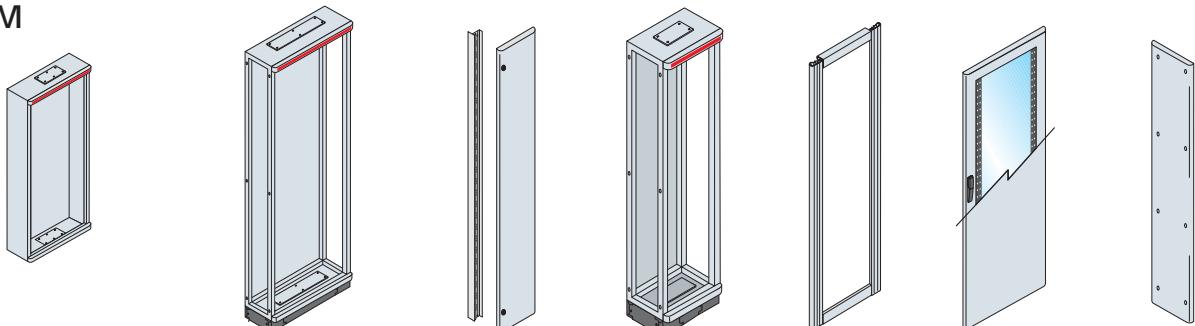


Wall structures Functional dimensions ⁽¹⁾ (mm) Height Width Depth			Floor structures Functional dimensions ⁽¹⁾ (mm) Height Width Depth			Internal cable container Width	Additional cable container Width 300mm	Front covers IP31	IP65	Side covers IP65
600	600	115							•	
800	600	115							•	
	600	165							•	
1000	600	165							•	
1200	600	165							•	
	1400	600	195				•	•	•	•
	1600	600	195				•	•	•	•
	800	195					•	•	•	•
	1800	600	195				•	•	•	•
	800	195					•	•	•	•
	1800	800	195				•	•	•	•
	600	195					•	•	•	•
	2000	600	195				•	•	•	•
	800	195					•	•	•	•

⁽¹⁾ External dimensions available on page 8/6.

Presentation of the range

Composition of the series

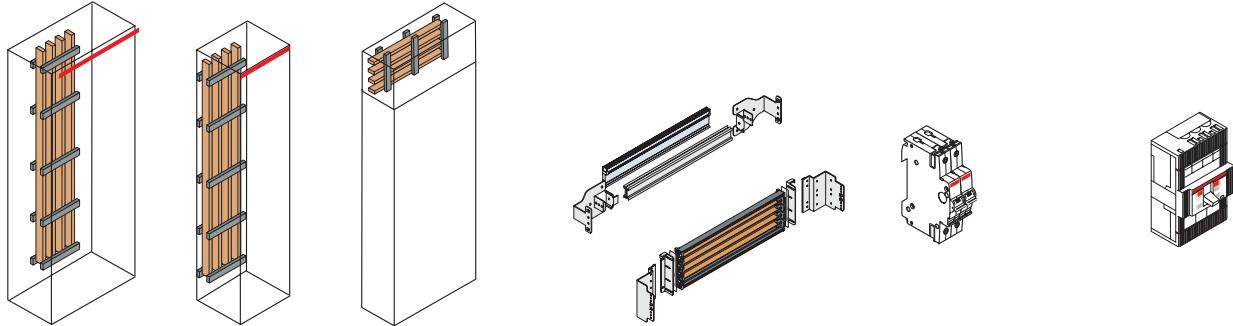

Busbar distribution system

Vert.
back

Vert.
cable container

Horiz.
box

Unifix distribution system

L Ser


H Series

System Pro M
modular
apparatus

Tmax moulded-case
circuit-breakers

T1-T2-T3
≤250A

T4-T5-T6
≤800A

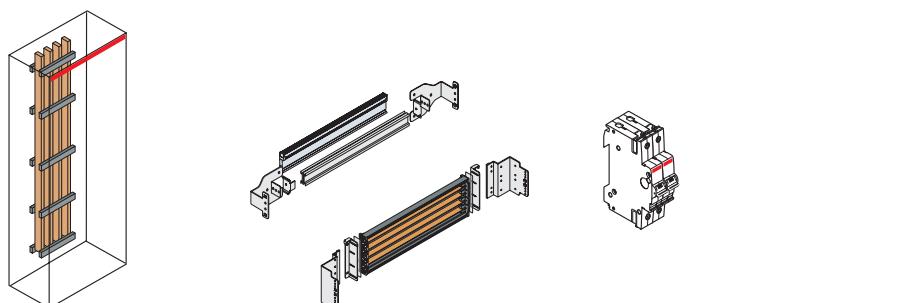

Busbar distribution system

Vert.
cable container

Unifix
distribution system

L Series

System Pro M
modular
apparatus

T1-T2
160A

Tmax moulded-case circuit-breakers



T3
250A

T4-T5-T6
630A

Presentation of the range

Composition of the series

ArTu K

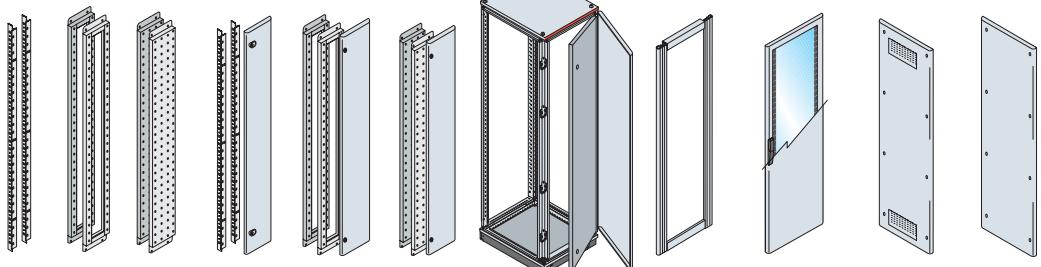



Functional dimensions⁽¹⁾
(mm)

Height	Width	Depth	Functional frames	with reduced frames	Internal cable container	Additional cable container	Front coverings		Side coverings		
			reduced	open	closed	for frames open	for frames closed	Width 300mm	IP31/41	IP65	IP31/41
1600	600	150	•					•	•	•	•
	800	150	•		•			•	•	•	•
	390	225	•					•	•	•	•
	390	300	•					•	•	•	•
	390	500	•	•	•			•	•	•	•
	390	700	•	•	•			•	•	•	•
	390	900	•	•	•			•	•	•	•
	600	150	•					•	•	•	•
	600	225	•					•	•	•	•
	390	300	•					•	•	•	•
1800	600	500	•	•	•			•	•	•	•
2000	600	700	•	•	•			•	•	•	•
	600	900	•	•	•			•	•	•	•
	800	150	•		•			•	•	•	•
	800	225	•		•			•	•	•	•
	390	300	•		•			•	•	•	•
	800	500	•	•	•	•	•	•	•	•	•
	800	700	•	•	•	•	•	•	•	•	•
	800	900	•	•	•	•	•	•	•	•	•

⁽¹⁾ External dimensions available on page 8/14.

Gemini

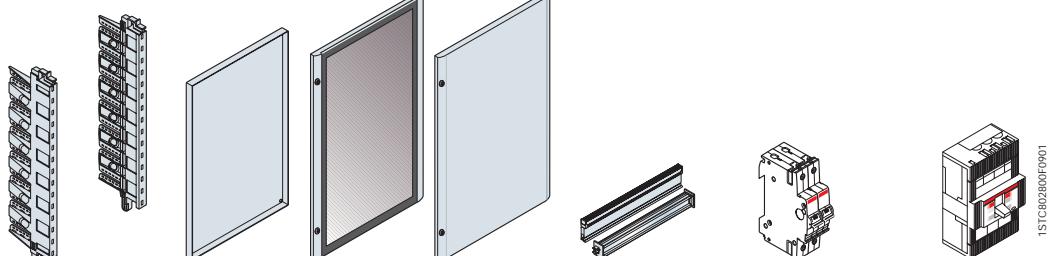


Functional dimensions⁽¹⁾
(mm)

Height	Width	Depth	Functional frames	counterdoor IP40	glass door IP66	blind door IP66	Unifix L distribution system	System Pro M modular apparatus	Tmax moulded-case circuit-breakers T1...T5 630A
			•	•	•	•	•	•	•
300	250	180	•	•	•	•	•	•	•
450	375	230	•	•	•	•	•	•	•
600	375	230	•	•	•	•	•	•	•
600	500	230	•	•	•	•	•	•	•
750	500	330	•	•	•	•	•	•	•
900	750	300	•	•	•	•	•	•	•

⁽¹⁾ External dimensions available on page 8/2.

Presentation of the range

Composition of the series

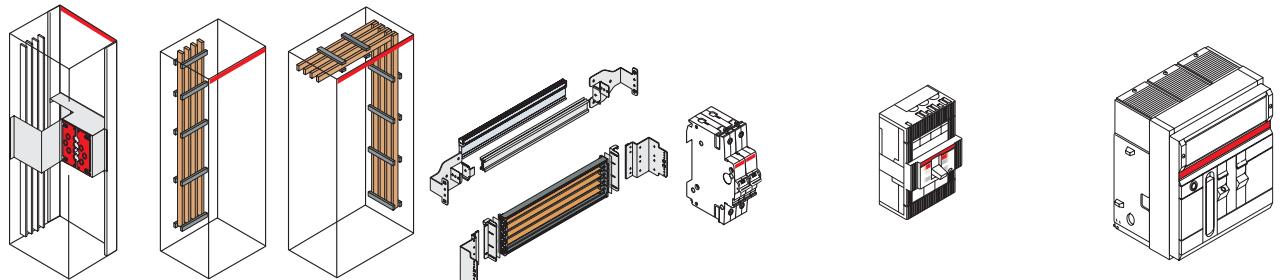

1STC802003F0901

Busbar distribution system

Unifix distribution system

System Pro M
modular
apparatus

Tmax moulded-case circuit-breakers

Emax air
circuit-breakers



Index

General.....	2/2
Selection of the structure.....	2/4
Kits for installing apparatus	2/6
Distribution system	2/8
Examples of configuration	2/10

Gemini switchboards

General

ABB SACE's Gemini range is revolutionizing the market of low voltage electric insulating switchboards. The reason for this is that it is the first switchboard made in thermoplastic material, to which the co-injection molding technique gives the same mechanical characteristics as polyester. This means that it is extremely sturdy, with its rigid covering and expanded internal core. Moreover, it contains no fiberglass, a material that with time rises to the surface, jeopardizing the functioning and safety of switchboards made in polyester with which it is usually mixed. Gemini switchboards have IP66 degree of protection (IP40 with the door open and with the appropriate components installed) and a very high resistance to chemical and atmospheric agents. This is the reason why Gemini guarantees excellent performances even in particularly severe operating conditions.



In distribution and mixed applications, the Gemini switchboard is designed to be fitted with System pro M modular devices and Tmax moulded-case circuit breakers.




Gemini switchboards are made with co-injection, which ABB SACE is the first manufacturer in the electric field to use as a molding technique. This process obtains a "sandwich" of two materials with a compact external covering and an expanded core, guaranteeing the highest level of mechanical protection against impacts (IK10) without the need to add hardening substances.



The frame can be extracted to make wiring operations easier at the workbench.

Gemini switchboards

General

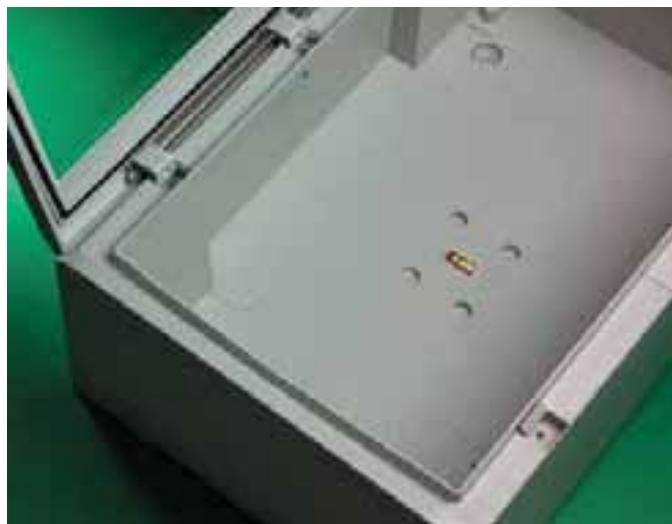

The special structure of the inner perimeter of the box ensures further protection against the penetration of water. The box is supplied with a spirit level.

The frame is the load-bearing element of the configuration: DIN rails, partial modular plates and the special Tmax mounting and cabling kits are snapped onto the uprights. All the components can be adjusted to six different depths with a pitch of 12.5 mm and arranged at heights with a distance of 75 mm between the rows.

Blank or drilled front panels are applied to protect the equipment and these can be hinged onto both sides; the cables are housed inside the vertical wiring duct integrated in the uprights according to an exclusive ABB patent.

Wiring is carried out by pulling out the frame and working from the front; the ergonomic grip and the standard feet and snap-on hooks supplied make it easy to insert it inside the switchboard after the job is finished.

To finish the job, the inner door can be mounted (reversible and in insulating material), guaranteeing IP40 degree of protection when the switchboard door is open.

No tools are needed unless the inner door is equipped with buttons, warning lights, etc.




Technical characteristics

Compliance with Standards	Compliance with IEC 62208 international reference Standard, qualification for the requirements of IEC 60439 Standard, IMO mark according to EN 62208 Standard
Rated service voltage Ue	up to 690 V
Operating temperature	-25 °C ÷ +100 °C
Resistance to abnormal heat and fire	up to 750 °C
Degree of resistance to impacts IK	10
IP degree of protection	40 open door 66 closed door
Recyclable	100%


Gemini switchboards

Selection of the structure

Structure

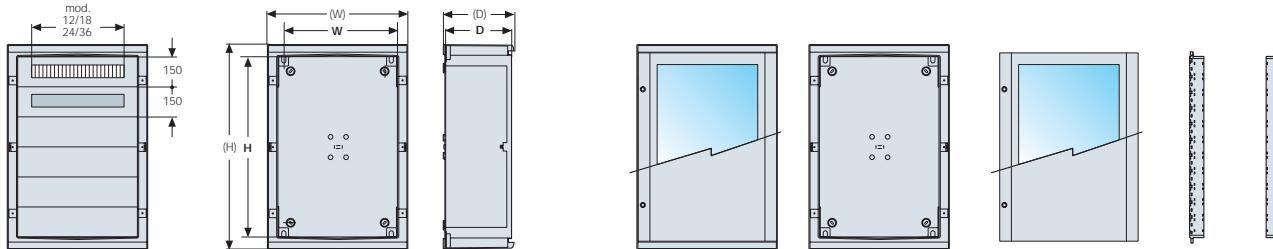


Size	N° of vertical mod. H=150mm	N° of installable DIN modules	External dimensions			Functional dimensions			Complete switchboards		Door		Uprights	
			(H) mm	(W) mm	(D) mm	H mm	W mm	D mm	Transparent	Opaque	Box	Transparent	Opaque	
1	2	24 (12x2)	400	335	210	300	250	180	1SL0211A00	1SL0201A00	1SL0221A00	1SL0241A00	1SL0231A00	1SL0283A00
2	3	54 (18x3)	550	460	260	450	375	230	1SL0212A00	1SL0202A00	1SL0222A00	1SL0242A00	1SL0232A00	1SL0284A00
3	4	72 (18x4)	700	460	260	600	375	230	1SL0213A00	1SL0203A00	1SL0223A00	1SL0243A00	1SL0233A00	1SL0285A00
4	4	96 (24x4)	700	590	260	600	500	230	1SL0214A00	1SL0204A00	1SL0224A00	1SL0244A00	1SL0234A00	1SL0285A00
5	5	120 (24x5)	855	590	360	750	500	330	1SL0215A00	1SL0205A00	1SL0225A00	1SL0245A00	1SL0235A00	1SL0286A00
6	6	216 (36x6)	1005	840	360	900	750	330	1SL0216A00	1SL0206A00	1SL0226A00	1SL0246A00	1SL0236A00	1SL0287A00

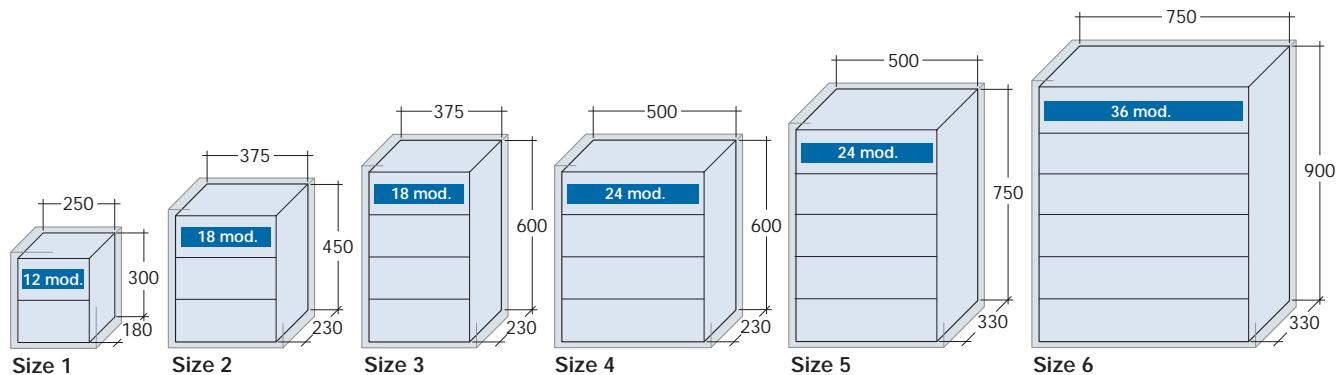

Gemini switchboards

Selection of the structure



DIN rail kit DIN rail+drilled panel	Kit for Tmax plate+drilled panel	Blank panel	Modular plate	DIN rail					
1 mod. H=150mm	1+1/2 mod. H=225mm	1 mod. H=150mm	2 mod. H=300mm	1/2 mod. H=75mm	1 mod. H=150mm	2 mod. H=300mm	1 mod. H=150mm	2 mod. H=300mm	1 mod. H=150mm
1SL0307A00	-	-	-	1SL0318A00	1SL0324A00	1SL0330A00	1SL0296A00	-	1SL0290A00
1SL0308A00	1SL0313A00	1SL0336A00	1SL0370A00	1SL0319A00	1SL0325A00	1SL0331A00	1SL0297A00	1SL0302A00	1SL0291A00
1SL0308A00	1SL0313A00	1SL0336A00	1SL0370A00	1SL0319A00	1SL0325A00	1SL0331A00	1SL0297A00	1SL0302A00	1SL0291A00
1SL0309A00	1SL0314A00	1SL0337A00	1SL0371A00	1SL0320A00	1SL0326A00	1SL0332A00	1SL0298A00	1SL0303A00	1SL0292A00
1SL0309A00	1SL0314A00	1SL0337A00	1SL0371A00	1SL0320A00	1SL0326A00	1SL0332A00	1SL0298A00	1SL0303A00	1SL0292A00
1SL0310A00	1SL0315A00	1SL0338A00	1SL0372A00	1SL0321A00	1SL0327A00	1SL0333A00	1SL0299A00	1SL0304A00	1SL0293A00

Suggestion for installation of Tmax moulded-case circuit breakers

The table indicates the type of installation required for the different versions of Tmax moulded-case circuit breakers in Gemini switchboards. Before carrying out wiring operations check compliance with Standards on the basis of the technical characteristics of the switchboard and circuit breaker (IEC 60439).

Size	Installation	Tmax T1	Tmax T2	Tmax T3	Tmax T4	Tmax T5
1	D	•	•	•		
	O1	•	•			
	T	•	•	•	• (3)	• (3)
2	D	•	•	•		
	K1	•	• (1)			
	K2	•	• (2)	•		
	O1	•	•	•	• (4)	
	O2	•	•	•	•	• (3)
	T	•	•	•	•	•
3	D	•	•	•		
	K1	•	• (1)			
	K2	•	• (2)	•		
	O1	•	•	•	• (4)	
	O2	•	•	•	•	• (3)
	T	•	•	•	•	•
4	D	•	•	•		
	K1	•	• (1)			
	K2	•	• (2)	•		
	O1	•	•	•	• (4)	
	O2	•	•	•	•	
	T	•	•	•	•	•
5	D	•	•	•		
	K1	•	• (1)			
	K2	•	• (2)	•		
	O1	•	•	•	• (4)	
	O2	•	•	•	•	
	T	•	•	•	•	•
6	D	•	•	•		
	K1	•	• (1)			
	K2	•	• (2)	•		
	O1	•	•	•	• (4)	
	O2	•	•	•	•	
	T	•	•	•	•	•

Caption


- D, installation on DIN rail
- K1, installation with Tmax kit H = 150 (holes made)
- K2, installation with Tmax kit H = 300 (holes made)
- O1, installation on modular plate (1 module, H = 150 mm)
- O2, installation on modular plate (2 modules, H = 300 mm)
- T, installation on total base plate
- • (1), Tmax T2 3 poles (with or without residual current release) and Tmax T2 4 poles (without residual current release)
- • (2), Tmax T2 4 poles (with residual current release)
- • (3), only version without residual current release
- • (4), only version with 3 poles

Gemini switchboards

Kits for installing apparatus

Horizontal installation


Kit for Tmax with pre-drilled holes



Fixed circuit-breaker with front terminals	N° poles	Dimensions H (mm)	Size		
			2/3	4/5	6
Tmax T1	3-4	150	1SL0336A00	1SL0337A00	1SL0338A00
Tmax T2	3-4	150	1SL0336A00	1SL0337A00	1SL0338A00
Tmax T2+res. cur.	3	300	1SL0370A00	1SL0371A00	1SL0372A00
Tmax T3	3-4	300	1SL0370A00	1SL0371A00	1SL0372A00

Vertical installation

Installation on DIN rail




Fixed circuit-breaker with front terminals	N° poles	Dimensions H (mm)	Size			
			1	2/3	4/5	6
System Pro M compact modular apparatus		150	1SL0307A00	1SL0308A00	1SL0309A00	1SL0310A00
		225		1SL0313A00	1SL0314A00	1SL0315A00
Tmax T1-T2-T3	3-4	225		1SL0313A00	1SL0314A00	1SL0315A00

Gemini switchboards

Kits for installing apparatus

Wiring ducts

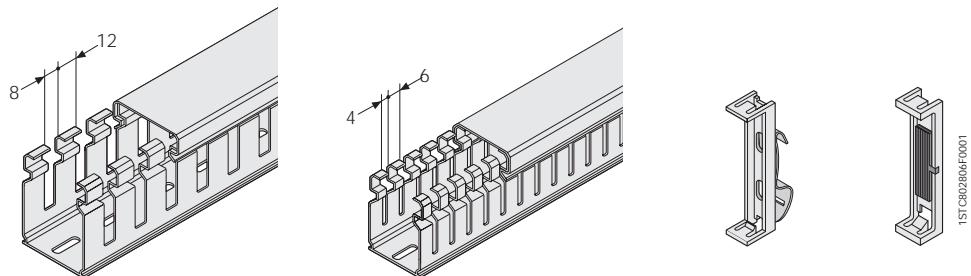

2

1STCB02806F0001

Base (mm)	H (mm)
25	15
	30
	40
	60
40	80
	100
	30
	40
60	60
	80
	100
	30
80	40
	60
	80
	100
100	40
	60
	80
	100
120	40
	80
150	100



Wiring ducts		Fix-O-rapid	
8-12 mm slots	4-6 mm slots	Rapid snap-on bases for DIN rail	Rapid snap-on bases for plate
05 019	05 119	-	-
05 033	05 133	05 250	05 270
05 043	05 143	05 252	05 272
05 063	05 163	05 254	05 274
05 083	05 183	05 256	05 276
05 094	05 194	05 258	05 278
05 035	05 135	05 260	05 280
05 045	05 145	05 262	05 282
05 065	05 165		
05 085	05 185		
05 095	05 195		
05 037	05 137		
05 047	05 147		
05 067	05 167		
05 087	05 187		
05 096	05 196		
05 049	05 149		
05 069	05 169		
05 089	05 189		
05 097	05 197		
05 051	05 151		
05 071	05 171		
05 091	05 191		
05 098	05 198		
05 053	05 153		
05 093	05 193		
05 099	05 199		

Gemini switchboards



Distribution systems

Modular dividers

Single-pole







Three-poles



Code	AD1076	AD1080 ⁽¹⁾	AD1007	AD1081 ⁽²⁾	AD1030	AD1031	AD1075	AD1006
In (A)	125	125	160	160	250	400	125	160
Icw (kA)	4.2	10	11	10	21	21	4.2	
Version	poli	1	1	1	1	1	3	3
Installation	DIN35/plate	DIN35/plate	DIN35/plate	DIN35/plate	DIN35/plate	DIN35/plate	DIN35/plate	DIN35/plate
Power supply Ø cable (mm²)	min.	10	6	16	10	35	95	10
	max	35	35	70	70	120	185	35
N°outgoing feeder (mm²)	2.5÷10				4	4		
Ø cable	2.5÷16	10	6	10	6	5	5	6
	2.5÷25					2	2	
	2.5÷35							
Dimensions HxWxD (mm)	71x45x42.5	75x25x47	71x45x42.5	92x35x49	96x45x49	96x45x49	80x71.5x42.5	80x71.5x42.5
N° DIN modules	2.5	1.5	2.5	2	3	3	4.5	4.5
Rated service voltage Ue (V)	690	500	690	500	500	500	690	690
Degree of protection IP	20	20	20	20	20	20	20	20

Four-poles



Code	AD1004	AD1028	AD1029	AD1027
In (A)	125	125	125	160
Icw (kA)	10	4.2	4.2	6
Version poles	4	4	4	4
Installation	DIN35/plate	DIN35/plate	DIN35/plate	DIN35
Power supply Ø cable (mm²)	min.	6	6	10
	max	35	25 with cable terminal 35 without cable terminal	50
N°outgoing feeder (mm²)	5 holes/phase Ø1÷6	2xØ6÷25 + cable terminal	25 with cable terminal 35 without cable terminal	8xØ2.5÷16
Ø cable	2 holes/phase Ø1.5÷16	2xØ6÷35 no cable terminal	2xØ6÷35 no cable terminal	3xØ6÷35
	6 holes/neutral Ø1.5÷16	9xØ6÷10	2xØ6÷16	
	4 holes/neutral Ø1.5÷6 ²		9xØ6÷10	
Dimensions HxWxD (mm)	45x75x98	89x93x48	126x93x48	90x160x50
N° DIN modules	5.5	5	7	9
Rated service voltage Ue (V)	500	690	690	500
Degree of protection IP	20	20	20	20

⁽¹⁾ possibility of putting in parallel with AD1083 connections.

⁽²⁾ possibility of putting in parallel with comb type connections (not supplied).


Gemini switchboards

Distribution systems


Unifix L

Technical characteristics


Rated service voltage (U_s)	400V AC
Rated insulation voltage (U)	500V AC
Rated impulse withstand voltage (U_{imp})	6kV
Rated frequency	50/60Hz
Rated current (I_n)	central power supply lateral power supply
Rated short-time withstand current (I_{cw})	100A 80A
Maximum peak current (I_{pk})	
Maximum installable circuit-breaker size	100A
Conditioned short-circuit current (I_{cc})	Tmax T1 Tmax T2 N, S ⁽¹⁾ Tmax T3
With circuit-breaker	S200 S200 H S200 P
Degree of protection	IP20
Characteristics of the insulating material	Self-extinguishing thermoplastic V1 (UL94)
Characteristics of the conductor material	Electrolytic copper
Width (N° modules/mm)	12/400 18/500 24/600 36/800



Connections (L1-L2-L3-N) for System Pro M modular apparatus..

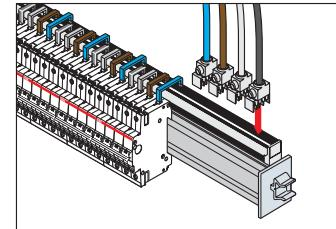

Power supply of the busbar with 100A feeder module without cable. Terminal capacity 35mm².



Direct power supply of the busbars by means of feeder module.

Table for selecting connections according to the circuit-breaker

Circuit-breaker series

S941- S951 - S971
DS941 - DS951 - DS971

S200 - DS 200
F200 ≤ 63A

Unifix L

ED3272 L1/N 40A
ED3280 L2/N 40A
ED3298 L3/N 40A

ED3033 L1 100A
ED3041 L2 100A
ED3058 L3 100A
ED3066 N 100A

F660 - F670 - S280 (80-100A)
E200 ≤ 100A - RS370 - F 200 80-100A (Unifix)


ED3132 Power supply L1/L2/L3/N - 350mm
ED0026 Power supply L1/L2/L3/N - 1500mm
ED0025 Power supply L1/L2/L3/N - 2500mm

MDRC - Various apparatus

ED3108 Power supply 2 cables L1/N 16A
ED3116 Power supply 3 cables L1/L2/L3 16A
ED3124 Power supply 4 cables L1/L2/L3/N 16A

ED3355 Power supply 2 cables L1/N 40A
ED3363 Power supply 3 cables L1/L2/L3 40A
ED3371 Power supply 4 cables L1/L2/L3/N 71A


For the DDA locks, order the false module **ED2845** codes separately according to the size of the residual current lock.



Power supply by means of modules and cables in parallel.


Gemini switchboards

Examples of configuration




**Gemini switchboards 12 mod. DIN dim.300x250x180 (400x335x210)mm
(external hwxwd) IP66**

Code	Description	Q.ty
1SL0211A00	Box + transparent door	1
1SL0283A00	No. 2 uprights	1
1SL0307A00	DIN rail kit (DIN rail + panel) H=150mm	2



**Gemini switchboards 18 mod. DIN dim.450x375x230 (550x460x260)mm
(external hwxwd) IP66**

Code	Description	Q.ty
1SL0212A00	Box + transparent door	1
1SL0284A00	No. 2 uprights	1
1SL0297A00	Modular plate 1 mod.DIN H=150mm	1
1SL0325A00	Blank panel 1 mod.DIN H=150mm	1
1SL0313A00	DIN rail kit (DIN rail+panel) 1+1/2 mod. H=225mm	1
1SL0319A00	Blank panel 1/2 mod. H=75mm	1
12863	Module covers	1

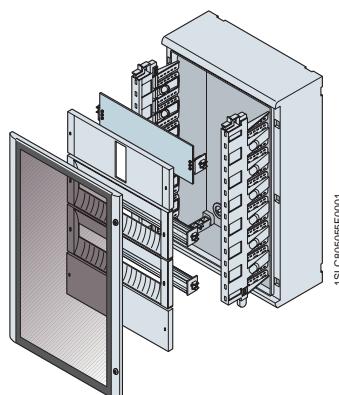


**Gemini switchboards 18 mod. DIN dim.600x375x230 (700x460x260)mm
(external hwxwd) IP66**

Code	Description	Q.ty
1SL0213A00	Box + transparent door	1
1SL0285A00	No. 2 uprights	1
1SL0336A00	Kit for Tmax H=150mm	1
1SL0308A00	DIN rail kit (DIN rail + panel) 1 mod. H=150mm	2
1SL0291A00	DIN rail	1
1SL0325A00	Blank panel 1 mod. DIN H=150mm	1

Gemini switchboards


Examples of configuration

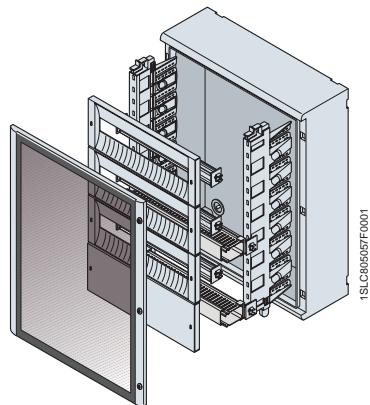

**Gemini switchboards 24 mod. DIN dim.600x500x230 (700x590x260)mm
(external hxwxh) IP66**


Code	Description	Q.ty
1SL0214A00	Box + transparent door	1
1SL0285A00	No. 2 uprights	1
1SL0309A00	DIN rail kit (DIN rail+panel) 1 mod. H=150mm	3
1SL0326A00	Blank panel 1 mod. H=150mm	1
1SL0355A00	Wiring kit (Fix-O-rapid+wiring duct 25x60mm)	2
1SL0292A00	DIN rail	1
12863	Module covers	1

2

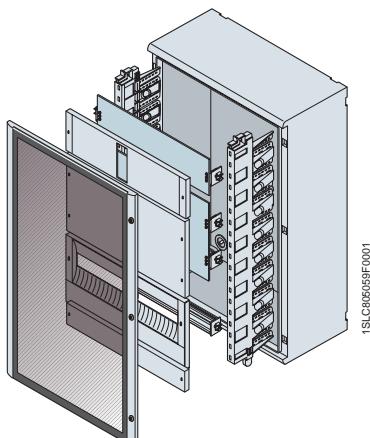

**Gemini switchboards 24 mod. DIN dim.750x500x330 (855x590x360)mm
(external hxwxh) IP66**

Code	Description	Q.ty
1SL0215A00	Box + transparent door	1
1SL0286A00	No. 2 uprights	1
1SL0337A00	Kit for Tmax H=150mm	1
1SL0303A00	Modular plate H=300mm	1
1SL0332A00	Blank panel H=300mm	1
1SL0314A00	DIN rail kit (DIN rail+panel) 1+1/2 mod. H=225mm	1
1SL0320A00	Front blind panel 1/2 mod. H=75mm	1
12863	Module covers	1

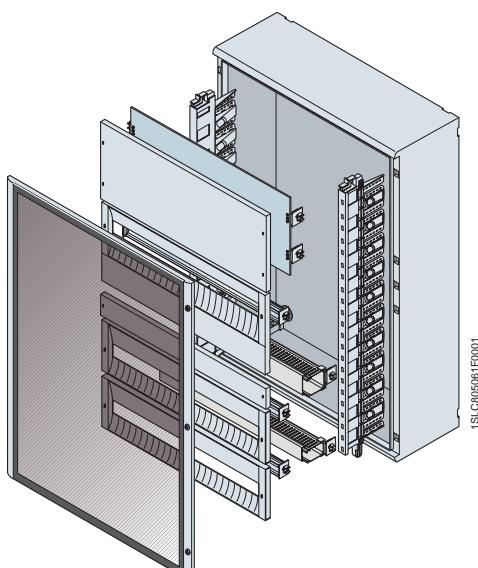

**Gemini switchboard 36 mod. DIN dim.900x750x330 (1005x840x360)mm
(external hxwxh) IP66**

Code	Description	Q.ty
1SL0216A00	Box + transparent door	1
1SL0287A00	No. 2 uprights	1
1SL0304A00	Modular plate H=300mm	1
1SL0333A00	Blank panel H=300mm	1
1SL0315A00	DIN rail kit (DIN rail + panel) 1+1/2 mod. H=225mm	1
1SL0321A00	Blank panel 1/2 mod. H=75mm	1
1SL0310A00	DIN rail kit (DIN rail+panel) 1 mod. H=150mm	2
1SL0356A00	Wiring kit (Fix-O-rapid+wiring duct 25x60mm)	1
1SL0363A00	Wiring kit (Fix-O-rapid+wiring duct 40x60mm)	1



Index

General.....	3/2
Selection of the structure.....	3/4
Kits for installing apparatus	3/6
Distribution systems	3/11

ArTu L modular structures

General

The ArTu L range is composed of structures consisting of modular kits which can be built up in different combinations able to cover applications of terminal distribution switchgear, both wall-mounted up to 250 A and floor-standing up to 800 A. The overall dimensions are reduced thanks to the depth of just 200 mm for the former and 240 mm for the latter. Both versions can be placed side-by-side with other structures and with cable risers with a width of 300 mm.

Modular apparatus of the System pro M series, moulded-case Tmax up to T6 800 A (fixed version with front terminals) circuit-breakers are housed inside the ArTu L switchgear, with a capacity of 24 or 36 modules per row.

Apart from in the traditional plain and pre-drilled versions with 200 mm height, the modular panels are also available in the 150 mm height, which allows optimisation of the space available.



Cabling becomes simpler, thanks to the structure which is completely open: in fact, it is possible to conveniently carry out cabling horizontally on trestles inside the workshop or on the building site with the switchgear completely open and then only complete its assembly when cabling has been completed.




Technical characteristics

Wall-mounted D=204mm	Floor-standing D=240mm
Compliance with Standards	IEC 60439-1
Rated service voltage Ue	up to 690 V
Rated insulation voltage Ui	up to 1000 V
Rated frequency	50-60 Hz
Rated impulse withstand voltage Uimp	6 kV
Rated current In	up to 250 A
Rated short-time short-circuit withstand current Icw	up to 25 kA
Rated short-circuit peak current Ipk	up to 52.5 kA
IP degree of protection	31 without door 43 with door
	31 without door 43 with door

ArTu L modular structures

General


It is possible to use the rapid Unifix (H and L) cabling system. Furthermore, the kit for fixing the circuit-breakers further simplifies the job, thanks to the practical rapid snap-on hooking up system and the standardised small items.



The 400 and 800A busbar system with shaped section, with prefabricated connections between circuit-breakers and busbars placed in the various situations can be used. It is always possible to use the traditional flat busbars for capacities up to 630A. The degree of protection goes from IP31, for the versions without door, up to IP43 for the versions with door.

Lateral access is guaranteed, as is the possibility of mounting the vertical wiring duct both on the right, on the left and horizontally.

An accessory box is available, to be placed above the switchgear roof, which increases the space available for the incoming cables and, together with the distribution frame, makes distribution simpler. The maximum form of segregation, which can be obtained, is type 2.

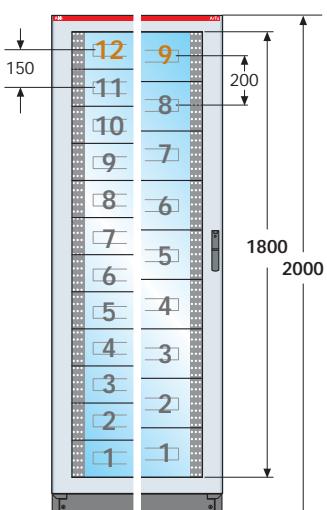


ArTu L modular structures

Selection of the structure


Structures

3

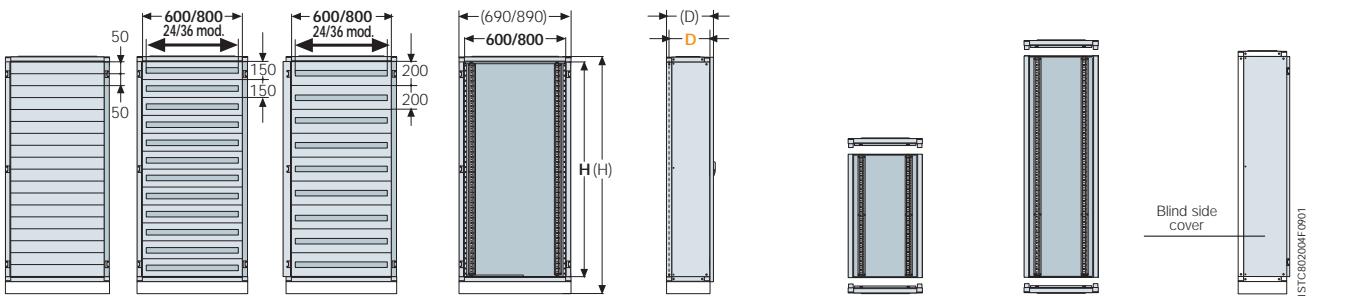

N° vert. mod. H=100mm	N° DIN modules installable	N° DIN modules installable	External overall dimensions ⁽¹⁾	Functional dimensions ⁽²⁾	Wall-mounted back of structure ⁽³⁾	Floor-standing back of structure	Side cover
	DIN panel 24/36 modules H=150mm	DIN panel 24/36 modules H=200mm	(H) mm (W) mm (D) mm	H mm W mm D ⁽⁴⁾ mm	Including roof and base	Including roof and base	Blind
6	96 (24x4)	72 (24x3)	650	600 600 165	SL0600		MC0600
8	120 (24x5)	96 (24x4)	850		SL0800		MC0800
10	144 (24x6)	120 (24x5)	1050		SL1000		MC1000
12	192 (24x8)	144 (24x6)	1250		SL1200		MC1200
14	216 (24x9)	168 (24x7)	1550		SL1400		MC1400
16	240 (24x10)	192 (24x8)	1750		SL1600		MC1600
18	288 (24x12)	216 (24x9)	1950		SL1800		MC1800
20	312 (24x13)	240 (24x10)	2150		SL2000		MC2000
14	324 (36x9)	252 (36x7)	1550		SL1408		MC1400
16	360 (36x10)	288 (36x8)	1750		SL1608		MC1600
18	432 (36x12)	324 (36x9)	1950		SL1808		MC1800
20	468 (36x13)	360 (36x10)	2150		SL2008		MC2000

Additional cable container

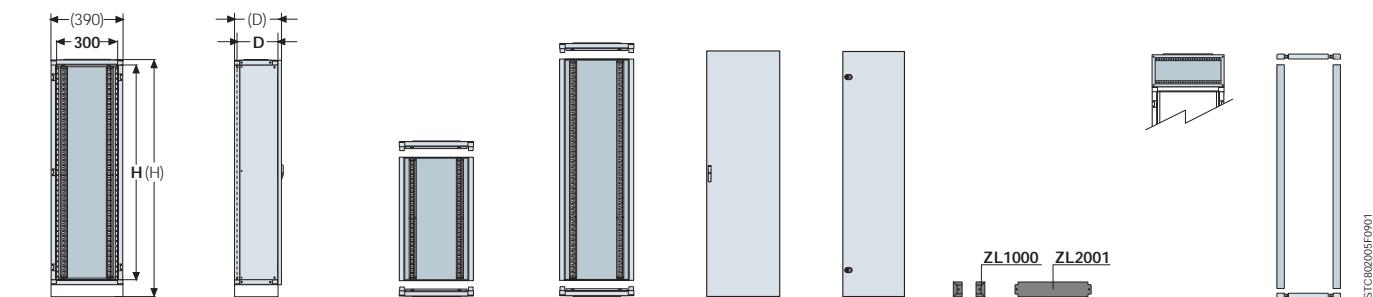

External overall dimensions ⁽¹⁾	Functional dimensions ⁽²⁾	Wall-mounted cable container ⁽³⁾	Floor-mounted cable container	Front door IP43	Internal doors	Base strip	Connection box	Finishing section IP31
(H) mm mm	(W) mm mm	(D) mm mm	H mm mm	W mm mm	D ⁽⁴⁾ mm mm	Including roof and base	Including roof and base	
650			600			VC0600		
850	390	204	800	300	165	VC0800		
1050			1000			VC1000		
1250			1200			VC1200		
1550			1400			VC1400	PO1431	
1750	390	240	1600	300	195	VC1600	PO1631	ZL1000 ZL2001
1950			1800			VC1800	PO1831	
2150			2000			VC2000	PO2031	RC2000

(1) The external overall dimensions of floor-mounted ArTu L switchgear include the palletisable base strip h=100mm (angle and flanges to be ordered separately).

(2) The functional dimensions represent the useful space for installing the apparatus.


(3) The wall-mounted structures cannot be superimposed.

(4) In this catalogue, reference is always made to the 204/240mm depth corresponding respectively to the overall dimensions with front door. The useful dimensions between panel and back of the structure are 165/195 mm.

See page 9/17

ArTu L modular structures

Selection of the structure

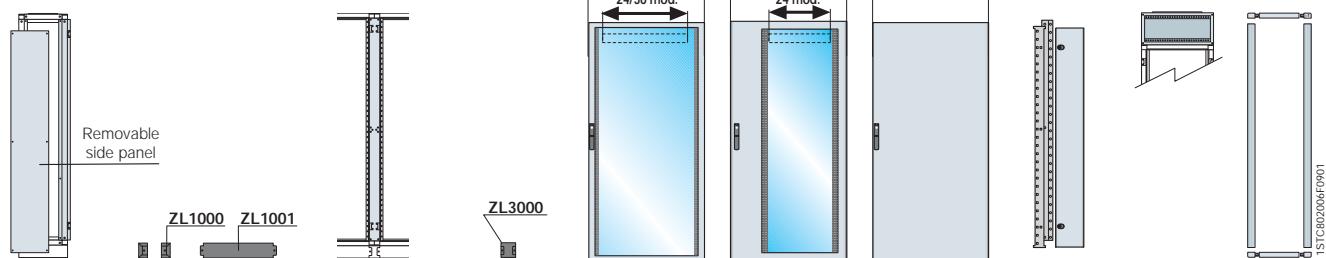

Side cover	Base strip	Intermediate uprights	Base strip	IP43 front doors	Internal cable container	Connection box	IP31 finishing section
With removable panel	Angles Flanges	For side-by-side positioning	Angle for side-by-side structures	Glass door 24/36 mod.	Glass door 24 mod. + int cable container	Blind door 24/36 mod.	
		MI0600		PV0600		PC0601	
		MI0800		PV0800		PC0801	
		MI1000		PV1000		PC1001	
		MI1200		PV1200		PC1201	
LF1400		MI1400		PV1400		PC1401	
LF1600	ZL1000 ZL1001	MI1600	ZL3000	PV1600		PC1601	
LF1800		MI1800		PV1800		PC1801	
LF2000		MI2000		PV2000		PC2001	
LF1400		MI1400	ZL3000	PV1436 PV1424	PC1436 VC1425		
LF1600	ZL1000 ZL1101	MI1600		PV1636 PV1624	PC1636 VC1625		
LF1800		MI1800		PV1836 PV1824	PC1836 VC1825		
LF2000		MI2000		PV2036 PV2024	PC2035 VC2025		

3

Recommended solutions for installation of the apparatus

Apparatus	Type of structure/installation						
	Wall structures			Floor structures			
	Vertical on DIN rail	Vertical	Horizontal	Vertical on DIN rail	Vertical	Horizontal	Connection box
Pro M System modular apparatus							
OESA	•						
OETL							
Tmax T1	3/4 poles - fixed / front terminals						
Tmax T1	4 poles - fixed / front terminals + diff. mod.	•	•	•	(•)	•	
Tmax T2	3/4 poles - fixed / front terminals				(•)	•	
Tmax T2	4 poles - fixed / front terminals + diff. mod.	•	•	•	(•)	•	
Tmax T3	3/4 poles - fixed / front terminals				(•)	•	
Tmax T3	4 poles - fixed / front terminals + diff. mod.	•	(•)	•	(•)	•	
Tmax T3	3/4 poles - fixed / front terminals + divider				(•)	•	
Tmax T4	3/4 poles - fixed / front terminals						
Tmax T4	4 poles - fixed / front terminals + diff. mod.				(•)	•	
Tmax T5	3/4 poles - fixed / front terminals				•	•	
Tmax T5	4 poles - fixed / front terminals + diff. mod.				(•)	•	
Side-by-side Tmax kits							
Busbars with snaped section	Linear busbar holder Scaled busbar holder		(•)		(•)		•
Flat busbar	Linear busbar holder Scaled busbar holder		(•)		(•)		•
Unifix L				•		•	
Unifix H						•	




(•) Can also be installed in the additional cable container.

(□) Can only be installed in the additional cable container.

ArTu L modular structures

Kits for installing apparatus

Kit for System Pro M, ≤160 OT modular apparatus, Tmax T1-T2-T3, and supports for Unifix H

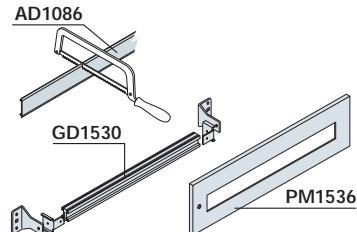

157CB02020PF001

W=600mm

H (mm)	DIN rail kit 24 DIN mod.	Panel 1 DIN row 24 DIN mod.	Panel 2 DIN rows 48 DIN mod.	Panel 3 DIN rows 72 DIN mod.	DIN rail kit 36 DIN mod.	Panel 1 DIN row 36 DIN mod.	Panel 2 DIN rows 72 DIN mod.
Standard aluminium version							
150 ⁽¹⁾	GD1520	PM1500				GD1536	
200	GD1520	PM2624				GD1536	
300 ⁽²⁾	GD1520	PM2312				PM2836	
300	2x GD1520		PM3648 ⁽¹⁾			PM2315	
600	3x GD1520			PM6672			PM3872 ⁽¹⁾

Unifix H fixing brackets


300	AD1097	PM3624			AD1097	PM3836	
-----	--------	--------	--	--	--------	--------	--

⁽¹⁾ Only for modular System Pro M


⁽²⁾ Version for Tmax with differential module underplaced RC 221/222.

Completion items for installation on DIN rail

Screw fixing of ducts up to 100x100mm.

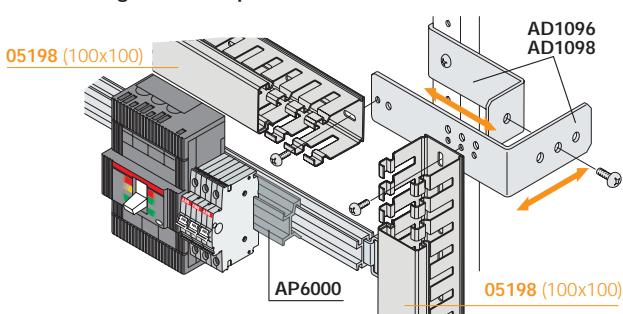

Fixing with rapid hooking base of
ducts up to 100x100mm.

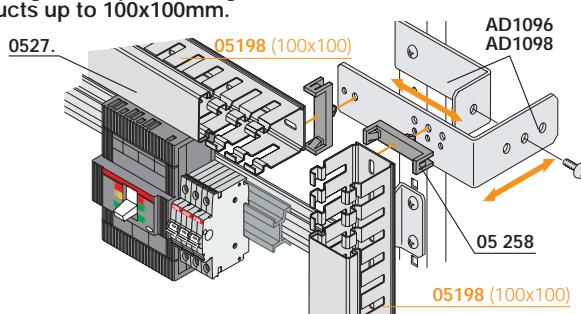

157CB020710901

Supports for horizontal wiring duct

Code	Description
AD1096	Support for horizontal/vertical wall-mounted wiring duct
AD1098	Support for horizontal/vertical floor-mounted wiring duct

Allows assembly of the cabling wiring duct horizontally and vertically up to 100x100mm (in the case of installation in floor-mounted structure with removable side panel LF.... the vertical wiring duct has maximum dimensions of 100x80mm hwx). The support AD1098 has compensation drillings as the height and width of the wiring duct varies. The accessory is also prepared with ø7mm holes for assembly of the ABB wiring duct by means of the Fix-O-rapid hook.

Depth adapter

Code	Description
AP6000	Depth adapter W=600mm for side-by-side Pro M - Tmax T1-T2-T3

DIN cut-out hole covers


Code	Description
AD1086	Hole covering strip DIN W=2000mm - grey RAL 7035
AD1088	Hole covering strip DIN 24 modules - grey RAL 7035
AD1089	Hole covering strip DIN 36 modules - grey RAL 7035

For Isomax kits, please see page 9/83.

ArTu L modular structures

Kits for installing apparatus

Horizontal installation




Fixed

Circuit-breaker front terminals	N° poles	Dimensions H (mm)	Wall-mounted structures	Floor-mounted structures
			Structure 24 DIN mod. W=600mm	Structure 24 DIN mod. W=600mm
Tmax T1	3-4	200	LK1000	LK1000
Tmax T1 CB + diff. mod.	4	200	LK1004 ⁽¹⁾	LK1004 ⁽¹⁾
Tmax T2	3-4	200	LK2000	LK2000
Tmax T2 CB + diff. mod.	4	200	LK2004	LK2004
Tmax T3	3-4	200	LK3000	LK3000
Tmax T3 CB + diff. mod.	4	300	LK3004	LK3004
Tmax T3 CB + distr. frame	3-4	200		LK3301
Tmax T4	3-4	200		LK4003
Tmax T4 CB + diff. mod.	4	200		LK4004
Tmax T5	3-4	300		LK5003
Tmax T5 CB + diff. mod.	4	300		LK5004

⁽¹⁾ Version for Tmax with differential module underplaced RC 221/222.

Vertical installation



Fixed

Circuit-breaker front terminals	N° poles	Dimensions H (mm)	Wall-mounted structures	Floor-mounted structures	Cable container side by side W=300mm
			Structure 24 DIN mod. W=600mm	Structure 24 DIN mod. W=600mm	Structure 36 DIN mod. W=800mm
Tmax T1-T2-T3					
on DIN 35 rail		200	(see page 3/6)	(see page 3/6)	
Tmax T1	3-4	200	LK1001	LK1001	LK1002
Tmax T1 CB + diff. mod.	4	300			LK1008 ⁽¹⁾
Tmax T1 N° 4 CBs side by side	3-4	200		LK4100	LK4108*
Tmax T2	3-4	200	LK2001	LK2001	LK2002
Tmax T2 CB + diff. mod.	4	300			LK2008
Tmax T2 N° 3 CBs side by side	3-4	200		LK3200	LK3111**
Tmax T3	3-4	300	LK3001	LK3001	LK3002
Tmax T3 CB + diff. mod.	4	300	LK3005	LK3005	LK3008
Tmax T3 N° 3 CBs side by side	3-4	300		LK3300	LK3102**
Tmax T4	3-4	400		LK4005	LK4105
Tmax T4 CB + diff. mod.	4	500		LK4006	LK4106
Tmax T5	3-4	400		LK5005	LK5105
Tmax T5 CB + diff. mod.	4	500		LK5006	LK5106
Tmax T6	3-4	500		LK6011	LK6012

* N°5 circuit-breakers only for structures W=800mm.

** N°4 circuit-breakers only for structures W=800mm.





⁽¹⁾ Version for Tmax with differential module underplaced RC 221/222.

For Isomax kits, please see page 9/83.

ArTu L modular structures

Kits for installing apparatus

Plain back plates, plain and ventilated panels



IS/TCB/0202/FR0001

Back plates

H (mm)	Structure 24 DIN mod. W=600mm	Plain flat Structure 36 DIN mod. W=800mm	Cable container W=300mm
50			
100			
150			
200 ⁽¹⁾	PF1002	PF1102	
300	PF1003	PF1103	PC0300
400 ⁽²⁾	PF1004	PF1104	
600	PF1006	PF1106	PC0600
800	PF1008	PF1108	
1600			
1800			
2000			

Panels


Structure 24 DIN mod. W=600mm	Plain flat Structure 36 DIN mod. W=800mm	Cable container W=300mm	Structure 24 DIN mod. W=600mm	Structure 36 DIN mod. W=800mm	Int.cable container W=300mm	Ventilated Structure 24 DIN mod. W=600mm
PC1050	PC0580					
PC1600	PC1800	PC1403				
PC1150	PC1580					
PC2600	PC2800	PC2401	PR2600	PR2800		
PC3600	PC3800	PC3401				
PC4600	PC4800	PC4401	PR4600	PR4800	PR4401	
PC6600	PC6800	PC6401	PR6600	PR6800		
PC8600	PC8800	PC8401				
PC1660	PC1680					
PC1860	PC1880					
PC2060	PC2080					

Can be used to mount all the non-modular apparatus and for installation of OESA and OETL switch-disconnectors.


⁽¹⁾ For OETL 200 K3-K4 - 315 K3-K4. ⁽²⁾ For OETL 400 D1-D2 - 630 K3-K4. Useful dimensions: page 8/20

Kit for OT200/250/315/400

vertical installation




horizontal installation




H (mm)	Width structure (mm)	
300	600	KO1260
300	800	KO1280
300	300	KO1262

Useful internal space


Wall-mounted structure

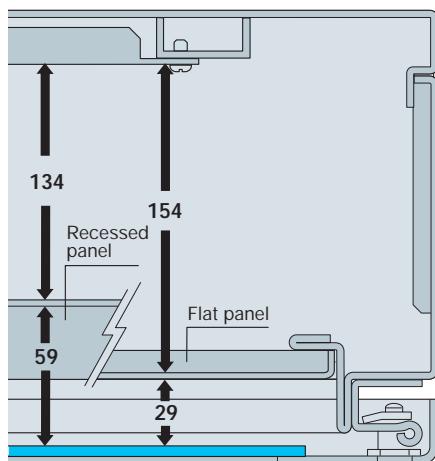

Floor-mounted structure

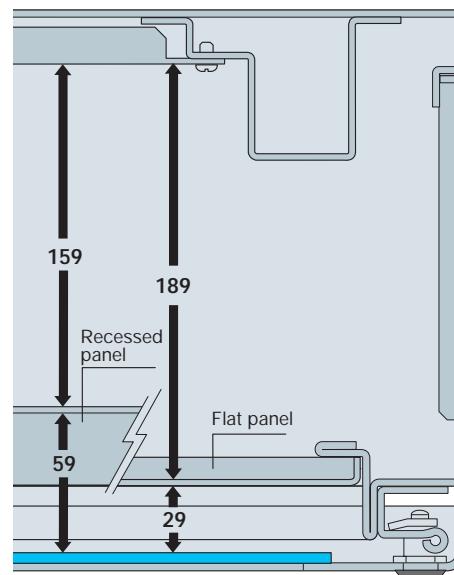

Cable connection box

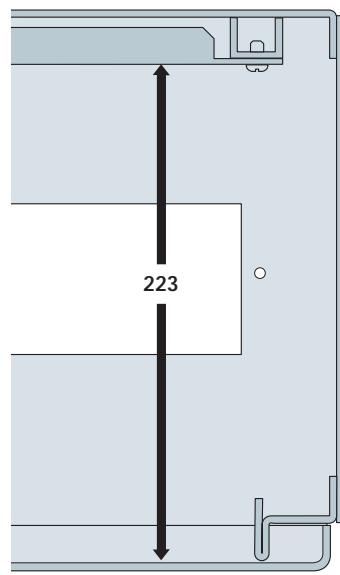


IS/TCB/0209/E/0901


ArTu L modular structures

Kits for installing apparatus

Panels for square measuring instruments



2-instrument panel



4-instrument panel

H (mm)	72x72mm		96x96mm		72x72mm		96x96mm	
	24 mod.DIN W=600mm	36 mod.DIN W=800mm						
200	PS2720	PS2728	PS2960	PS2968	PS4720	PS4728	PS4960	PS4968

These allow installation of measuring instruments and relative changeover switches.

Square instrument hole covers


Code Description

EV1135 Hole cover of 72x72mm instrument black RAL 9005

EV1136 Hole cover of 96x96mm instrument black RAL 9005

3


Installation of terminal boxes on DIN rail

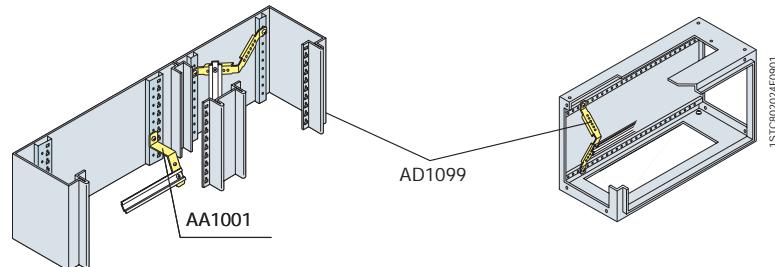

Terminal box mounting position

Installation on DIN rail	Structure	Internal cable container	Cable container side-by-side	Box
Horizontal	AA1001			AD1099
Horizontal angled 45°		AD1005		
Vertical			AD1099	

Installation of terminal boxes on DIN rail and earthing busbar

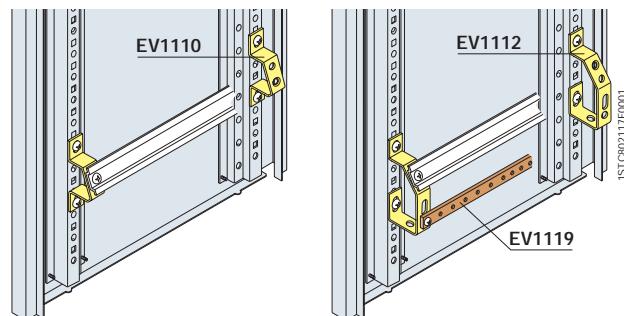

Angled supports for terminal boxes and earthing busbar


Code	Description
EV1110	Angled supports 1 row of terminals
EV1112	Angled supports 1 row of terminals + earth

ArTu L modular structures


Distribution systems

Modular dividers

Single-pole




Three-poles



Codice	AD1076	AD1080⁽¹⁾	AD1007	AD1081⁽²⁾	AD1030	AD1031	AD1075	AD1006
In (A)	125	125	160	160	250	400	125	160
Icw (kA)	4.2	10	11	10	21	21	4.2	
Version poli	1	1	1	1	1	1	3	3
Installation DIN35/plate	DIN35/plate	DIN35/plate	DIN35/plate	DIN35/plate	DIN35/plate	DIN35/plate	DIN35/plate	DIN35/plate
Power supply Ø cable (mm ²)	min.	10	6	16	10	35	95	16
	max	35	35	70	70	120	185	70
N°outgoing feeder (mm ²)	2,5÷10				4	4		
Ø cable	2,5÷16	10	6	10	6	5	5	
	2,5÷25					2	2	
	2,5÷35							
Dimensions HxWxD (mm)	71x45x42,5	75x25x47	71x45x42,5	92x35x49	96x45x49	96x45x49	80x71,5x42,5	80x71,5x42,5
N° DIN modules	2,5	1,5	2,5	2	3	3	4,5	4,5
Rated service voltage Ue (V)	690	500	690	500	500	500	690	690
Degree of protection IP	20	20	20	20	20	20	20	20

Four-poles



Code	AD1004	AD1028	AD1029	AD1027	AD1034	AD1053
In (A)	125	125	125	160	250	250
Icw (kA)	10	4,2	4,2	6	15	15
Version poles	4	4	4	4	4	4
Installation DIN35/plate	DIN35/plate	DIN35/plate	DIN35/plate	DIN35	with AD1038 brackets	with AD1038 brackets
Power supply Ø cable (mm ²)	min.	6	6	10		
	max	35	25 with cable terminal 35 without cable terminal	25 with cable terminal 35 without cable terminal	50	
N°outgoing feeder (mm ²)	5 holes/phase Ø1÷6 2 holes/phase Ø1,5÷16 6 holes/neutral Ø1,5÷16 4 holes/neutral Ø1,5÷6 ²	2xØ6÷25 + cable terminal 2xØ6÷35 no cable terminal 9xØ6÷10	2xØ6÷25 + cable terminal 2xØ6÷35 no cable terminal 2xØ6÷16 9xØ6÷10	8xØ2,5÷16 3xØ6÷35	N°22 holes M5 with 17,5mm pitch per phase (threaded busb. 20x5mm)	N°32 holes M5 with 17,5mm pitch per phase (threaded busb. 20x5mm)
Ø cable						
Dimensions HxWxD (mm)	45x75x98	89x93x48	126x93x48	90x160x50	150x600x70	150x800x70
N° DIN modules	5,5	5	7	9	24	36
Rated service voltage Ue (V)	500	690	690	500	500	500
Degree of protection IP	20	20	20	20		

⁽¹⁾ possibility of putting in parallel with AD1083 connections.

⁽²⁾ possibility of putting in parallel with comb type connection (not supplied).

Flexible busbars up to 1000A

Cross-section	In (A)	Code	N° busbar/phase	IP31	capacity (A) IP41	IP65	WxW (mm)	Section dimensions (mm ²)	Lenght (mm)	Weight (kg)
—	250	BF1602	1	395	323	250	20x3	60	2000	1,42
—	400	BF2502	1	498	460	400	20x5	100	2000	2,15
—	500	BF4002	1	660	620	500	24x6	144	2000	3
—	630	BF4012⁽¹⁾	1	758	702	630	32x5	160	2000	3,36
—	1000	BF6302	1	1203	1140	1000	40x8	320	2000	6,33


⁽¹⁾ Only for front extended terminals and rear terminals.

ArTu L modular structures


Distribution systems

Selection of busbar holders and crosspieces

Vertical installation

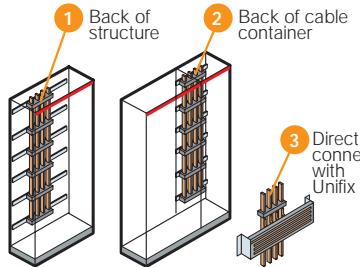

Horizontal installation



Busbar holder

Busbars with shaped section


Crosspieces for fixing to structure

Type	In ≤ 400÷800A	Installation	Structure	Cable container	Internal cable container	Cable connection box
Scaled up to 800A PB0802	BA0400 BA0800	② ④		TL2000 (W=300mm)	TL2100 (W=200mm)	
Linear up to 800A PB0803	BA0400 BA0800	① ② ③ ④	TL1000 (W=600mm) TL1100 (W=800mm)	TL3000 (W=300mm)		TL2000 (H=300mm)
			TL1000 (W=600mm) TL1100 (W=800mm)			TL3000 (H=300mm)

Busbars with shaped section for applications up to 800 A

Section	In (A)	Code	N° busbar/phase	capacity (A)	IP31	IP43	Icw max (kA)	WxW (mm)	Section dimensions (mm²)	Lenght (mm)	Weight (kg)
	520	BA0400	1		630	520	35	20x20	200	1730	4
	830	BA0800	1		970	830	35	20x20	283	1730	4,4

Table for selection and assembly of busbars with shaped section and busbar holders



The distance between the first busbar holder and the end of the busbar must not exceed 1/4 of "X".

max X = maximum distance not to be exceeded between two consecutive busbar holders

N° of busbar holders according to the max. I_{cc}


Busbar code	capacity	Busbar holder code	N° busbars per phase	25 kA X max (mm)	35 kA X max (mm)	50 kA X max (mm)	65 kA X max (mm)	75 kA X max (mm)	85 kA X max (mm)	100 kA X max (mm)
BA0400	400A	PB0803	1	4 550	5 425	- -	- -	- -	- -	- -
BA0800	800A	PB0803	1	4 550	4 550	- -	- -	- -	- -	- -
BA0400	400A	PB0802	1	4 550	4 550	- -	- -	- -	- -	- -
BA0800	800A	PB0802	1	4 550	4 550	- -	- -	- -	- -	- -

The use of the correct number of busbar holders ensures resistance to electrodynamic forces in the case of a short-circuit. Assess the maximum distance (max X) which must not be exceeded between two consecutive busbar holders according to the max. I_{cc}.

ArTu L modular structures

Distribution systems

Prefabricated kits for connections between apparatus and busbars with shaped section 400/800A

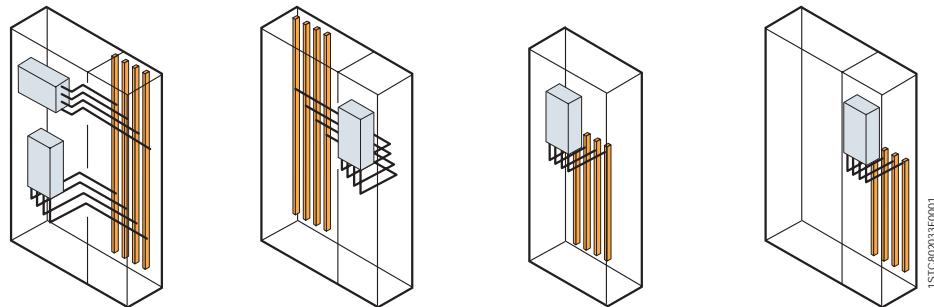

Apparatus

Connection kit

3



Type of installation	From circuit-breaker in structure towards busbars in cable container	From circuit-breaker in cable container towards busbars in structure	From circuit-breaker in structure towards busbars on back of structure	From circuit-breaker in cable container towards busbars on back of structure
Type of busbar holder	Scaled PB0802	Linear PB0803	Linear PB0803	Linear PB0803
Apparatus with front terminals fixed horizontal installation				
Tmax T1 4 poles	KB1001 ⁽¹⁾			
Tmax T2 4 poles	KB1001			
Tmax T3 4 poles	KB1002			
Tmax T5 4 poles	KB1020			
Tmax T5 4 poles CB + diff. mod.	KB1021			
Apparatus with front terminals fixed vertical installation				
Tmax T3 4 poles	KB1006	KB1010	KB1014 / KB1018 ⁽²⁾	KB1014 / KB1018 ⁽²⁾
Tmax T3 4 poles (w/mount. struct)	KB1006	KB1010	KB1014	KB1014
Tmax T3 4 poles CB + diff.mod.		KB1019		
Tmax T5 4 poles	KB1022	KB1024		
Tmax T5 4 poles CB + diff.mod.	KB1022	KB1024		

⁽¹⁾ For Tmax T1 fit the circuit-breaker with extended terminals.

⁽²⁾ KB1018: only with flat busbars and scaled busbar holder.

Apparatus

Dimensions of the conductors




Apparatus	AxBxC (mm)	cross-section (mm²)
Tmax T1-T2		50
Tmax T3	20x5x1	150
Tmax T5 630A	32x6x1	

The use of the prefabricated connection kits is only possible with the cable container mounted on the right of the structure.

ArTu L modular structures

Distribution systems

Selection of busbar holders and crosspieces

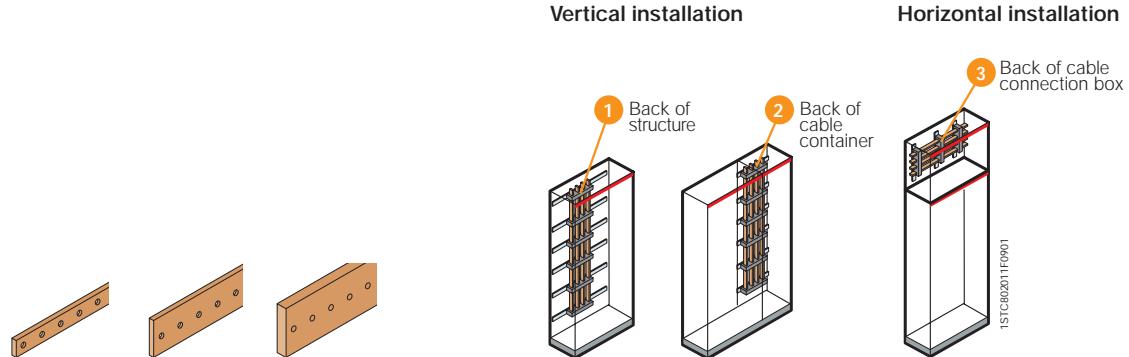

Busbar holder

Busbars with shaped section

Type	In=250A	In=400A	In=630A
Scaled up to 630A BP0634	BR0250	BR0400	BR0630
Linear up to 630A BP0630	BR0250	BR0400	BR0630

⁽¹⁾ The busbar terminal protection covers must be ordered separately BP0632.

3

Crosspieces for fixing to structure

Installation	Structure	Cable container	Cable connection box
2		TL3000 (W=300mm)	
3			TL3000 (H=300mm)
1	TL1000 (W=600mm) TL1100 (W=800mm)		
2		TL3000 (W=300mm)	
3			TL3000 (H=300mm)

Flat busbars for distribution up to 630A


Cross-section	In (A)	Code	N° busbar/phase	IP31 capacity (A)	IP43 capacity (A)	max Icw (kA)	WxW (mm)	Lenght (mm)	Weight (kg)
—	275	BR0250	1	290	275	23	15x5	1750	1,35
—	440	BR0400	1	475	440	23	25x5	1750	1,8
—	695	BR0630	1	750	695	32	30x10	1750	4,4

1STC802050F0001

ArTu L modular structures

Distribution systems

Table for selection and assembly of busbars with shaped section and busbar holders



The distance between the first busbar holder and the end of the busbar must not exceed $\frac{1}{4}$ of "X".

Busbar code	capacity	Busbar holder code	N° busbars per phase	N° of busbar holders according to the max. I_{cc}				
				16 kA	max X (mm)	20 kA	max X (mm)	23 kA
BR0250	250A	BP0634	1	11	175	15	125	18 100
BR0400	400A		1	9	225	15	125	18 100
BR0630	630A		1	9	225	15	125	18 100
BR0250	250A	BP0630	1	4	500	6	350	10 200
BR0400	400A		1	4	500	6	350	10 200
BR0630	630A		1	-	-	4	600	4 600 9 210

max X = maximum distance not to be exceeded between two consecutive busbar holders

The use of the correct number of busbar holders ensures resistance to electrodynamic forces in the case of a short-circuit. Assess the maximum distance (max X) which must not be exceeded between two consecutive busbar holders according to the max. I_{cc} .

Flat drilled and threaded busbars for earthing connections

Cross-section	Code	Threading	Pitch	WxW (mm)	Length (mm)	AxB (mm)
	EV1119	6 MA	20	20x5	2000	
	EV1120	6 MA	20	25x5	2000	
	EV1121	6MA	25	50x5	2000	
	EV1122	6MA				34x30
	EV1123	8MA				34x30
	EV1124	6MA				40x50
	EV1125	8MA				40x50

ArTu L modular structures

Distribution systems

3


Technical characteristics

	Unifix H	Unifix L
Rated service voltage (U_s)	690V AC	400V AC
Rated insulation voltage (U)	1000V AC	500V AC
Rated impulse withstand voltage (U_{imp})	8kV	6kV
Rated frequency	50/60Hz	50/60Hz
Rated current (I_n)	central power supply lateral power supply	100A 80A
Rated short-time withstand current (I_{cw})	25kA	
Maximum peak current (I_{pk})	52.5kA-400V	
Maximum installable circuit-breaker size	250A	100A
Conditioned short-circuit current (I_{cc})	Tmax T1 Tmax T2 N, S ⁽¹⁾ Tmax T3	36kA-400V 50kA-400V 50kA-400V
With circuit-breaker	S200 S200 M S200 P	6kA-400V 10kA-400V 25kA-400V
Degree of protection	IP20 with accessory	IP20
Characteristics of the insulating material	Self-extinguishing thermoplastic V1 (UL94)	Self-extinguishing thermoplastic V1 (UL94)
Characteristics of the conductor material	Electrolytic copper	Electrolytic copper
Width (N° modules/mm)	24/600 36/800	12/400 24/600 36/800


Installation of Unifix system

Frame for Tmax	300x600mm (hxL) 300x800mm (hxL)	ED2183 ED2191
Fixing brackets H=300mm		AD1097
Crosspiece for direct connection to the rear	W=600mm	TL1000
busbars with shaped section with PB0803	W=800mm	TL1100
Busbar 2P	12 mod. 18 mod. 24 mod. 36 mod.	ED2993 ED3009 ED3017 ED3025
Busbar 4P	12 mod. 18 mod. 24 mod. 36 mod.	ED2944 ED2951 ED2969 ED2977
Fixing support	24 mod. 36 mod.	GD1520 GD1530


⁽¹⁾ Select circuit-breakers in version with front terminals for copper cables.




Direct connection with the 400/800A system of busbars with shaped section.




Feeder module for 400A frame (L1-L2-L3-N).




Direct power supply of the bases by means of feeder module ED2209.




Power supply by means of general row circuit-breaker.




Connections (L1-L2-L3-N) for System Pro M modular apparatus.

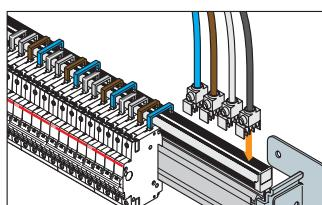

Power supply of the busbar with 100A feeder module without cable. Terminal capacity 35mm².



Direct power supply of the busbars by means of feeder module.



Power supply by means of modules and cables in parallel.

ArTu L modular structures

Distribution systems


Table for selecting connections according to the circuit-breaker

Circuit-breaker series	Unifix H	Unifix L
S941- S951 - S971 DS941 - DS951 - DS971	(top power supply) ED2654 L1/N 40A ED2662 L2/N 40A ED2670 L3/N 40A	ED3272 L1/N 40A ED3280 L2/N 40A ED3298 L3/N 40A
S200 - DS 200 F200 up to 63A (Unifix L)	(top power supply) (bottom power supply) ED2531 L1 63A ED2572 L1 63A ED2549 L2 63A ED2590 L2 63A ED2556 L3 63A ED2598 L3 63A ED2564 N 63A ED2606 N 63A ED2845 False pole module	ED3033 L1 100A ED3041 L2 100A ED3058 L3 100A ED3066 N 100A
S800	(top power supply) ED2557 L1 ≤32A ED2558 L2 ≤32A ED2559 L3 ≤32A ED2560 N ≤32A ED2551 L1 125A ED2552 L2 125A ED2553 L3 125A ED2554 N 125A ED2550 False pole module	
F660 - F670 - S280 (80-100A) E200 up to 100A - RS370 - F200 80/100A (Unifix H)	(bottom power supply) ED2720 L1 100A ED2738 L2 100A ED2746 L3 100A ED2753 N 100A	ED3132 L1/L2/L3/N pow. supply - 350mm ED0026 L1/L2/L3/N pow. supp.- 1500mm ED0025 L1/L2/L3/N pow. supp. - 2500mm
MDRC - Various apparatus	(bottom power supply) ED2894 L1/N 16A ED2902 L1/L2 16A	(bottom power supply) ED2910 L1/N 16A ED2928 L1/L2 16A
Tmax T1	Circuit-breaker	(top/bottom power supply) ED2217 L1 Top/L2 Bottom ED2225 L2 Top/L1 Bottom ED2233 L3 Top/N Bottom ED2241 N Top/L3 Bottom ED2373 False pole module ED2381 False pole module
	Residual current	
	Selenoid operator	
Tmax T2	Circuit-breaker	(top/bottom power supply) ED2258 L1 Top/L2 Bottom ED2266 L2 Top/L1 Bottom ED2274 L3 Top/N Bottom ED2282 N Top/L3 Bottom ED2373 False pole module ED2399 False pole module
	Residual current	
	Selenoid operator	
Tmax T3	Circuit-breaker	(top power supply) (bottom power supply) ED2290 L1 ED2332 L1 ED2308 L2 ED2340 L2 ED2316 L3 ED2357 L3 ED2324 N ED2365 N ED2373 False pole module
	Residual current	

For the DDA locks, order the false module **ED2845** codes separately according to the size of the residual current lock.


ArTu L modular structures

Examples of configuration



ArTu L dim.800x600x165 (850x690x204) mm (external hwxwd) IP43 with modular panels


Code	Description	Q.ty
SL0800	Back structure 800x700x200mm (hwxwd)	1
MC0800	Blind riser h=800mm	1
PV0800	Glass door x structure h=800mm	1
AL2000	N °2 wall fixing brackets L	2
PM6672	Panel 72 mod.600x600mm (hwx) M, K	1
PC2600	Plain panel 200x600mm (hwx) M, K	1
GD1520	DIN rail, pitch 150/200mm	3

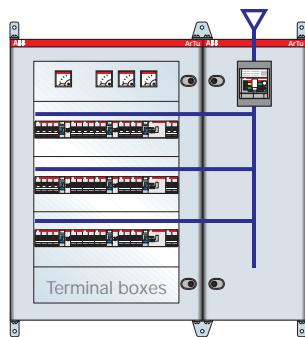

ArTu L dim.1000x900x165 (1050x1080x204) mm (external hwxwd) IP43 with cable container, plate for Tmax T3, modular panels Icw 16kA complete with busbar holder, 250A busbars and Unifix L

Code	Description	Q.ty
SL1000	Back structure 1000x700x200mm (hwxwd)	1
MC1000	Blind riser h=1000mm	1
PV1000	Glass door x structure h=1000mm	1
PC2600	Plain panel 200x600mm (hwx) M, K	1
PM2624	Panel 24 mod.200x600mm (hwx) M, K	3
PS4720	Panel 4 strum.72x72 200x600mm (hwx) M, K	1
MI1000	Riser CB side-by-side structures h=1000mm	1
VC1000	Cable container h=1000mm	1
PC1002	Blind door x cable container h=1000mm	1
LK3003	Kit wallT3 vert. in cable cont.	1
PC6401	Plain panel h=600mm	1
PC1403	Plain panel h=100mm	1
TL3000	Linear crosspiece x cable container	3
BP0630	N °2 flat busbar holders 250-630A	2
BR0250	N °2 flat busbars 250A	1
AL2000	N °2 wall fixing brackets L	2
AA1000	N °2 fixing brackets wall side-by-side structures	1
ED2969	4P busbar 24 modules	3
ED3132	Feeder+cable l=350mm 4P 100A	3
ED... ^(*)	Connection L 1-L2-L3-N	
GD1520	DIN rail, pitch 150/200mm	3
AD1096	N °4 horz./vert. wall wiring duct metal support	1

(*) For selection of the connection according to the circuit-breaker, see page 3/15.

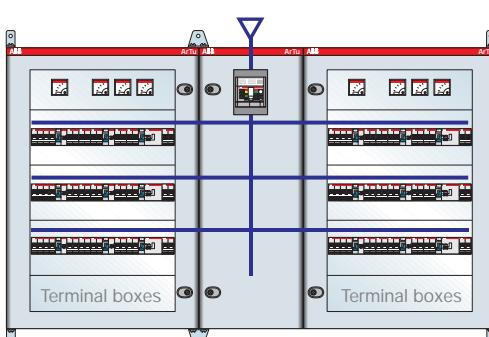


ArTu L Series dim.1000x1500x165 (1050x1770x204) mm (external hwxwd) IP43 with cable container, plate for Tmax T3, modular panels Icw 16kA complete with busbar holder, 250A busbars and Unifix L

Code	Description	Q.ty
SL1000	Back structure 1000x700x200mm (hwxwd)	2
MC1000	Blind riser h=1000mm	1
PV1000	Glass door x structure h=1000mm	2
PC2600	Plain panel 200x600mm (hwx) M, K	3
PM2624	Panel 24 mod.200x600mm (hwx) M, K	6
PS4720	Panel 4 strum.72x72 200x600mm (hwx) M, K	1
MI1000	Riser CB side-by-side structures h=1000mm	2
VC1000	Cable container h=1000mm	1
PC1002	Blind door x cable container h=1000mm	1
LK3003	Kit wall T3 vert. in cable cont.	1
PC6401	Plain panel h=600mm	1
PC1403	Plain panel h=100mm	1
AL2000	N °2 wall fixing brackets L	2
AA1000	N °2 fixing brackets wall side-by-side structures	2
GD1520	DIN rail, pitch 150/200mm	6
ED2969	4P busbar 24 modules	6
ED3132	Feeder+cable l=350mm 4P 100A	6
ED... ^(*)	Connection L 1-L2-L3-N	
TL3000	Linear crosspiece x cable container	3
BP0630	N °2 flat busbar holders 250-630A	2
BR0250	N °2 flat busbars 250A	1
AD1096	N °4 horz./vert. wall wiring duct metal support	2

(*) For selection of the connection according to the circuit-breaker, see page 3/15.

ArTu L modular structures


Examples of configuration

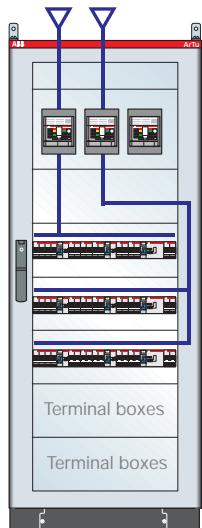

ArTu L Series dim.1600x600x195 (1750x690x240) mm (external hwxwd) IP43 with plate for n° 3 Tmax T3, modular panels, 250A divider and Unifix L

Code	Description	Q.ty
SL1600	Back structure 1600x700x240mm (hwxwd)	1
ZL1000	Base strips x structure	1
ZL1001	Structure flanges	1
MC1600	Blind riser h=1600mm	1
PV1600	Glass door x structure h=1600mm	1
LK3300	Kit floor x n °3 T3 side-by-side	1
PM2624	Panel 24 mod.200x600mm (hxw) M, K	3
PC2600	Plain panel 200x600mm (hxw) M, K	3
PC1600	Plain panel 100x600mm (hxw) M, K	1
AL2000	N °2 wall fixing brackets L	1
AD1034	Horiz. busbar Kit 250A l=600mm	1
AD1038	N °2 divider fixing brackets AD1034	1
ED2969	4P busbar 24 modules	3
ED3132	Feeder+cable l=350mm 4P 100A	1
GD1520	DIN rail, pitch 150/200mm	3
ED3090	Feeder+cable l=600mm parallel 4P 100A	2
AD1098	N °4 floor wiring duct supports	2

(*) For selection of the connection according to the circuit-breaker, see page 3/15.

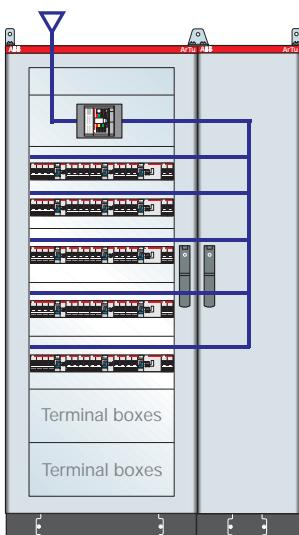


ArTu L Series dim.1600x900x195 (1750x1080x240) mm (external hwxwd) IP43 with cable container, plate for Tmax T3, modular panels Icw 25kA complete with busbar holder, 400A busbars, connections to the circuit-breaker, Unifix H and L

Codice	Descrizione	Q.tà
SL1600	Back structure 1600x700x240mm (hwxwd)	1
ZL1000	Base strips x structure	1
ZL1001	Structure flanges	1
MC1600	Blind riser h=1600mm	1
PV1600	Glass door x structure h=1600mm	1
PC1600	Plain panel 100x600mm (hxw) M, K	1
LK3000	T3 floor/wall Kit horiz.3/4P	1
PM3648	Panel 48 mod.300x600mm (hxw) M, K	1
PM2624	Panel 24 mod.200x600mm (hxw) M, K	3
PC2600	Plain panel 200x600mm (hxw) M, K	2
MI1600	Riser CB side-by-side structures h=1600mm	1
ZL3000	Base strips x side-by-side ass.	1
VC1600	Cable container h=1600mm	1
ZL2001	Cable container flanges	1
PC1602	Blind door x cable container h=1600mm	1
AL2000	N °2 wall fixing brackets L	1
AA1000	N °2 fixing brackets wall side-by-side structures	1
ED2969	4P busbar 24 modules	3
ED3132	Feeder+cable l=350mm 4P 100A	1
GD1520	DIN rail, pitch 150/200mm	3
ED3090	Feeder+cable l=600mm parallel 4P 100A	2
TL2000	Scaled crosspiece x cable container	4
PB0802	Scaled busbar holder In=800A (35 kA)	2
BA0400	Busbar In=400A	2
KB1002	Connections T3 floor/wall	1
ED2183	Frame with busbars 24 modules	1
AD1097	Unifix H fixing brackets	1
AD1064	N °12 joining screws l=27 x flat busbars up to 10mm	1
AD1098	N °4 floor wiring duct supports	2

(*) For selection of the connection according to the circuit-breaker, see page 3/15.

ArTu L modular structures


Examples of configuration

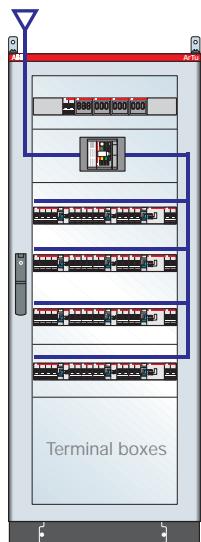

ArTu L Series dim. 1800x600x195 (1950x690x240) mm (external hxwxd) IP43 with plate for Tmax T3 and modular panels

Code	Description	Q.ty
SL1800	Back structure 1800x700x240mm (hxwxd)	1
MC1800	Blind riser h=1800mm	1
ZL1000	Base strips x structure	1
ZL1001	Structure flanges	1
PV1800	Glass door x structure h=1800mm	1
LK3000	T3 floor/wall Kit horiz. 3/4P	1
PC2600	Plain panel 200x600mm (hxw) M, K	1
PC4600	Plain panel 400x600mm (hxw) M, K	1
PM2624	Panel 24 mod. 200x600mm (hxw) M, K	2
PM6672	Panel 72 mod. 600x600mm (hxw) M, K	1
AL2000	N°2 wall fixing brackets L	1
GD1520	DIN rail, pitch 150/200mm	5
AD1098	N °4 supports for horiz./vert. floor-standing wiring duct	2

3

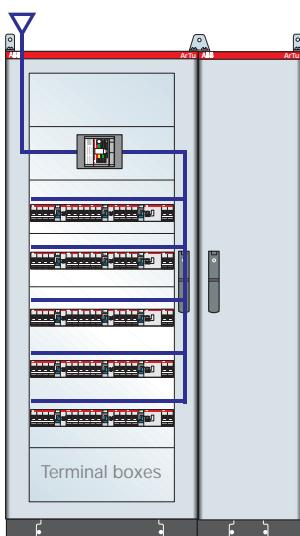


ArTu L Series dim. 1800x900x195 (1950x1080x240) mm (external hxwxd) IP43 complete with cable container l=300mm, plate for Tmax T3 and modular panels

Code	Description	Q.ty
SL1800	Back structure 1800x700x240mm (hxwxd)	1
MC1800	Blind riser h=1800mm	1
ZL1000	Base strips x structure	1
ZL1001	Structure flanges	1
PV1800	Glass door x structure h=1800mm	1
LK3000	T3 floor/wall Kit horiz. 3/4P	1
PC2600	Plain panel 200x600mm (hxw) M, K	1
PC4600	Plain panel 400x600mm (hxw) M, K	1
PM2624	Panel 24 mod. 200x600mm (hxw) M, K	2
PM6672	Panel 72 mod. 600x600mm (hxw) M, K	1
AL2000	N°2 wall fixing brackets L	1
ZL3000	Base strips x side-by-side assembly	1
ZL2001	Cable container flanges	1
VC1800	Cable container h=1800mm	1
PO1831	Blind door 1800x300mm (hxw) L, M int.	1
PC1802	Blind door x cable container h=1800mm	1
MI1800	Riser CB side-by-side structures h=1800mm	1
AA1000	N°2 fixing brackets wall side-by-side structures	1
GD1520	DIN rail, pitch 150/200mm	5
AD1098	N °4 supports for horiz./vert. floor-standing wiring duct	3

ArTu L modular structures


Examples of configuration

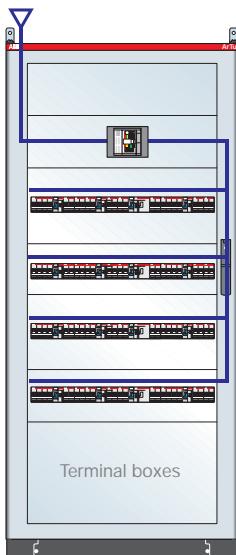

ArTu L Series dim. 1800x800x195 (1950x890x240) mm (external hwxwd)
IP43 complete with internal cable container w=200mm


Code	Description	Q.ty
SL1808	Back structure 1800x800x195mm (hwxwd)	1
MC1800	Blind riser h1800	1
ZL1000	Base strips x structure	1
ZL1101	Structure flanges w=800mm	1
PV1836	Glass door x structure 1800x800mm 36mod	1
LK3110	T3 floor/wall Kit horiz. 3/4P	1
PC2800	Blind panel 200x800 (hwx)	1
PC4800	Blind panel 400x800 (hwx)	1
PM2836	Panel 36 mod. 200x800	2
PM3872	Panel mod. h=300 l=800 pitch 150mm	2
AL2000	N °2 wall fixing brackets	1
GD1530	DIN rail, pitch 150/200mm w=36 mod.DIN	4
EV1110	N°50 angled supports 1 row of terminals	1
EV1119	N°2 busbars 20x5 mm drilled and threaded M6 W=2000mm	1

3

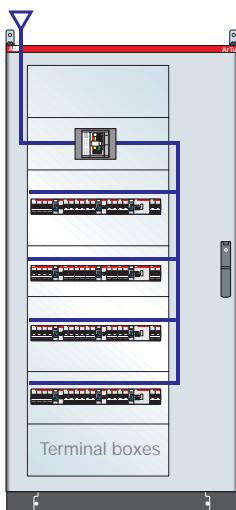

ArTu L Series dim.1600x800x195 (1750x890x240)mm (external hwxwd)
IP43 complete with internal cable container w=200mm, plate for
Tmax T3, and modular panels

Code	Description	Q.ty
SL1608	Back structure 1600x800x195mm (hwxwd)	1
ZL1000	Base strips x structure	1
ZL1101	Structure flanges w =800mm	1
MC1600	Blind riser h1600	1
PV1624	Glass door x structure 1600x800mm 24mod	1
VC1625	Int. cable container h=1600mm	1
LK3000	T3 floor/wall Kit horiz. 3/4P	1
PM3624	Panel 24 mod. 300x600	2
PM2624	Panel 24 mod. 200x600	2
PC2600	Blind panel 200x600	2
AL2000	N °2 wall fixing brackets	1
GD1520	DIN rail, pitch 150/200mm	4

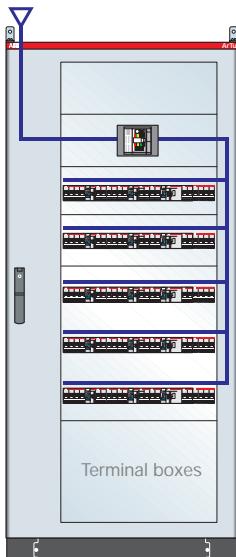

ArTu L Series dim.1800x800x195 (1950x890x240)mm (external hwxwd)
IP43 complete with internal cable container w =200mm,
plate for Tmax T3 and modular panels

Code	Description	Q.ty
SL1808	Back structure 1900x800x195mm (hwxwd)	1
MC1800	Blind riser h1800	1
ZL1000	Base strips x structure	1
ZL1101	Structure flanges w=800mm	1
PV1824	Glass door x structure 1800x800mm 24mod	1
LK3000	T3 floor/wall Kit horiz. 3/4P	1
PC2600	Blind panel 200x600	1
PC4600	Blind panel 400x600	1
PM2624	Panel 24 mod. 200x600	2
PM6672	Panel 74 mod. 600x600	1
AL2000	N °2 wall fixing brackets	1
VC1825	Internal cable container h=1800mm	1
GD1520	DIN rail, pitch 150/200mm	5



Index

General	4/2
Selection of the structure	4/4
Kits for installing apparatus.....	4/7
Distribution systems.....	4/12
Examples of configurations.....	4/18

ArTu M monobloc structures

General

The ArTu M switchgear offers a simple and functional solution for constructing secondary and terminal distribution switchgear for uses where the degree of protection is important.

It can be wall or floor-mounted, only requiring assembly of the front door and side panels thanks to their characteristic monobloc structure.



ISTC9020515001

Within the series, the wall-mounted switchgear is preset for installation of System Pro M modular apparatus and Tmax T1, T2 and T3 moulded-case circuit-breakers up to 250A and the Unifix wiring system.

The wall-mounted models include two depths (150 and 200mm), a functional width of 24 DIN modules (600 mm) and four different heights (600, 800, 1000 and 1200 mm), corresponding to 3, 4, 5 and 6 DIN rows with 200 mm centre distance.

Technical characteristics

	Wall-mounted D=150/200	Floor-mounted D=250
Compliance with Standards	IEC 60439-1	
Rated service voltage Ue	up to 690 V	
Rated insulation voltage Ui	up to 1000 V	
Rated frequency	50-60 Hz	
Rated impulse withstand voltage Uimp	6 kV	8 kV
Rated current In	up to 250 A	up to 630 A
Rated short-time short-circuit withstand current Icw	up to 25 kA	up to 35 kA
Rated peak short-circuit current Ipk	up to 52,5 kA	up to 74 kA
Degree of protection IP	65 with door	31 without door 65 with door



ISTC9020509001

ArTu M monobloc structures

General

It is also possible to use the 150 mm centre distance, thereby considerably increasing the internal capacity, which reaches 4, 5, 6 and 8 DIN rows respectively.



The floor-mounted switchgear, on the other hand, has a depth of 250 mm and is available in two functional widths (600 mm 24 DIN modules and 800 mm 36 DIN modules or 24 DIN modules plus cable riser) in four heights (1400, 1600, 1800 and 2000 mm), corresponding to 7, 8, 9 and 10 DIN rows respectively, with 200 mm centre distance. Again in this case it is possible to use the 150 mm centre distance to increase the internal capacity, taking this to 9, 10, 12 and 13 DIN rows respectively.

The modular System Pro M, and the Tmax up to T6 moulded-case circuit-breakers in the fixed version with front terminals are found within the floor-mounted version. The busbar systems with shaped section up to 800A, flat up to 630A and the Unifix cabling system can be used. The sides of the M series floor-mounted switchgear consist of two removable side panels, which allow lateral coupling of the structures or cable containers with useful width of 300mm.

The front door, available either made of transparent tempered glass applied from the inside, or of plain steel sheet, can be replaced according to the different application requirements by finishing frames with IP 31 degree of protection. It is also possible to carry out fixing to the wall using dedicated brackets for the floor-mounted versions.

The 100 mm high base strip, complete with removable flanges, is already mounted on the structure, and allows easy handling with transpallets. Removable flanges for conductor inlet are also provided in the top and bottom area.


The maximum rated current is 630 A and the degree of protection varies from IP31 (without front door) to IP65 (with front door).

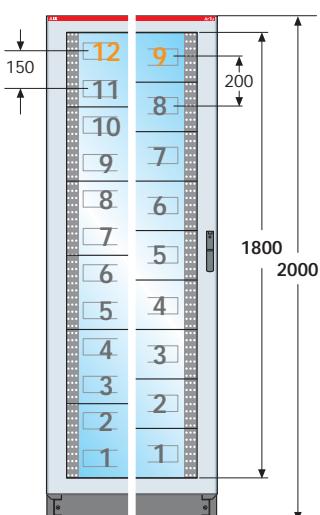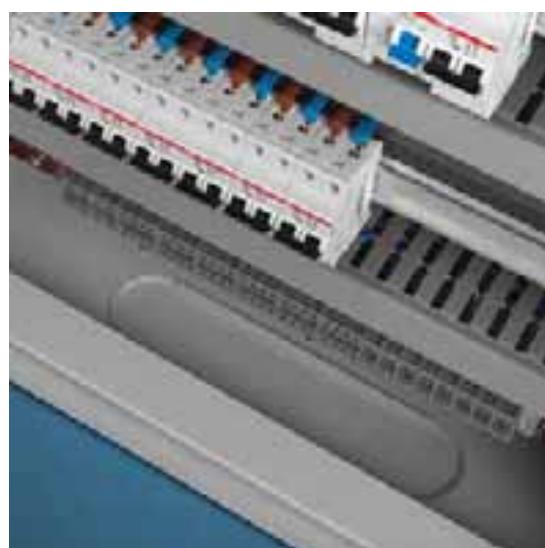

ArTu M monobloc structures

Selection of the structure

Structure

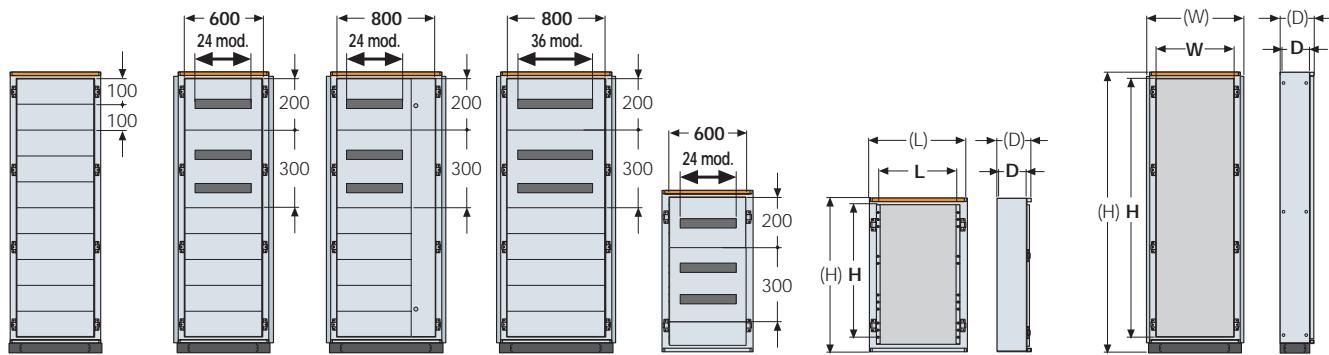


N° vert. mod. H=100mm	N° of DIN mod. which can be installed	DIN panel 150 mm centre dist.	DIN panel 200 mm centre dist.	Overall external dimensions ⁽¹⁾	Functional dimensions ⁽²⁾	Wall structures	Floor structures
6	96 (24x4)	72 (24x3)		700 (H) mm 700 (W) mm 150 (D) ⁽³⁾ mm	600 (H) mm 600 (W) mm 115 (D) ⁽³⁾ mm	SM6061	-
8	120 (24x5)	96 (24x4)		900 (H) mm 700 (W) mm 150 (D) ⁽³⁾ mm	800 (H) mm 600 (W) mm 165 (D) ⁽³⁾ mm	SM8061	-
10	144 (24x6)	120 (24x5)		1100 (H) mm 700 (W) mm 200 (D) ⁽³⁾ mm	1000 (H) mm 600 (W) mm 165 (D) ⁽³⁾ mm	SM8062	-
12	192 (24x8)	144 (24x6)		1300 (H) mm 700 (W) mm 200 (D) ⁽³⁾ mm	1200 (H) mm 600 (W) mm 165 (D) ⁽³⁾ mm	SM1062	-
14	216 (24x9)	168 (24x7)		1596 (H) mm 724 (W) mm 250 (D) ⁽³⁾ mm	1400 (H) mm 600 (W) mm 195 (D) ⁽³⁾ mm	SM1262	-
16	240 (24x10)	192 (24x8)		1796 (H) mm 724 (W) mm 250 (D) ⁽³⁾ mm	1600 (H) mm 600 (W) mm 195 (D) ⁽³⁾ mm	SM1462	-
	360 (36x10)	288 (36x8)		924 (H) mm 250 (W) mm	800 (H) mm 195 (W) mm	SM1662	-
18	288 (24x12)	216 (24x9)		1996 (H) mm 724 (W) mm 250 (D) ⁽³⁾ mm	1800 (H) mm 600 (W) mm 195 (D) ⁽³⁾ mm	SM1862	-
	432 (36x12)	324 (36x9)		924 (H) mm 250 (W) mm	800 (H) mm 195 (W) mm	SM1882	-
20	313 (24x13)	240 (24x10)		2196 (H) mm 724 (W) mm 250 (D) ⁽³⁾ mm	2000 (H) mm 600 (W) mm 195 (D) ⁽³⁾ mm	SM2062	-
	468 (36x13)	360 (36x10)		924 (H) mm 250 (W) mm	800 (H) mm 195 (W) mm	SM2082	-

The cable container, placed at the side of the structure with the special kit (AD1012), keeps the IP65 degree of protection when installed with an external door.

The external doors are used on the additional cable container to be placed side by side with an ArTu structure with door (IP65). The internal doors are used on the additional cable container placed side by side with an ArTu structure in the IP31 version (i.e. without door and with finishing profiles). This ensures uniformity of appearance between the structure and additional cable container.

Furthermore, the internal doors can be used as internal segregations of the cable container: should a segregation with door of the additional cable container open be requested, it is possible to mount both the internal and external door at the same time.

Additional cable container W = 300mm

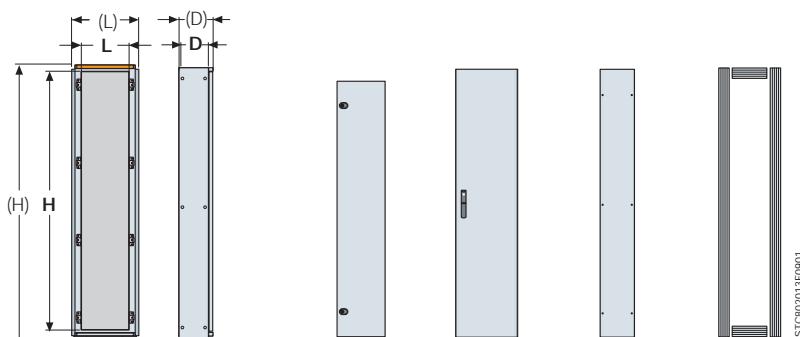


Overall external dimensions ⁽¹⁾	Functional dimensions ⁽²⁾	Structure	Internal door front IP31	External door front IP65	Side panel	Finishing section IP31
(H) mm	(W) mm	(D) ⁽³⁾ mm	H mm	W mm	D ⁽³⁾ mm	
1796	424	250	1600	300	195	VC1632
1996	424	250	1800	300	195	VC1832
2196	424	250	2000	300	195	VC2032
			L	D		PO1631
			L	D		PO1831
			L	D		PO2031
			L	D		PO1630
			L	D		PO1830
			L	D		PO2030
			L	D		LF1625
			L	D		LF1825
			L	D		LF2025
						See page 9/35

1ST08201310901

ArTu M monobloc structures

Selection of the structure

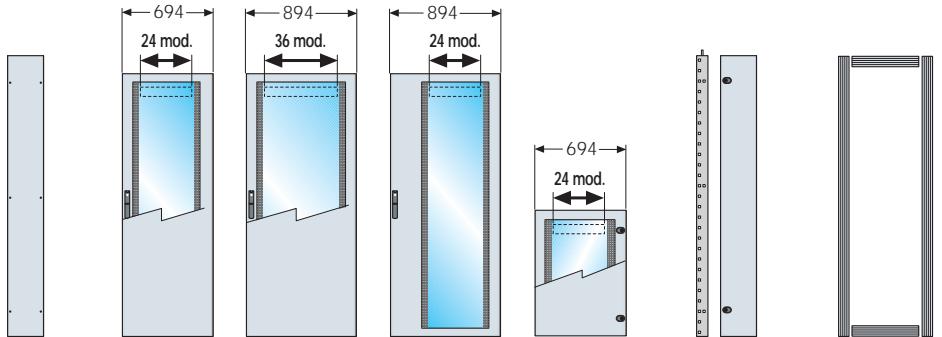

Side covering IP65	Front doors IP65	Internal cable container	Finishing section IP31
Side panel	Glass door 24/36 mod.	Glass door 24 mod.+ int cable container	Blind door 24/36 mod.
-	PV6060	-	PO6060
-	PV8060	-	PO8060
-	PV8060	-	PO8060
-	PV1060	-	PO1060
-	PV1260	-	PO1260
LF1425	PV1460	-	PO1460
LF1625	PV1660	-	PO1660
LF1625	PV1688	PV1680	PO1680
LF1825	PV1860	-	PO1860
LF1825	PV1888	PV1880	PO1880
LF2025	PV2060	-	PO2060
LF2025	PV2088	PV2080	PO2080

(1) The overall dimensions of the ArTu M switchgear starting from the 1400mm (1596mm) height include the base strip h=100mm and the side panels.


(2) The functional dimensions represent the useful space for installing the apparatus.

(3) In this catalogue, reference is always made to the 150/200/250mm depths corresponding to the external overall dimensions with front door. The useful dimensions between panel and bottom of the structure are 115/165/195 mm.

(5) The QSO switchgear for operating theatres is complete with brackets (AD1009 n° 4 pieces) for installation of the wiring duct, two DIN rail kits (GD6001 and PM2624 n° 2 pieces) and relative brackets for wall fixing (4 pieces). The switchgear can be fitted with the Yale type key box with unique numbering (AA8002).

4

Structure for constructing IP40 switchgear for operating theatres

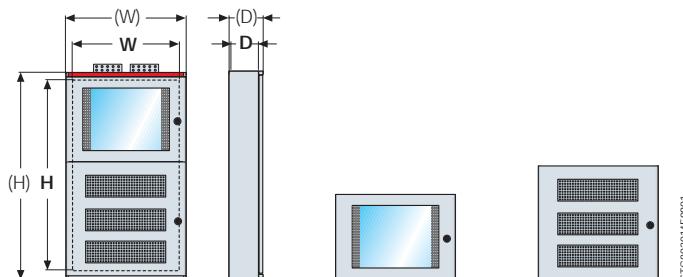

Overall external dimensions ⁽¹⁾	Functional dimensions ⁽²⁾	Complete structure ⁽⁴⁾	Spare parts				
(H) mm	(W) mm	(D) ⁽³⁾ mm	H mm	W mm	D ⁽³⁾ mm		
1100	700	200	1000	600	165	SM1069	PV4060 PO6069

ArTu M monobloc structures

Selection of the structure

Solutions recommended for installation of the apparatus

Apparatus	Type of structure/Installation		
	Wall-mounted structures	Floor-mounted structures	
	Vertical on DIN rail	Vertical	Horizontal
System Pro M modular apparatus			
OT	•	•	•
OESA		•	•
OETL		•	•
Tmax T1	3/4 poles - fixed / front terminals	•	•
Tmax T1	4 poles - fixed / front terminals +diff. mod.	• ⁽¹⁾	•
Tmax T2	3/4 poles - fixed / front terminals	•	•
Tmax T2	4 poles - fixed / front terminals +diff. mod.	• ⁽¹⁾	•
Tmax T3	3/4 poles - fixed / front terminals	•	•
Tmax T3	4 poles - fixed / front terminals +diff. mod.	• ⁽¹⁾	•
Tmax T4	3/4 poles - fixed / front terminals		•
Tmax T4	4 poles - fixed / front terminals +diff. mod.		•
Tmax T5	3/4 poles - fixed / front terminals		•
Tmax T5	4 poles - fixed / front terminals +diff. mod.		•
Tmax T6	3/4 poles - fixed / front terminals		•
Busbar with shaped section	Linear busbar holder		(*)
Flat busbar	Scaled busbar holder		(a)
Unifix L	Linear busbar holder	(*)	•
Unifix H			(*)



⁽¹⁾ Only for structures D=200mm.

(•) Can only be installed in the structure.

(a) Can only be installed in the cable container.

Wall-mounted ArTu M

Assembly solution

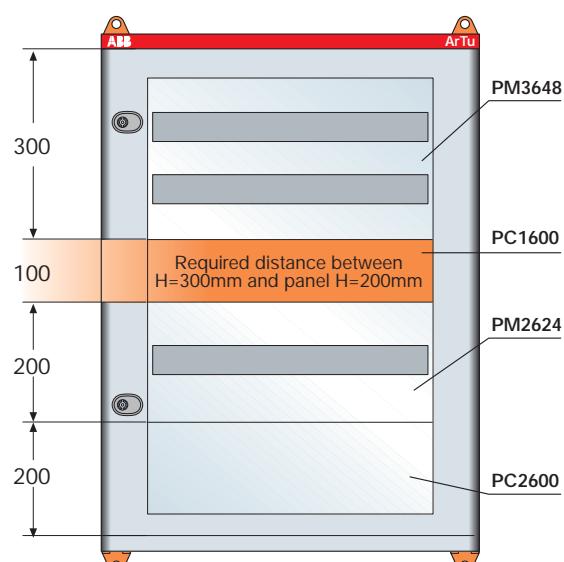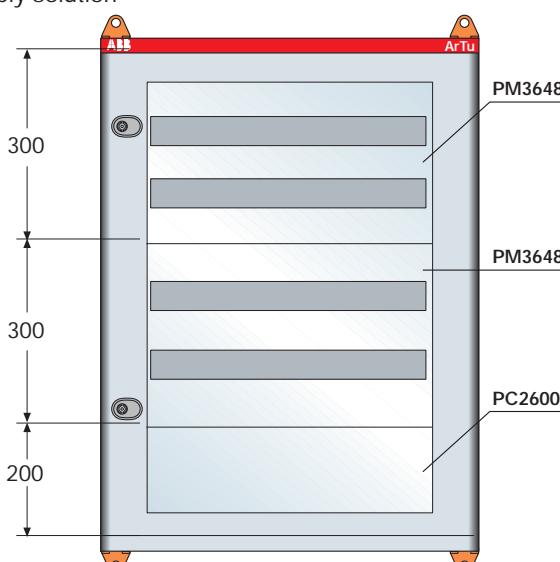


Side-by-side assembly between a H=300mm and a H=200mm modular panel is not allowed

ArTu M monobloc structures

Kits for installing apparatus

System Pro M modular apparatus, Tmax T1-T2-T3, Isomax S1-S2 moulded-case circuit-breakers, OT \leq 160 and supports for Unifix H

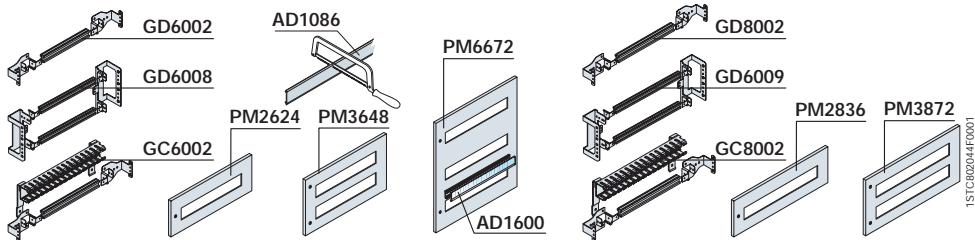


H (mm)	W=600mm			W=800mm			
	DIN rail kit 24 DIN mod.	Panel 1 DIN row 24 DIN mod.	Panel 2 DIN rows 48 DIN mod.	Panel 3 DIN rows 72 DIN mod.	DIN rail kit 36 DIN mod.	Panel 1 DIN row 36 DIN mod.	Panel 2 DIN rows 72 DIN mod.
Standard aluminium version							
200	GD6002	PM2624			GD8002	PM2836	
300 ⁽¹⁾	GD6002	PM2312			GD8002	PM2315	
300	GD6008		PM3648		GD6009	PM3872	
600	3x GD6002			PM6672			
Version fitted with accessories (complete with 60x80 wiring duct and AD 1037 supports)							
200	GC6002	PM2624			GC8002	PM2836	
Reinforced version for Tmax and Tmax differential RC 222/1 mod. 200mm							
200	GD6010 ⁽¹⁾	PM2624			GD8010	PM2836	
Reinforced version Tmax + differential module ⁽²⁾							
300	GD6010 ⁽¹⁾	PM2312			GD8010	PM2315	
Unifix H fixing brackets							
300	AD1061	PM3624			AD1061	PM3836	

⁽¹⁾ Cannot be installed on wall-mounted version.

⁽²⁾ Version for Tmax with differential module underplaced RC 221/222.

Completion items for installation on DIN rail

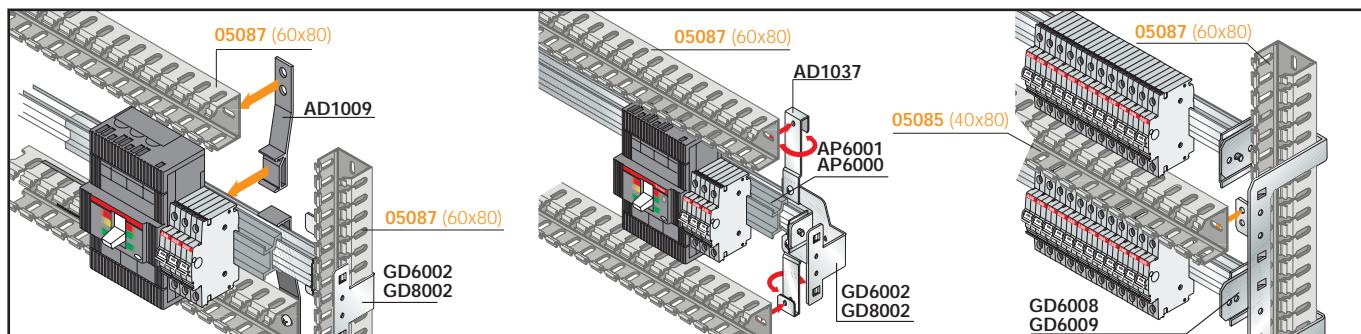

4

1STC802045F0001

Supports for horizontal wiring duct

Code	Description
AD1009	Horizontal wiring duct (plastic) supports
AD1037	Horizontal wiring duct (metal) supports

Allows assembly of the cabling wiring duct horizontally up to 60x80mm. The AD1009 plastic model can be positioned on the rear of the DIN rail, whereas the AD1037 metal version is fixed onto the brackets of DIN rail GD6002/ GD8002, and allows adjustment of the wiring duct depth.

For Isomax kits, please see page 9/83.

Depth adapter

Code	Description
AP6000	Depth adapter for Pro M Tmax T1,T2,T3 side-by-side in wall mounted structure
AP6001	Depth adapter for Pro M Tmax T1-T2-T3 side-by-side in floor standing structure


DIN window hole covers

Code	Description
AD1086	DIN L=2000mm hole cover strip - grey RAL 7035
AD1088	DIN 24 modules hole cover strip - grey RAL 7035
AD1089	DIN 36 modules hole cover strip - grey RAL 7035

ArTu M monobloc structures

Kits for installing apparatus

Horizontal installation




Circuit-breaker front terminals	N° poles	Dimensions H (mm)
Tmax T1	3-4	200
Tmax T1	4	200
Tmax T2	3-4	200
Tmax T2	4	200
Tmax T3	3-4	200
Tmax T3	4	300
Tmax T3	3-4	200
Tmax T4	3-4	200
Tmax T4	4	200
Tmax T5	3-4	300
Tmax T5	4	300
Tmax T6	3-4	500

Fixed		Fixed + diff. mod. underneath	
24 DIN mod. W=600mm	36 DIN mod. W=800mm	24 DIN mod. W=600mm	36 DIN mod. W=800mm
KT1117		KT1102 ⁽¹⁾	
KT2117		KT2102	KL2103
KT3112	KL3113	KT3102	KL3103
KT3118 ⁽¹⁾			
KT4112	KL4115	KT4110	KL4116
KT5112	KL5114	KT5110	KL5116
KT6113	KL6113		

⁽¹⁾ Version for Tmax with differential module underplaced RC 221/222

Vertical installation



Circuit-breaker front terminals	N° poles	Dimensions H (mm)
Tmax T1-T2-T3 on DIN 35 rail		200
Tmax T3	3-4	300
Tmax T4	3-4	400
Tmax T4	4	500
Tmax T5	3-4	400
Tmax T5	3-4	500
Tmax T6	3-4	500

Fixed		Fixed + diff. mod. underneath	
24 DIN mod. W=600mm	36 DIN mod. W=800mm	24 DIN mod. W=600mm	36 DIN mod. W=800mm
	(see page 4/7)		
KT3212			
KT4212			
KT5212	KL5212	KT4102	
KT6213	KL6213	KT5102	KL5102

Hole cover W=2000mm Article **AD1086**, 24 DIN modules **AD1088**, 36 DIN modules **AD1088**, colour grey RAL 7035.


⁽¹⁾ Kit for wall-mounted ArTu M D=200mm.

For Isomax kits, please see page 9/83.

ArTu M monobloc structures

Kits for installing apparatus

Plain back plates, plain and ventilated panels

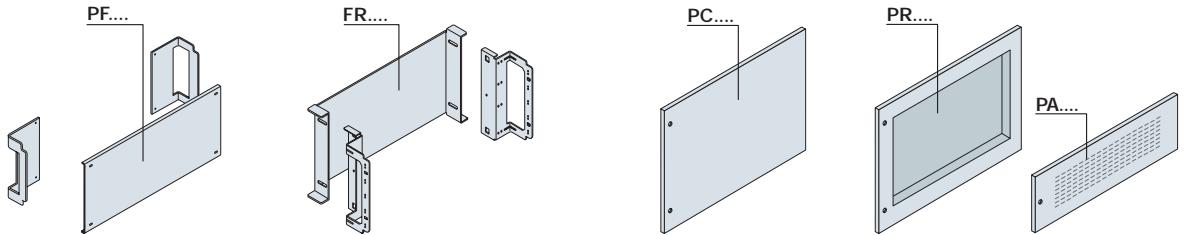

1STC80204/FF0001

Back plates

H (mm)	Plain flat 24 DIN mod. W=600mm	Plain flat 36 DIN mod. W=800mm	Plain recessed 24 DIN mod. W=600mm	Plain recessed 36 DIN mod. W=800mm
100				
200	PF2610 ⁽¹⁾	PF2810	FR2601	FR2801
300				
400	PF4610	PF4810	FR4601	FR4801
600				
800				
1600				
1800				
2000				

Panels


Plain flat 24 DIN mod. W=600mm	Plain flat 36 DIN mod. W=800mm	Plain recessed 24 DIN mod. W=600mm	Plain recessed 36 DIN mod. W=800mm	Ventilated 24 DIN mod. W=600mm
PC1600	PC1800			PA1600
PC2600	PC2800			PA2600
PC3600	PC3800			
PC4600	PC4800			
PC6600	PC6800			
PC8600	PC8800			
PC1660	PC1680			
PC1860	PC1880			
PC2060	PC2080			

⁽¹⁾ Can also be installed on wall-mounted Artu M version. Can be used to mount all the non-modular apparatus. For useful dimensions, please see page 8/20.


4

Kit for OT200/250/315/400

vertical installation



horizontal installation






H (mm)	Width structure (mm)
300	600
300	800


OT200/250 OT315/400	OT125/160
KO2260	KO1201
KO2280	

OT200/250 OT315/400
KO2261
KO2281

Useful internal space

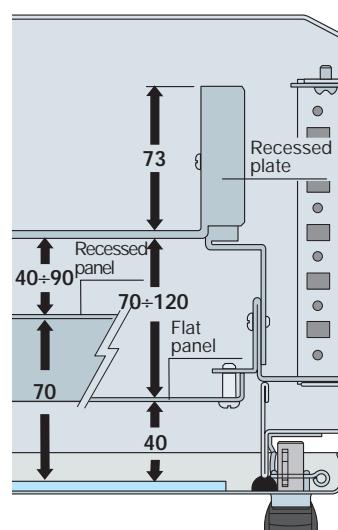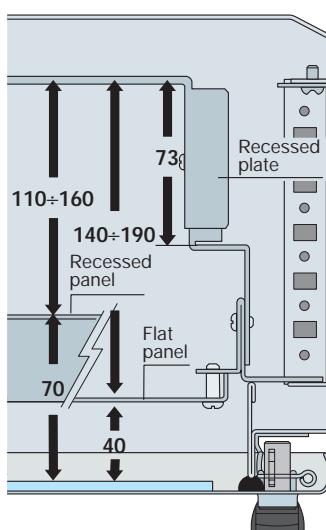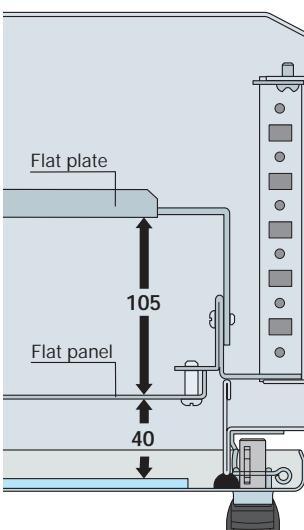

Minimum distance between back plate and busbar holder

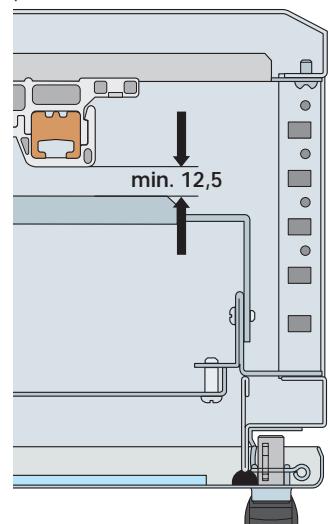


1STC802015/F0001


ArTu M monobloc structures

Kits for installing apparatus

Panels for square measuring instruments



2-instrument panel



4-instrument panel

H (mm)	72x72mm		96x96mm		72x72mm		96x96mm	
	24 DIN mod. W=600mm	36 DIN mod. W=800mm						
200	PS2720	PS2728	PS2960	PS2968	PS4720	PS4728	PS4960	PS4968

These allow installation of measuring instruments and relative changeover switches.




Square instrument hole covers

Code Description

EV1135 Hole cover of 72x72mm instrument black RAL 9005

EV1136 Hole cover of 96x96mm instrument black RAL 9005

Installation of terminal boxes on DIN rail





Terminal box mounting position

Installation on DIN rail	Structure	Internal cable container	External cable container
Horizontal	AD1044		
Horizontal angled 45°	AD1041		
Vertical		AD1044	AD1055

The ArTu switchgear is preset for assembly of terminal boxes with the sole exception of the models in the M wall-mounted series with 150mm depth.

Installation of terminal boxes on DIN rail and earthing busbar



Angled supports for terminal boxes and earthing busbar



Code	Description
EV1110	Angled supports 1 row of terminals
EV1112	Angled supports 1 row of terminals + earth

ArTu M monobloc structures



Distribution system

Modular dividers

Single-pole









Three-poles



Codice	AD1076	AD1080⁽¹⁾	AD1007	AD1081⁽²⁾	AD1030	AD1031	AD1075	AD1006
In (A)	125	125	160	160	250	400	125	160
Icw (kA)	4.2	10	11	10	21	21	4.2	
Version	1	1	1	1	1	1	3	3
Installation	DIN35/plate	DIN35/plate	DIN35/plate	DIN35/plate	DIN35/plate	DIN35/plate	DIN35/plate	DIN35/plate
Power supply Ø cable (mm ²)	min.	10	6	16	10	95	10	16
	max	35	35	70	70			
N° outgoing feeder Ø cable (mm ²)	2,5÷10				4	4		
	2,5÷16	10	6	10	5	5	6	6
	2,5÷25				2	2		
	2,5÷35							
Dimensions HxWxD (mm)	71x45x42,5	75x25x47	71x45x42,5	92x35x49	96x45x49	96x45x49	80x71,5x42,5	80x71,5x42,5
N° DIN modules	2,5	1,5	2,5	2	3	3	4,5	4,5
Rated service voltage Ue (V)	690	500	690	500	500	500	690	690
Degree of protection IP	20	20	20	20	20	20	20	20

Four-poles



Code	AD1004	AD1028	AD1029	AD1027	AD1034	AD1053
In (A)	125	125	125	160	250	250
Icw (kA)	10	4,2	4,2	6	15	15
Version poles	4	4	4	4	4	4
Installation	DIN35/plate	DIN35/plate	DIN35/plate	DIN35	with AD1038 brackets	with AD1038 brackets
Power supply Ø cable (mm ²)	min.	6	6	10		
	max	35	25 with cable terminal 35 without cable terminal	25 with cable terminal 35 without cable terminal		
N° outgoing feeder Ø cable (mm ²)	5 holes/phase Ø1÷6	2xØ6÷25 + cable terminal	2xØ6÷25 + cable terminal	8xØ2,5÷16	N°22 holes M5 with	N°32 holes M5 with
	2 holes/phase Ø1,5÷16	2xØ6÷35 no cable terminal	2xØ6÷35 no cable terminal	3xØ6÷35	17,5mm pitch per phase	17,5mm pitch per phase
	6 holes/neutral Ø1,5÷16	9xØ6÷10	2xØ6÷16		(threaded busb. 20x5mm)	(threaded busb. 20x5mm)
	4 holes/neutral Ø1,5÷6 ²		9xØ6÷10			
Dimensions HxWxD (mm)	45x75x98	89x93x48	126x93x48	90x160x50	150x600x70	150x800x70
N° DIN modules	5,5	5	7	9	24	36
Rated service voltage Ue (V)	500	690	690	500	500	500
Degree of protection IP	20	20	20	20		

⁽¹⁾ possibility of putting in parallel with AD1083 connections.

⁽²⁾ possibility of putting in parallel with comb type connection (not supplied).

Flexible busbars


Cross-section	In (A)	Code	N° busbar/phase	IP31	capacity (A) IP41	IP65	WxW (mm)	Section dimensions (mm ²)	Lenght (mm)	Weight (kg)
—	250	BF1602	1	395	323	250	20x3	60	2000	1,42
—	400	BF2502	1	498	460	400	20x5	100	2000	2,15
—	500	BF4002	1	660	620	500	24x6	144	2000	3
1STC802029F001	630	BF4012⁽¹⁾	1	758	702	630	32x5	160	2000	3,36

⁽¹⁾ Only for front extended terminals and rear terminals.

ArTu M monobloc structures


Distribution systems

Busbar holders and crosspieces



1STC8020316F001

Vertical installation

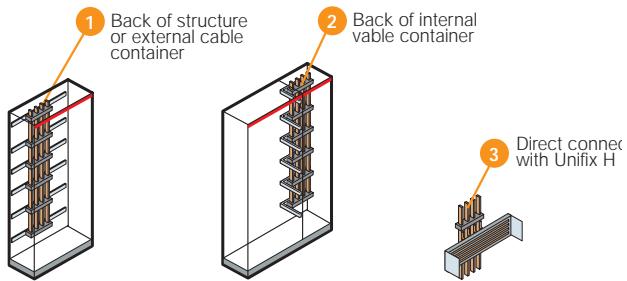

Busbar holder

Busbars with shaped section

Type
Scaled up to 800A
PB0802



Linear up to 800A
PB0803



In ≤ 400-800A

BA0400
BA0800

BA0400
BA0800

Installation

1

2

1

3

Structure
24/36 DIN modules

Internal cable
container

Additional cable
container

TR3001 (W=300mm)

TV2000 (W=200mm)


TV6200 (W=600mm)
TV8200 (W=800mm)

Crosspieces for fixing to structure

Busbars with shaped section for applications up to 800A

Cross-section	In (A)	Code	N° busbar/phase	capacity (A)		Icw max (kA)	WxW (mm)	Section dimensions (mm²)	Length (mm)	Weight (kg)
				IP31	IP65					
	400	BA0400	1	630	400	35	20x20	200	1730	4
	800	BA0800	1	970	800	35	20x20	283	1730	4,4

Selection and assembly of busbars with shaped section and busbar holders



The distance between the first busbar holder and the end of the busbar must not exceed $\frac{1}{4}$ of "X".

max X = maximum distance not to be exceeded between two consecutive busbar holders

N° of busbar holders according to the max. I_{cc}

Busbar code	capacity	Busbar holder code	N° busbars per phase	25 kA	X max (mm)	35 kA	X max (mm)	50 kA	X max (mm)	65 kA	X max (mm)	75 kA	X max (mm)	85 kA	X max (mm)	100 kA	X max (mm)
Linear																	
BA0400	400A	PB0803	1	4	550	5	425	-	-	-	-	-	-	-	-	-	-
BA0800	800A	PB0803	1	4	550	4	550	-	-	-	-	-	-	-	-	-	-
Scaled																	
BA0400	400A	PB0802	1	4	550	4	550	-	-	-	-	-	-	-	-	-	-
BA0800	800A	PB0802	1	4	550	4	550	-	-	-	-	-	-	-	-	-	-



Using the correct number of busbar holders ensures resistance to electrodynamic forces in the case of a short-circuit. Assess the maximum distance (max X) which must not be exceeded between two consecutive busbar holders according to the max. I_{cc} .

ArTu M monobloc structures

Distribution systems

Busbar holders and crosspieces

Vertical installation



Busbar holder

Busbars with shaped section

Crosspieces for fixing to structure

Type	In=250A	In=400A	In=630A	Installation	Structure	Additional cable container
Linear up to 630A BP0630	BR0250	BR0400	BR0630	1	TV6200 (W=600mm) TV8200 (W=800mm)	TR3001 (W=300mm)

⁽¹⁾ The busbar terminal protection covers must be ordered separately **BP0632**.

Flat busbars for distribution up to 630A

Cross-section	In (A)	Code	N° busbar/phase	capacity (A)		lcw max (kA)	WxW (mm)	Lenght (mm)	Weight (kg)
				IP31	IP65				
	250	BR0250	1	290	250	23	15x5	1750	1,35
	400	BR0400	1	475	400	23	25x5	1750	1,8
	630	BR0630	1	750	630	32	30x10	1750	4,4


1STC82025F0001

ArTu M monobloc structures

Distribution systems

Selection and assembly of flat busbars and busbar holders

1STC802095F0001



The distance between the first busbar holder and the end of the busbar must not exceed $\frac{1}{4}$ of "X".

Busbar code	capacity	Busbar holder code	N° busbars per phase	N° of busbar holders according to the max. I_{cc}			
				16 kA (mm)	20 kA (mm)	23 kA (mm)	32 kA (mm)
BR0250	250A	BP0630	1	4	500	6	350
BR0400	400A		1	4	500	10	200
BR0630	630A		1	-	-	4	600
				4	600	9	210

max X = maximum distance not to be exceeded between two consecutive busbar holders

4

Using the correct number of busbar holders ensures resistance to electrodynamic forces in the case of a short-circuit. Assess the maximum distance (max X) which must not be exceeded between two consecutive busbar holders according to the max. I_{cc} .

Flat drilled and threaded busbars for earthing connection

1STC802118F0001

Cross-section	Code	Threading	Pitch	WxW (mm)	Length (mm)	AxB (mm)
	EV1119	6 MA	20	20x5	2000	
	EV1120	6 MA	20	25x5	2000	
	EV1121	6MA	25	50x5	2000	
	EV1122	6MA				34x30
	EV1123	8MA				34x30
	EV1124	6MA				40x50
	EV1125	8MA				40x50

ArTu M monobloc structures

Distribution systems


Technical characteristics

Technical characteristics	Unifix H	Unifix L
Rated service voltage (U_s)	690V AC	400V AC
Rated insulation voltage (U_i)	1000V AC	500V AC
Rated impulse withstand voltage (U_{imp})	8kV	6kV
Rated frequency	50/60Hz	50/60Hz
Rated current (I_n)	central power supply lateral power supply	100A 80A
Rated short-time withstand current (I_{cw})	25kA	
Maximum peak current (I_{pk})	52.5kA-400V	
Maximum installable circuit-breaker size	250A	100A
Conditioned short-circuit current (I_{cc})	Tmax T1 Tmax T2 N, S ⁽¹⁾ Tmax T3	36kA-400V 50kA-400V 50kA-400V
With circuit-breaker	S200 S2200 H S200 P	6kA-400V 10kA-400V 25kA-400V
Degree of protection	IP20 with accessory	IP20
Characteristics of the insulating material	Self-extinguishing thermoplastic V1 (UL94)	Self-extinguishing thermoplastic V1 (UL94)
Characteristics of the conductor material	Electrolytic copper	Electrolytic copper
Width (N° modules/mm)	24/600 36/800	12/400 24/600 36/800


Installation of Unifix system

Frame for Tmax	300x600mm (hx) 300x800mm (hxL)	ED2183 ED2191
Fixing bracket H=300mm		AD1061
Crosspiece for direct connection to the rear	W=600mm	TV6200
busbars with shaped section with PB0803	L=800mm	TV8200
Busbar 2P	12 mod. 18 mod. 24 mod. 36 mod.	ED2993 ED3009 ED3017 ED3025
Busbar 4P	12 mod. 18 mod. 24 mod. 36 mod.	ED2944 ED2951 ED2969 ED2977
Fixing support	24 mod. 36 mod.	GD6002 GD8002


⁽¹⁾ Select circuit-breakers in version with front terminals for copper cables.




Direct connection with the 400/800A system of busbars with shaped section.




Feeder module for 400A frame (L1-L2-L3-N).




Direct power supply of the bases by means of feeder module ED2209.




Power supply by means of general row circuit-breaker.




Connections (L1-L2-L3-N) for System Pro M modular apparatus.

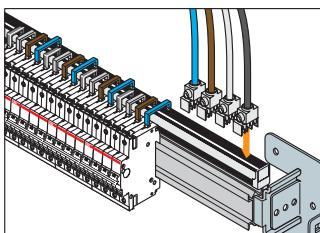

Power supply of the busbar with 100A feeder module without cable. Terminal capacity 35mm².



Direct power supply of the busbars by means of feeder module.



Power supply by means of modules and cables in parallel.

ArTu M monobloc structures

Distribution systems


Table for selecting connections according to the circuit-breaker

Circuit-breaker series	Unifix H	Unifix L	
S941 - S951 - S971 DS941 - DS951 - DS971	(top power supply) ED2654 L1/N 40A ED2662 L2/N 40A ED2670 L3/N 40A	ED3272 L1/N 40A ED3280 L2/N 40A ED3298 L3/N 40A	
S200 - DS 200 F200 ≤ 63 A (Unifix L)	(top power supply) (bottom power supply) ED2531 L1 63A ED2572 L1 63A ED2549 L2 63A ED2590 L2 63A ED2556 L3 63A ED2598 L3 63A ED2564 N 63A ED2606 N 63A ED2845 False pole module	ED3033 L1 100A ED3041 L2 100A ED3058 L3 100A ED3066 N 100A	
S800	(top power supply) ED2557 L1 ≤32A ED2558 L2 ≤32A ED2559 L3 ≤32A ED2560 N ≤32A ED2551 L1 125A ED2552 L2 125A ED2553 L3 125A ED2554 N 125A ED2550 False pole module		
F660 - F670 - S280 (80-100A) E200 up to 100A - RS370 - F200 800-100A (Unifix H)	(bottom power supply) ED2720 L1 100A ED2738 L2 100A ED2746 L3 100A ED2753 N 100A	ED3132 L1/L2/L3/N pow. supply - 350mm ED0026 L1/L2/L3/N pow. supp.- 1500mm ED0025 L1/L2/L3/N pow. supp. - 2500mm	
MDRC - Various apparatus	(bottom power supply) ED2894 L1/N 16A ED2902 L1/L2 16A	(bottom power supply) ED2910 L1/N 16A ED2928 L1/L2 16A	ED3108 Power supply 2 cab. L1/N 16A ED3116 Pow. supply 3 cab. L1/L2/L3 16A ED3124 Pow. supp. 4 cab. L1/L2/L3/N 16A ED3355 Power supply 2 cab. L1/N 40A ED3363 Pow. supply 3 cab. L1/L2/L3 40A ED3371 Pow. supp. 4 cab. L1/L2/L3/N 71A
Tmax T1	Circuit-breaker	(top/bottom power supply) ED2217 L1 Top/L2 Bottom ED2225 L2 Top/L1 Bottom ED2233 L3 Top/N Bottom ED2241 N Top/L3 Bottom ED2373 False pole module ED2381 False pole module	
	Residual current		
	Selenoid operator		
Tmax T2	Circuit-breaker	(top/bottom power supply) ED2258 L1 Top/L2 Bottom ED2266 L2 Top/L1 Bottom ED2274 L3 Top/N Bottom ED2282 N Top/L3 Bottom ED2373 False pole module ED2399 False pole module	
	Residual current		
	Selenoid operator		
Tmax T3	Circuit-breaker	(top power supply) (bottom power supply) ED2290 L1 ED2332 L1 ED2308 L2 ED2340 L2 ED2316 L3 ED2357 L3 ED2324 N ED2365 N ED2373 False pole module	
	Residual current		

For the DDA locks, order the false module **ED2845** codes separately according to the size of the residual current lock.


ArTu M monobloc structures

Examples of configurations




ArTu M Series dim. 1100x600x200 (1130x700x200)mm (external hxwxd) IP65 with modular panels

Code	Description	Q.ty
SM1069	ArTu M structure 1000x600x200mm (hxwxd) QSO + acc.	1




ArTu M Series dim. 600x600x150 (700x700x150) mm (external hxwxd) IP65 with modular panels

Code	Description	Q.ty
SM6061	ArTu M structure 600x600x150mm (hxwxd)	1
PM6672	Panel 72 mod.600x600mm (hxw) M, K	1
GD6002	DIN rail kit not segregated 24 mod. w=600mm, K	3
PV6060	Glass door 600x600mm (hxw) M	1
AA1206	N °4 wall fixing brackets M	1



ArTu M Series dim. 800x600x150 (900x700x150) mm (external hxwxd) IP65 with modular panels

Code	Description	Q.ty
SM8061	ArTu M structure 800x600x150mm (hxwxd)	1
PM2624	Panel 24 mod.200x600mm (hxw) M, K	1
PM6672	Panel 72 mod.600x600mm (hxw) M, K	1
GD6002	DIN rail kit not segregated 24 mod. w=600mm, K	4
PV8060	Glass door 800x600mm (hxw) M	1
AA1206	N °4 wall fixing brackets M	1




ArTu M Series dim. 800x600x200 (900x700x200) mm (external hxwxd) IP65 with modular panels

Code	Description	Q.ty
SM8062	ArTu M structure 800x600x200mm (hxwxd)	1
PC2600	Panel 24 mod.200x600mm (hxw) M, K	1
PM6672	Panel 72 mod.600x600mm (hxw) M, K	1
GD6002	DIN rail kit not segregated 24 mod. w=600mm, K	3
PV8060	Glass door 800x600mm (hxw) M	1
AA1206	N °4 wall fixing brackets M	1


ArTu M monobloc structures

Examples of configurations




ArTu M Series dim. 1000x600x200 (1000x700x200) mm (external hxwxd) IP65 with modular panels

Code	Description	Q.ty
SM1062	ArTu M structure 1000x600x200mm (hxwxd)	1
PC2600	Blind panel 200x600mm (hxw) M, K	1
PM2624	Panel 24 mod.200x600mm (hxw) M, K	1
PM6672	Panel 72 mod.600x600mm (hxw) M, K	1
GD6002	DIN rail kit not segregated 24 mod. w=600mm, K	4
PV1060	Glass door 1000x600mm (hxw) M	1
AA1206	N °4 wall fixing brackets M	1




ArTu M Series dim. 1200x600x200 (1300x700x200) mm (external hxwxd) IP65 with modular panels

Code	Description	Q.ty
SM1262	ArTu M structure 1200x600x200mm (hxwxd)	1
PC2600	Blind panel 200x600mm (hxw) M, K	1
PM2624	Panel 24 mod.200x600mm (hxw) M, K	2
PM6672	Panel 72 mod.600x600mm (hxw) M, K	1
GD6002	DIN rail kit not segregated 24 mod. w=600mm, K	5
PV1260	Glass door 1200x600mm (hxw) M	1
AA1206	N °4 wall fixing brackets M	1



ArTu M Series dim. 1200x600x200 (1300x700x200) mm (external hxwxd) IP65 with modular panels

Code	Description	Q.ty
SM1262	ArTu M structure 1200x600x200mm (hxwxd)	1
PC2600	Blind panel 200x600mm (hxw) M, K	2
PM2624	Panel 24 mod.200x600mm (hxw) M, K	4
GD6002	DIN rail kit not segregated 24 mod. w=600mm, K	4
PV1260	Glass door 1200x600mm (hxw) M	1
AA1206	N °4 wall fixing brackets M	1

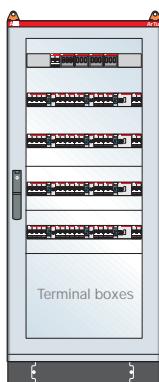


ArTu M Series dim. 1400x600x250 (1596x724x250) mm (external hxwxd) IP65 with modular panels

Code	Description	Q.ty
SM1462	ArTu M structure 1400x600x250mm (hxwxd)	1
PC4600	Blind panel 400x600mm (hxw) M, K	1
PM2624	Panel 24 mod.200x600mm (hxw) M, K	2
PM6672	Panel 72 mod.600x600mm (hxw) M, K	1
GD6002	DIN rail kit not segregated 24 mod. w=600mm, K	5
PV1460	Glass door 1400x600mm (hxw) M	1
LF1425	N° 2 side panels 1400x250mm (hxd) M	1
AA1206	N °4 wall fixing brackets M	1


ArTu M monobloc structures

Examples of configurations

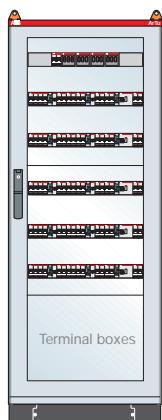


ArTu M Series dim. 1600x600x250 (1796x724x250) mm (external hxwxd) IP65 with modular panels

Code	Description	Q.ty
SM1662	ArTu M structure 1600x600x250mm (hxwxd)	1
PC4600	Blind panel 400x600mm (hxw) M, K	1
PM6672	Panel 72 mod.600x600mm (hxw) M, K	2
GD6002	DIN rail kit not segregated 24 mod. w=600mm, K	6
PV1660	Glass door 1600x600mm (hxw) M	1
LF1625	N° 2 side panels 1600x250mm (hxd) M	1
AA1206	N °4 wall fixing brackets M	1

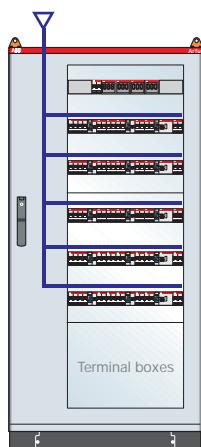

ArTu M Series dim. 1600x800x250 (1796x924x250) mm (external hxwxd) IP65 with modular panels

Code	Description	Q.ty
SM1682	ArTu M structure 1600x800x250mm (hxwxd)	1
PC4600	Blind panel 400x600mm (hxw) M, K	1
PM6672	72 mod. Panel 600x600mm (hxw) M, K	2
GD6002	DIN rail kit not segregated 24 mod. w=600mm, K	6
PV1680	Glass door 1600x800mm (hxw) M	1
VC1622	Internal cable container 1600x200x250mm M	1
LF1625	N°2 side panels 1600x250mm (hxd) M	1
AA1206	N °4 wall fixing brackets M	1

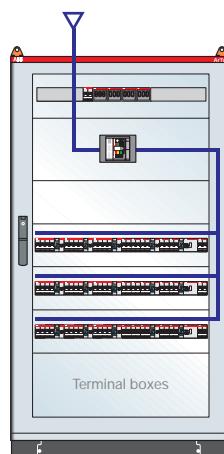


ArTu M Series dim. 1600x800x250 (1796x924x250) mm (external hxwxd) IP65 with plate for Tmax T5 and modular panels

Code	Description	Q.ty
SM1682	ArTu M structure 1600x800x250mm (hxwxd)	1
PC2800	Blind panel 200x800mm (hxw) M, K	1
PC3800	Blind panel 300x800mm (hxw) M, K	1
KL5114	T5 horiz. fixed kit 300x800mm (hxw), M, K	1
PM2836	Panel 36 mod.200x800mm (hxw) M, K	4
GD8002	DIN rail kit not segregated 36 mod. w=800mm, K	4
PV1688	Glass door 36 mod. 1600x800mm (hxw) M	1
LF1625	N° 2 side panels 1600x250mm (hxd) M	1
AA1206	N °4 wall fixing brackets M	1


ArTu M monobloc structures

Examples of configurations

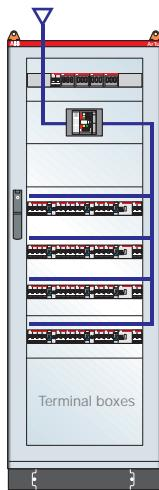


ArTu M Series dim. 1800x600x250 (1996x724x250) mm (external hwxwd) IP65 with plate for Tmax T3 and modular panels, complete with 400A vertical busbars on back of structure - max. Icw 35kA

Code	Description	Q.ty
SM1862	ArTu M structure 1800x600x250mm (hwxwd)	1
KT3112	T3 3/4P horiz. fixed kit not segregated M, K250	1
PC2600	Blind panel 200x600mm (hwx) M, K	1
PC4600	Blind panel 400x600mm (hwx) M, K	1
PM2624	Panel 24 mod.200x600mm (hwx) M, K	2
PM6672	Panel 72 mod.600x600mm (hwx) M, K	1
GD6002	DIN rail kit not segregated 24 mod. w=600mm, K	5
PV1860	Glass door 1800x600mm (hwx) M	1
LF1825	N° 2 side panels 1800x250mm (hxd) M	1
AA1206	N° 4 wall fixing brackets M	1
PB0803	Linear busbar holder In=800A (35kA)	5
BA0400	Busbar In=400A	4
TV6200	N° 2 rear crosspieces w=600mm	3
AD1064	N°12 joining screw M8 W=27mm flat busbars up to10mm	1

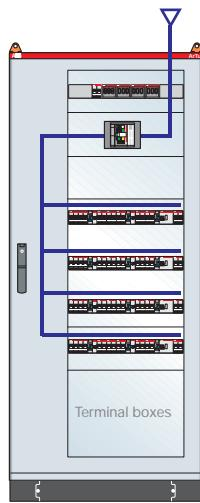

ArTu M Series dim. 1800x800x250 (1996x924x250) mm (external hwxwd) IP65 with plate for Tmax T3 and modular panels, complete with 800A vertical busbars on back of internal cable container - max. Icw 35kA

Code	Description	Q.ty
SM1882	ArTu M structure 1800x800x250mm (hwxwd)	1
KT3112	T3 3/4P horiz. fixed kit not segregated M, K250	1
PC2600	Blind panel 200x600mm (hwx) M, K	1
PC4600	Blind panel 400x600mm (hwx) M, K	1
PM2624	Panel 24 mod.200x600mm (hwx) M, K	2
PM6672	Panel 72 mod.600x600mm (hwx) M, K	1
GD6002	DIN rail kit not segregated 24 mod. w=600mm, K	5
PV1880	Glass door 1800x800mm (hwx) M	1
LF1825	N° 2 side panels 1800x250mm (hxd) M	1
VC1822	Int. cable container 1800x200x250mm M	1
AA1206	N° 4 wall fixing brackets M	1
PB0802	Scaled busbar holder In=800A (35kA)	5
BA0800	Busbar In=800A	4
TV2000	N° 2 rear crosspieces w=200mm	3
AD1064	N°12 joining screw M8 W=27mm flat busbars up to10mm	1

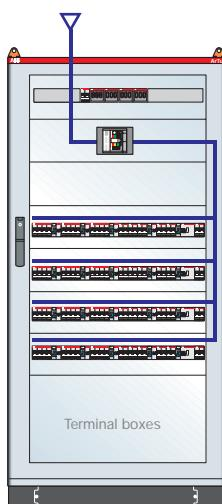


ArTu M Series dim. 1800x800x250 (1996x924x250) mm (external hwxwd) IP65 with plate for Tmax T3 and modular panels, complete with 800A vertical busbars on back of structure - max. Icw 35kA

Code	Description	Q.ty
SM1882	ArTu M structure 1800x800x250mm (hwxwd)	1
PC2800	Blind panel 200x800mm (hwx) M, K	1
PC4800	Blind panel 400x800mm (hwx) M, K	1
KL3113	T3 3/4P horiz. fixed kit not segregated M, K250	1
PM2836	Panel 36 mod.200x800mm (hwx) M, K	5
GD8002	DIN rail kit not segregated 36 mod. w=800mm, K	5
PV1888	Glass door 36 mod. 1800x800mm (hwx) M	1
LF1825	N° 2 side panels 1800x250mm (hxd) M	1
AA1206	N° 4 wall fixing brackets M	1
PB0803	Linear busbar holder In=800A (35kA)	5
BA0800	Busbar In=800A	4
TV8200	N° 2 rear crosspieces w=800mm	3
AD1064	N°12 joining screw M8 W=27mm flat busbars up to10mm	1


ArTu M monobloc structures

Examples of configurations

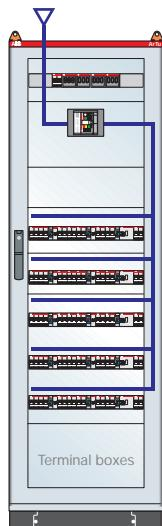


ArTu M Series dim. 2000x600x250 (2196x724x250) mm (external hxwxd) IP65 with plate for Tmax T5 and modular panels, complete with 400A vertical busbars on back of structure - max. Icw 35kA

Code	Description	Q.ty
SM2062	ArTu M structure 2000x600x250mm (hxwxd)	1
KT5112	T5 horiz. fixed kit 300x600mm (hxw) M, K	1
PC2600	Blind panel 200x600mm (hxw) M, K	1
PC3600	Blind panel 300x600mm (hxw) M, K	1
PM2624	Panel 24 mod.200x600mm (hxw) M, K	3
PM6672	Panel 72 mod.600x600mm (hxw) M, K	1
GD6002	DIN rail kit not segregated 24 mod. w=600mm, K	6
PV2060	Glass door 2000x600mm (hxw) M	1
LF2025	N° 2 side panels 2000x250mm (hxd) M	1
AA1206	N °4 wall fixing brackets M	1
PB0803	Linear busbar holder In=800A (35kA)	5
BA0800	Busbar In=800A	4
TV6200	N° 2 rear crosspieces w=600mm	3
AD1064	N°12 joining screw M8 W=27mm flat busbars up to10mm	1

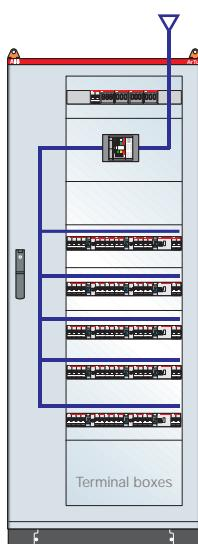

ArTu M Series dim. 2000x800x250 (2196x924x250) mm (external hxwxd) IP65 with plate for Tmax T5 and modular panels, complete with 800A vertical busbars on back of internal cable container - max. Icw 35kA

Code	Description	Q.ty
SM2082	ArTu M structure 2000x800x250mm (hxwxd)	1
KT5112	T5 horiz. fixed kit 300x800mm (hxw) M, K	1
PC2600	Blind panel 200x600mm (hxw) M, K	1
PC3600	Blind panel 300x600mm (hxw) M, K	1
PM2624	Panel 24 mod.200x600mm (hxw) M, K	3
PM6672	Panel 72 mod.600x600mm (hxw) M, K	1
GD6002	DIN rail kit not segregated 24 mod. w=600mm, K	6
PV2080	Glass door 2000x800mm (hxw) M	1
LF2025	N° 2 side panels 2000x250mm (hxd) M	1
VC2022	Int. cable container 2000x200x250mm M	1
AA1206	N °4 wall fixing brackets M	1
PB0802	Scaled busbar holder In=800A (35kA)	5
BA0800	Busbar In=800A	4
TV2000	N° 2 rear crosspieces w=200mm	3
AD1064	N°12 joining screw M8 W=27mm flat busbars up to10mm	1

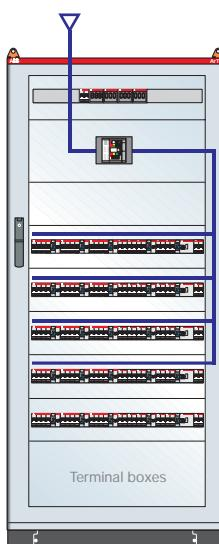

ArTu M Series dim. 2000x800x250 (2196x924x250)mm (external hxwxd) IP65 with plate for Tmax T5 and modular panels, complete with 800A vertical busbars on back of structure- max. Icw 35kA

Code	Description	Q.ty
SM2082	ArTu M structure 2000x800x250mm (hxwxd)	1
PC2800	Blind panel 200x800mm (hxw) M, K	1
PC3800	Blind panel 300x800mm (hxw) M, K	1
KL5114	T5 horiz. fixed kit 300x800mm (hxw) M, K	1
PM2836	Panel 36 mod.200x800mm (hxw) M, K	6
GD8002	DIN rail kit not segregated 36 mod. w=800mm, K	6
PV2088	Glass door 36 mod. 2000x800mm (hxw) M	1
LF2025	N° 2 side panels 2000x250mm (hxd) M	1
AA1206	N °4 wall fixing brackets M	1
PB0803	Linear busbar holder In=800A (35kA)	5
BA0800	Busbar In=800A	4
TV8200	N° 2 rear crosspieces w=800mm	3
AD1064	N°12 joining screw M8 W=27mm flat busbars up to10mm	1



Index

General	5/2
Selection of the structure	5/4
Kits for installing apparatus.....	5/10
Distribution systems.....	5/27
Examples of configurations.....	5/34

ArTu K Modular Structures

General

The K series of ArTu switchgear consists of a series of components for configuration of floor-standing kit switchgear, with the following dimensions:

- three heights (useful)
- 1600 mm (16 modules of 100 mm), 1800 mm (18 modules of 100 mm) and 2000 mm (20 modules of 100 mm) to which the h=100mm base strip measurement fitted with removable flanges must always be added;
- three widths (useful)
- 390mm (12 DIN modules), 600 mm (24 DIN modules) and 800 mm (36 or 24 DIN modules + cable riser);
- five depths (useful)
150 mm (for Tmax T6 up to fixed 630A S6) 225mm (for Tmax up to fixed 800A S6), 300mm (for Tmax T7 1600A), 500 mm (for Tmax to fixed T71600A), 700mm (for Emax up to withdrawable E3 3200A) and 900mm (for Emax up to withdrawable E4 4000A).

The structure is made entirely of hot galvanised steel sheet, which guarantees the equipotentiality of the switchgear.

Base and top are supplied pre-mounted by means of a three-way joint, which is able to provide considerable structural rigidity. The base is fitted with removable flanges which allow entry into the areas reserved for the cables and a pre-mounted (H=100mm) base strip, consisting of four angle irons with removable over the whole perimeter.



1STC80225F0001

Base and top are supplied pre-mounted by means of a three-way joint, which is able to provide considerable structural rigidity. The base is fitted with removable flanges which allow entry into the areas reserved for the cables and a pre-mounted (H=100mm) base strip, consisting of four angle irons with removable over the whole perimeter.



The four uprights are fitted with a multi-purpose hinge used to assemble the door and to couple the structures, both laterally and at the rear.

The structure is completed with two types of functional frames, fitted with reference nicks (at 100 mm pitch) to avoid annoying measurements during assembly of the apparatus kits:

- open functional frame (can be used in switchgear where no form of segregation is required);
- closed functional frame (can be used in switchgear where forms 2-3 and 4 segregation are required).

Technical characteristics

Compliance with Standards	IEC 60439-1
Rated service voltage Ue	up to 1000 V
Rated insulation voltage Ui	up to 1000 V
Rated frequency	50-60 Hz
Rated impulse withstand voltage Uimp	8 kV
Rated current In	up to 4000 A
Rated short-time short-circuit withstand current Icw	up to 105 kA
Rated peak short-circuit current Ipk	up to 254 kA
Degree of protection IP	31 without door 41 with accessories 65 with door and blind panel

ArTu K Modular Structures

General

The switchgear is completed with:

- blind (IP65) and ventilated (IP41) type side panels;
- blind and transparent doors, fitted with safety glass which can be mounted on all sides (IP65).
- kit for installing the apparatus, designed to integrate enclosure structures and circuit-breaker perfectly .

The mounting positions are established previously so as to guarantee the insulation distances and perfect alignment of the apparatus on the front panel. Furthermore, the kit plates are of the self-centring type and are fitted with threaded bushings to provide easy assembly of the apparatus from the front.

- DIN rail kit consisting of a drawn piece of aluminium able to resist the load of the circuit-breakers fitted with fixing brackets (patented), preset to house the vertical and horizontal cabling duct.



The aluminium DIN rail has three established mounting positions, corresponding respectively to the

depths of the System Pro M, Tmax and Isamax circuit-breakers. It is fitted with double DIN 35 section (front and rear), and the rear part can be used to support the duct, up to 60x80mm;

- kit for air circuit-breakers consisting of sturdy supporting crosspieces and of the front panel;
- universal kits, consisting of back plates and blind front panels, which allow assembly of generic apparatus.

The panels have vertical 100mm modularity and are fitted with an invisible hinge on the outside, which can be mounted either on the right or on the left, and which guarantees panel earthing, making the equipotential connection superfluous. The DIN panels are also available in the versions for one, two or three rows, corresponding to heights of 200, 300 and 600mm respectively and can have 150/200mm centre distance between the rows.


In the case of modular and moulded-case circuit-breakers placed side by side in the same row, the special section must be used which allows the assembly position of the circuit-breakers to be adapted correctly so that the same modular panel can be used. When the circuit-breakers do not take up the whole window of the panel, the spaces can be closed using the hole covers.

Within the K series of ArTu switchgear with 500, 700 and 900mm depths, segregation compartments of Form 2, 3 and 4 can be made in conformity with the IEC 60439-1 Standard, for the whole range of moulded-case circuit-breakers with rear terminals, simply by using the closed functional frame, the installation kits in the segregated version and the special segregations.

The distribution systems, which can be used inside the ArTu switchgear, consist of:

- shaped section busbars up to 3200A;
- flat busbars up to 4000A;
- flexible busbars;
- Unifix cabling system, structured up to 400A;
- dividers up to 400A.

The extremely compact dimensions of the system allow the busbars to be mounted directly inside the switchgear, positioning them horizontally or vertically, on the back or on the side of the structure, keeping front access, also thanks to the practicality of the scaled type busbar holder.

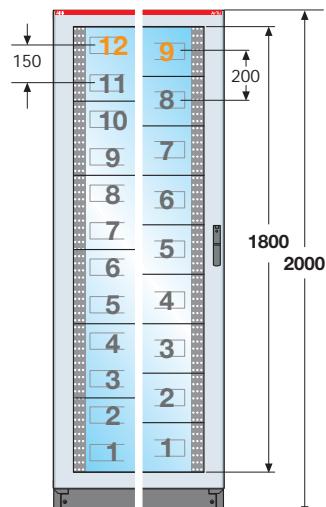

5




1STC80250F0001

ArTu K Modular Structures

Selection of the structure

Structure

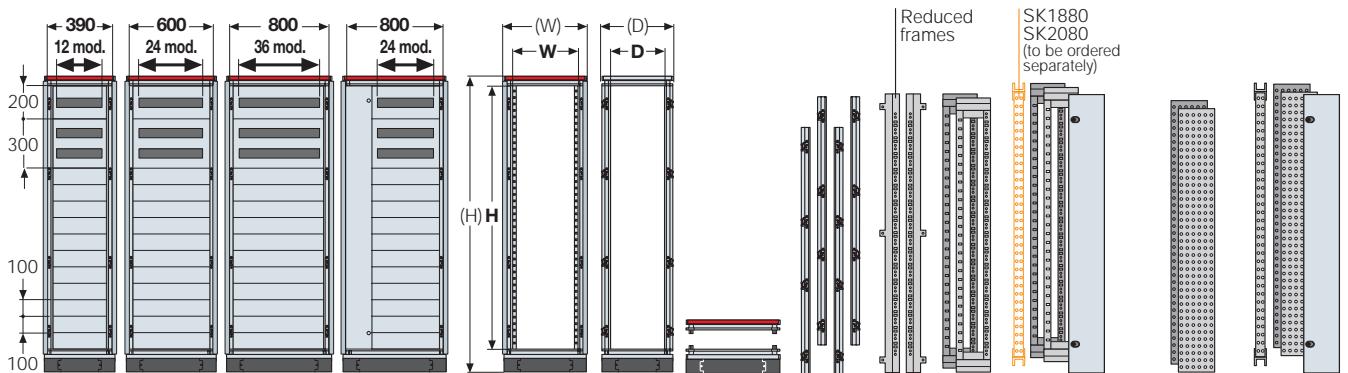

N° vert. mod. H=100mm	N°DIN modules installable	External overall dimensions ⁽¹⁾	Functional dimensions ⁽²⁾	(*)Base Top Base strip	Side flanges base strip	Uprights	Functional frames for switchgear without segregation	Solution 1	Solution 2 ⁽⁴⁾	Solution 1	Solution 2 ⁽⁴⁾
		DIN panel 150 mm centre dist.	DIN panel 200 mm centre dist.	(H) mm	(W) mm	(D) ⁽³⁾ mm	H mm	W mm	D mm		
16	240 (24x10) 360 (36x10)	192 (24x8) 236 (36x8)	1831	748 948	287	1600 800	600 150	SK6025 SK8025	ZD1015 ZD1015	SK1600	SK1604 ⁽⁵⁾ SK1604 ⁽⁵⁾
				538	362		390	225	SK4040	ZD1025	-
				538	437		390	300	SK4050	ZD1030	-
				538	637		390	500	SK4060	ZD1050	-
				538	837		390	700	SK4080	ZD1070	-
				538	1037		390	900	SK4010	ZD1090	-
				748	287		600	150	SK6025	ZD1015	-
				748	362		600	225	SK6040	ZD1025	-
				748	437		600	300	SK6050	ZD1030	-
18	288 (24x12) 432 (36x12)	216 (24x9) 324 (36x9)	2031	748 948 1037	637	1800 600 500	600 150	SK6060	ZD1050	SK1800	SK1804 ⁽⁵⁾ SK1804 ⁽⁵⁾
				748	837		600	700	SK6080	ZD1070	-
				748	1037		600	900	SK6010	ZD1090	-
				948	287		800	150	SK8025	ZD1015	-
				948	362		800	225	SK8040	ZD1025	-
				948	437		800	300	SK8050	ZD1030	-
				948	637		800	500	SK8060	ZD1050	-
				948	837		800	700	SK8080	ZD1070	-
				948	1037		800	900	SK8010	ZD1090	-
				538	362		390	225	SK4040	ZD1025	-
156 (12x13)	120 (12x10)			538	437		390	300	SK4050	ZD1030	-
				538	637		390	500	SK4060	ZD1050	-
				538	837		390	700	SK4080	ZD1070	-
				538	1037		390	900	SK4010	ZD1090	-
				748	287		600	150	SK6025	ZD1015	-
				748	362		600	225	SK6040	ZD1025	-
				748	437		600	300	SK6050	ZD1030	-
20	312 (24x13) 468 (36x13)	240 (24x10) 360 (36x10)	2231	748 948 1037	637	2000 600 500	600 150	SK6060	ZD1050	SK2000	SK2004 ⁽⁵⁾ SK2004 ⁽⁵⁾
				748	837		600	700	SK6080	ZD1070	-
				748	1037		600	900	SK6010	ZD1090	-
				948	287		800	150	SK8025	ZD1015	-
				948	362		800	225	SK8040	ZD1025	-
				948	437		800	300	SK8050	ZD1030	-
				948	637		800	500	SK8060	ZD1050	-
				948	837		800	700	SK8080	ZD1070	-
				948	1037		800	900	SK8010	ZD1090	-
⁽¹⁾ The side flanges of the base strip should be ordered separately.											


⁽¹⁾ The side flanges of the base strip should be ordered separately.

The positioning of two structures or a structure and a cable container side-by-side is realized by the AD1014 kit.

When selecting the components, the characteristics of the apparatus to be mounted inside the switchgear must be taken into consideration, opting for the open frame and cable container when no form of segregation is required and, on the contrary, for the closed frame and cable container when forms of segregation from 2 to 4 are required. According to the type of covering selected, the degree of protection varies from IP31/41 (switchgear without front door) to IP65 (switchgear with front door and blind side panels).

ArTu K Modular Structures


Selection of the structure

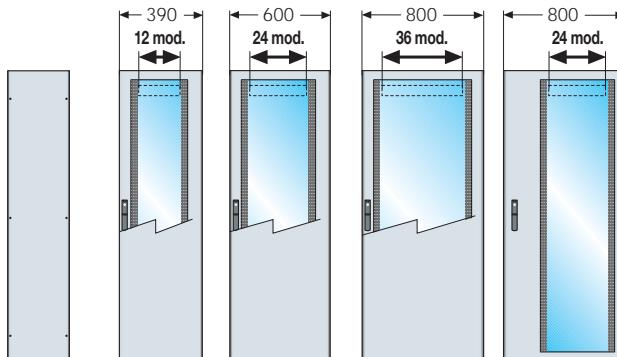


- 1) The overall external dimensions of the ArTu K switchgear include the base strip $h=100\text{mm}$ and the side panels, each 14mm wide.
- (4) Only to be ordered for the structures with $W=800\text{mm}$, already inclusive of functional frame.
The rear intermediate upright SK 1880 ($H=1800\text{mm}$) or SK 2080 ($H=2000\text{mm}$) in switchgear without segregation must be ordered separately if necessary for fixing onto the back of crosspieces, accessories, busbars, etc.
- 2) The functional dimensions represent the useful space for installing the apparatus.
- (5) Reduced functional frame.
- 3) In this catalogue, reference is always made to the following depths:
functional
 $150/225/300/500/700/900\text{ mm}$
external
 $287/362/437/637/837/1037\text{ mm}$.
- (6) Reduced functional frame or standard opened functional frame

To complete the structure


Switchgears without segregation

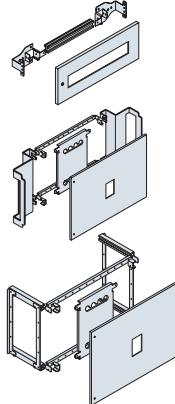

DIN rail and panels Page 5/10




Tmax kits for ArTu
 $D=150-225-300\text{mm}$ Page 5/11




Tmax/Emax kits for ArTu $D \geq 225\text{mm}$ Page 5/13

Segregated switchgears




DIN rail and panels Page 5/18



Tmax/Emax kits Page 5/19

Distribution System



Busbars with shaped section Page 5/18



Flat busbars Page 5/19

IP31/IP41 finishing section

Side panel	Glass door 12/24/36 mod.	Glass door 24 mod. + int. cable cont.	Blind door 12/24/36 mod.	Rear panel
LF1626	PV1661	-	PO1661	RF1660
LF1626	PV1682	PV1681	PO1681	RF1680
LF1840	PV1841	-	PO1841	RF1840
LF1850	PV1841	-	PO1841	RF1840
LF1860	PV1841	-	PO1841	RF1840
LF1880	PV1841	-	PO1841	RF1840
LF1810	PV1841	-	PO1841	RF1840
LF1826	PV1861	-	PO1861	RF1860
LF1840	PV1861	-	PO1861	RF1860
LF1850	PV1861	-	PO1861	RF1860
LF1860	PV1861	-	PO1861	RF1860
LF1880	PV1861	-	PO1861	RF1860
LF1810	PV1861	-	PO1861	RF1860
LF1826	PV1882	PV1881	PO1881	RF1880
LF1840	PV1882	PV1881	PO1881	RF1880
LF1850	PV1882	PV1881	PO1881	RF1880
LF1860	PV1882	PV1881	PO1881	RF1880
LF1880	PV1882	PV1881	PO1881	RF1880
LF1810	PV1882	PV1881	PO1881	RF1880
LF2040	PV2041	-	PO2041	RF2040
LF2050	PV2041	-	PO2041	RF2040
LF2060	PV2041	-	PO2041	RF2040
LF2080	PV2041	-	PO2041	RF2040
LF2010	PV2041	-	PO2041	RF2040
LF2026	PV2061	-	PO2061	RF2060
LF2040	PV2061	-	PO2061	RF2060
LF2050	PV2061	-	PO2061	RF2060
LF2060	PV2061	-	PO2061	RF2060
LF2080	PV2061	-	PO2061	RF2060
LF2010	PV2061	-	PO2061	RF2060
LF2026	PV2082	PV2081	PO2081	RF2080
LF2040	PV2082	PV2081	PO2081	RF2080
LF2050	PV2082	PV2081	PO2081	RF2080
LF2060	PV2082	PV2081	PO2081	RF2080
LF2080	PV2082	PV2081	PO2081	RF2080
LF2010	PV2082	PV2081	PO2081	RF2080








The functional frames of ArTu K switchgear are available in two versions:

- **switchgear without segregation** (open frame) in cases where no form of segregation is required;
- **segregated switchgear** (closed frame) in cases where forms 2-3 and 4 segregation are required

ArTu K Modular Structures

Selection of the structure

Additional cable container



1STC02019F0901

Overall external dimensions ⁽¹⁾			Functional dimensions ⁽²⁾		(*) Base Top Base strip	Side flanges for base strip	Uprights	Side covers, front and rear covers			Finishing section IP31/41		
(H) mm	(W) mm	(D) mm	H mm	W mm	D (3) mm	VC3025	ZD1015	SK1600	LF1626	Blind side door IP65	Internal front door IP31	External front door IP65	Rear panel IP65
1831	448	287	1600	300	150	VC3025	ZD1015	SK1600	LF1626	PO1631	PO1633	RF1630	
		287			150	VC3025	ZD1015		LF1826				
		362			225	VC3040	ZD1025		LF1840				
		437			300	VC3050	ZD1030		LF1850				
2031	448	637	1800	300	500	VC3060	ZD1050	SK1800	LF1860	PO1831	PO1833	RF1830	See page 9/54
		837			700	VC3080	ZD1070		LF1880				
		1037			900	VC3010	ZD1090		LF1810				
		287			150	VC3025	ZD1015		LF2026				
		362			225	VC3040	ZD1025		LF2040				
		437			300	VC3050	ZD1030		LF2050				
2231	448	637	2000	300	500	VC3060	ZD1050	SK2000	LF2060	PO2031	PO2033	RF2030	
		837			700	VC3080	ZD1070		LF2080				
		1037			900	VC3010	ZD1090		LF2010				

(*) The side flanges of the base strip should be ordered separately.

(1) The overall external dimensions of the ArTu K switchgear include the base strip h=100mm and the side panels, each 14mm wide.

(2) The functional dimensions represent the useful space for installing the apparatus.

(3) In this catalogue, reference is always made to depths 250/350/600/800/1000mm corresponding to overall external dimensions 287/362/637/837/1037 mm and to useful dimensions 150/225/500/700/900 mm.

Additional structure 300mm wide are available, which can be used as cable containers placed side by side laterally with all the ArTu K switchgear.



In the same way as the structures, the additional cable container is made up of a base, top, base strip and uprights and is fixed to the structures using the side-by-side kits (AD1014). It is completed with the side panels and the doors (to be ordered separately). The external doors are used on the additional cable container to be placed side by side with an ArTu structure with door (IP65); the internal doors are used on the additional cable container placed side by side with an ArTu IP31 version structure (i.e. without door and with finishing sections).

This ensures uniformity of appearance between the structure and additional cable container. Furthermore, the internal doors can be used as internal segregations of the cable container: should a segregation with door open of the additional cable container be requested, it is possible to mount both the internal and external door at the same time.

ArTu K Modular Structures

Selection of the structure

Angle square

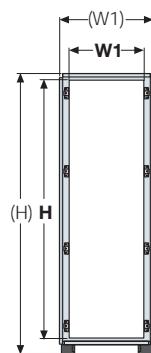

1STC020205F0901

Overall external dimensions ⁽¹⁾			Functional dimensions ⁽²⁾			Base/Top/ Base strip	Uprights	Side covers
(H) mm	(W1) mm	(W2) ⁽³⁾ mm	H mm	W1 mm	W2 ⁽³⁾ mm			
2031	637	637	1800	500	500	SK6600	SK1815	Blind side panel IP65
	837	837	700	700	700	SK8800		LF1860
2231	637	637	2000	500	500	SK6600	SK2015	LF1880
	837	837	700	700	700	SK8800		LF2060


(1) The overall external dimensions of the ArTu K switchgear include the base strip h=100mm.

(2) The functional dimensions represent the useful space for installing the apparatus.

(3) In this catalogue reference is always made to the following depth:
functional
 500/700mm
external
 637/837mm.

5

Example of use

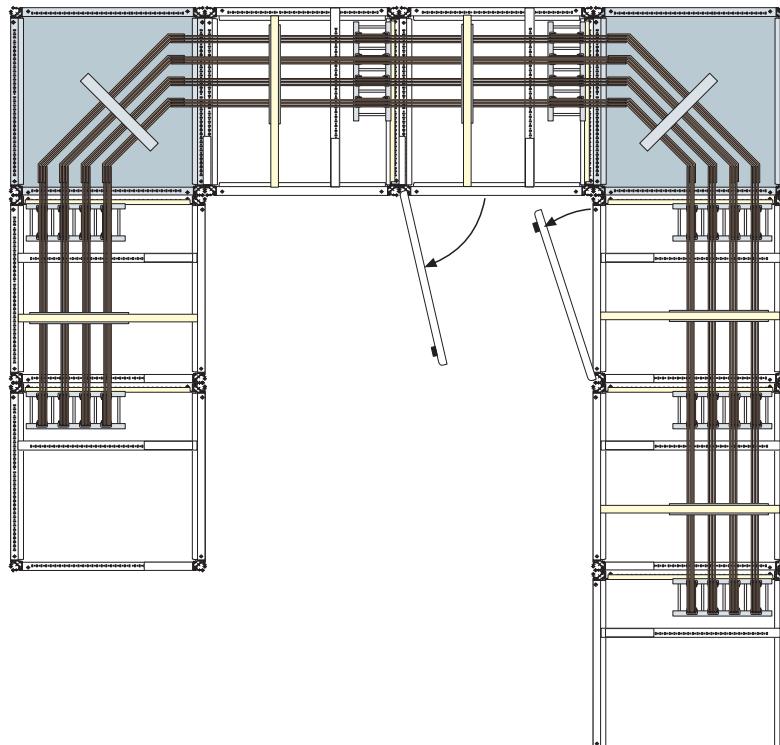

1STC020205F0901

ArTu K Modular Structures

Selection of the structure

Solutions recommended for installation of the apparatus

Apparatus		Type of structure/installation											
		Switchgear without segregation						Segregated switchgear					
		D=150mm Horiz. Vertic.	D=225mm Horiz. Vertic.	D=300mm Horiz. Vertic.	D=500mm Horiz. Vertic.	D=700mm Horiz. Vertic.	D=900mm Horiz. Vertic.	D=500mm Horiz. Vertic.	D=700mm Horiz. Vertic.	D=900mm Horiz. Vertic.			
System Pro M modular apparatus		•	•	•	•	•	•	•	•	•	•	•	•
Tmax T1	front terminals	fixed											
		fixed+diff. mod.											
Tmax T2	front terminals	fixed											
		plug-in											
		fixed+diff. mod.											
Tmax T3	front terminals	fixed											
		plug-in											
		withdrawable											
		fixed+diff. mod.											
Tmax T4	front terminals	fixed											
		plug-in											
		withdrawable											
	rear terminals	fixed											
		plug-in											
		withdrawable											
		fixed+diff. mod.											
Tmax T5	front terminals	fixed											
		plug-in											
		withdrawable											
	rear terminals	fixed											
		plug-in											
		withdrawable											
Tmax T6	front terminals	fixed											
		withdrawable											
	rear terminals	fixed											
		withdrawable											
Tmax T7	front terminals	fixed											
		withdrawable											
	rear terminals	fixed											
		withdrawable											
Emax X1	front terminals	fixed											
		withdrawable											
Emax E1-E2-E3	rear terminals	fixed											
		withdrawable											
Emax E4	rear terminals	fixed											
		withdrawable											

ArTu K Modular Structures

Selection of the structure

Solutions recommended for installation of the apparatus

Apparatus fitted with accessories


Type of structure/installation

			Switchgear without segregation				Segregated switchgear				
			D=225mm	D=300mm	D=500mm	D=700mm	D=900mm	D=500mm	D=700mm	D=900mm	
			Horiz.	Vertic.	Horiz.	Vertic.	Horiz.	Vertic.	Horiz.	Vertic.	
Direct rotary handle											
Motor operator											
Tmax T1	front terminal	fixed	•	—	•	—	•	—	•	—	—
Tmax T2	front terminal	fixed	•	—	•	—	•	—	•	—	—
	rear terminal	fixed	•	—	•	—	•	—	•	—	—
Tmax T3	front terminal	fixed	•	—	•	—	•	—	•	—	—
		plug-in	•	—	•	—	•	—	•	—	—
		withdrawable	•	—	•	—	•	—	•	—	—
		rear terminal	fixed	—	•	—	•	—	•	—	•
			plug-in	—	•	—	•	—	•	—	•
			withdrawable	—	•	—	•	—	•	—	•
Tmax T4	front terminal	fixed	•	•	•	—	•	—	•	—	—
		plug-in	•	—	•	—	•	—	•	—	—
		withdrawable	•	—	•	—	•	—	•	—	—
			fixed	—	•	—	•	—	•	—	•
			plug-in	—	•	—	•	—	•	—	•
			withdrawable	—	•	—	•	—	•	—	•
Tmax T5	front terminal	fixed	•	•	•	•	•	•	•	•	—
		plug-in	•	•	•	•	•	•	•	•	—
		withdrawable	•	•	•	•	•	•	•	•	—
			fixed	—	•	—	•	—	•	—	•
			plug-in	—	•	—	•	—	•	—	•
			withdrawable	—	•	—	•	—	•	—	•
Tmax T6	front terminal	fixed	•	•	•	•	•	•	•	•	—
		withdrawable	—	•	—	•	—	•	—	•	—
			fixed	—	•	—	•	—	•	—	•
			withdrawable	—	•	—	•	—	•	—	•
Tmax T7	front terminal	fisso	—	—	—	—	—	—	—	—	—
		withdrawable	—	—	—	—	—	—	—	—	—
			fixed	—	•	—	•	—	•	—	•
			withdrawable	—	—	—	—	—	—	—	—
Interlocked											
Interlocked motor operated											
Tmax T3	front terminal	fixed	•	—	•	—	•	—	•	—	—
		plug-in	•	—	•	—	•	—	•	—	—
		withdrawable	•	—	•	—	•	—	•	—	—
			fixed	—	•	—	•	—	•	—	•
			plug-in	—	•	—	•	—	•	—	•
			withdrawable	—	•	—	•	—	•	—	•
			fixed+diff.mod.	—	—	—	—	—	—	—	—
Tmax T4	front terminal	fixed	—	—	—	—	—	—	—	—	—
		plug-in	—	—	—	—	—	—	—	—	—
			fixed	—	•	—	•	—	•	—	•
			plug-in	—	•	—	•	—	•	—	•
			withdrawable	—	•	—	•	—	•	—	•
Tmax T5	front terminal	fixed	—	—	—	—	—	—	—	—	—
		plug-in	—	—	—	—	—	—	—	—	—
		withdrawable	—	—	—	—	—	—	—	—	—
			fixed	—	•	—	•	—	•	—	•
			plug-in	—	•	—	•	—	•	—	•
			withdrawable	—	•	—	•	—	•	—	•
Tmax T6	front terminal	fixed	—	—	—	—	—	—	—	—	—
Isomax S6		withdrawable	—	—	—	—	—	—	—	—	—
			fixed	—	•	—	•	—	•	—	•
			withdrawable	—	—	—	—	—	—	—	—
Tmax T7	front terminal	fixed	—	—	—	—	—	—	—	—	—
		withdrawable	—	—	—	—	—	—	—	—	—
			fixed	—	•	—	•	—	•	—	•
			withdrawable	—	—	—	—	—	—	—	—

ArTu K Modular Structures

Kits for installing apparatus

System Pro M modular apparatus Tmax T1-T2-T3 moulded-case circuit-breakers, OT_≤160A and Unifix H supports

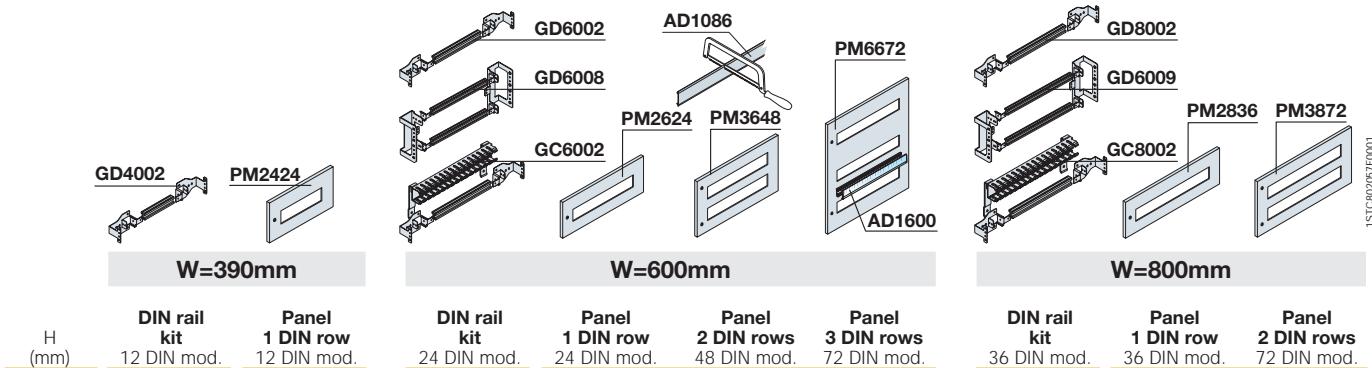

Standard aluminium version

200	GD4002	PM2424
300 ⁽²⁾		
300 ⁽¹⁾	2x GD6011	PM3424
600		

GD6002	PM2624		
GD6002	PM2312		
2x GD6008		PM3648	
3x GD6002			PM6672


GD8002	PM2836	
GD8002	PM2315	
2x GD6009		PM3872
GC8002	PM2836	
GD8010	PM2836	
GD8010	PM2315	
AD1061	PM3836	

⁽¹⁾ Only for System Pro M modular apparatus.

⁽²⁾ Version for Tmax with differential module underplaced RC 221/222.

For Isomax kits, please see page 9/83.

Completion items for installation on DIN rail

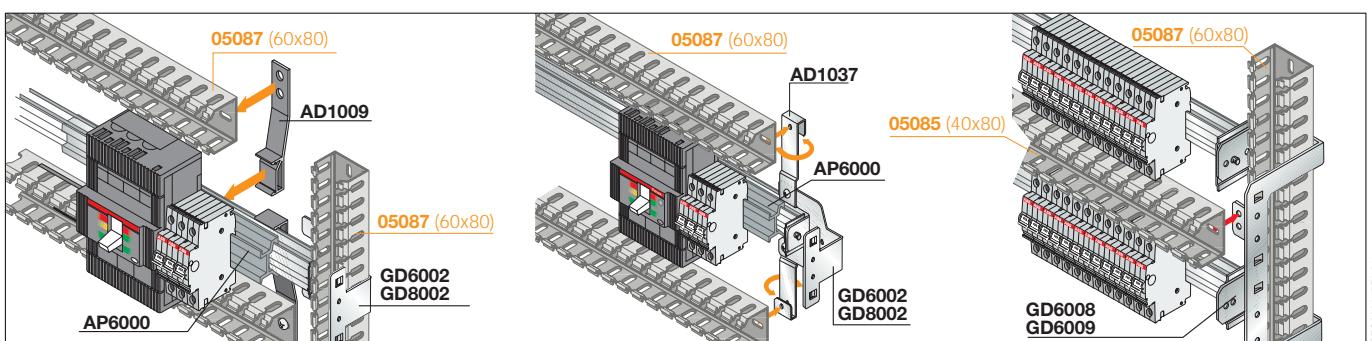

Supports for horizontal wiring duct

Code	Description
AD1009	Horizontal wiring duct (plastic) supports
AD1037	Horizontal wiring duct (metal) supports

Allows assembly of the cabling wiring duct horizontally up to 60x80mm. The AD1009 plastic model can be positioned on the rear of the DIN rail, whereas the AD1037 metal version is fixed onto the brackets of DIN rail GD6002/ GD8002, and allows adjustment of the wiring duct depth.

Depth adapter

Code	Description
AP6000	Depth adapter for Pro M Tmax T1,T2,T3 side-by-side in wall mounted structure
AP6001	Depth adapter for Pro M Tmax T1-T2-T3 side-by-side in floor standing structure


DIN window hole covers

Code	Description
AD1086	DIN L=2000mm hole cover strip - grey RAL 7035
AD1088	DIN 24 modules hole cover strip - grey RAL 7035
AD1089	DIN 36 modules hole cover strip - grey RAL 7035

ArTu K Structures without segregation

Kit for switchgear with reduced frames D=150-225-300mm


Horizontal installation



Circuit-breaker front terminals	N° poles	Dimensions H (mm)	Fixed		Fixed + diff. mod. underneath	
			24 DIN mod. W=600mm	36 DIN mod. W=800mm	24 DIN mod. W=600mm	36 DIN mod. W=800mm
Tmax T1	3-4	200	KT1117		KT1102 ⁽¹⁾	
Tmax T1	4	200			KT2102	KL2103
Tmax T2	3-4	200	KT2117		KT3102	KL3103
Tmax T2	4	200			KT4110	KL4116
Tmax T3	3-4	200	KT3112	KL3113	KT5110	KL5116
Tmax T3	4	300				
Tmax T4	3-4	200	KT4112	KL4115		
Tmax T4	4	200				
Tmax T5	3-4	300	KT5112	KL5114		
Tmax T5	4	300				
Tmax T6	3-4	500	KT6113	KL6113		

⁽¹⁾ Version for Tmax with differential module underplaced RC 221/222

Vertical installation



5

Circuit-breaker front terminals	N° poles	Dimensions H (mm)	Fixed		Fixed + diff. mod. underneath	
			24 DIN mod. W=600mm	36 DIN mod. W=800mm	24 DIN mod. W=600mm	36 DIN mod. W=800mm
Tmax T1-T2-T3 on DIN rail 35		200		(see page 5/10)		
Tmax T3	3-4	300	KT3212			
Tmax T4	3-4	400	KT4212		KT4102	
Tmax T4	4	500			KT5102	KL5102
Tmax T5	3-4	400	KT5212	KL5212		
Tmax T5	4	500				
Tmax T6	3-4	500	KT6213	KL6213		

For Isomax kits, please see page 9/83.

Selection by componentspage 9/51

In-depth technical informationpage 6/10

Overall dimensionspage 8/14


ArTu K Structures without segregation

Kit for switchgear with reduced frames D=150-225-300mm


Apparatus of the OETL series up to 400A and OESA up to 160 A (in both cases not motor operated) can be installed inside the floor-mounted ArTu K switchgear. According to the dimensions of the apparatus, a plain back plate must be used (PF or FR...) and a panel (PC or PR...) of appropriate height and depth must be used. The useful space between panel and door is 50mm. For larger-sized handles, use plain recessed panels PR... (see dimensions in table).

Kit for OT125-400

vertical installation




horizontal installation



H (mm)	Width (mm)	OT200/250 OT315/400	OT125/160	OT200/250 OT315/400
300	600	KO2260	KO1201	KO2261
300	800	KO2280		KO2281

Plain back plates, plain and ventilated panels

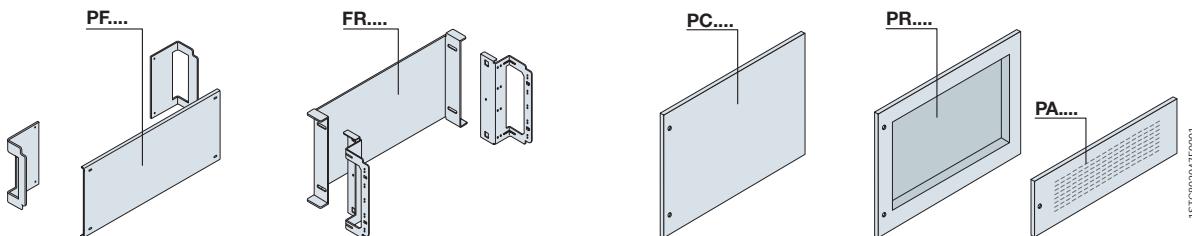

Back plates




H (mm)	Plain flat		Plain recessed	
	24 DIN mod. W=600mm	36 DIN mod. W=800mm	24 DIN mod. W=600mm	36 DIN mod. W=800mm
100	PF2610	PF2810	FR2601	FR2801
200				
300				
400	PF4610	PF4810	FR4601	FR4801
600				
800				
1600				
1800				
2000				

Panels


H (mm)	Plain flat		Plain recessed		Ventilated
	24 DIN mod. W=600mm	36 DIN mod. W=800mm	24 DIN mod. W=600mm	36 DIN mod. W=800mm	24 DIN mod. W=600mm
100	PC1600	PC1800	PR2600	PR2800	PA1600
200	PC2600	PC2800			PA2600
300	PC3600	PC3800			
400	PC4600	PC4800			
600	PC6600	PC6800			
800	PC8600	PC8800			
1600	PC1660	PC1680			
1800	PC1860	PC1880			
2000	PC2060	PC2080			

Can be used to mount all the non-modular apparatus. Useful dimensions - see page 8/20.

Useful internal space

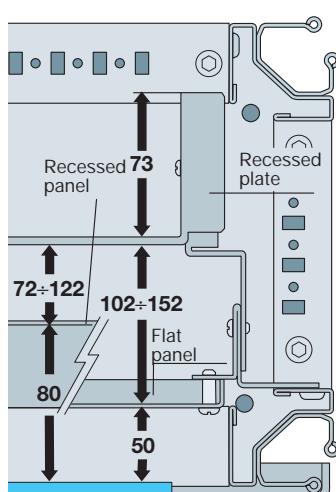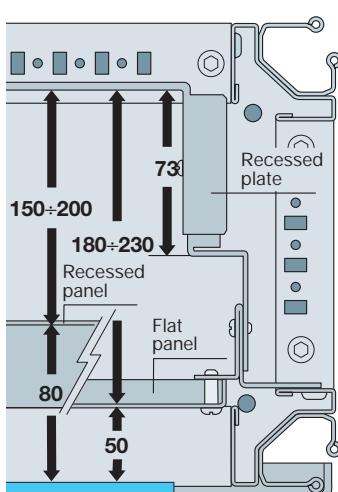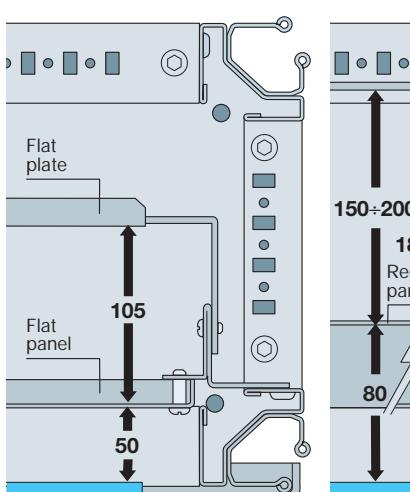

Minimum distance between back plate and busbar holder

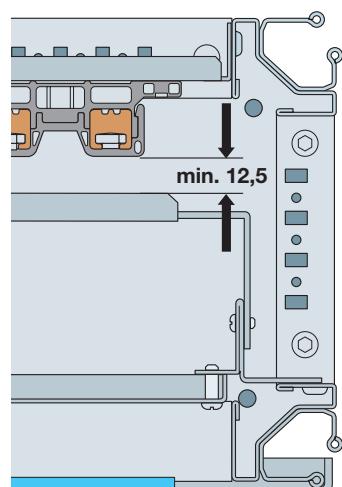


1STCB0204/F0001

ArTu K Structures without segregation

Kit for switchgear with standard frames D≥225mm


Horizontal installation



	Fixed	Fixed + diff. mod. underneath			Plug-in	Withdrawable				
	12 DIN mod. W=390mm	24 DIN mod. W=600mm	36 DIN mod. W=800mm	12 DIN mod. W=390mm	24 DIN mod. W=600mm	36 DIN mod. W=800mm	12 DIN mod. W=390mm	24 DIN mod. W=600mm	12 DIN mod. W=390mm	24 DIN mod. W=600mm
Tmax T1	3-4	200		KT1411	KT1111					
Tmax T1	4	200								
Tmax T2	3-4	200		KT2411	KT2111					
Tmax T2	4	200	(¹)							
Tmax T3	3-4	200		KT3419	KT3119	KL3114				
Tmax T3	4	300	(¹)							
Tmax T4	3-4	200		KT4411	KT4111					
Tmax T4	3-4	300								
Tmax T4	4	200								
Tmax T5 (400A)	3-4	300		KT5411	KT5111	KL5115				
Tmax T5	3-4	300		KT5411	KT5111	KL5115				
Tmax T5	4	300								
Tmax T6	3-4	500			KT6111					
Tmax T7	3-4	400		KT7110 ⁽²⁾	KT7111	KL7112				

(¹) Version for Tmax with differential module underplaced RC 221/222

Vertical installation



Front or rear circuit-breaker terminals	N° poles	Dimensions H (mm)	Fixed	Fixed + diff. mod. underneath			Plug-in	Withdrawable	
			12 DIN mod. W=390mm	24 DIN mod. W=600mm	36 DIN mod. W=800mm	12 DIN mod. W=390mm	24 DIN mod. W=600mm	12 DIN mod. W=390mm	24 DIN mod. W=600mm
Tmax T1-T2-T3				(vedere pag. 5/10)					
on DIN 35 rail	3-4	200		KT3416	KT3211	KL3212			
Tmax T3	3-4	300							
Tmax T3	3-4	400		KT4412	KT4211				
Tmax T4	3-4	400			KT4116 ⁽⁵⁾	KL4118 ⁽³⁾			
Tmax T4 side by side	3-4	400					KT4103		
Tmax T4	4	500							
Tmax T5 (400A)	3-4	400		KT5412	KT5211	KL5213			
Tmax T5	3-4	400		KT5412	KT5211	KL5213			
Tmax T5 side by side	3-4	400			KT5214 ⁽⁴⁾	KL5214 ⁽⁵⁾			
Tmax T5	3-4	500						KT5221	KT5231
Tmax T5	4	500							
Tmax T5 side by side	3-4	500						KT5222	KT5232
Tmax T6	3-4	500		KT6211	KL6214				
Tmax T6 side by side	3-4	500			KL6124				
Tmax T7	3-4	500		KT7211 ⁽⁶⁾	KL7212 ⁽⁶⁾				
Isomax S8	3-4	900		KS8211					KT7231 ⁽⁶⁾

(¹) Only front terminals,

(²) Only rear terminals,

(³) Kit for n° 4 T4 circuit-breakers side by side,

(⁴) Kit for n° 2 T4/T5 circuit-breakers side by side,

(⁵) Kit for n° 3 T5 circuit-breakers side by side.


(⁶) Order N°2 blind panels H=100mm (PC....).

For Isomax kits, please see page 9/83.

ArTu K Structures without segregation

Kit for switchgear with standard frames D≥225mm

Horizontal installation

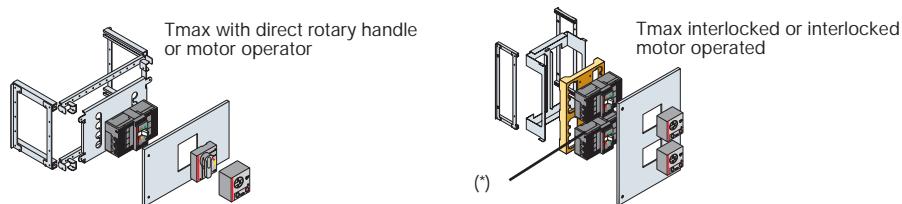


	Fixed			Plug-in			Withdrawable		
	Direct rotary handle	Motor operator	Interlocked	Direct rotary handle	Motor operator	Interlocked	Direct rotary handle	Motor operator	Interlocked
24 mod. DIN L=600mm									
Tmax T1	3-4	200		KT1112	KT1111				
Tmax T2	3-4	200		KT2112	KT2111				
Tmax T3	3-4	200		KT3114	KT3119				
Tmax T3	3-4	600		KT3131 KT3131					
Tmax T4	3-4	200		KT4111	KT4111				
Tmax T4	3-4	300							
Tmax T4	3-4	600							
Tmax T5 (400A)	3-4	300		KT5111	KT5111				
Tmax T5	3-4	300		KT5111	KT5111				
Tmax T5	3-4	600							
Tmax T6	3-4	500		KT6112	KT6115				
Tmax T6	3-4	800			KT6116 ⁽²⁾	KT6117 ⁽²⁾			
Tmax T7	3-4	400			KT7111 ⁽¹⁾	KT7111 ⁽¹⁾	KT7111 ⁽¹⁾		

⁽¹⁾ Kit for width 800mm **KL7112**.

⁽²⁾ Use with rear connection.

Vertical installation

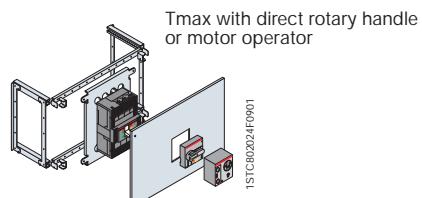

	Fixed			Plug-in			Withdrawable		
	Direct rotary handle	Motor operator	Interlocked	Direct rotary handle	Motor operator	Interlocked	Direct rotary handle	Motor operator	Interlocked
24 mod. DIN L=600mm									
Front or rear circuit-breaker terminals N° poles Dimensions H (mm)									
Tmax T4	3-4	400		KT4211	KT4211				
Tmax T5 (400A)	3-4	400		KT5211	KT5211				
Tmax T5	3-4	400		KT5211	KT5211				
Tmax T5	3-4	500							
Tmax T6	3-4	500		KT6120	KT6121				
Tmax T7	3-4	500			KT7211 ⁽²⁾	KT7211 ⁽²⁾	KT7211 ⁽²⁾		

According to the type of set-up provided, the composition of the kit for installing circuit-breakers in ArTu K switchgear without segregation varies according to what is indicated in the table. To select the glass door to use (standard or extending) see the table on page 4/8.

(¹) Interlocking plate supplied with the circuit-breakers.

(²) Only rear terminals.

(²) Kit for width 800mm **KL7212**.


(³) Kit for width 800mm **KL7213**.

For Isomax kits, please see page 9/83.

ArTu K Structures without segregation

Kit for switchgear with standard frames D≥225mm

Vertical installation

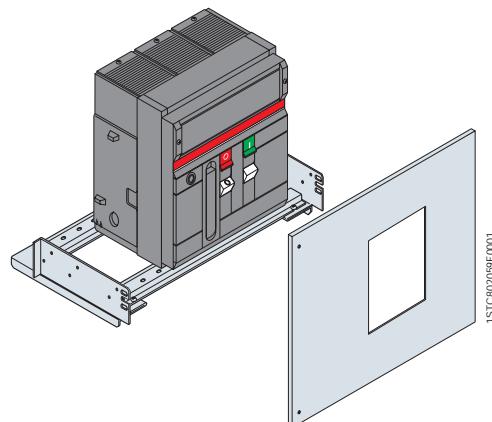


		Fixed	Withdrawable
Circuit-breaker	N° poles	Dimensions H (mm)	
Emax X1/X1 interlocked	3-4	500	24 DIN mod. W=600mm
Emax E1-E2-E3	3-4	600	KL7212⁽¹⁾
Emax E3/E3 interlocked	3-4	600	KE3215
Emax E4/E4 interlocked	3-4	600	KE4215
			KE5215
		36 DIN mod. W=800mm	24 DIN mod. W=600mm
		KT7211⁽¹⁾	KT7231⁽¹⁾
		KE3235	KE4235
			KE5235
		36 DIN mod. W=800mm	
		KL7213⁽¹⁾	

The kit for installing Emax air circuit-breakers in the versions of switchgear indicated includes the pre-drilled front panel and the resting crosspieces. To install Emax E1...E3 circuit-breakers, always use structures with 700mm depth, for Emax E4 use structures with 900mm depth or several structures placed side by side at the rear.

⁽¹⁾ This kit can also be used for motor operated, interlocked and interlocked motor operated version.

Useful internal space

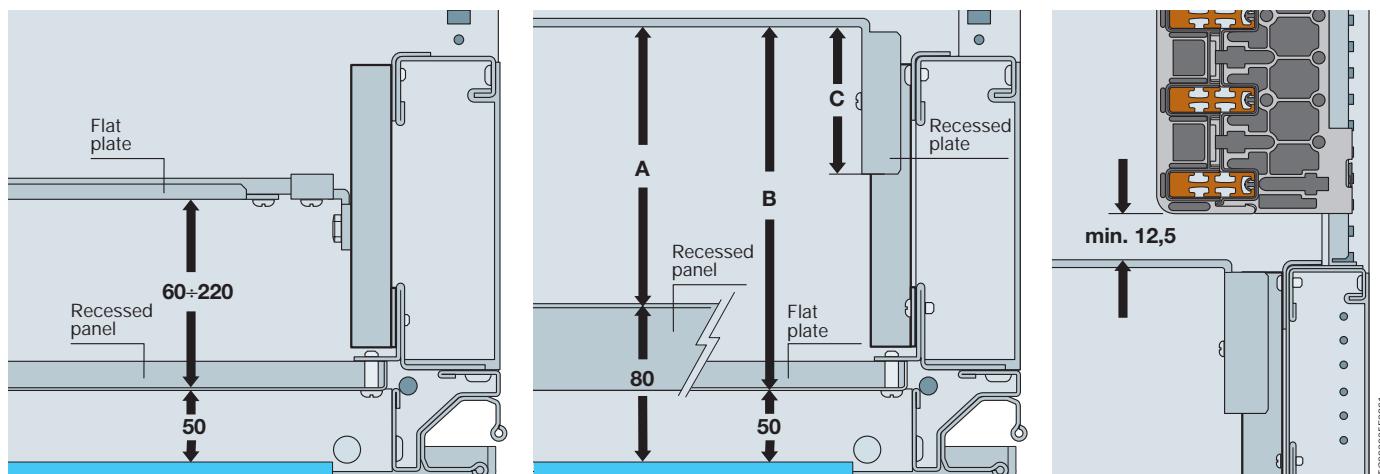

Structure	H recessed place (mm)	A (mm)	B (mm)	C (mm)
ArTu K D≤300mm	200	45+220	75+250	28
	400	110+220	140+250	95
ArTu K D≥500mm	200	45+200	75+230	28
	400	110+270	140+300	95
	600	250+380	280+410	240

Minimum distance between back plate and busbar holder

ArTu K Structures without segregation

Kit for switchgear with standard frames D≥225mm


Apparatus of the OETL series up to 1600A (not motor operated) and OESA up to 800A (not motor operated) can be installed inside the floor-mounted ArTu K switchgear.

Again in this case, according to the dimensions of the apparatus, a plain back plate must be used (PF or FR...) and a panel (PC or PR...) of appropriate height and depth.


The useful space between panel and door is 50mm. For larger-sized handles, use plain recessed panels RR... (see dimensions in table).

Kit for OT125÷1600

vertical installation







horizontal installation



H (mm)	Width (mm)	OT200/250 OT315/400	OT125 OT160	OT630 OT800	OETL1000 OETL1600	OT200/250 OT315/400
300	600	KO2260	KO1201			KO2261
300	800	KO2280				KO2281
400	600			KO3660		
400	800			KO3680		
600	600				KO1251 ⁽¹⁾	

⁽¹⁾ with recessed panel

Plain back plates, plain and ventilated panels



1STC802040F001

Back plates

H (mm)	Plain flat			Plain recessed	
	12 DIN mod. W=390mm	24 DIN mod. W=600mm	36 DIN mod. W=800mm	24 DIN mod. W=600mm	36 DIN mod. W=800mm
100	PF2401	PF2601	PF2801	FR2600	FR2800
200	PF3403	PF3601	PF3801		
300	PF4401	PF4601	PF4801	FR4600	FR4800
400	PF6401	PF6601	PF6801	FR6600	FR6800
600					
800					


Counter-door or whole blind panels

1600			
1800			
2000			

H (mm)	Plain flat			Plain recessed		Ventilated
	12 DIN mod. W=390mm	24 DIN mod. W=600mm	36 DIN mod. W=800mm	24 DIN mod. W=600mm	36 DIN mod. W=800mm	24 DIN mod. W=600mm
100	PC1400	PC1600	PC1800	PR2600	PR2800	PA1600
200	PC2400	PC2600	PC2800			PA2600
300	PC3400	PC3600	PC3800			
400	PC4400	PC4600	PC4800	PR4600	PR4800	
600	PC6400	PC6600	PC6800	PR6600	PR6800	
800	PC8600	PC8800				

Can be used to mount all the non-modular apparatus. Useful dimensions - see page 8/20.


Back plates

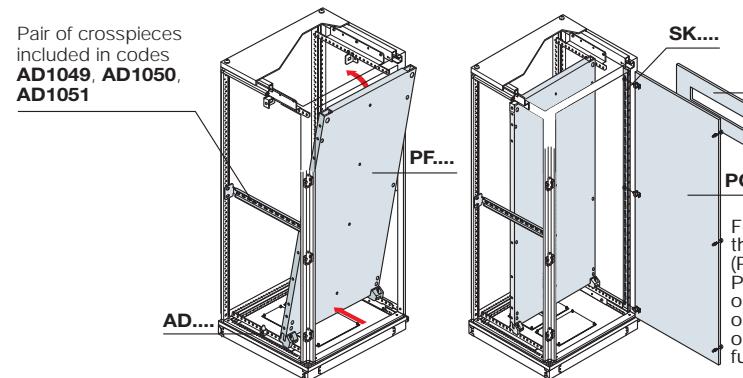

Galvanised sheet back plate

H (mm)	24 DIN mod. W=600mm	36 DIN mod. W=800mm
	PF1806	PF1808
1800		
2000	PF2006	PF2008

Useful internal space

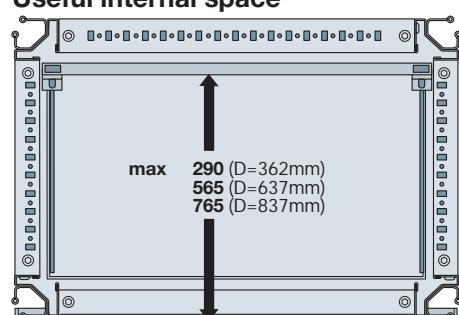

1STC802042AF001


Track for front insertion

D=362mm	D=637mm	D=837mm
AD1049	AD1050	AD1051

ArTu K Structures without segregation

Kit for switchgear with standard frames D≥225mm


Panels for square measuring instruments



2-instrument panel

H (mm)	72x72mm	96x96mm
200	24 DIN mod. W=600mm	36 DIN mod. W=800mm
	PS2720	PS2728

24 DIN mod. W=600mm	36 DIN mod. W=800mm
PS2960	PS2968



4-instrument panel

72x72mm	96x96mm
24 DIN mod. W=600mm	24 DIN mod. W=600mm
PS4720	PS4728

36 DIN mod. W=800mm	36 DIN mod. W=800mm
PS4960	PS4968

These allow installation of measuring instruments and relative changeover switches.


Square instrument hole covers

Code Description

EV1135 Hole cover of 72x72mm instrument black RAL 9005

EV1136 Hole cover of 96x96mm instrument black RAL 9005

Installation of terminal boxes on DIN rail

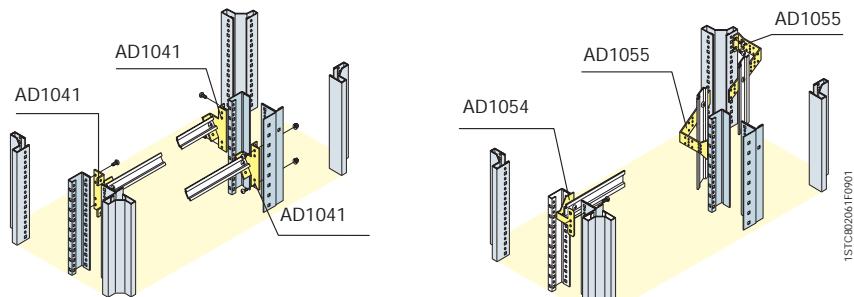


Terminal box mounting position

Installation on DIN rail	Structure
Horizontal	AD1054
Horizontal angled 45°	AD1041
Vertical	

Internal cable container	External cable container
AD1055	AD1055

Installation of terminal boxes on DIN rail and earthing busbar

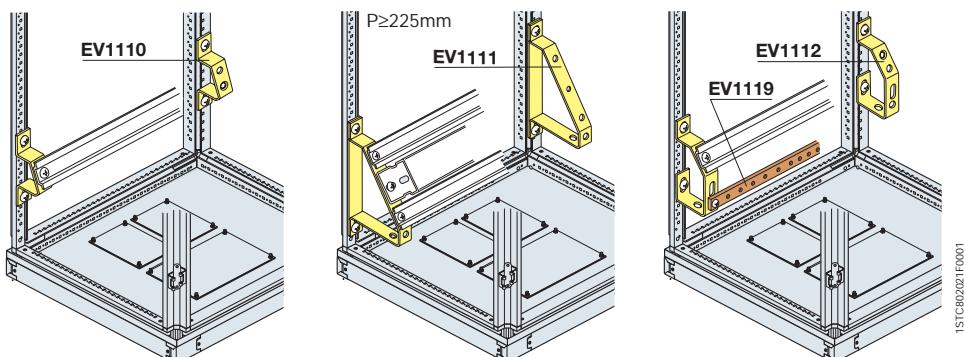

1STC02021F0901


Angled supports for terminal boxes and earthing busbar

Code	Description
EV1110-EV2110	Angled supports 1 row of terminals
EV1111	Angled supports double row of terminals
EV1112-EV2112	Angled supports 1 row of terminals + earth

ArTu K segregated structures


Kit for switchgear with segregated frames D≥500mm

Installation on DIN rail

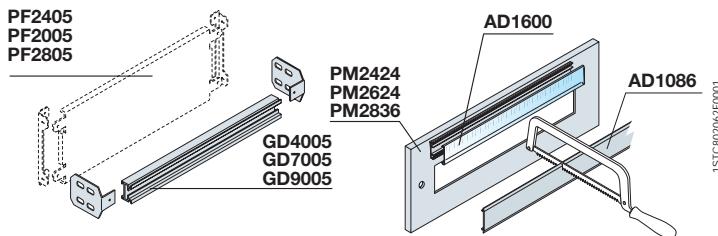

	W=390mm		W=600mm		W=800mm	
H (mm)	DIN rail kit 12 DIN mod.	Panel 1 DIN row 12 DIN mod.	DIN rail kit 24 DIN mod.	Panel 1 DIN row 24 DIN mod.	DIN rail kit 36 DIN mod.	Panel 1 DIN row 36 DIN mod.
200	GD4005	PM2424	GD7005	PM2624	GD9005	PM2836

Back plates, square measuring instrument panels and blind panels

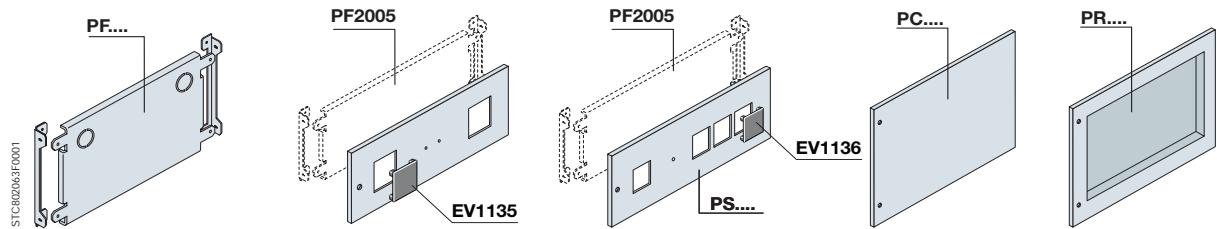

5 Back plates

H (mm)	Blind flat		
	12 DIN mod. W=390mm	24 DIN mod. W=600mm	36 DIN mod. W=800mm
100			
200	PF2405	PF2005	PF2805
300	PF3405	PF3005	PF3805
400	PF4405	PF4005	PF4805
600	PF6405	PF6005	PF6805
800	PF8005	PF8805	

Instrument support panels



2 instruments		4 instruments	
72x72mm	96x96mm	72x72mm	96x96mm
24 DIN mod. W=600mm	24 DIN mod. W=600mm	24 DIN mod. W=600mm	24 DIN mod. W=600mm
PS2720	PS2960	PS4720	PS4960

Blind panels

flat		recessed	
12 DIN mod. W=390mm	24 DIN mod. W=600mm	36 DIN mod. W=800mm	24 DIN mod. W=600mm
PC1400	PC1600	PC1800	
PC2400	PC2600	PC2800	PR2600
PC3400	PC3600	PC3800	
PC4400	PC4600	PC4800	PR4600
PC6400	PC6600	PC6800	PR6600
PC8600	PC8800		

These allow installation of measuring instruments with dimensions of 72x72mm and 96x96mm.
They are available in the versions for two or four instruments and relative change-over switches.

Useful internal space

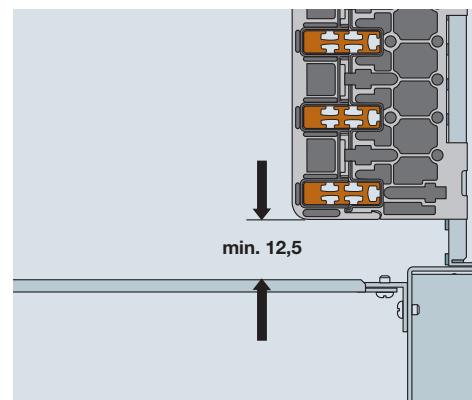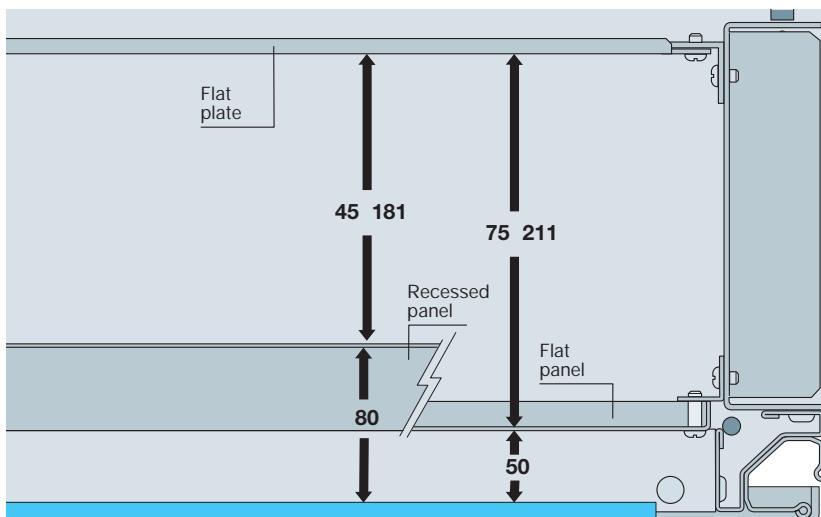


Minimum distance between back plate and busbar holder.

ArTu K segregated structures

Kit for switchgear with segregated frames D≥500mm

Horizontal installation




Front or rear circuit-breaker terminals N° poles H (mm)		Dimensions	Fixed	Fixed+diff. mod undern.	Plug-in	Withdrawable				
Tmax T1	3-4	200	12 DIN mod. W=390mm	24 DIN mod. W=600mm	KT1410	KT1110	KT1100 ⁽¹⁾	KT2420	KT2120	KT4130
Tmax T2	3-4	200			KT2410	KT2110		KT3420	KT3120	KT5430
Tmax T3	3-4	200			KT3410	KT3110			KT4113	KT5431
Tmax T4	3-4	200			KT4120	KT4124				KT6130
Tmax T4	3-4	300								
Tmax T5 (400A)	3-4	300			KT5122	KT5136			KT5420	
Tmax T5	3-4	300			KT5122	KT5136			KT5421	
Tmax T6	3-4	500				KT6110				
Tmax T7	3-4	400			KT7115					

⁽¹⁾ Version for Tmax with differential module underplaced RC 221/222

5

Vertical installation

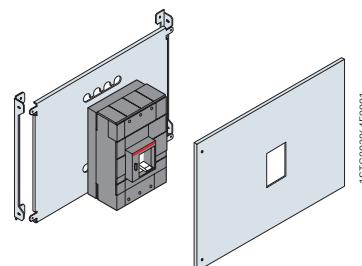


Front or rear circuit-breaker terminals N° poles H (mm)		Dimensions	Fixed	Fixed + diff. mod.	Plug-in	Withdrawable		
Tmax T4	3-4	400	12 DIN mod. W=390mm	24 DIN mod. W=600mm	KT4129	KT4121	KT4222	KT4128
Tmax T5 (400A)	3-4	400			KT5137	KT5128		KT5223
Tmax T5	3-4	400			KT5137	KT5128		KT5125
Tmax T6	3-4	500				KT6210		KT5126
Tmax T7	3-4	500				KT7215		KT6230
Isomax S8	3-4	900				KS8210		KT7230

For Isomax kits, please see page 9/83.

ArTu K segregated structures

Kit for switchgear with segregated frames D≥500mm

Horizontal installation

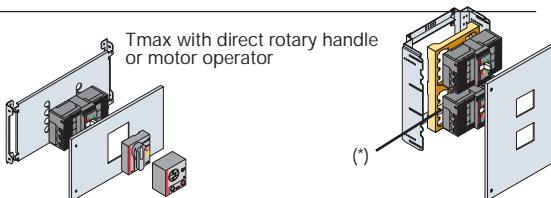

Front circuit-breaker terminals	N° poles	Dimensions H (mm)
Tmax T2	3-4	200
Tmax T3	3-4	200
Tmax T3	3-4	600
Tmax T4	3-4	200
Tmax T4	3-4	300
Tmax T4	3-4	600
Tmax T5 (400A)	3-4	300
Tmax T5	3-4	300
Tmax T5	3-4	600
Tmax T6	3-4	500
Tmax T6	3-4	800
Tmax T7	3-4	400

Fixed				Plug-in				Withdrawable			
Direct rotary handle	Motor operator	Interlocked	Direct rotary handle	Direct rotary handle	Motor operator	Interlocked	Direct rotary handle	Direct rotary handle	Motor operator	Interlocked	Direct rotary handle
KT2210											
KT3115				KT3124							
		KT3132	KT3132								
	KT4124	KT4310									
			KI4116	KI4116			KI4116	KI4116			
			KT5136	KT5310							
			KT5136	KT5310							
			KI5116	KI5116			KI5116	KI5116			
			KT6220	KT6221							
					KT6142	KT6143					
					KT7115	KT7115	KT7115				

Tmax interlocked or interlocked motor operated

24 DIN mod. W=600mm

24 DIN mod. W=600mm

24 DIN mod. W=600mm

KT4130 KT4320*

KI4117 KI4118

KT5430 KT5320*

KT5431 KT5321*

KI5117 KI5118


KT6130 KT6134

KT6144 KT6145

* Only Form 2 segregation

5

Vertical installation (only Form 2)

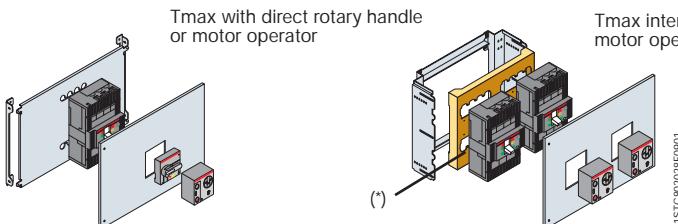

Rear circuit-breaker terminals	N° poles	Dimensions H (mm)
Tmax T6	3-4	500
Tmax T7	3-4	500

Fixed				Plug-in				Withdrawable			
Direct rotary handle	Motor operator	Interlocked	Direct rotary handle	Direct rotary handle	Motor operator	Interlocked	Direct rotary handle	Direct rotary handle	Motor operator	Interlocked	Direct rotary handle
KT6132	KT6133										
		KT7215	KT7215	KT7215							

According to the type of set-up provided, the composition of the kit for installing Tmax circuit-breakers in segregated ArTu K switchgear varies according to what is indicated in the table. To select the glass door to use (standard or extending) see the table on page 4/8.


(*) Interlocking plate to be ordered with the circuit-breakers.

For Isamax kits, please see page 9/83.

ArTu K segregated structures

Kit for switchgear with segregated frames D≥500mm

Vertical installation

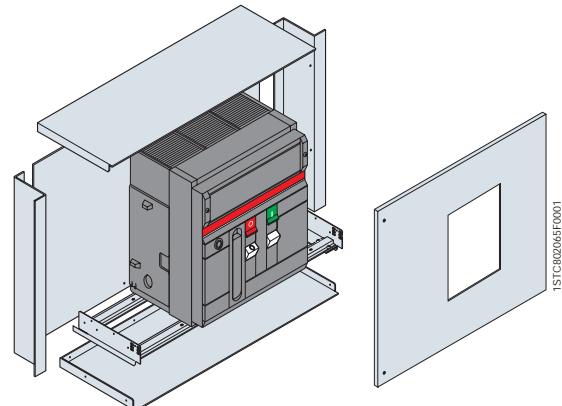

Circuit-breaker	N° poles	Dimensions H (mm)	Fixed		Withdrawable	
			24 DIN mod. W=600mm	36 DIN mod. W=800mm	24 DIN mod. W=600mm	36 DIN mod. W=800mm
Emax X1/X1 interlocked	3-4	500	KT7215⁽¹⁾		KT7230⁽²⁾	
Emax E1-E2	3-4	600	KE2215		KE2235	
Emax E3	3-4	600	KE3205		KE3236	
Emax E3/E3 interlocked	3-4	600		KE4214		KE4234
Emax E4/E4 interlocked	3-4	600		KE5214		KE5234

The kit for installing Emax air circuit-breakers in the versions of switchgear indicated includes the pre-drilled front panel and the resting crosspieces. To install Emax E1...E3 circuit-breakers, always use structures with 700mm depth, for Emax E4 use structures with 900mm depth or several structures placed side by side at the rear.

To complete the 36 module structure, ask for the special back plates.

⁽¹⁾ This kit can also be used for the motor operated version.

⁽²⁾ This kit can also be used for the motor operated, interlocked and interlocked motor operated versions.

ArTu K segregated structures

Form 2-3-4 segregations for structures D≥500mm


Segregations according to the IEC 60439-1 Standard

By form of segregation, the type of subdivision provided inside the switchgear is meant. Segregation by means of barriers or partitions (metallic or insulating) can have the purpose of:

- Ensuring protection against direct contacts (at least IPXXB), in the case of accessing a part of the switchgear with the power turned off, in relation to the rest of the switchgear left live.

- Reducing the probability of an internal arc striking and propagating.
- Preventing passage of solid bodies between different parts of the switchgear (at least IP2X degree of protection).

By partition, the separation element between two compartments is meant, whereas the barrier protects the operator against direct contacts and the effects of an arc of the breaking apparatus in the normal access direction.

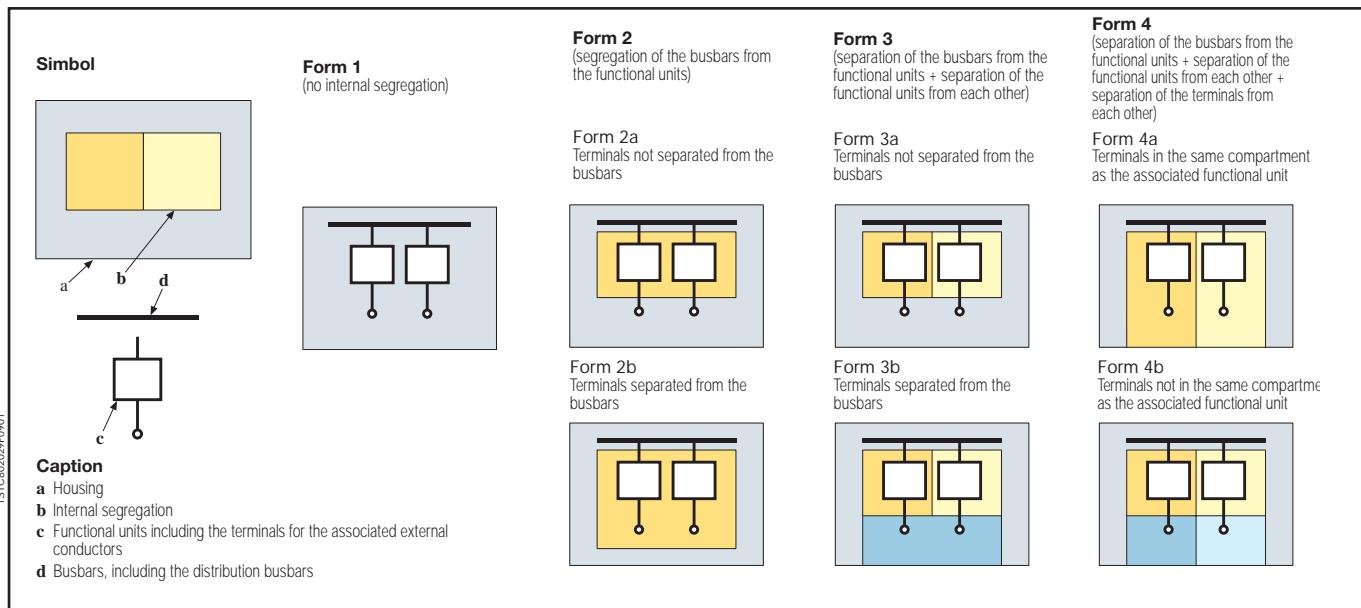

1STC90202965901

5

Note

The segregations can be made in ArTu K 390 and 600mm wide switchgear in 500/700/900mm depths with closed functional frame and segregated kits.


Form 2 is obtained automatically using the segregated type kits.

To obtain the desired form of segregation, the segregations kits relative to the previous forms must be ordered (e.g. Form 4 = Form 2 kit + Form 3 kit + Form 4 kit).

ArTu K segregated structures

Form 2-3-4 segregations for structures D≥500mm


Examples of segregation

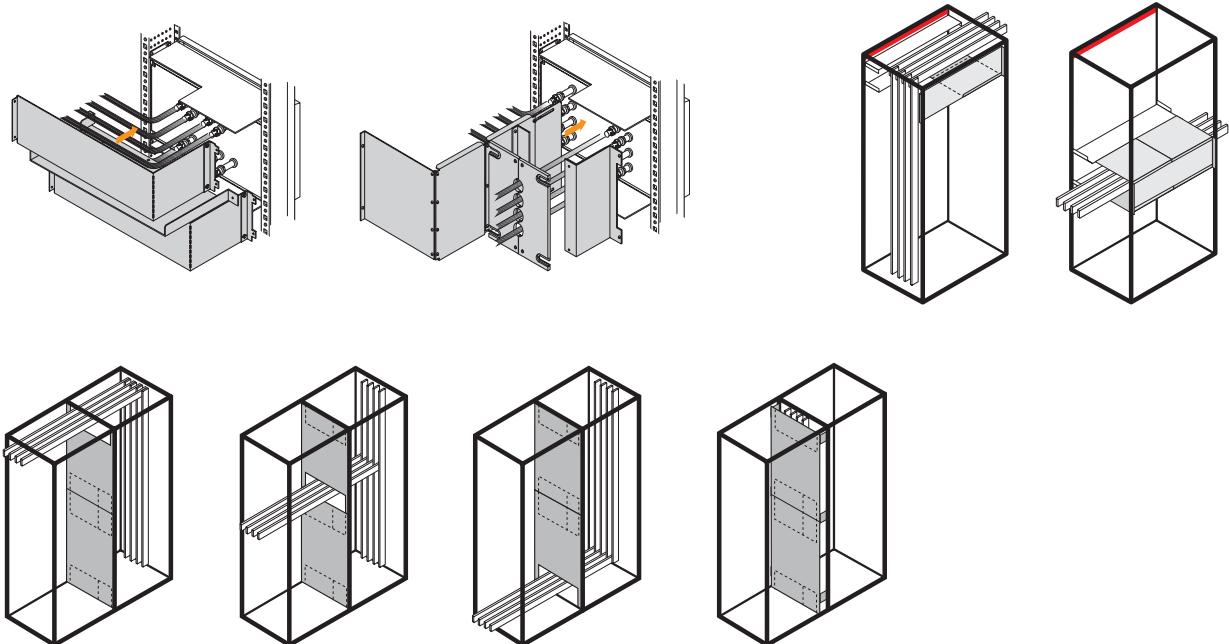

ArTu K segregated structures

Form 2-3-4 segregations for structures D≥500mm


Forms of segregation

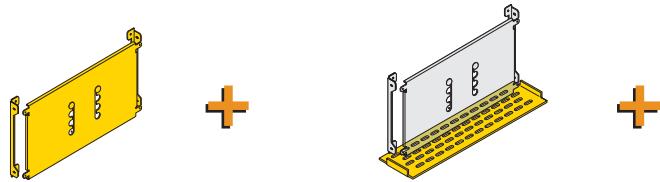


Selection of segregation according to the height of the kit

Installation	Height kit (mm)	Form 2a	Form 3a
Horizontal moulded-case circuit-breaker 	200	See kit on page 5/20	12 DIN mod. W=390mm
	300		SH4000
	400		SH6000
	500		SH8000
	600		24 DIN mod. W=390mm
	600		24 DIN mod. W=390mm
	800		SH8000
Vertical moulded-case circuit-breaker 	200	See kit on page 5/19 See kit on page 5/20	SH4000
	400		SH6000
	500		SH8000
	600		
	800		
Vertical air circuit-breaker 1STC802030F0001	500	Emax X1	Included in Form 2 kit
	600	Emax E1-E2-E3 fixed	Included in Form 2 kit
	600	Emax E1-E2-E3 withdrawable	Included in Form 2 kit
		Emax E4 fixed	
		Emax E4 withdrawable	


Uprights for switchgear D=900mm

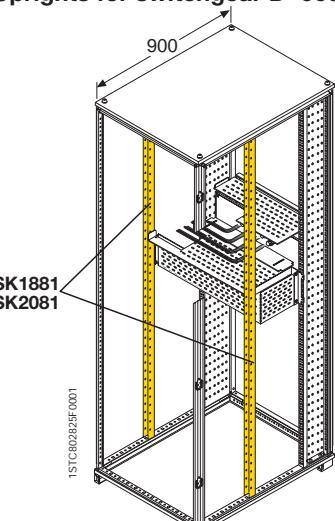

Example of Form 2a segregation

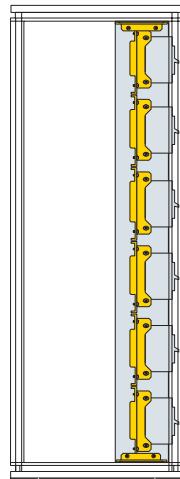


Example of Form 3a segregation

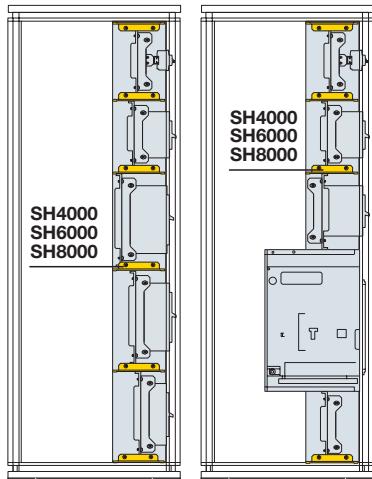

ArTu K segregated structures

Form 2-3-4 segregations for structures D≥500mm

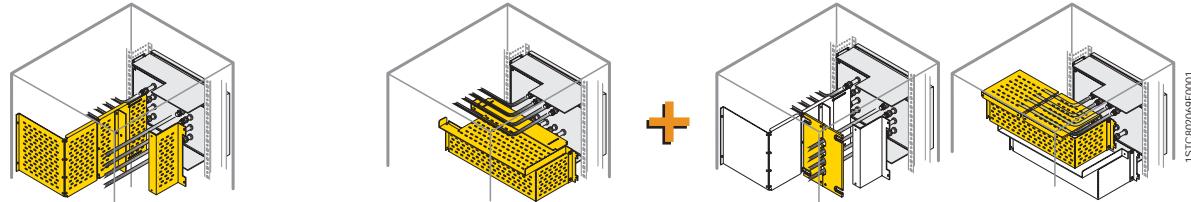

Form 3b

Horizontal circuit-breaker

12 DIN mod.
W=390mm
D=500/700

24 DIN mod.
W=600mm
D=500/700

24 DIN mod.
W=600mm
D=900

FH3224 FH3220 FH1020

FH3434 FH3430 FH1030

FH3544 FH3540 FH1040

FH3650 FH1050

FH3764 ⁽¹⁾ FH3760 FH1060

FV4557 FV4557

FH3680 ⁽²⁾

Vertical circuit-breaker

Structure
D=500mm

Structure
D=700mm

Structure
D=900mm

Form 4b

Horiz. circ.-breaker

Structure
D=500/700/900mm

Vertical circuit-breaker

Structure
D=500mm

Structure
D=700mm

Height kit
(mm)

FH4220

FH4430

FH4540

FH4650

FH4760

Included in
Form 3b kit

4 x FH4220

200

300

400

500

600

600

800

FV3456

FV3458

FV3556

FV3558

FV3668

FV3788

FV4456

FV4458

200

400

FV4556

FV4558

500

FV4668

FV4788

600

800

5

FH3960

FH3960

FH3961

FH3965

FH3966

FV4558

500

FV4558

600

FV4558


600

⁽¹⁾ Only for blind back plate H=600mm.


⁽²⁾ Only for Tmax T6 interlocked in fixed/plug-in/withdrawable/motor operated versions.

Emax segregation Form 3b

Rear segregation

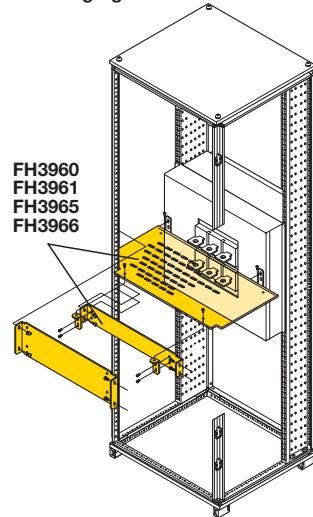

Example of Emax segregation Form 4b

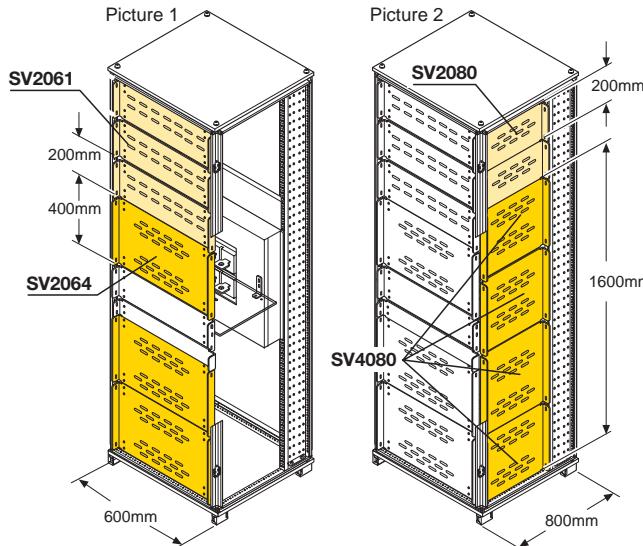

Picture 1

Rear segregation

Structure height	Fixed Emax installed
1800mm	2000mm
N 3 SV2064	N 3 SV2064
N 2 SV2061	N 3 SV2061
N 3 SV2064	N 3 SV2064
N 1 SV2061	N 2 SV2061

Picture 2

Side segregation


Structure height	Fixed Emax installed
1800mm	2000mm
N 1 SV4080	N 1 SV4080
N 1 SV2080	N 2 SV2080

ArTu K segregated structures

Busbar segregation

Busbar segregation

The SH2030 and SV2061 versions are reciprocally indispensable for assembly. The SH2030 model and SH4030 model must also be used in combination with shelves SH4000 and SH6000 to make complete horizontal segregations of the busbar system.

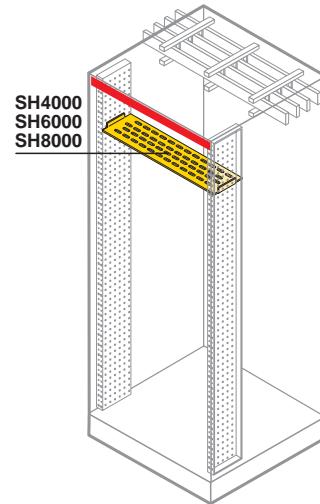

Horizontal Busbars

Universal horizontal shelf

Horizontal busbar segregation

Vertical busbar segregation H=200mm

Vertical busbar segregation H=400mm

Horizontal segregation for internal cable container W=200mm

Horizontal segregation for external cable container W=300mm

Horizontal segregation for structure used as busbar container W=390mm

Horizontal segregation for structure used as busbar container W=600mm

12 DIN mod.
W=390mm

SH4000 (1)

24 DIN mod.
W=600mm


SH6000 (1)

36 DIN mod.
W=800mm

SH8000 (1)


5

Side segregation



Spacers for AD1042 segregations

Allow simultaneous assembly of the vertical segregations and crosspieces positioned between the functional frame and rear upright (cannot be coupled with the side panel).

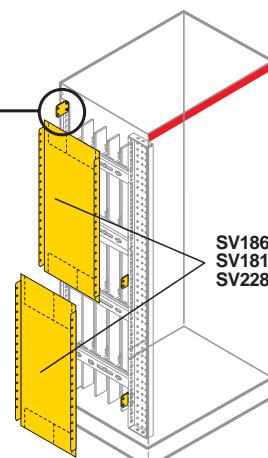

Vertical Busbars

Vertical segregation for structure H=1800mm

Vertical segregation for structure H=2000mm

Rear segregation for internal cable container

Segregation/front door for internal cable container W=200mm

Segregation/front door for external cable container W=300mm

Structure
D=500mm

SV1860

Structure
D=700mm

SV1880

Structure
D=900mm

SV1815


SV2265

SV2285

SV2015

ArTu K segregated structures


Busbar segregation

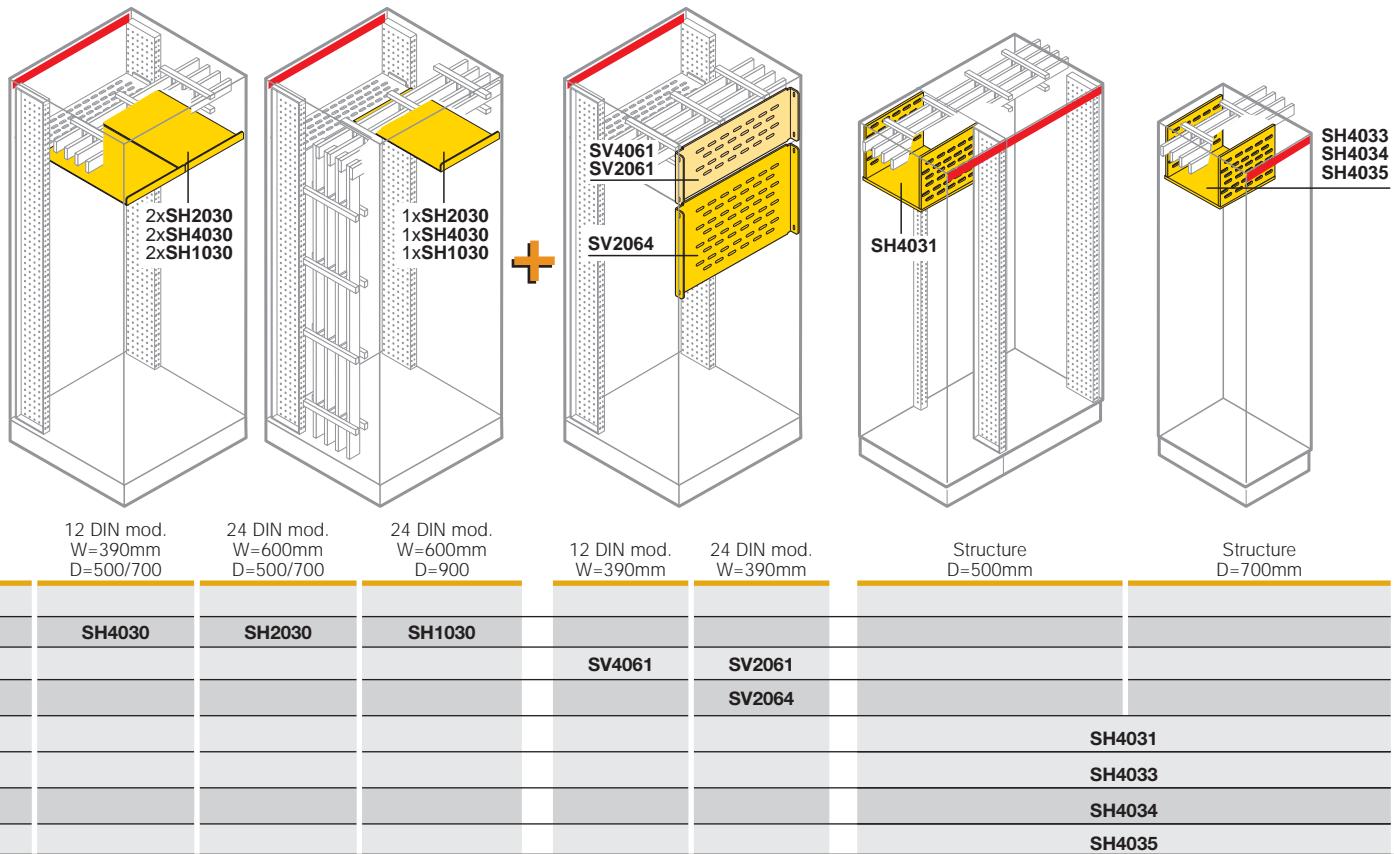

5

Rear segregation

Internal cable container

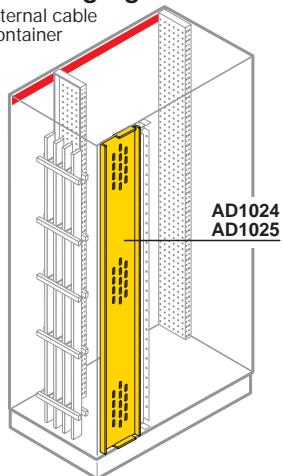


Structure
H=1800mm

AD1024

Front segregation


Internal cable container

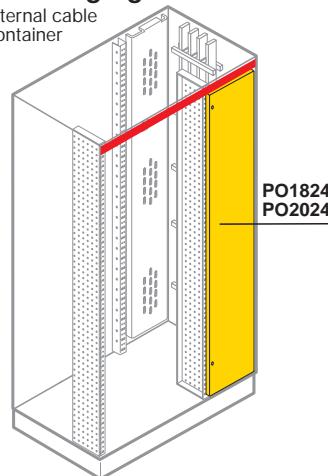

Structure
H=2000mm

AD1025

External cable container

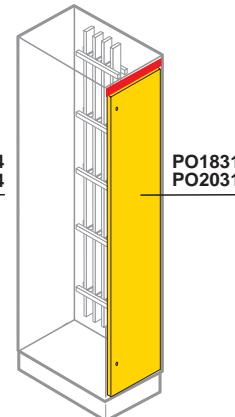

Structure
H=2000mm

PO1824

PO1831

PO2024




PO2031

ArTu K Modular structures

Distribution system







Modular dividers

Single-pole



Code	AD1076	AD1080 ⁽¹⁾	AD1007	AD1081 ⁽²⁾	AD1030	AD1031	AD1075	AD1006
In (A)	125	125	160	160	250	400	125	160
Icw (kA)	4.2	10	11	10	21	21	4.2	
Version poli	1	1	1	1	1	1	3	3
Installation	DIN35/plate	DIN35/plate	DIN35/plate	DIN35/plate	DIN35/plate	DIN35/plate	DIN35/plate	DIN35/plate
Power supply Ø cable (mm²)	min.	10	6	16	10	35	95	16
	max	35	35	70	70	120	185	70
N°outgoing feeder Ø cable (mm²)	2,5÷10				4	4		
	2,5÷16	10	6	10	6	5	5	6
	2,5÷25					2		
	2,5÷35							
Dimensions HxWxD (mm)	71x45x42,5	75x25x47	71x45x42,5	92x35x49	96x45x49	96x45x49	80x71,5x42,5	80x71,5x42,5
N° DIN modules	2,5	1,5	2,5	2	3	3	4,5	4,5
Rated service voltage Ue (V)	690	500	690	500	500	500	690	690
Degree of protection IP	20	20	20	20	20	20	20	20

Four-poles



Code	AD1004	AD1028	AD1029	AD1027	AD1034	AD1053
In (A)	125	125	125	160	250	250
Icw (kA)	10	4,2	4,2	6	15	15
Version poles	4	4	4	4	4	4
Installation	DIN35/plate	DIN35/plate	DIN35/plate	DIN35	with AD1035 brackets	with AD1035 brackets
Power supply Ø cable (mm²)	min.	6	6	10		
	max	35	25 with cable terminal 35 without cable terminal	50		
			35 without cable terminal			
N°outgoing feeder Ø cable (mm²)	5 holes/phase Ø1÷6 2 holes/phase Ø1,5÷16 6 holes/neutral Ø1,5÷16 4 holes/neutral Ø1,5÷6 ²	2xØ6÷25 + cable terminal 2xØ6÷35 no cable terminal 9xØ6÷10	2xØ6÷25 + cable terminal 2xØ6÷35 no cable terminal 9xØ6÷10	8xØ2,5÷16 3xØ6÷35	N°22 holes M5 with 17,5mm pitch per phase (threaded busb. 20x5mm)	N°32 holes M5 with 17,5mm pitch per phase (threaded busb. 20x5mm)
Dimensions HxWxD (mm)	45x75x98	89x93x48	126x93x48	90x160x50	150x600x70	150x800x70
N° DIN modules	5,5	5	7	9	24	36
Rated service voltage Ue (V)	500	690	690	500	500	500
Degree of protection IP	20	20	20	20		

⁽¹⁾ possibility of putting in parallel with AD1083 connections.

⁽²⁾ possibility of putting in parallel with comb type connection (not supplied).

ArTu K Modular structures

Distribution system

Flexible busbars up to 1250A

Cross-section	In (A)	Code	N° busbar/phase	capacity (A)			WxW (mm)	Section dimensions (mm ²)	Lenght (mm)	Unit weight (kg)
				IP31	IP41	IP65				
—	250	BF1602	1	395	323	250	20x3	60	2000	1,42
—	400	BF2502	1	498	460	400	20x5	100	2000	2,15
—	500	BF4002	1	660	620	500	24x6	144	2000	3
—	630	BF4012⁽¹⁾	1	758	702	630	32x5	160	2000	3,36
—	1000	BF6302	1	1203	1140	1000	40x8	320	2000	6,33
—	1250	BF8002	1	1515	1390	1250	50x10	500	2000	9,68

⁽¹⁾ Only for front extended terminals and rear terminals.

ArTu K Modular Structures


Distribution systems

Busbars with shaped section for applications up to 3200A

Cross-section	In (A)	Code	N° busbar/phase	IP31	capacity (A) IP41	IP65	Icw max (kA)	WxW (mm)	Dimensions section (mm²)	Lenght (mm)	Weight (kg)
	400	BA0400	1	630	520	400	35	20x20	200	1730	4
	800	BA0800	1	970	830	800	35	20x20	283	1730	4,4
	1250	BA1250	1	1400	1330	1250	75	20x60	603	1730	9,3
	1600	BA1600	1	1820	1710	1600	75	20x60	703	1730	10
	2000	BA2000	1	2350	2200	2000	100	25x60	1000	1730	14,8
	3200	BA2000	2	3600	3400	3200	100	25x60	2000	1730	29,6

1STCB02035FF0001

Selection and assembly of busbars with shaped section and busbar holders



The distance between the first busbar holder and the end of the busbar must not exceed $\frac{1}{4}$ of "X".

N° of busbar holders according to the max. I_{cc}											
Busbar code	capacity	Busbar holder code	N° busbars per phase	25 kA	X max (mm)	35 kA	X max (mm)	50 kA	X max (mm)	65 kA	X max (mm)
		Linear									
		PB0803		4	550	5	425	-	-	-	-
BA0400	400A	PB1601 (1)	1	4	550	4	550	-	-	-	-
		PB1603 (1)		4	550	4	550	-	-	-	-
		PB0803		4	550	5	425	-	-	-	-
BA0800	800A	PB1601 (1)	1	4	550	4	550	-	-	-	-
		PB1603 (1)		4	550	4	550	-	-	-	-
BA1250	1250A	PB1601	1	4	550	4	550	5	425	7	275
		PB1603		4	550	5	425	6	350	9	225
BA1600	1600A	PB1601	1	4	550	4	550	5	425	7	275
		PB1603		4	550	4	550	6	350	9	225
BA2000	2000A	PB3201	1/2	4	550	4	550	5	425	6	350
										7	275
		Scaled									
BA0400	400A	PB0802		4	550	5	425	-	-	-	-
		PB1600 (1)	1	4	550	4	550	-	-	-	-
BA0800	800A	PB0802	1	4	550	5	425	-	-	-	-
		PB1600 (1)	1	4	550	4	550	-	-	-	-
BA1250	1250A	PB1600	1	4	550	4	550	5	425	7	275
		BA1600	1	4	550	4	550	5	425	7	275

(1) Can be used with the special AD1066 adapter.

max X = maximum distance not to be exceeded between two consecutive busbar holders


Using the correct number of busbar holders ensures resistance to electrodynamic forces in the case of a short-circuit.

Assess the maximum distance (max X) which must not be exceeded between two consecutive busbar holders according to the max. I_{cc} .

ArTu K Modular Structures

Distribution systems


Busbar holders and crosspieces




Busbar holder

Busbars with shaped section

Vertical installation

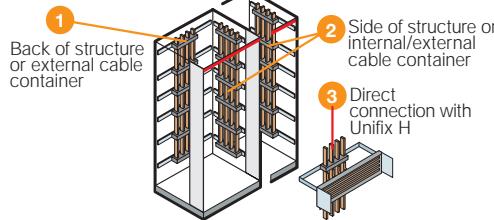

Horizontal installation



1STCB02035F0901

5

Type	In≤400÷800A	In=1250A	In=1600A	In=3200A	Installation	Switchgear without segregation	Segregated switchgear	Internal cable container	Additional cable container
Scaled up to 800A PB0802 	BA0400 BA0800				1	TV4001 (W=390mm)			TV3201 (W=300mm)
					2				TV3101 (D=225mm) TV5101 (D=300mm)
Scaled up to 1600A PB1600 	BA0400 BA0800 with adap. AD1066	BA1250	BA1600		1	TV4000 (W=390mm)			TV3201 (W=300mm)
					2	TV8001 (D=700mm) TV1001 (D=900mm)	TV8005 (D=700mm) TV1005 (D=900mm)	TV8101 (D=700mm) TV1101 (D=900mm)	TV6101 (D=500mm) TV8101 (D=700mm) TV1101 (D=900mm)
Linear up to 800A PB0803 	BA0400 BA0800				1	TV4001 (W=390mm) TV6202 (W=600mm) TV8202 (W=800mm)			
					3	TV6203 (W=600mm) TV8203 (W=800mm)		(1)	
Linear up to 1600A PB1601 	BA0400 BA0800 with adap. AD1066	BA1250	BA1600		1	TV4000 (W=390mm) TV6201 (W=600mm) TV8201 (W=800mm)	TV6201 (W=600mm) TV8201 (W=800mm)		TV6101 (D=500mm) TV8101 (D=700mm) TV1101 (D=900mm)
					2	TV8001 (D=700mm) TV1001 (D=900mm)	TV8005 (D=700mm) TV1005 (D=900mm)	TV8101 (D=700mm) TV1101 (D=900mm)	TV8211 (D=700mm) TV1211 (D=900mm)
					4	TV8211 (D=700mm) TV1211 (D=900mm)	TV8211 (D=700mm) TV1211 (D=900mm)		TV8211 (D=700mm) TV1211 (D=900mm)
					5	TV4221 (W=390mm) TV6221 (W=600mm) TV8221 (W=800mm)	TV4221 (W=390mm) TV6221 (W=600mm) TV8221 (W=800mm)		
					A	TV8011 (D=700mm) TV1011 (D=900mm)	TV8011 (D=700mm) TV1011 (D=900mm)	(1)	
					B	TV4000 (W=390mm) TV6201 (W=600mm) TV8201 (W=800mm)	TV4000 (W=390mm) TV6201 (W=600mm) TV8201 (W=800mm)		
Linear up to 1600A PB1603 	BA0400 BA0800 with adap. AD1066	BA1250	BA1600		1	TV4000 (W=390mm) TV6201 (W=600mm) TV8201 (W=800mm)	TV4000 (W=390mm) TV6201 (W=600mm) TV8201 (W=800mm)		TV5101 (D=300mm) TV6101 (D=500mm) TV8101 (D=700mm)
					2	TV6001 (D=500mm) TV8001 (D=700mm) TV1001 (D=900mm)	TV6005 (D=500mm) TV8005 (D=700mm) TV1005 (D=900mm)	TV5101 (D=500mm) TV6101 (D=500mm) TV8101 (D=700mm)	TV5101 (D=500mm) TV6101 (D=500mm) TV8101 (D=700mm)
					4	TV1261 (D=500mm) TV8211 (D=700mm) TV1211 (D=900mm)	TV1261 (D=500mm) TV8211 (D=700mm) TV1211 (D=900mm)	TV5101 (D=500mm) TV6101 (D=500mm) TV8101 (D=700mm)	TV5101 (D=500mm) TV6101 (D=500mm) TV8101 (D=700mm)
					5	TV4221 (W=390mm) TV6221 (W=600mm) TV8221 (W=800mm)	TV4221 (W=390mm) TV6221 (W=600mm) TV8221 (W=800mm)		
					A	TV6011 (D=500mm) TV8011 (D=700mm) TV1011 (D=900mm)	TV6011 (D=500mm) TV8011 (D=700mm) TV1011 (D=900mm)		
					B	TV8001 (D=700mm) TV1011 (D=900mm)	TV8001 (D=700mm) TV1011 (D=900mm)		
Linear up to 3200A PB3201 				BA2000 1/2 busbar per phase	2	TV8001 (D=700mm) TV1001 (D=900mm)	TV8005 (D=700mm) TV1005 (D=900mm)	TV8101 (D=700mm) TV1101 (D=900mm)	TV8101 (D=700mm) TV1101 (D=900mm)
					4	TV8211 (D=700mm)	TV8211 (D=700mm)	TV8211 (D=700mm)	TV8211 (D=700mm)
					5	TV6221 (W=600mm) TV8221 (W=800mm)	TV6221 (W=600mm) TV8221 (W=800mm)		
					A	TV8011 (D=700mm) TV1011 (D=900mm)	TV8011 (D=700mm) TV1011 (D=900mm)		
					B	TV1011 (D=900mm)	TV1011 (D=900mm)		

(1) Only form 2

1STCB0207F0901

Selection by componentspage 9/51


In-depth technical informationpage 6/10

Overall dimensionspage 8/14


ArTu K Modular Structures

Distribution systems


Busbar holders and crosspieces



Vertical installation

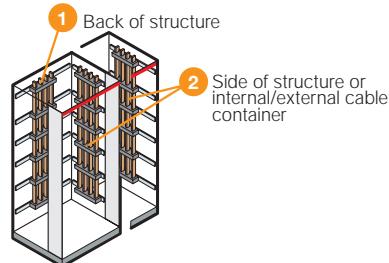

Horizontal installation




1STC92034F0901


Busbar holder

Type


Linear up to 1250A
BP1250




Linear up to 1600A
BP1600




Linear up to 2500A
BP2500



Linear up to 3200A
BP3200



Linear up to 4000A
BP3200



BR2000 not drilled

Flat busbars

In=400÷1250A

BR4005
BR6305
BR8005
BR1250
1 busbar per phase

In=1600÷4000A

BR1600
1 busbar per phase

BR1600/BR2000
2 busbars per phase

BR1600
3 busbars per phase

BR2000
3 busbars per phase

Crosspieces for fixing to structure

Installation

1

Switchgear without segregation

TR7005 (W=600mm)
TR8000 (W=800mm)

2

Segregated switchgear

TR7005 (W=600mm)
TR8000 (W=800mm)

3

Internal cable container

TR6101 (D=500mm)
TR8101 (D=700mm)
TV1101 (D=900mm)

4

Additional cable container

TR6101 (D=500mm)
TR8101 (D=700mm)
TV1101 (D=900mm)

1

Switchgear without segregation

TR7005 (W=600mm)
TR8000 (W=800mm)

2

Segregated switchgear

TR6001 (P=500mm)
TR8005 (P=700mm)
TV1005 (P=900mm)

3

Internal cable container

TR6101 (D=500mm)
TR8101 (D=700mm)
TV1101 (D=900mm)

4

Additional cable container

TR6301 (D=500mm)
TR8301 (D=700mm)

1

Switchgear without segregation

TR7005 (W=600mm)
TR8000 (W=800mm)

2

Segregated switchgear

TR6005 (D=500mm)
TR8005 (D=700mm)
TV1005 (D=900mm)

3

Internal cable container

TR6101 (D=500mm)
TR8101 (D=700mm)
TV1101 (D=900mm)

4

Additional cable container

TR6301 (D=500mm)
TR8301 (D=700mm)

1

Switchgear without segregation

TR7005 (W=600mm)
TR8000 (W=800mm)

2

Segregated switchgear

TR8001 (D=700mm)
TR1001 (D=900mm)
TV1005 (P=900mm)

3

Internal cable container

TR8101 (D=700mm)
TR1101 (D=900mm)
TV1101 (D=900mm)

4

Additional cable container

TR8201 (D=700mm)
TR1201 (D=900mm)
TR8205 (D=700mm)
TR1205 (D=900mm)

1

Switchgear without segregation

TR7005 (W=600mm)
TR8000 (W=800mm)

2

Segregated switchgear

TR8001 (D=700mm)
TR1001 (D=900mm)
TV1005 (P=900mm)

3

Internal cable container

TR8101 (D=700mm)
TR1101 (D=900mm)
TV1101 (D=900mm)

4

Additional cable container

TR8201 (D=700mm)
TR1201 (D=900mm)
TR8205 (D=700mm)
TR1205 (D=900mm)

1

Switchgear without segregation

TR7005 (W=600mm)
TR8000 (W=800mm)

2

Segregated switchgear

TR8001 (D=700mm)
TR1001 (D=900mm)
TV1005 (P=900mm)

3

Internal cable container

TR8101 (D=700mm)
TR1101 (D=900mm)
TV1101 (D=900mm)

4

Additional cable container

TR8201 (D=700mm)
TR1201 (D=900mm)
TR8205 (D=700mm)
TR1205 (D=900mm)

1

Switchgear without segregation

TR7005 (W=600mm)
TR8000 (W=800mm)

2

Segregated switchgear

TR8001 (D=700mm)
TR1001 (D=900mm)
TV1005 (P=900mm)

3

Internal cable container

TR8101 (D=700mm)
TR1101 (D=900mm)
TV1101 (D=900mm)

4

Additional cable container

TR8201 (D=700mm)
TR1201 (D=900mm)
TR8205 (D=700mm)
TR1205 (D=900mm)

1

Switchgear without segregation

TR7005 (W=600mm)
TR8000 (W=800mm)

2

Segregated switchgear

TR8001 (D=700mm)
TR1001 (D=900mm)
TV1005 (P=900mm)

3

Internal cable container

TR8101 (D=700mm)
TR1101 (D=900mm)
TV1101 (D=900mm)

4

Additional cable container

TR8201 (D=700mm)
TR1201 (D=900mm)
TR8205 (D=700mm)
TR1205 (D=900mm)

5

Selection by componentspage 9/51

In-depth technical informationpage 6/10

Overall dimensionspage 8/14

5/32

ABB SACE

ArTu K Modular Structures


Distribution systems

Flat busbars for distribution up to 4000A

Cross-section	In (A)	Code	N° busbar/phase	IP31	capacity (A) IP41	IP65	Icw max (kA)	WxW (mm)	Lenght (mm)	Weight (kg)
—	400	BR4005	1	530	490	400	35	32x5	1750	2,1
—	630	BR6305	1	772	695	630	50	50x5	1750	3,4
—	800	BR8005	1	951	863	800	50	63x5	1750	4,4
—	1250	BR1250	1	1431	1347	1250	50	100x5	1750	7,25
—	1600	BR1600	1	1836	1710	1600	105	100x10	1750	14,5
—	2000	BR2000	1	2250	2110	2000	105	120x10	1750	18,7
—	2500	BR1600	2	3056	2700	2500	105	100x10	1750	29
—	3000	BR2000	2	3500	3200	3000	105	120x10	1750	37,4
—	3200	BR1600	3	4018	3600	3200	105	100x10	1750	43,5
—	4000	BR2000	3	4460	4250	4080	105	120x10	1750	56,1

1STCB0202160001

Selection and assembly of flat busbars and busbar holders



1STCB020235FF0001

The distance between the first busbar holder and the end of the busbar must not exceed $\frac{1}{4}$ of "X".

Using the correct number of busbar holders ensures resistance to electrodynamic forces in the case of a short-circuit.

Assess the maximum distance (max X) not to be exceeded between two consecutive busbar holders according to the max. I_{cc} .

5

N° of busbar holders according to the max. I_{cc}

Busbar code	Busbar holder code	N° busbars/type per phase	25 kA	X max (mm)	35 kA	X max (mm)	50 kA	X max (mm)	75 kA	X max (mm)	105 kA	X max (mm)
BR4005 400A	BP1250	1	7	300	9	225	-	-	-	-	-	-
BR6305 630A	BP1250	1	6	375	7	275	9	225	-	-	-	-
BR8005 800A	BP1250	1	5	425	7	300	9	225	-	-	-	-
BR1250 1250A	BP1250	1	4	500	6	375	8	250	-	-	-	-
BR1600 1600A	BP1600	1	3	1000	3	1000	4	600	6	375	9	225
BR2000 2000A	BP1600	1	3	1000	3	1000	4	600	6	375	9	225
BR1600 2500A	BP2500	2 x BR 1600	3	1000	3	1000	3	900	5	400	9	225
BR2000 3000A	BP2500	2 x BR 2000	3	1000	3	1000	3	900	5	400	9	225
BR1600 3200A	BP3200	3 x BR 1600	3	1000	3	1000	3	800	5	400	9	225
BR2000 4000A	BP3200	3 x BR 2000	3	1000	3	1000	3	800	5	400	9	225

max X = maximum distance not to be exceeded between two consecutive busbar holders

Flat drilled and threaded busbars for earthing connection

Cross-section	Code	Threading	Pitch	WxW (mm)	Length (mm)	AxB (mm)
	EV1119	6 MA	20	20x5	2000	
	EV1120	6 MA	20	25x5	2000	
	EV1121	6MA	25	50x5	2000	
	EV1122	6MA				34x30
	EV1123	8MA				34x30
	EV1124	6MA				40x50
	EV1125	8MA				40x50

Selection by componentspage 9/51

In-depth technical informationpage 6/10

Overall dimensionspage 8/14

1STCB02116F0001

ArTu K Modular Structures

Distribution systems


Technical characteristics

Technical characteristics	Unifix H	Unifix L
Rated service voltage (U_s)	690V AC	400V AC
Rated insulation voltage (U)	1000V AC	500V AC
Rated impulse withstand voltage (U_{imp})	8kV	6kV
Rated frequency	50/60Hz	50/60Hz
Rated current (I_r)	central power supply lateral power supply	100A 80A
Rated short-time withstand current (I_{cw})	25kA	
Maximum peak current (I_{pk})	52.5kA-400V	
Maximum installable circuit-breaker size	250A	100A
Conditioned short-circuit current (I_{cc})	Tmax T1 Tmax T2 N, S ⁽¹⁾ Tmax T3	36kA-400V 50kA-400V 50kA-400V
With circuit-breaker	S200 S200 H S200 P	6kA-400V 10kA-400V 25kA-400V
Degree of protection	IP20 with accessory	IP20
Characteristics of the insulating material	Self-extinguishing thermoplastic V1 (UL94)	Self-extinguishing thermoplastic V1 (UL94)
Characteristics of the conductor material	Electrolytic copper	Electrolytic copper
Width (N° modules/mm)	24/600 36/800	12/400 24/600 36/800


Installation of Unifix system

Frame for Tmax	300x600mm (hx) 300x800mm (hx)	ED2183 ED2191 AD1061 TV6200 TV8200	
Fixing bracket H=300mm			
Crosspiece for direct connection to the rear	W=600mm		
busbars with shaped section with PB0803	L=800mm		
Busbar 2P	12 mod. 18 mod. 24 mod. 36 mod.		ED2993 ED3009 ED3017 ED3025 ED2944 ED2951 ED2969 ED2977
Busbar 4P	12 mod. 18 mod. 24 mod. 36 mod.		GD6002 GD8002
Fixing support	24 mod. 36 mod.		


⁽¹⁾ Select circuit-breakers in version with front terminals for copper cables.




Direct connection with the 400/800A system of busbars with shaped section.




Feeder module for 400A frame (L1-L2-L3-N).




Direct power supply of the bases by means of feeder module ED2209.




Power supply by means of general row circuit-breaker.




Connections (L1-L2-L3-N) for System Pro M modular apparatus.



Power supply of the busbar with 100A feeder module without cable.
Terminal capacity 35mm².



Direct power supply of the busbars by means of feeder module.



Power supply by means of modules and cables in parallel.

ArTu K Modular Structures

Distribution systems

Table for selecting connections according to the circuit-breaker

Circuit-breaker series	Unifix H (top power supply) ED2654 L1/N 40A ED2662 L2/N 40A ED2670 L3/N 40A	Unifix L ED3272 L1/N 40A ED3280 L2/N 40A ED3298 L3/N 40A
S941- S951 - S971 DS941 - DS951 - DS971		
S200-DS200 F200 \leq 63A (Unifix L)	(top power supply) ED2531 L1 63A ED2549 L2 63A ED2556 L3 63A ED2564 N 63A ED2845 False pole module	(bottom power supply) ED2572 L1 63A ED2590 L2 63A ED2598 L3 63A ED2606 N 63A
S800	(top power supply) ED2551 L1 125A ED2552 L2 125A ED2553 L3 125A ED2554 N 125A ED2550 False pole module	
F660 - F670 - S280 (80-100A) E200 \leq 100A - RS370 - F200 80 - 100A (Unifix H)	(top power supply) ED2557 L1 \leq 32A ED2558 L2 \leq 32A ED2559 L3 \leq 32A ED2560 N \leq 32A ED2720 L1 100A ED2738 L2 100A ED2746 L3 100A ED2753 N 100A	ED3132 L1/L2/L3/N power sup.- 350mm ED0026 L1/L2/L3/N pow. sup. - 1500mm ED0025 L1/L2/L3/N pow. sup. - 2500mm
MDRC - Various apparatus	(top power supply) ED2894 L1/N 16A ED2902 L1/L2 16A	(bottom power supply) ED2910 L1/N 16A ED2928 L1/L2 16A
Tmax T1	Circuit-breaker	(top/bottom power supply) ED2217 L1 Top/L2 Bottom ED2225 L2 Top/L1 Bottom ED2233 L3 Top/N Bottom ED2241 N Top/L3 Bottom ED2373 False pole module ED2381 False pole module
	Residual current	
	Solenoid operator	
Tmax T2	Circuit-breaker	(top/bottom power supply) ED2258 L1 Top/L2 Bottom ED2266 L2 Top/L1 Bottom ED2274 L3 Top/N Bottom ED2282 N Top/L3 Bottom ED2373 False pole module ED2399 False pole module
	Residual current	
	Solenoid operator	
Tmax T3	Circuit-breaker	(top power supply) ED2290 L1 ED2308 L2 ED2316 L3 ED2324 N ED2373 False pole module
	Residual current	(bottom power supply) ED2332 L1 ED2340 L2 ED2357 L3 ED2365 N

5

For the DDA locks, order the false module **ED2845** codes according to the size of the residual current lock.

For kit Isomax S1-S7, please see page 9/66.


Selection by componentspage 9/51

In-depth technical informationpage 6/10

Overall dimensionspage 8/14


ArTu K Modular Structures

Examples of configurations

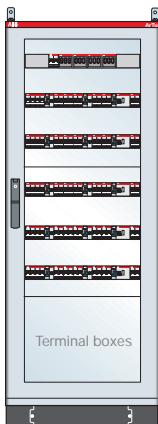


ArTu K Series dim. 1600x500x150 (1831x748x287) mm (external hwxwxd) IP65 with modular panels

Code	Description	Q.ty
SK6025	ArTu K Base/Top/Base strip 600x250mm (wxw)	1
SK1604	N°2 reduced funct. frames h=1600mm K d=250mm	1
SK1600	N°4 ArTu K uprights h=1600mm	1
LF1626	N°2 side panels 1600x250mm (hxd) K	1
GD6002	DIN rail Kit without segreg.24 mod. w=600mm, K	6
PV1661	Glass door 1600x600mm (hxw) K	1
AD1808	N°2 wall fixing brackets, K	1
PC4600	Blind panel 400x600mm (hxw) M, K	1
RF1660	Rear panel 1600x600mm (hxw) K	1
PM6672	Panel 72 mod. 600x600mm (hxw) M, K	2

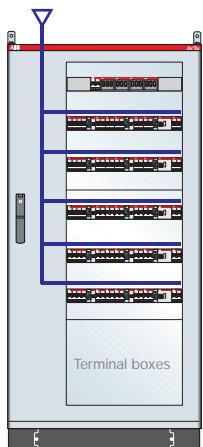

ArTu K Series dim. 1600x800x150 (1831x948x287) mm (external hwxwxd) IP65 with modular panels

Code	Description	Q.ty
SK8025	ArTu K Base/Top/Base strip 800x250mm (wxw)	
SK1600	N°4 ArTu K uprights h=1600mm	1
VC1624	Int. reduced cable cont.1600x250mm (hxd) K	1
LF1626	N°2 side panels 1600x250mm (hxd) K	1
GD6002	DIN rail Kit without segreg.24 mod. w=600mm, K	6
PV1681	Glass door 1600x800mm (hxw) K	1
AD1808	N°2 wall fixing brackets, K	1
PC4600	Blind panel 400x600mm (hxw) M, K	1
RF1680	Rear panel 1600x800mm (hxw) K	1
PM6672	Panel 72 mod. 600x600mm (hxw) M, K	2

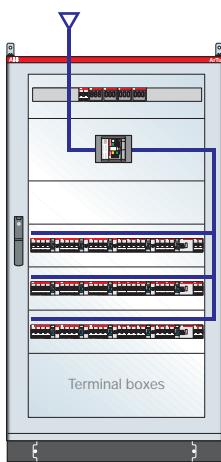


ArTu K Series dim. 1600x800x150 (1831x948x287) mm (external hwxwxd) IP65 with plate for Tmax T5 and modular panels

Code	Description	Q.ty
SK8025	ArTu K Base/Top/Base strip 800x250mm (wxw)	1
SK1604	N°2 reduced funct. frames h=1600mm K d=250mm	1
SK1600	N°4 ArTu K uprights h=1600mm	1
LF1626	N°2 side panels 1600x250mm (hxd) K	1
GD8002	DIN rail Kit without segreg.36 mod. w=800mm, K	4
PV1682	Glass door 36 mod. 1600x800mm (hxw) K	1
AD1808	N°2 wall fixing brackets, K	1
PC2800	Blind panel 200x800mm (hxw) M, K	1
RF1680	Rear panel 1600x800mm (hxw) K	1
KL5114	Hor. fixed T5 Kit 300x800mm(hxw) M,K	1
PM2836	Panel 36 mod. 200x800mm (hxw) M, K	4
PC3800	Blind panel 300x800mm (hxw) M, K	1


ArTu K Modular Structures

Examples of configurations

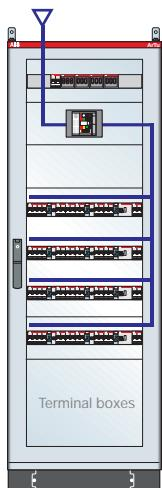


ArTu K Series dim. 1800x600x150 (2031x748x287) mm (external hxwxd) IP65 with plate for Tmax T5 and modular panels, complete with 400A busbars vertically on back of structure - Icw max 35kA

Code	Description	Q.ty
SK6025	ArTu K Base/Top/Base strip 600x250mm (wxd)	1
SK1804	N°2 reduced funct. frames h=1800mm K d=250mm	1
SK1800	N°4 ArTu K uprights h=1800mm	1
LF1826	N°2 side panels 1800x250mm (hxd) K	1
GD6002	DIN rail Kit without segreg. 24 mod. w=600mm, K	5
PV1861	Glass door 1800x600mm (hxw) K	1
AD1808	N°2 wall fixing brackets, K	1
PC2600	Blind panel 200x600mm (hxw) M, K	1
RF1860	Rear panel 1800x600mm (hxw) K	1
KT5112	Hor. fixed T5 Kit 300x600mm(hxw) M,K	1
PM2624	Panel 24 mod. 200x600mm (hxw) M, K	2
PM6672	Panel 72 mod. 600x600mm (hxw) M, K	1
PB0803	Linear busbar holder In=800A (35kA)	5
BA0400	Busbar In=400A	4
TV6202	N°2 rear of struct. crosspieces w=600xPB0803	3
PC4600	Blind panel 400x600mm (hxw) M, K	1

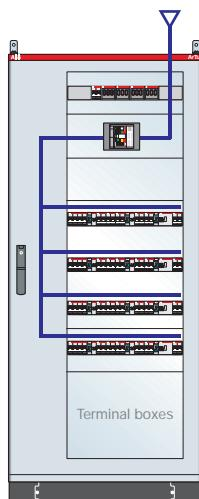

ArTu K Series dim. 1800x800x150 (2031x948x287) mm (external hxwxd) IP65 with plate for Tmax T3 and modular panels, complete with 800A busbars vertically on back of internal cable cont. - Icw max 35kA

Code	Description	Q.ty
SK8025	ArTu K Base/Top/Base strip 800x250mm (wxd)	1
SK1800	N°4 ArTu K uprights h=1800mm	1
LF1826	N°2 side panels 1800x250mm (hxd) K	1
VC1824	Int. reduced cable cont. 1800x250mm (hxd) K	1
GD6002	DIN rail Kit without segreg.24 mod. w=600mm, K	5
PV1881	Glass door 1800x800mm (hxw) K	1
AD1808	N°2 wall fixing brackets, K	1
PC2600	Blind panel 200x600mm (hxw) M, K	1
RF1880	Rear panel 1800x800mm (hxw) K	1
KT3112	T3 3/4P horiz. fixed without segreg. Kit M, K250	1
PM2624	Panel 24 mod. 200x600mm (hxw) M, K	2
PM6672	Panel 72 mod. 600x600mm (hxw) M, K	1
PB0802	Scaled busbar holder In=800A (35 kA)	5
BA0800	Busbar In=800A	4
TV3000	N°2 int. cable cont. cross. w=200mm x K d=250mm	3
PC4600	Blind panel 400x600mm (hxw) M, K	1

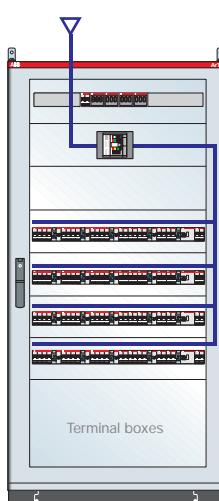


ArTu K Series dim. 1800x800x150 (2031x948x287) mm (external hxwxd) IP65 with plate for Tmax T3 and modular panels, complete with 800A busbars vertically on back of internal cable cont. - Icw max 35kA

Code	Description	Q.ty
SK8025	ArTu K Base/Top/Base strip 800x250mm (wxd)	1
SK1804	N°2 reduced funct. frames h=1800mm K d=250mm	1
SK1800	N°4 ArTu K uprights h=1800mm	1
LF1826	N°2 side panels 1800x250mm (hxd) K	1
GD8002	DIN rail Kit without segreg.36 mod. w=800mm, K	5
PV1882	Glass door 36 mod. 1800x800mm (hxw) K	1
AD1808	N°2 wall fixing brackets, K	1
PC2800	Blind panel 200x800mm (hxw) M, K	1
RF1880	Rear panel 1800x800mm (hxw) K	1
KL3113	T3 3/4P horiz. fixed without segreg. Kit w=800mm M, K250	1
PM2836	Panel 36 mod. 200x800mm (hxw) M, K	5
PB0803	Linear busbar holder In=800A (35kA)	5
BA0800	Busbar In=800A	4
TV8202	N°2 rear of struct. crosspieces w=800xPB0803	3
PC4800	Blind panel 400x800mm (hxw) M, K	1


ArTu K Modular Structures

Examples of configurations

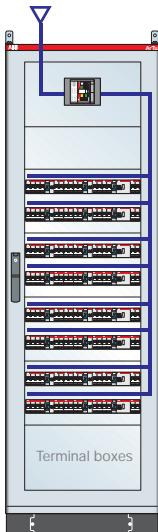


ArTu K Series dim. 2000x600x150 (2131x748x287) mm (external hwxwd) IP65 with plate for Tmax T5-630A and modular panels, complete with 400A busbars vertically on back of structure - lcw max 35kA

Code	Description	Q.ty
SK6025	ArTu K Base/Top/Base strip 600x250mm (wxd)	1
SK2000	N°4 ArTu K uprights h=2000mm	1
RF2060	Rear panel 2000x600mm (hwx) K	1
LF2026	N°2 side panels 2000x250mm (hxd) K	1
PV2061	Glass door 2000x600mm (hwx) K	1
KT5112	Hor. fixed T5 Kit 300x600mm(hwx) M, K	1
PC2600	Blind panel 200x600mm (hwx) M, K	1
PC3600	Blind panel 300x600mm (hwx) M, K	1
PM3648	Panel 48 mod. 300x600mm (hwx) M, K	4
GD6008	DIN rail Kit int. 150mm w=600mm M floor-mount. K	4
SK2004	N°2 reduced funct. frames h=2000mm K d=250mm	1
BA0400	Busbar In=400A	4
TV6202	N°2 rear of struct. crosspieces w=600xPB0803	3
PB0803	Linear busbar holder In=800A (35kA)	5
AD1808	N°2 wall fixing brackets, K	1

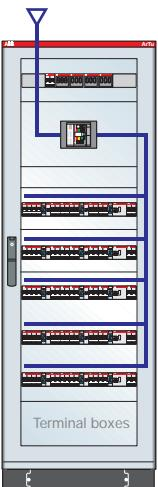

ArTu K Series dim. 1800x600x350 (2031x748x225) mm (external hwxwd) IP65 with plate for Isomax S5 and modular panels, complete with 800A busbars vertically on back of structure - lcw max 35kA

Code	Description	Q.ty
KT5112	Hor. fixed T5 Kit+accessories 300x600mm (hwx) K	1
PC2600	Blind panel 200x600mm (hwx) M, K	1
PC1600	Blind panel 100x600mm (hwx) M, K	1
PM2624	Panel 24 mod. 200x600mm (hwx) M, K	3
PM6672	Panel 72 mod. 600x600mm (hwx) M, K	1
GD6002	DIN rail Kit without segreg.24 mod. w=600mm, K	6
RF1860	Rear panel 1800x600mm (hwx) K	1
PV1861	Glass door 1800x600mm (hwx) K	1
SK1800	N°4 ArTu K uprights h=1800mm	1
SK1803	N°2 funct. frames h=1800mm open K	1
SK6040	ArTu K Base/Top/Base strip 600x350mm (wxd)	1
LF1840	N°2 side panels 1800x350mm (hxd) K	1
PB1601	Linear busbar holder In=1600A (75 kA)	3
BA0800	Busbar In=800A	4
AD1066	N°4 busbar adapters In=800A with busbar holders up to 1600A	3
TV6201	N°2 structure crosspieces w=600mm	2

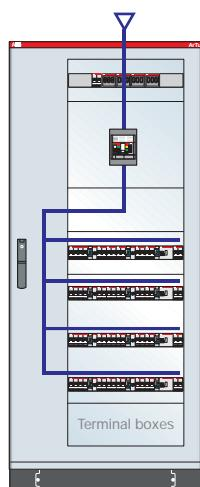


ArTu K Series dim. 1800x800x225 (2031x948x362) mm (external hwxwd) IP65 with plate for Tmax T5 and modular panels, complete with 800A busbars vertically on side of int. cable container - lcw max 35kA

Code	Description	Q.ty
KT5102	Kit T5 3/4P vertic. fissio+mod diff. non segreg. K 500x600mm (hxI) 1	1
PC2600	Blind panel 200x600mm (hwx) M, K	2
PM2624	Panel 24 mod. 200x600mm (hwx) M, K	2
PM6672	Panel 72 mod. 600x600mm (hwx) M, K	1
GD6002	DIN rail Kit without segreg.24 mod. w=600mm, K	5
PV1881	Glass door 1800x800mm (hwx) K	1
RF1880	Rear panel 1800x800mm (hwx) K	1
SK1800	N°4 ArTu K uprights h=1800mm	1
SK8040	ArTu K Base/Top/Base strip 800x350mm (wxd)	1
LF1840	N°2 side panels 1800x350mm (hxd) K	1
VC1823	Int. reduced cable cont.1800x200mm (hwx) K	1
PB0802	Scaled busbar holder In=800A (35 kA)	5
BA0800	Busbar In=800A	4
TV3101	N°2 int./ext. cable cont. crosspieces d=350mm	3
PC1600	Pann. cieco 100x600mm (hxI) M, K	1


ArTu K Modular Structures

Examples of configurations

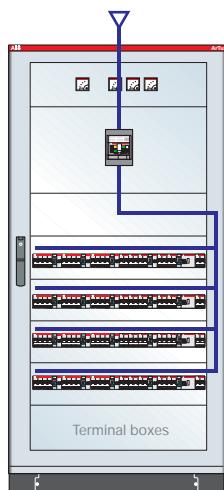


ArTu K Series dim. 1800x800x225 (2031x948x362)mm (external hxwxd) IP65 with plate for Tmax T5 and modular panels.

Code	Description	Q.ty
KL5102	Kit for T5 3/4 poles fixed + RC mod. not segregated K 500x600mm (hxw)	1
PC2800	Blind Panels 200x800mm (hxw) M, K	1
PS4968	Panels for 4 instruments 96x96 200x800mm (hw)M, K	1
PM2836	36 mod. panels 200x800mm (hxw) M, K	4
GD8002	DIN rail kit not segregated 36 mod. w=800mm, K	4
RF1880	Rear panel 1800x800mm (hxw) K	1
PV1882	Glass door 36 mod. 1800x800mm (hxw) K	1
SK1800	N°4 uprights ArTu K h=1800mm	1
SK1804	N°2 functional frames h=1800mm aperto K	1
SK8040	Base/Top/Base strip ArTu K 800x350mm (wxd)	1
LF1840	N°2 side panels 1800x350mm (hxd) K	1
PC1800	Blind panel 100x800mm (hxw) M, K	1

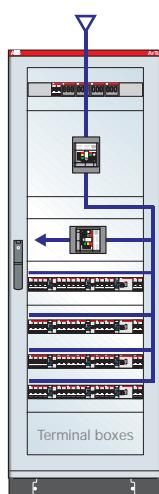

ArTu K Series dim. 2000x600x300 (2231x748x437)mm (external hxwxd) IP65 with plate for Tmax T5, T2 and modular panels.

Code	Description	Q.ty
KL5102	Kit for T5 3/4 poles fixed + RC mod. not segregated K 500x600mm (hxw)	1
KT2117	Kit for T2 3/4 p. horiz. fixed 200x600mm (hxw)	1
PC2600	Blind panel 200x600mm (hxw) M, K	2
PM2624	24 mod. Panel 200x600mm (hxw) M, K	2
PM6672	72 mod. Panel 600x600mm (hxw) M, K	1
GD6002	DIN rail kit not segregated 24 mod. w=600mm, K	5
RF2060	Rear panel. 2000x600mm (hxw) K	1
PV2061	Glass door 2000x600mm (hxw) K	1
SK2000	N°4 uprights ArTu K h=2000mm	1
SK2004	N°2 functional frames h=2000mm open K	1
SK6050	Base/Top/Base strip ArTu K 600x300mm (wxd)	1
LF2050	N°2 side panels 200x300mm (hxd) K	1




ArTu K Series dim. 2000x390x225 (2231x538x362) mm (external hxwxd) IP65 with plate for Tmax T5, T2 and modular panels, complete with 800A busbars vertically on back of structure - Icw max 35kA

Code	Description	Q.ty
KT2411	T2 3/4P horiz. fixed without segreg. Kit, K	1
KT5412	T5 vert. fixed Kit 400x400mm (hxw)	1
PC2400	Blind panel 200x400mm (hxw) K	2
PM2424	Panel 12 mod. 200x400mm (hxw) K	5
GD4002	DIN rail Kit without segreg.12 mod. w=400mm, K	5
RF2040	Rear panel 2000x400mm (hxw) K	1
PV2041	Glass door 2000x400mm (hxw) K	1
SK2000	N°4 ArTu K uprights h=2000mm	1
SK2003	N°2 funct. frames h=2000mm open K	1
SK4040	ArTu K Base/Top/Base strip 400x350mm (wxd)	1
LF2040	N°2 side panels 2000x350mm (hxd) K	1
PB1601	Linear busbar holder In=1600A (75 KA)	4
BA0800	Busbar In=800A	4
AD1066	N°4 busbar adapters In=800A with bus. hold. up to 1600A	4
TV4000	N°2 rear crosspieces w=400mm, K	2


ArTu K Modular Structures

Examples of configurations

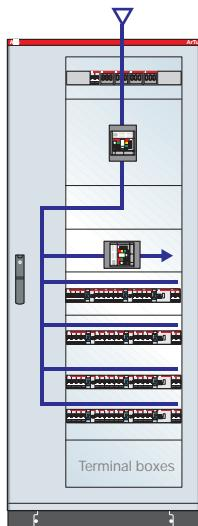


ArTu K Series dim. 2000x800x300 (2231x948x437)mm (external hwxwd) IP65 with plate for Tmax T5, T2 and modular panels, complete with 400A busbars vertically on back of structure - lcw max 35kA

Code	Description	Q.ty
KT5102	Kit for T5 3/4 poles fixed + RC mod. not segregated K 500x600mm (hwx)	1
KT2117	Kit for T2 3/4 p. horiz. fixed 200x600mm (hxw)	1
PC2600	Blind panel 200x600mm (hwx) M, K	2
PM2624	24 mod. Panel 200x600mm (hwx) M, K	2
PM6672	72 mod. Panel 600x600mm (hwx) M, K	1
GD6002	DIN rail kit not segregated 24 mod. w=600mm, K	5
RF2080	Rear panel 2000x800mm (hwx) K	1
PV2081	Glass door 2000x800mm (hwx) K	1
SK2000	N°4 uprights ArTu K h=2000mm	1
VC2024	Internal reduced cable container 2000x200mm (hwx) K	1
SK8050	Base/Top/Base strip ArTu K 800x300mm (wxd)	1
LF2050	N°2 side panels 2000x300mm (hxd) K	1
PB1603	Linear busbar holder In=1600A (65 kA)	5
BA0400	Busbar In=400A	4
AD1066	N°4 busbar adapters 400/800A	5
TV5101	N°2 int./ext. cable container crosspieces d=300mm	3
PC1600	Blind panel 100x600mm (hwx) M, K	1

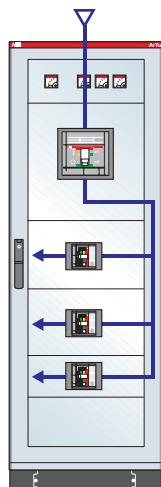

ArTu K Series dim. 1800x600x500 (2031x748x637) mm (external hwxwd) IP41 with plate for Isamax S7, Tmax T5, T2 and modular panels, complete with 1250A busbars vertically on back of structure - lcw max 50kA

Code	Description	Q.ty
KT2111	T2 3/4P horiz. fixed without segreg. Kit, K	1
KT5111	Hor. fixed T5 Kit+accessories 300x600mm (hwx) K	2
KS7211	S7 vert. fixed without segreg. Kit, K	1
PC1600	Blind panel 100x600mm (hwx) M, K	1
PS4960	4-instrument panel 96x96 200x600mm (hwx) M, K	1
RF1860	Rear panel 1800x600mm (hwx) K	1
PV1861	Glass door 1800x600mm (hwx) K	1
SK1800	N°4 ArTu K uprights h=1800mm	1
SK1803	N°2 funct. frames h=1800mm open K	1
SK6060	ArTu K Base/Top/Base strip 600x600mm (wxd)	1
LA1860	N°2 ventilated side panels 1800x600mm (hwx) K	1
PB1603	Linear busbar holder In=1600A (65kA)	4
BA0800	Busbar In=800A	1
BA1250	Busbar In=1250A	3
AD1066	N°4 busbar adapters In=800A with busbar holders up to 1600A	1
TV6001	N°2 axto frame struct. crosspieces d=600mm	2

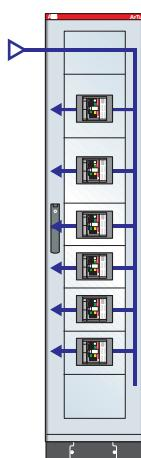


ArTu K Series dim. 1800x390x500 (2031x538x637) mm (external hwxwd) IP41 with plate for Tmax T5, T3, T2 and modular panels, complete with 1250A busbars vertically on side of structure - lcw max 50kA

Code	Description	Q.ty
KT2411	T2 3/4P horiz. fixed without segreg. Kit, K	3
KT5411	T5 horiz. fixed Kit 300x400mm (hwx) K	2
KT3419	T3 3/4P horiz. fixed without segreg. Kit, K	1
PC2400	Blind panel 200x400mm (hwx) K	2
RF1840	Rear panel 1800x400mm (hwx) K	1
PV1841	Glass door 1800x400mm (hwx) K	1
SK1800	N°4 ArTu K uprights h=1800mm	1
SK1803	N°2 funct. frames h=1800mm open K	1
SK4060	ArTu K Base/Top/Base strip 400x600mm (wxd)	1
LA1860	N°2 ventilated side panels 1800x600mm (hwx) K	1
PB1603	Linear busbar holder In=1600A (65kA)	4
BA0800	Busbar In=800A	1
BA1250	Busbar In=1250A	3
AD1066	N°4 busbar adapters In=800A with bus. hold. up to 1600A	1
TV6001	N°2 axto frame struct. crosspieces d=600mm	2


ArTu K Modular Structures

Examples of configurations

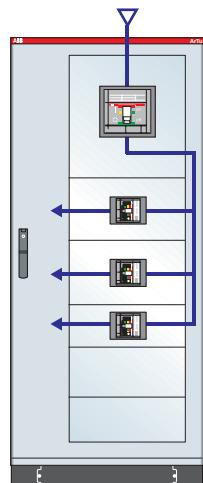


ArTu K Series dim. 1800x800x500 (2031x948x637) mm (external hxwxd) IP41 with plate Tmax T7, T5, T2 and modular panels, complete with 1250A busbars vertically on side of internal cable riser - Icw max 35kA

Code	Description	Q.ty
KT2111	T2 3/4P horiz. fixed without segreg. Kit, K	1
KT5111	Hor. fixed T5 Kit+accessories 300x600mm (hxw) K	2
KT7231	S7 vert. fixed without segreg. Kit, K	1
PC1600	Blind panel 100x600mm (hxw) M, K	1
PC2600	Blind panel 200x600mm (hxw) M, K	1
PV1881	Glass door 1800x800mm (hxw) K	1
RF1880	Rear panel 1800x800mm (hxw) K	1
SK1800	N°4 ArTu K uprights h=1800mm	1
VC1823	Int. reduced cable cont.1800x200mm (hxw) K	1
SK8060	ArTu K Base/Top/Base strip 800x600mm (wxm)	1
LA1860	N°2 ventilated side panels 1800x600mm (hxw) K	1
PB1603	Linear busbar holder In=1600A (65kA)	3
BA0800	Busbar In=800A	1
BA1250	Busbar In=1250A	3
AD1066	N°4 busbar adapters In=800A with bus. hold. up to 1600A	1
TV6101	N°2 int./ext. cable cont. crosspieces d=600mm	2

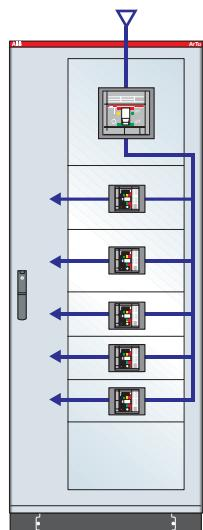

ArTu K Series dim. 2000x800x500 (2231x948x637)mm (external hxwxd) P41 with kit for Tmax T6, T5, T3, complete with 1600A busbars vertically on side on side of internal cable riser - Icw max 65kA

Code	Description	Q.ty
KT6211	Kit for T6 vertical fixed without segregation K	1
KT5111	Kit for T5 horizontal fixed +accessories 300x600mm (hxw) K	2
KT3119	Kit for T3 3/4P horizontal fixed not segregated K	3
PC3600	Blind panel 300x600mm (hxw) M, K	1
PV2081	Glass door 2000x800mm (hxw) K	1
RF2080	Rear panel 2000x800mm (hxw) K	1
SK2000	N°4 uprights ArTu K h=2000mm	1
VC2023	Internal reduced cable container. 2000x200mm (hxw) K	1
SK8060	Base/Top/Base strip ArTu K 800x600mm (wxm)	1
LA2060	N°2 ventilated side panels 2000x600mm (hxw) K	1
PB1601	Linear busbar holder In=1600A (75 kA)	7
BA1600	Busbar In=1600A	3
BA1250	Busbar In=1250A	1
TV6101	N°2 int./ext. cable container crosspieces d=600mm	4

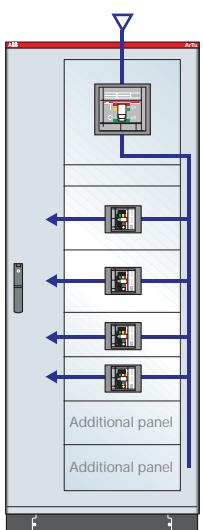


ArTu K Series dim. 2000x800x500 (2231x948x637)mm (external hxwxd) IP65 with kit for Tmax T6, T3, T2, complete with 1600A busbars vertically on side on side of internal cable riser - Icw max 65kA

Code	Description	Q.ty
KT6211	Kit for T6 vert. fixed not segregated K	1
KT3111	Kit for T3 3/4P horiz. fixed not segregated K	2
KT2111	Kit for T2 3/4P horiz. fixed not segregated K	2
PC1600	Blind panel 100x600mm (hxw) M, K	1
PC2600	Blind panel 200x600mm (hxw) M, K	2
PV2081	Glass door 2000x800mm (hxw) K	1
RF2080	Rear panel 2000x800mm (hxw) K	1
SK2000	N°4 uprights ArTu K h=2000mm	1
VC2023	Internal reduced cable container 2000x200mm (hxw) K	1
SK8060	Base/Top/Base strip ArTu K 800x600mm (wxm)	1
LA2060	N°2 ventilated side panels 2000x600mm (hxw) K	1
PB1601	Linear busbar holder In=1600A (75 kA)	7
BA1600	Busbar In=1600A	3
BA1250	Busbar In=1250A	1
TV6101	N°2 int./ext. cable container crosspieces d=600mm	4

ArTu K Modular Structures

Examples of configurations

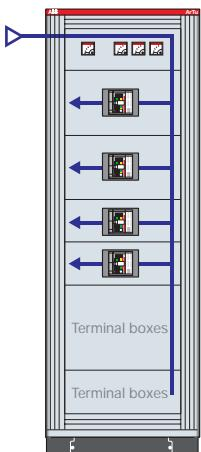

ArTu K Series Form 3/4 segregation dim.1800x600x700 (2031x748x837) mm (external hwxwxd) IP31 with plate for Tmax T5, T3, T2, complete with 1600A busbars vertically on side of structure - Icw max 50kA

Code	Description	Q.ty
KT5136	T5 segr. hor. fixed Kit 300x600mm(hwx)K	1
KT3110	T3 3/4P hor. fixed segreg. Kit, K	1
KT2110	T2 3/4P hor. fixed segreg. Kit, K	2
PC2600	Blind panel 200x600mm (hwx) M, K	1
PC4600	Blind panel 400x600mm (hwx) M, K	1
PS4960	4-instrument panel 96x96 200x600mm (hwx)M, K	1
IP3060	N°2 hor. finishing sections w=600mm K	1
SK1800	N°4 ArTu K uprights h=1800mm	1
IP3180	N°2 vert. finishing sections IP31 h=1800mm K	1
RF1860	Rear panel 1800x600mm (hwx) K	1
LA1880	N°2 ventilated side panels 1800x800mm (hwx) K	1
SK1802	N°2 funct. frames h=1800mm closed K	1
SK6080	ArTu K Base/Base strip 600x700mm (wxd)	1
PF2005	Plain plate 200x600mm (hwx) segreg. K	2
PF4005	Plain plate 400x600mm (hwx) segreg. K	1
SH6000	Busbar hor. shelf w=600mm, K	2
SH2030	Busbar hor. segregation w=600mm, K, PC	1
SV2061	Busbar vert. segregation 200x600mm (hwx) K	1
PB1601	Linear busbar holder In=1600A (75 kA)	5
BA1600	Busbar In=1600A	3
BA1250	Busbar In=1250A	1
TV8005	N°2 funct. frame struct. crosspieces d=800mm	3

Segregation Form 3


FH3540	F3 horiz. segreg. Kit 400x600mm (hwx) K	1
FH3220	F3 horiz. segreg. Kit 200x600mm (hwx) K	4
FH3430	F3 horiz. segreg. Kit 300x600mm (hwx) K	2

Segregation Form 4

FH4540	Fairlead plate F4 h=400mm	1
FH4220	Fairlead plate F4 h=200mm	2
FH4430	Fairlead plate F4 h=300mm	1

ArTu K Modular Structures

Examples of configurations

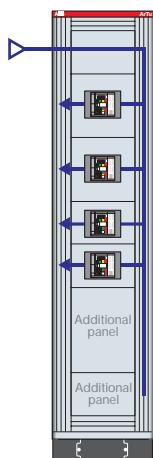

ArTu K Series Form 3/4 segregation dim.1800x390x700 (2031x538x837) mm (external hwxw) IP31 with plate for Tmax T5, T3, T2 and modular panels, complete with 1600A busbars vertically on side of structure - lcw max 50kA

Code	Description	Q.ty
KT5122	T5 segr. hor. fixed Kit 300x400mm(hwx)K	1
KT3410	T3 3/4P hor. fixed segreg. Kit, K	1
KT2410	T2 3/4P hor. fixed segreg. Kit, K	2
PC2400	Blind panel 200x400mm (hwx) K	2
PC4400	Blind panel 400x400mm (hwx) K	1
IP3040	N°2 hor. finishing sections IP31 w=400mm K	1
SK1800	N°4 ArTu K upright ts h=1800mm	1
IP3180	N°2 vert. finishing sections IP31 h=1800mm K	1
RF1840	Rear panel 1800x400mm (hwx) K	1
LA1880	N°2 ventilated side panels 1800x800mm (hwx) K	1
SK1802	N°2 funct. frames h=1800mm closed K	1
SK4080	ArTu K Base/Top/Base strip 400x800mm (wdx)	1
PF2405	Plain plate 200x400mm (hwx) segreg. K	2
PF4405	Plain plate 400x400mm (hwx) segreg. K	1
SH4000	Busbar hor. shelf w=400mm, K	2
SH4030	Busbar hor. segregation w=400mm, K	1
SV4061	Busbar vert. segregation 200x400mm (hwx) K	1
PB1601	Linear busbar holder In=1600A (75 kA)	5
BA1600	Busbar In=1600A	3
BA1250	Busbar In=1250A	1
TV8005	N°2 funct. frame struct. crosspieces d=800mm	1

Segregation Form 3


FH3540	F3 horiz. segreg. Kit 400x600mm (hwx) K	1
FH3220	F3 horiz. segreg. Kit 200x600mm (hwx) K	4
FH3430	F3 horiz. segreg. Kit 300x600mm (hwx) K	2

Segregation Form 4

FH4540	Fairlead plate F4 h=400mm	1
FH4220	Fairlead plate F4 h=200mm	2
FH4430	Fairlead plate F4 h=300mm	1

ArTu K Modular Structures

Examples of configurations

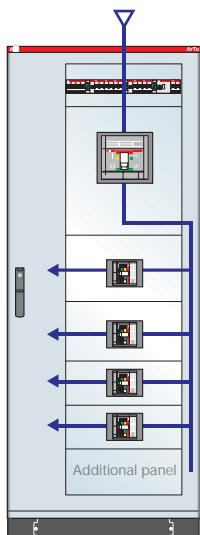

ArTu K Series Form 3/4 segregation dim.2000x800x700 (2231x948x837) mm (external hwxw) IP65 with plate for Tmax T6, T3, T2 and modular panels, complete with 1600A busbars vertically on side of structure - Icw max 50kA

Code	Description	Q.ty
KT6210	T6 vert. fixed segreg. Kit, K	1
KT3110	T3 3/4P hor. fixed segreg. Kit, K	2
KT2110	T2 3/4P hor. fixed segreg. Kit, K	2
PC2600	Blind panel 200x600mm (hwx) M, K	1
PM2624	Panel 24 mod. 200x600mm (hwx) M, K	1
GD7005	DIN rail Kit w=700mm segreg. K, PC	1
PV2081	Glass door 2000x800mm (hwx) K	1
RF2080	Rear panel 2000x800mm (hwx) K	1
LA2080	N°2 ventilated side panels 2000x800mm (hwx) K	1
SK2000	N°4 ArTu K uprights h=2000mm	1
SK8080	ArTu K Base/Base strip 800x800mm (wxd)	1
VC2020	Cable container int. segreg. 2000x200mm (hwx) K	1
PF2005	Plain plate 200x600mm (hwx) segreg. K	2
SH6000	Busbar hor. shelf w=600mm, K	2
SH2030	Busbar hor. segregation w=600mm, K, PC	1
SV2061	Busbar vert. segregation 200x600mm (hwx) K	1
PB1601	Linear busbar holder In=1600A (75 kA)	5
BA1600	Busbar In=1600A	3
BA1250	Busbar In=1250A	1
TV8101	N°2 int./ext. cable cont. crosspieces d=800mm	3

Segregation Form 3


FV3668	S6 vert. F3 segreg. Kit600x800mm (hxd)	1
FH3220	F3 horiz. segreg. Kit 200x600mm (hwx) K	4
FH3430	F3 horiz. segreg. Kit 300x600mm (hwx) K	2

Segregation Form 4

FV4668	Fairlead plate F4 vert. d=800mm	1
FH4220	Fairlead plate F4 h=200mm	3
FH4430	Fairlead plate F4 h=300mm	2


ArTu K Modular Structures

Examples of configurations

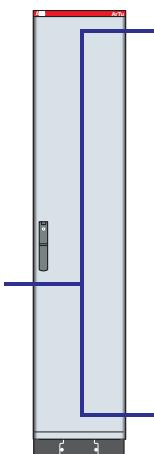

ArTu K Series dim. 1800x300x700 (2031x420x837) mm (external hxwxd) IP65 complete with 1250A busbars vertically on side of cable riser - Icw max 50kA

Code	Description	Q.ty
VC3080	Cable container 300x800mm (wxh) K	1
SK1800	N°4 ArTu K uprights h=1800mm	1
PO1831	Blind door 1800x300mm (hxw) L, M int.	1
PO1833	Blind door 1800x300mm (hxw) K ext.	1
RF1830	Cable container rear panel 1800x300mm (hxw) K	1
AD1014	Lateral side-by-side Kit, K	1
PB1600	Scaled busbar holder In=1600A (75 kA)	5
BA0800	Busbar In=800A	1
BA1250	Busbar In=1250A	3
AD1066	N°4 busbar adapters In=800A with busbar holder up to 1600A	2
TV8101	N°2 int./ext. cable cont. crosspieces d=800mm	3

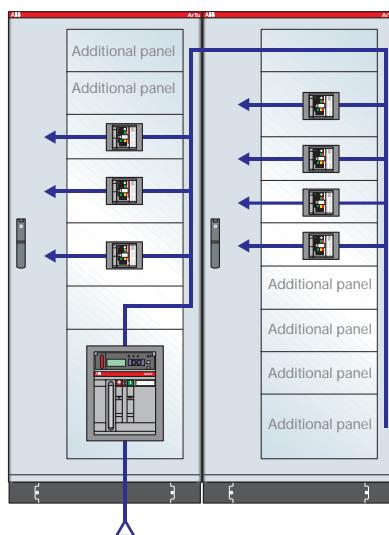


ArTu K Series 2 x dim.2000x1600x700 (2231x1924x837) mm (external hxwxd) IP65 complete with 1600A horizontal and 1250A vertical busbars - Icw max 75kA

Code	Description	Q.ty
SK8080	ArTu K Base/Top/Base strip 800x800mm (wxh)	2
SK2000	N°4 ArTu K uprights h=2000mm	2
PV2081	Glass door 2000x800mm (hxw) K	2
LF2080	N°2 side panels 2000x800mm (hxw) K	1
RF2080	Rear panel 2000x800mm (hxw) K	2
VC2023	Int. reduced cable cont.2000x200mm (hxw) K	2
PC2600	Blind panel 200x600mm (hxw) M, K	7
PC3600	Blind panel 300x600mm (hxw) M, K	1
KT4111	T4 Kit hor. fixed+access. 200x600mm (hxw) K	2
KT5111	Hor. fixed T5 Kit+accessories 300x600mm (hxw) K	3
KT2111	T2 Kit 3/4P horiz. fixed without segreg. K	2
KE3215	Kit per Emax E1, E2, E3 vert. fixed	1
AD1014	Lateral side-by-side Kit, K	1
PB1601	Linear busbar holder In=1600A (75 kA)	10
BA0800	Busbar In=800A	1
BA1250	Busbar In=1250A	4
BA1600	Busbar In=1600A	3
AD1066	N°4 busbar adapters In=800A with busbar holders up to 1600A	2
TV8001	N°2 open frame structure crosspieces d=800mm	3
AD1069	N°4 connect. coupling busbars from 1250/1600A to 800A	1
AD1064	N°12 coupling screws w=27 x flat up to 10mm	4
TV8211	N°2 structure crosspieces w=800mm	2

ArTu K Modular Structures

Examples of configurations

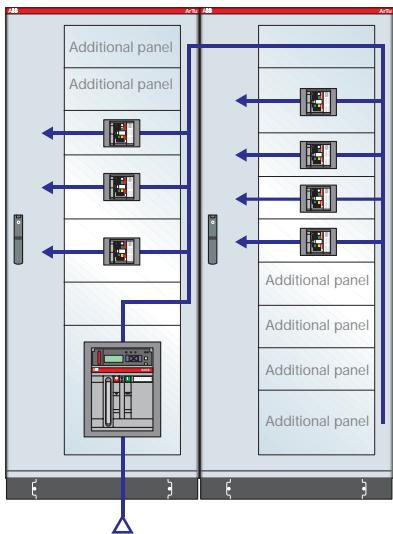

ArTu K Series 2 x dim.2000x1600x700 (2231x1924x837) mm (external hxwxd) IP65 complete with 3200A horizontal and 1250A vertical busbars - Icw max 75kA

Code	Description	Q.ty
SK8080	ArTu K Base/Top/Base strip 800x800mm (wxd)	2
SK2000	N°4 ArTu K uprights h=2000mm	2
PV2081	Glass door 2000x800mm (hxw) K	2
LF2080	N°2 side panels 2000x800mm (hxd) K	1
RF2080	Rear panel 2000x800mm (hxw) K	2
VC2023	Int. reduced cable cont.2000x200mm (hxw) K	2
PC2600	Blind panel 200x600mm (hxw) M, K	7
PC3600	Blind panel 300x600mm (hxw) M, K	1
KT4111	T4 Kit hor. fixed+access. 200x600mm (hxw) K	2
KT5111	Hor. fixed T5 Kit+accessories 300x600mm (hxw) K	3
KT2111	T2 Kit 3/4P horiz. fixed without segreg. K	2
KE3215	Kit per Emax E1, E2, E3 vert. fixed	1
AD1014	Lateral side-by-side Kit, K	1
PB3201	Linear busbar holder In=3200A (75 kA)	6
PB1601	Linear busbar holder In=1600A (75 kA)	14
BA0800	Busbar In=800A	2
BA1250	Busbar In=1250A	6
BA2000	Busbar In=2000A	7
AD1066	N°4 busbar adapters In=800A with busbar holders up to 1600A	2
TV8001	N°2 Open frame struct. crosspieces d=800mm	3
AD1078	N°4 connect. coupling busbars from 3200A to 1600/1250A	2
AD1064	N°12 coupling screws w=27 x flat up to 10mm	4
TV8211	N°2 structure crosspieces w=800mm	3




ArTu K Series dim. 2000x600x500 (2231x748x637) mm (external hxwxd) IP65 with back plate h=2000

Code	Description	Q.ty
RF2060	Rear panel 2000x600mm (hxw) K	1
PO2061	Blind door 2000x600mm (hxw) K	1
SK2000	N°4 ArTu K uprights h=2000mm	1
SK6060	ArTu K Base/Top/Base strip 600x600mm (wxd)	1
LF2060	N°2 side panels 2000x600mm (hxd) K	1
AD1050	N°2 pair of tracks x back plate w=600mm	1
PF2006	Plain plate 2000x600mm (hxw) K	1

ArTu K Modular Structures

Examples of configurations

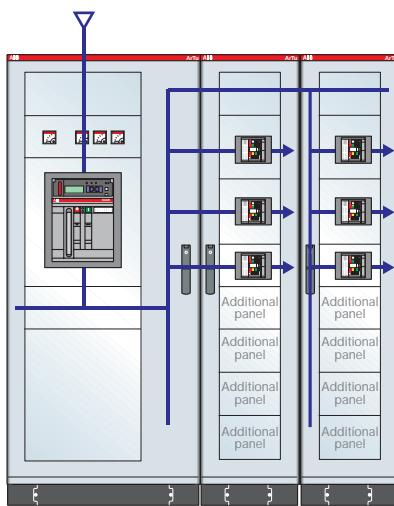


ArTu K Series dim. 1800x1580x700 (2031x1984x837) mm (external hxwxd) IP65 with Emax E1, T5 and T3, 1600A omnibus busbars and vertical 800A branches - lcw 50kA

Code	Description	Q.ty
AD1014	Lateral side-by-side Kit, K	2
AD1066	N°4 busbar adapters In=800A with busbar holders up to 1600A	4
AD1069	N°4 connect. coupling busbars from 1250/1600A to 800A	2
BA0800	Busbar In=800A	4
BA1600	Busbar In=1600A	10
KE3215	Kit E1, E2, E3 vert. fixed without segreg. K	1
KT3419	T3 Kit 3/4P horiz. fixed without segreg. K	2
KT5411	T5 Kit horiz. fixed 300x400mm (hxw) K	4
LF1880	N°2 side panels 1800x800mm (hxw) K	1
PB1601	Linear busbar holder In=1600A (75 kA)	8
PC2400	Blind panel 200x400mm (hxw) K	10
PC2600	Blind panel 200x600mm (hxw) M, K	2
PC6600	Blind panel 600x600mm (hxw) M, K	1
PS4720	4-instrument panel 72x72 200x600mm (hxw) M, K	1
PV1841	Glass door 1800x400mm (hxw) K	2
PV1881	Glass door 1800x800mm (hxw) K	1
RF1840	Rear panel 1800x400mm (hxw) K	2
RF1880	Rear panel 1800x800mm (hxw) K	1
SK1800	N°4 ArTu K uprights h=1800mm	3
SK1803	N°2 funct. frames h=1800mm open K	2
SK1880	Open frame int. cable cont. rear assembly h=1800mm	1
SK4080	ArTu K Base/Base strip 400x800mm (wxh) K	2
SK8080	ArTu K Base/Base strip 800x800mm (wxh) K	1
TV6221	N°2 funct. frame struct. crosspieces w=600mm	1
TV8001	N°2 Open frame struct. crosspieces d=800mm	2
TV8011	N°2 structure crosspieces d=800mm	1
TV8211	N°2 structure crosspieces w=800mm	2
VC1823	Int. reduced cable cont.1800x200mm (hxw) K	1

ArTu K Modular Structures

Examples of configurations

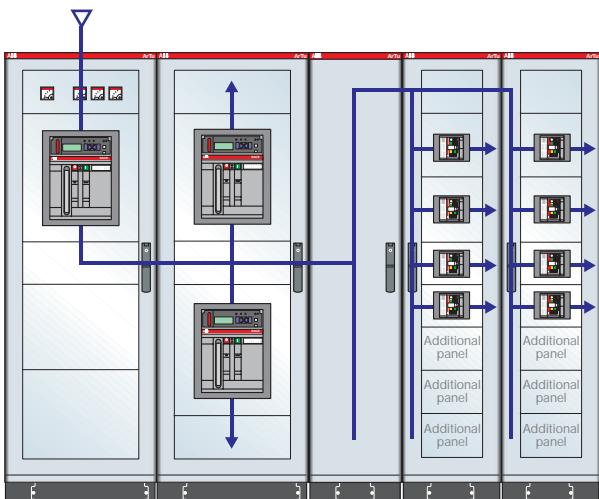


ArTu K Series dim. 1800x2280x700 (2031x2904x837) mm (external hwxwxd) IP65 with Emax E1, T5 and T3, 1600A omnibus busbars and vertical 1250A branches - Icw 50kA

Code	Description	Q.ty
AD1014	Lateral side-by-side Kit, K	4
AD1069	N°4 connect. coupling busbars from 1250/1600A to 800A	3
BA1250	Busbar In=1250A	4
BA1600	Busbar In=1600A	12
KE3215	Kit E1, E2, E3 vert. fixed without segreg. K	3
KT3419	T3 Kit 3/4P horiz. fixed without segreg. K	4
KT5411	T5 Kit horiz. fixed 300x400mm (hwx) K	4
LF1880	N°2 side panels 1800x800mm (hxd) K	1
PB1601	Linear busbar holder In=1600A (75 kA)	10
PC2400	Blind panel 200x400mm (hwx) K	8
PC2600	Blind panel 200x600mm (hwx) M, K	5
PC6600	Blind panel 600x600mm (hwx) M, K	1
PO1831	Blind door 1800x300mm (hwx) L, M int.	1
PO1833	Blind door 1800x300mm (hwx) K ext.	1
PS4720	4-instrument panel 72x72 200x600mm (hwx)M, K	1
PV1841	Glass door 1800x400mm (hwx) K	2
PV1861	Glass door 1800x600mm (hwx) K	2
RF1830	Cable container rear panel 1800x300mm (hwx) K	1
RF1840	Rear panel 1800x400mm (hwx) K	2
RF1860	Rear panel 1800x600mm (hwx) K	2
SK1800	N°4 ArTu K uprights h=1800mm	5
SK1803	N°2 funct. frames h=1800mm open K	4
SK4080	ArTu K Base/Base strip 400x800mm (wxd)	2
SK6080	ArTu K Base/Base strip 600x800mm (wxd)	2
TV6221	N°2 funct. frame struct. crosspieces w=600mm	2
TV8001	N°2 Open frame struct. crosspieces d=800mm	2
TV8011	N°2 structure crosspieces d=800mm	2
TV8211	N°2 structure crosspieces w=800mm	2
VC3080	Cable container 300x800mm (wxd) K	1

ArTu K Modular Structures

Examples of configurations

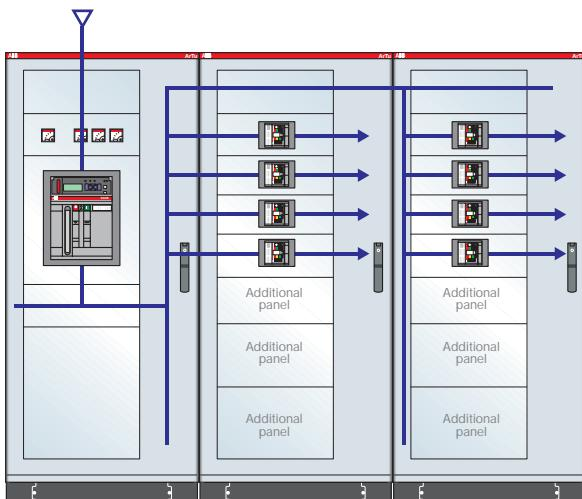


ArTu K Series dim. 1800x2400x700 (2031x2784x837) mm (external hxwxd) IP65 with Emax E1, T4 and T1, 1600A omnibus busbars and vertical 1250A branches - Icw 50kA

Code	Description	Q.ty
AD1069	N°4 connect. coupling busbars from 1250/1600A to 800A	3
BA1250	Busbar In=1250A	5
BA1600	Busbar In=1600A	11
KE3215	Kit E1, E2, E3 vert. fixed without segreg. K	1
KT1111	Kit T1 3/4P horiz. fixed without segreg. K	2
KT4111	T4 Kit hor. fixed+access.200x600mm (hxw) K	6
PB1601	Linear busbar holder In=1600A (75 kA)	12
PC2600	Blind panel 200x600mm (hxw) M, K	6
PC3600	Blind panel 300x600mm (hxw) M, K	4
PC6600	Blind panel 600x600mm (hxw) M, K	1
PS4720	4-instrument panel 72x72 200x600mm (hxw)M, K	1
PV1881	Glass door 1800x800mm (hxw) K	3
RF1880	Rear panel 1800x800mm (hxw) K	3
SK1800	N°4 ArTu K uprights h=1800mm	3
SK1880	Open frame int. cable cont. rear assembly h=1800mm	1
SK8080	ArTu K Base/Top/Base strip 800x800mm (wxh)	3
TV6221	N°2 funct. frame struct. crosspieces w=600mm	1
TV8001	N°2 open frame struct. crosspieces d=800mm	2
TV8011	N°2 structure crosspieces d=800mm	1
TV8211	N°2 structure crosspieces w=800mm	1
VC1823	Int. reduced cable cont.1800x200mm (hxw) K	3
LF1880	N°2 side panels 1800x800mm (hxd) K	1
AD1014	Lateral side-by-side kit, K	2

ArTu K Modular Structures

Examples of configurations

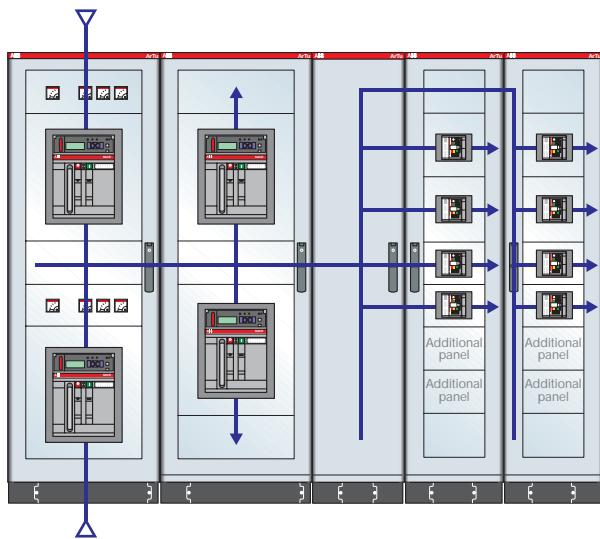


ArTu K Series dim. 1800x2280x700 (2031x2900x837) mm (external hwxwd) IP65 with Emax E2, T5 and T3, 3200A omnibus busbars and vertical 1600A branches - Icw 65kA

Code	Description	Q.ty
AD1014	Lateral side-by-side Kit, K	4
AD1073	N°4 busbar section T-couplings 3200A	1
AD1078	N°4 connect. coupling busbars from 3200A to 1600/1250A	1
BA1600	Busbar In=1600A	4
BA2000	Busbar In=2000A	20
KE3215	Kit E1, E2, E3 vert. fixed without segreg. K	4
KT3419	T3 Kit 3/4P horiz. fixed without segreg. K	3
KT5411	T5 Kit horiz. fixed 300x400mm (hxw) K	4
LF1880	N°2 side panels 1800x800mm (hxd) K	1
PB1601	Linear busbar holder In=1600A (75 kA)	6
PB3201	Linear busbar holder In=3200A (75 kA)	12
PC2400	Blind panel 200x400mm (hxw) K	8
PC2600	Blind panel 200x600mm (hxw) M, K	5
PO1831	Blind door 1800x300mm (hxw) L, M int.	1
PO1833	Blind door 1800x300mm (hxw) K ext.	1
PS4720	4-instrument panel 72x72 200x600mm (hxw) M, K	1
PV1841	Glass door 1800x400mm (hxw) K	2
PV1861	Glass door 1800x600mm (hxw) K	2
RF1830	Cable container rear panel 1800x300mm (hxw) K	1
RF1840	Rear panel 1800x400mm (hxw) K	2
RF1860	Rear panel 1800x600mm (hxw) K	2
SK1800	N°4 ArTu K uprights h=1800mm	5
SK1803	N°2 funct. frames h=1800mm open K	4
SK1880	Open frame int. cable cont. rear assembly h=1800mm	1
SK4080	ArTu K Base/Top/Base strip 400x800mm (wxw)	2
SK6080	ArTu K Base/Top/Base strip 600x800mm (wxw)	2
TV6221	N°2 funct. frame struct. crosspieces w=600mm	2
TV8001	N°2 open frame struct. crosspieces d=800mm	3
TV8011	N°2 structure crosspieces d=800mm	2
TV8101	N°2 int./ext. cable cont. crosspieces d=800mm	3
TV8211	N°2 structure crosspieces w=800mm	2
VC3080	Cable container 300x800mm (wxw) K	2

ArTu K Modular Structures

Examples of configurations

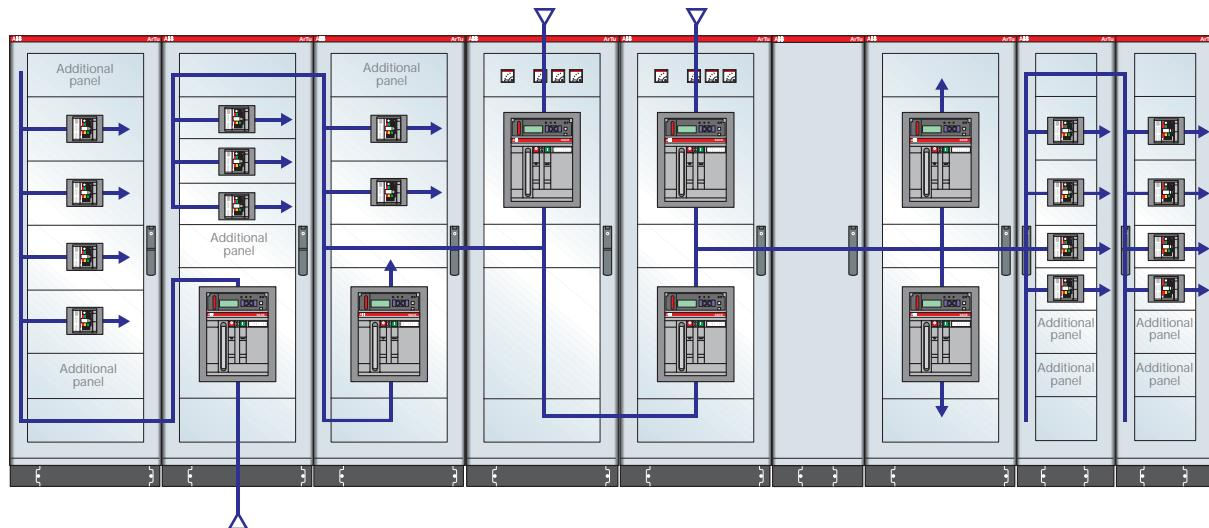

ArTu K Series dim. 1800x4680x900 (2031x5804x1037) mm. (external hwxwd) IP65 with Emax E3, T5 and T33200A omnibus busbars and vertical 1600A branches - Icw 50kA

Code	Description	Q.ty
SK6010	ArTu K Base/Top/Base strip 600x1000mm (wxd)	6
SK1800	N°4 ArTu K uprights h=1800mm	9
SK1803	N°2 funct. frames h=1800mm open K	8
RF1860	Rear panel 1800x600mm (hwx) K	6
PV1861	Glass door 1800x600mm (hwx) K	6
PC2600	Blind panel 200x600mm (hwx) M, K	16
KT5111	Hor. fixed T5 Kit+accessories 300x600mm (hwx) K	6
KE3215	Kit E1, E2, E3 vert. fixed without segreg. K	7
KT3119	T3 Kit 3/4P horiz. fixed without segreg. K	3
PS4720	4-instrument panel 72x72 200x600mm (hwx) M, K	2
PC6600	Blind panel 600x600mm (hwx) M, K	1
VC3010	ArTu K Base/Top/Base strip 300x1000mm (wxd)	1
RF1830	Cable container rear panel 1800x300mm (hwx) K	1
PO1833	Blind door 1800x300mm (hwx) K ext.	1
PO1831	Blind door 1800x300mm (hwx) L, M int.	1
SK4010	ArTu K Base/Top/Base strip 390x1000mm (wxd)	2
RF1840	Rear panel 1800x400mm (hwx) K	2
PV1841	Glass door 1800x400mm (hwx) K	2
KT5411	T5 Kit horiz. fixed 300x400mm (hwx) K	4
KT3419	T3 Kit 3/4P horiz. fixed without segreg. K	4
PC2400	Blind panel 200x400mm (hwx) K	8
AD1014	Lateral side-by-side Kit, K	8
BR1600	N°2 busbars cross-section100x10mm w=1750mm	29
BP3200	N°2 busbar holders 3 phase busbars cross-sect. 10mm	6
BP1600	N°2 busbar holders x cross-section 10mm	9
TV1001	N°2 open frame struct. crosspieces d=1000mm	15
TR1201	N°2 hor. struct. busbar crosspieces d=1000mm	6
TV1211	N°2 structure crosspieces d=1000mm	6
LF1810	N°2 side panels 1800x1000mm (hxd) K	1

Index

Gemini

Compliance with Standards and technical characteristics	6/2
IP degree of protection.....	6/4
IK degree of resistance to impacts.....	6/5
Double insulation.....	6/6
Self-extinguishing tests.....	6/6
Resistance to chemical agents	6/7
Disposal instructions	6/8

ArTu distribution switchgear

Mechanical and electrical characteristics	6/10
Declaration of conformity	6/12
Dissipated power	6/13
Handling	6/18
Electrical continuity	6/20
Equipotential conductors	6/21
Degrees of protection.....	6/22
IK mechanical resistance to impact	6/24

Busbars with shaped section and flat busbars

Mechanical and electrical characteristics	6/25
---	------

Busbars with shaped section

Characteristics of the components	6/26
---	------

Flat busbars

Characteristics of the components	6/28
---	------

Unifix cabling system

Examples of connections - Unifix H	6/30
--	------

Examples of connections - Unifix L	6/31
--	------

Segregations

Examples of ArTu segregation.....	6/32
-----------------------------------	------

Gemini switchboards

Compliance with Standards and technical characteristics

Reference Standards

Standard IEC 62208 ("Empty enclosures for low voltage switch-gear and control gear assemblies. General requirements."), that has implemented at an international level the Standard EN 50298, presently EN 62208, is the prescriptive reference for Gemini switchboards.

The object of Standard CEI EN 50298 is to formulate definitions, classifications, characteristics and test prescriptions for cases designed to be used as part of protection and operating equipment (switchboards) in compliance with the Standards of the EN 60439 series, that have a maximum rated voltage of 1000 V in alternating current for maximum frequencies of 1000 Hz or 1500 V in direct current and are suitable for general use in both internal and external applications.

The Standard applies to empty enclosures, before the user has installed protection and operating devices inside them.

The Standard does not apply to enclosures with structural and functional characteristics that make them subject to other prescriptions (e.g. cases for domestic installations and the like).

In this case Standards IEC 60670 – CEI 23-48 ("General requirements for enclosures for accessories for household and similar fixed electrical installations") and CEI 23-49 ("Enclosures for accessories for household and similar fixed electrical installations. Part 2: particular requirements for enclosures for protection devices and accessories dissipating a considerable power in normal use") apply.

On the basis of the indications of the ABB SACE technical characteristics' table, the installer may have to certify compliance with Standards CEI 23-51 – EN 60439-1 – CEI 17-13-1 ("Part 1: standard equipment subject to type tests – AS – and non-standard equipment partially subject to type tests – ANS").

Gemini switchboards

Compliance with Standards and technical characteristics

Table of Gemini switchboards' technical characteristics

Size	1	2	3	4	5	6
Gemini with transparent door	1SL0211A00	1SL0212A00	1SL0213A00	1SL0214A00	1SL0215A00	1SL0216A00
Gemini with opaque door	1SL0201A00	1SL0202A00	1SL0203A00	1SL0204A00	1SL0205A00	1SL0206A00
External dimensions WxHxD (mm)	335x400x210	460x550x260	460x700x260	590x700x260	590x855x360	840x1005x360
Internal dimensions WxHxD (mm)	250x300x180	375x450x230	375x600x230	500x600x230	500x750x330	750x900x330
IP degree	IP66	IP66	IP66	IP66	IP66	IP66
Double isolation	Yes	Yes	Yes	Yes	Yes	Yes
IK degree	10	10	10	10	10	10
GWT (°C)	750	750	750	750	750	750
Operating temperature	-25 °C ÷ +100 °C					
No. of DIN modules	24 (12x2)	54 (18x3)	72 (18x4)	96 (24x4)	120 (24x5)	216 (36x6)
No. of vertical modules (H=150 mm)	2	3	4	4	5	6
Material	Thermoplastic	Thermoplastic	Thermoplastic	Thermoplastic	Thermoplastic	Thermoplastic
Color	Grey RAL7035					
Fast wiring system	Unifix L					
No. of locks	2	2	2	2	3	3
Rated frequency	50-60 Hz					
Maximum dissipation power ⁽¹⁾	45 W	72 W	85 W	102 W	156 W	248 W
STANDARD CEI EN 60439-1						
Over-temperature (par. 8.2.1) ⁽²⁾						
- Max. dispersible power with over-temperature of 25 °C	40 W	65 W	77 W	91 W	133 W	205 W
- Max. dispersible power with over-temperature of 30 °C	45 W	72 W	85 W	102 W	156 W	248 W
- Max. dispersible power with over-temperature of 35 °C	52 W	85 W	100 W	121 W	187 W	299 W
- Max. dispersible power with over-temperature of 40 °C	62 W	100 W	118 W	143 W	221 W	355 W
Impulse withstand (par. 8.2.2)						
- Rated service voltage	≤ 690 V					
- Rated insulation voltage	≤ 800 V					
- Rated impulse withstand voltage	8 kV					
Short circuit withstand (par. 8.2.3)						
- Rated peak short-circuit current	-	-	-	-	-	-

⁽¹⁾ Maximum dissipation power data was obtained following the indications of **Standard CEI 23-49**, with a temperature difference of Dt=30 °C.

⁽²⁾ **Note to paragraph 8.2.1 of Standard CEI EN 60439-1**

The table gives the thermal dissipation values of Gemini switchboards when they are wall-mounted. The dispersible power figures (in Watts) vary according to the overtemperature allowed in the accessible parts of the switchboard and must be compared with the total amount of power dissipated by all the components installed inside the switchboard taking into due account the factor of contemporaneity.

Gemini switchboards

IP degree of protection

As indicated in the following table, the IP degree of protection is expressed by two characteristic numbers depending on the behavior of the product to which it refers according to the prescriptions

of CEI 70-1 and IEC 529 Standards.


With IP66 degree of protection, Gemini switchboards are totally protected against the penetration of dusts and sprays of seawater.

1st Number: protection against the penetration of solid bodies

0

No protection

1




Protection against the penetration of solid bodies with a diameter of over 50 mm

2




Protection against the penetration of solid bodies with a diameter of over 12 mm or a length of over 80 mm

3




Protection against the penetration of solid bodies with a diameter or thickness of over 2.5 mm

4




Protection against the penetration of solid bodies with a diameter or thickness of over 1.0 mm

5



Protection against the penetration of dusts

6




Total protection against the penetration of dusts

2nd Number: protection against the penetration of water

0


No protection

1




Protection against the penetration of drops of water falling vertically

2




Protection against the penetration of drops of water falling at an angle of up to 15° from vertical

3




Protection against the penetration of drops of water falling at an angle of up to 60° from vertical

4




Protection against the penetration of splashes of water from all directions

5




Protection against the penetration of water sprayed by a hose from all directions

6




Protection against the penetration of sea water

7



Protection against the penetration of water during temporary immersion

8



Protection against the penetration of water during continual immersion

2nd number defined by Standards CEI 70-1 - IEC 60529

1SL0805041F0001

Gemini switchboards

IK degree of resistance to impacts

IK degree of resistance to impacts


The IK degree is expressed in Joules in compliance with Standard CEI EN 50102.

IK 0




No protection against impacts

IK 01




Resistance to impacts with impact energy up to **0,150 J**

IK 02




Resistance to impacts with impact energy up to **0,200 J**

IK 03




Resistance to impacts with impact energy up to **0,350 J**

IK 04




Resistance to impacts with impact energy up to **0,500 J**

IK 05




Resistance to impacts with impact energy up to **0,700 J**

IK 06




Resistance to impacts with impact energy up to **1,00 J**

IK 07




Resistance to impacts with impact energy up to **2,00 J**

IK 08




Resistance to impacts with impact energy up to **5,00 J**

IK 09



Resistance to impacts with impact energy up to **10,00 J**

IK 10



Gemini
Resistance to impacts with impact energy up to **20,00 J**

Gemini switchboards

Double insulation and self-extinguishing tests

Double insulation


Double insulation guarantees that Gemini is protected against indirect contacts on condition that the manufacturer's instructions are observed when carrying out mounting and wiring operations on the switchboard and that the appropriate accessories are used (e.g. screw-cover caps).



Double insulation is indicated by the graphic symbol

Self-extinguishing tests

Test text	Equipment required	Compliance with Standards	Purpose of the test	Test results	Test conditions	Character. elements	
					Heat source	Length of test	
GLOW-WIRE TEST		IEC 695-2-1 CEI 50-11	To assess the danger of fire by simulating thermal stresses produced by heat sources or by ignition (e.g. glowing elements, resistances overloaded for short intervals)	If a flame is generated, it must go out within 30 seconds of removing the glow wire. The test is conducted at temperatures of: - 650 °C - 750 °C - 850 °C - 960 °C	Glow wire Ø 4 mm	30 sec.	Assessment of the time it takes for the flame to go out



1SLC8050A3F0001

Gemini switchboards

Resistance to chemical agents

Resistance to chemical agents

The behavior of Gemini switchboards in the presence of chemical agents is indicated in the table with the symbols:

	High resistance	Limited resistance
Cold water	•	
Hot water	•	
Sulfuric acid 50%	•	
Hydrochloric acid 36%	•	
Acetic acid 60%	•	
Benzol		•
Gasoline		•
Acetone	•	
Ethyl alcohol	•	
Ammonia	•	
Dichlromethane		•
Diesel oil - naphtha		•
Mineral oils and greases	•	
Food oils and greases	•	
Perchloroethylene		•
Trichlorethene		•
Ethylether	•	
Toluene		•
Methanol	•	
Wine	•	
Fruit juices	•	
Laundry lye	•	
Detergents	•	

Gemini switchboards

Disposal instructions

Information about how to dispose of Gemini switchboards when they reach the end of their life

Instructions are given below about the procedures to adopt when disposing of Gemini switchboards at the end of their life cycle. The text is drafted in the form of a table referring to Standard CEI 308-1 "Information table concerning the end of life of electric and electronic products and a compilation guide", 2002-04, ed. 1, pamphlet number 308-1 6454.

Section I – Global product specification

Name Size	Type of product			
	With transparent door	With opaque door	Rated weight (kg)	External dimensions WxHxD (mm)
1	1SL0211A00	1SL0201A00	4,3	335x400x210
2	1SL0212A00	1SL0202A00	7,9	460x550x260
3	1SL0213A00	1SL0203A00	9,5	460x700x260
4	1SL0214A00	1SL0204A00	12,0	590x700x260
5	1SL0215A00	1SL0205A00	17,8	590x855x360
6	1SL0216A00	1SL0206A00	21,1	840x1005x360

Section II – Global product table

General code: CER 17 02 03 plastic (more than 95% of the product's weight)

No. of the component part (P1, P2, etc.)	Diagram	Quantity % over total weight	Material description	Symbol	Dangerousness (Yes/No)	CER Code
P1/BOX		~ 80%	Polypropylene	>PP<	No	17 02 03
P2/ROOF			Polypropylene	>PP<	No	17 02 03
P3/DOOR		~ 20%	Polycarbonate	>PC<	No	17 02 03
P4/ACCESSORIES		< 5%	Steel	-	No	17 04 05
P5/ACCESSORIES		< 5%	Brass	-	No	17 04 01

1SLC895017/EP901

Gemini switchboards

Disposal instructions

Section III – Components to be removed from the product and sent for separate treatment

Refer to section II of the table for a description of the materials.

Notes for recovery and disposal

At the end of its life, after separating it from components, the product can be sent to be recovered.

The product is not biodegradable: do not dispose of it in the environment.

The product/waste product is assimilable as solid urban waste. It must be incinerated or disposed of in compliance with current EEC, national and local regulations. You are recommended to check all reutilization possibilities.

Other recommendations

The information in this table relates to the product in the condition it was supplied. Assembled parts coming from different supplies must be treated separately according to the reference specifications of the respective manufacturers.

Section IV – Safety instructions

Handling

No special instructions. Refer to the general regulations concerning hygiene on the workplace when using.

The product's main components contain mineral additives and coloring agents in concentrations that comply with current European Directives at the time this catalogue went to press: they do not contain substances classified as dangerous.

Transport

No special instructions.

Storage

No gas or harmful vapors are released during storage. Thermal decomposition in the event of fire or combustion may release dangerous products: if this should occur, specific means of protection must be used. In the event of fire, conventional fire extinguishing instruments are recommended (atomized water, foam, carbon dioxide, powder).

Empty packages are not contaminated by the product and can therefore be recycled or reused.

Utilization

No special instructions.

Other instructions

The information given in this section is based on current ABB SACE know-how and is aimed at describing the product only for environmental, health and safety purposes. It must not, therefore, be considered as a guarantee of specific properties. ABB SACE assumes no responsibility for the behavior of buyers that do not comply with the information given in this table and for incorrect or improper usages of the product or usages that cannot reasonably be envisaged.

ArTu distribution switchgear

Mechanical and electrical characteristics

Compliance with IEC 60439-1 Standard

The ArTu switchgear has undergone the type tests foreseen by the IEC 60439-1 (IEC 17/13-1 3rd edition) Standards in the ABB laboratories. The results of these tests guarantee the performances of the ArTu switchgear and, by using the metalwork structures, ABB SACE air, moulded-case and modular circuit-breakers, mean that no further type tests need to be carried out by following the selection criteria and the assembly instructions for the various components. These results, which are indicated below, can be referred to for making out the declaration of conformity of the switchgear.

Overtemperature (Ref. par. 8.2.1 of the Standard)

The table on page 6/5 and following pages shows the thermal dissipation values referred to all the dimensions of ArTu switchgear and to the type of installation, deriving from the type tests carried out. The dissipated power data (in Watt) is according to the admissible overtemperature inside the switchgear in the upper part, and must be compared with the sum of the powers dissipated by all the components installed inside the switchgear (appropriately taking into account the simultaneity factor).

Dielectric properties (Ref. par. 8.2.2 of the Standard)

	Wall-mounted ArTu L D=200mm	Floor-standing ArTu L D=250mm	Wall-mounted ArTu M D=150/200mm	Floor-standing ArTu M ArTu K D=250mm	ArTu K
Rated service voltage:	up to 690V AC	up to 690V AC	up to 690V AC	up to 690V AC	up to 1000V AC
Rated insulation voltage:	up to 1000V AC	up to 1000V AC	up to 1000V AC	up to 1000V AC	up to 1000V AC
Rated impulse withstand voltage:	6 kV	8 kV	6 kV	8 kV	8 kV

Short-circuit withstand current (Ref. par. 8.2.3 of the Standard)

	Wall-mounted ArTu L D=200mm	Floor-mounted ArTu L D=250mm	Wall-mounted ArTu M D=150/200mm	Floor-mounted ArTu M ArTu K D=250mm	ArTu K
Rated short-time short-circuit current: phase-phase	25 kA (1s)	35 kA (1s)	25 kA (1s)	35 kA (1s)	105kA (1s) 50kA(3s)
phase-phase	9 kA (1s)	21 kA (1s)	9kA (1s)	21 kA (1s)	60 kA (1s)
Rated max. peak short-circuit current	52.5kA	73kA	52.5kA	73kA	254kA

Efficiency of the protection circuit (Ref. par. 8.2.4 of the Standard)

	Wall-mounted ArTu L D=200mm	Floor-mounted ArTu L D=250mm	Wall-mounted ArTu M D=150/200mm	Floor-mounted ArTu M ArTu K D=250mm	ArTu K
(Ref. par. 8.2.4.1):	Following the assembly indications of the metal components, the effective electrical continuity between the exposed conductive parts is verified, with negligible resistance values.				
(Ref. par. 8.2.4.2):	Protection circuit short-circuit withstand current: phase-earthing busbar	9 kA (1s)	21 kA (1s)	9 kA (1s)	21 kA (1s)
					60 kA (1s)

Insulation distances (Ref. par. 8.2.5 of the Standard)

The insulation distances are guaranteed by following the ABB SACE metalwork structure and circuit-breaker assembly and mounting instructions.

Mechanical operation (Ref. par. 8.2.6 of the Standard)

Mechanical operation is verified by following the assembly and mounting instructions for the ABB SACE metalwork structures and circuit-breakers.

Degree of protection (Ref. par. 8.2.7 of the Standard) According to CEI EN 60529 (CEI 70-1 publication IEC 529)

	Wall-mounted ArTu L D=200mm	Floor-mounted ArTu L D=250mm	Wall-mounted ArTu M D=150/200mm	Floor-mounted ArTu M ArTu K D=250mm	ArTu K
Without door	IP31	IP31	-	IP 31	IP31
With door/without door and ventilated side panels	-	-	-	-	IP41
With door	IP43	IP43	IP 65	IP 65	IP 65

ArTu distribution switchgear

Mechanical and electrical characteristics

Mechanical characteristics

Material

ArTu L structure	12/10mm thick pickled steel sheet
ArTu M structure	15/10mm thick steel sheet (floor-mounted) / 15/10mm hot galvanised sheet (wall-mounted)
ArTu K structure	15/10mm thick steel sheet
Panels	12/15/10mm thick steel sheet
Doors	15/10mm hot galvanised steel sheet. 4mm thick glass tempered from inside
Plates	hot galvanised steel sheet, thickness: Plates 20/25/10mm

Painting

Structure colour	Grey orange-peel RAL 7035
Base strip colour	Grey orange-peel RAL 7012
Standard cycle	Sheet washing Phosphating with iron salt base Drying in tunnel at 100°C External and internal painting with electrostatic application of thermosetting powder enamel with epoxy polyester binders. Grey orange-peel RAL 7035 colour, total thickness: 60/70 micron. Polymerisation in oven at 180°C.
Paint characteristics	Binder: epoxy polyester Specific gravity: 1.61 g/cm ³ Theoretical coverage: 10.4 m ² /kg with average film thickness 60 micron Melting point: 85-95°C (Kofler bench method) Granulometry: standard distribution between 5 and 100 micron with average size of the particles between 30 and 40 micron. Hardening: 12 min. at 190 °C (temperature of object) Hardness: 1H - 2H DIN 53152 bending elasticity: unaltered on 1/4" spindle DIN 53151 reticular adherence: GT O (100%) Erichem elasticity: SEN DIN 53156: > 6mm Gardner resistance to impact: 25 Kg. x cm.

Tests carried out on degreased and phosphated sheets with film thickness of 60/70 micron.

The painting has passed the resistance tests to saline fog (193 hours).

Ambient characteristics

Type of installation	indoors
Installation conditions	Wall / Floor-mounted
Service climate (t° / r.h. %)	constant 23 °C/83% - 40 °C/93% variable 23 °C/98% - 40 °C/98%
Ambient temperature limits	operating -5 °C +40 °C storage -25 °C +55 °C

ArTu distribution switchgear

Declaration of conformity

ABB SACE declaration of conformity

ArTu switchgear with the following rated characteristics:

Rated service voltage	up to 690V
Rated insulation voltage	up to 1000V
Rated current / I_{cw}	ArTu L wall-mounted up to 250 A / 25 kA
	ArTu L floor-mounted up to 800 A / 35 kA
	ArTu K up to 4000 A / up to 105 kA
	ArTu M floor-mounted and K D=250mm up to 630 A / 35 kA
	ArTu M D=150/200mm up to 250 A / 25 kA
Degree of protection	ArTu L IP31 (without door), IP 43 (with door)
	ArTu K IP31 (without door), IP41 (with door and side ventilation), IP65 (with door)
	ArTu M D=250mm IP31 (without door), IP65 (with door)
	ArTu M D=150/200mm IP 65 (with door)

when correctly selected and assembled, as per the indications given in this catalogue and in the instruction manual, allow construction of switchgear complying with the IEC 60439-1 (CEI 17/13-1) Standard, on the basis of what is foreseen by the Low Voltage Directive of the European Community (Directive 73/23/EEC, Law 791/1977).


The above is valid if the switchgear is designed and constructed:

- selecting the materials according to the performances indicated in the ABB catalogues;
- sizing the conductors according to the prescriptions of the IEC 60439-1 and CEI 64-8 Standards;
- carrying out the individual tests foreseen under the IEC 60439-1 Standard successfully.

ArTu distribution switchgear

Dissipated power

ArTu IP 31 switchgear

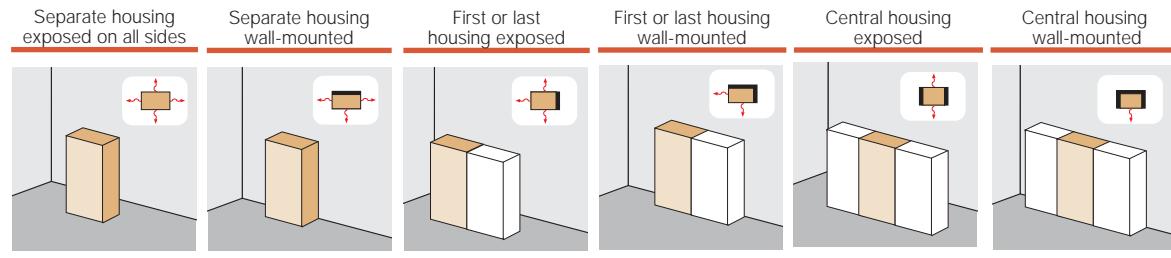

Overtemperature	Separate housing exposed on all sides				Separate housing wall-mounted				First or last housing exposed				First or last housing wall-mounted				Central housing exposed				Central housing wall-mounted						
	Max. dissipated power (W)	25 °C	30 °C	35 °C	40 °C	Max. dissipated power (W)	25 °C	30 °C	35 °C	40 °C	Max. dissipated power (W)	25 °C	30 °C	35 °C	40 °C	Max. dissipated power (W)	25 °C	30 °C	35 °C	40 °C	Max. dissipated power (W)	25 °C	30 °C	35 °C	40 °C		
ArTu L																											
SL0600						99	125	150	176							95	118	143	168					91	113	137	160
SL0800						106	134	160	188							100	125	152	178					107	132	160	189
SL1000						122	152	184	216							116	143	174	204					113	141	170	201
SL1200						135	170	205	241							128	161	193	228					126	156	189	223
SL1400						174	217	265	312	155	195	237	278	168	211	255	301	145	183	221	261	164	206	250	295		
SL1600						194	242	294	347	171	213	259	306	185	232	281	332	160	200	242	286	180	226	274	323		
SL1800						211	264	320	378	184	231	281	331	200	251	305	360	173	217	262	309	195	244	296	350		
SL2000						227	285	345	408	197	248	300	354	215	270	327	386	185	231	281	331	206	262	318	375		
SL1408						246	309	374	442	206	257	311	369	237	297	360	425	197	246	299	352	229	287	348	410		
SL1608						273	342	415	490	231	289	351	415	264	331	402	474	220	276	331	395	253	318	385	454		
SL1808						286	359	435	513	245	308	373	441	278	349	422	498	235	295	358	422	268	337	408	482		
SL2008						303	380	461	543	271	340	411	485	298	374	453	535	263	329	399	471	294	367	446	526		
ArTu M										271	340	411	485														
SM 1462	179	225	272	313	159	199	241	285	172	216	261	309	149	186	226	267	168	210	255	301	143	180	218	257			
SM 1662	196	246	298	352	173	217	263	310	187	235	285	336	161	203	245	290	182	229	277	327	156	195	236	279			
SM 1682	248	311	377	445	218	274	331	391	241	303	367	433	206	259	313	370	238	298	361	427	201	252	306	361			
SM 1862	212	266	323	381	186	233	282	333	202	253	307	362	174	218	264	311	196	246	298	352	167	210	254	300			
SM 1882	270	339	410	484	236	296	358	423	261	328	397	469	223	279	338	399	257	322	391	461	217	272	330	389			
SM 2062	228	286	346	409	198	248	301	355	215	270	327	386	185	232	281	331	209	262	317	375	178	223	270	319			
SM 2082	291	365	442	521	252	316	383	453	280	351	425	502	238	299	362	427	275	345	418	494	232	291	353	417			
ArTu K																											
H 1600mm																											
SK 6025	206	257	310	367	185	229	275	325	198	247	298	351	172	215	257	305	192	242	290	342	167	207	248	283			
SK 8025	260	322	391	460	230	286	345	406	252	315	380	448	216	273	325	385	250	310	373	442	212	265	320	376			
ArTu K																											
H 1800mm																											
SK 6025	222	278	338	396	196	245	295	348	212	255	320	377	184	230	276	325	206	258	310	368	178	222	267	315			
SK 8025	280	350	423	500	247	310	370	438	271	340	410	485	233	290	350	415	270	335	405	476	228	285	342	404			
SK 4040	223	280	338	400	208	258	314	371	208	262	315	374	187	234	281	332	193	246	296	350	170	215	260	310			
SK 6040	285	357	433	511	259	324	393	464	268	336	407	481	237	297	359	424	255	320	387	457	223	279	338	400			
SK 8040	356	446	540	638	319	400	484	572	319	425	515	608	296	371	449	530	327	410	496	586	283	355	430	508			
SK 4050	257	322	389	460	242	301	366	433	237	298	359	425	216	270	324	383	217	276	332	393	194	245	297	353			
SK 6050	328	412	499	589	302	378	458	541	306	383	464	549	273	342	414	489	286	359	434	513	254	319	386	456			
SK 8050	390	489	592	699	367	461	558	659	374	469	568	671	339	425	514	607	365	458	554	654	321	403	488	577			
SK 4060	290	364	440	520	276	344	418	494	265	333	402	476	244	305	367	434	240	305	367	435	218	274	333	395			
SK 6060	371	466	564	666	344	432	523	617	343	430	521	616	309	387	469	553	316	397	481	568	285	358	434	512			
SK 8060	423	531	643	759	415	521	631	745	408	512	621	733	381	478	579	684	402	505	611	722	359	451	546	645			
SK 4080	371	461	560	668	349	440	535	622	329	410	495	588	300	377	457	539	297	370	455	536	273	343	415	491			
SK 6080	428	537	651	769	426	535	648	765	407	511	619	731	388	486	589	695	384	481	583	688	352	442	535	632			
SK 8080	489	614	743	877	478	599	726	857	463	581	703	830	450	564	683	807	454	570	690	815	434	544	659	778			
SK 4010	445	553	672	802	419	528	642	746	395	492	594	706	360	452	548	647	356	444	546	643	428	498	589	642			
SK 6010	514	644	781	923	511	642	778	918	488	613	743	877	466	583	707	834	461	577	700	826	422	530	642	758			
SK 8010	587	737	892	1052	574	719	871	1028	556	697	844	996	540	677	820	968	545	684	828	978	521	653	791	934			
ArTu K																											
H 2000mm																											
SK 6025	240	298	358	424	208	260	313	370	225	282	340	402	195	245	295	346	219	275	329	388	188	234	282	334			
SK 8025	306	377	457	536	262	328	395	468	290	363	440	520	248	312	377	442	285	358	429	509	242	304	365	432			
SK 4040	242	304	368	435	224	268	337	399	223	280	339	399	200	251	304	359	209	260	316	377	183	230	278	329			
SK 6040	304	382	463	546	277	347	420	496	287	360	436	514	253	317	384	454	273	342	415	489	237	298	360	426			
SK 8040	368	462	559	660	340	427	517	610	362	454	550	650	315	395	479	565	349	437	530	625	301	378	458	541			
SK 4050	277	349	422	498	261	314	393	465	254	318	385	454	203	289	350	413	234	291	354	422	208	262	316	374			
SK 6050	343	431	522																								

ArTu distribution switchgear

Dissipated power

ArTu IP 31 switchgear with ventilated side panels

	Separate housing exposed on all sides				Separate housing wall-mounted				First or last housing exposed				First or last housing wall-mounted				
Overtemperature																	
	Max. dissipated power (W)				Max. dissipated power (W)				Max. dissipated power (W)				Max. dissipated power (W)				
	25°C	30°C	35°C	40°C	25°C	30°C	35°C	40°C	25°C	30°C	35°C	40°C	25°C	30°C	35°C	40°C	
ArTu K H 1800mm																	
SK 4060	442	570	707	852	421	544	675	813	325	420	521	628	312	402	499	601	
SK 6060	515	664	824	993	486	627	778	938	396	511	634	764	368	475	589	710	
SK 8060	590	761	944	1138	553	713	885	1067	461	594	737	889	426	550	682	823	
SK 4080	599	773	959	1155	581	749	930	1120	409	528	654	789	393	508	630	759	
SK 6080	685	885	1097	1323	660	852	1057	1274	496	640	793	956	461	595	738	889	
SK 8080	772	996	1236	1489	725	936	1161	1399	551	711	882	1064	498	695	863	1040	
SK 4010	799	1031	1279	1540	726	936	1163	1400	511	660	818	986	462	598	741	893	
SK 6010	913	1180	1463	1764	825	1065	1321	1593	620	800	991	1195	542	700	868	1046	
SK 8010	1029	1328	1648	1985	906	1170	1451	1749	689	889	1103	1330	586	818	1015	1224	
ArTu K H 2000mm																	
SK 4060	446	574	710	855	426	550	682	822	328	425	525	632	314	406	504	605	
SK 6060	529	683	847	1021	491	634	786	948	399	515	639	770	372	480	595	717	
SK 8060	596	769	955	1151	565	728	904	1089	464	598	742	894	431	556	690	831	
SK 4080	605	780	968	1167	584	754	935	1128	413	532	658	794	397	512	636	766	
SK 6080	691	892	1107	1334	665	858	1065	1283	503	648	804	970	472	608	755	910	
SK 8080	804	1037	1287	1551	738	953	1182	1425	575	742	920	1109	536	692	859	1035	
SK 4010	807	1040	1291	1556	730	943	1169	1410	516	665	823	993	467	602	748	901	
SK 6010	921	1189	1476	1779	831	1073	1331	1604	629	810	1005	1213	555	715	888	1071	
SK 8010	1072	1383	1716	2068	923	1191	1478	1781	719	928	1150	1386	631	814	1011	1218	

Dissipated power inside the ArTu switchgear according to the admissible overtemperature.

ArTu IP 31 switchgear with 2 ventilated side panels and 2 ventilated front panels H=200mm


	Separate housing exposed on all sides				Separate housing wall-mounted				First or last housing exposed				First or last housing wall-mounted			
Overtemperature																
	Max. dissipated power (W)				Max. dissipated power (W)				Max. dissipated power (W)				Max. dissipated power (W)			
	25°C	30°C	35°C	40°C	25°C	30°C	35°C	40°C	25°C	30°C	35°C	40°C	25°C	30°C	35°C	40°C
ArTu K H 1800mm																
SK 6060	571	737	914	1102	541	698	866	1044	428	552	685	826	406	524	650	784
SK 8060	649	837	1038	1252	611	788	978	1179	502	648	804	969	460	593	736	887
SK 6080	737	951	1180	1422	712	919	1140	1374	552	713	884	1066	518	668	829	999
SK 8080	836	1079	1339	1613	787	1016	1261	1519	625	806	1000	1205	595	768	953	1149
ArTu K H 2000mm																
SK 6060	586	756	938	1131	546	705	874	1131	434	560	695	838	407	525	651	785
SK 8060	654	844	1047	1261	623	804	997	1202	507	654	811	978	468	604	749	903
SK 6080	741	956	1186	1429	715	923	1145	1380	560	723	897	1081	527	680	843	1016
SK 8080	861	1112	1379	1662	792	1022	1268	1528	640	826	1024	1234	596	769	955	1151

Dissipated power inside the ArTu switchgear according to the admissible overtemperature.

ArTu distribution switchgear

Dissipated power

ArTu IP 41 switchgear with ventilated side panels

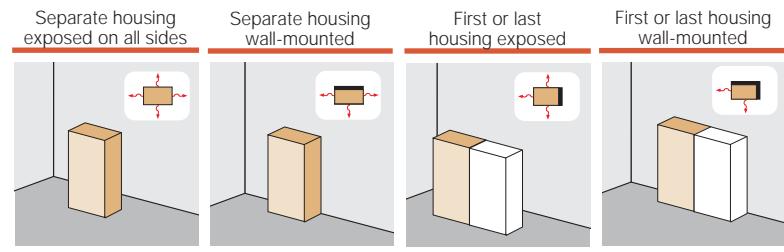

Overtemperature	Separate housing exposed on all sides				Separate housing wall-mounted				First or last housing exposed				First or last housing wall-mounted						
	Max. dissipated power (W)				Max. dissipated power (W)				Max. dissipated power (W)				Max. dissipated power (W)						
	25°C	30°C	35°C	40°C		25°C	30°C	35°C	40°C		25°C	30°C	35°C	40°C		25°C	30°C	35°C	40°C
ArTu K H 1800mm																			
SK 4060	418	539	669	806	398	514	637	768	317	409	507	611	304	392	486	586			
SK 6060	489	631	783	944	462	596	739	891	376	485	602	725	350	451	560	674			
SK 8060	560	723	897	1081	525	678	841	1013	438	565	700	844	405	523	648	781			
SK 6080	651	840	1042	1256	627	809	1004	1210	471	608	754	909	438	565	701	845			
SK 4080	562	725	899	1084	544	703	872	1051	395	509	632	761	382	493	612	738			
SK 8080	733	946	1174	1415	689	889	1103	1329	524	676	838	1010	473	661	819	988			
SK 4010	749	967	1199	1445	725	937	1163	1401	494	636	790	951	449	580	720	868			
SK 6010	868	1120	1389	1675	836	1079	1339	1613	589	760	943	1136	515	665	825	994			
SK 8010	977	1261	1565	1887	919	1185	1471	1772	655	845	1048	1263	556	778	964	1162			
ArTu K H 2000mm																			
SK 4060	422	543	671	809	403	519	644	777	320	413	511	615	309	398	492	591			
SK 6060	503	649	805	970	466	602	747	900	379	489	607	732	353	456	565	681			
SK 8060	566	731	907	1093	536	692	859	1035	440	568	705	850	410	528	656	790			
SK 4080	567	732	908	1094	547	706	876	1056	398	514	635	765	389	498	617	743			
SK 6080	657	847	1051	1267	632	815	1011	1219	477	616	764	921	448	578	717	864			
SK 8080	764	985	1222	1474	701	905	1123	1353	546	705	874	1054	510	658	816	983			
SK 4010	756	976	1211	1459	729	941	1168	1408	498	643	794	956	458	586	726	874			
SK 6010	876	1129	1401	1689	843	1087	1348	1625	596	770	955	1151	527	680	844	1016			
SK 8010	1019	1313	1629	1965	935	1207	1497	1804	683	881	1093	1318	600	774	960	1156			

Dissipated power inside the ArTu switchgear according to the admissible overtemperature.

ArTu distribution switchgear

Dissipated power

ArTu IP 43 switchgear

	Separate housing exposed on all sides				Separate housing wall-mounted				First or last housing exposed				First or last housing wall-mounted				Central housing exposed				Central housing wall-mounted				
Overtemperature	Max. dissipated power (W)				Max. dissipated power (W)				Max. dissipated power (W)				Max. dissipated power (W)				Max. dissipated power (W)				Max. dissipated power (W)				
	25°C	30°C	35°C	40°C	25°C	30°C	35°C	40°C	25°C	30°C	35°C	40°C	25°C	30°C	35°C	40°C	25°C	30°C	35°C	40°C	25°C	30°C	35°C	40°C	
ArTu L																									
SL0600					90	113	137	162					86	108	131	155					82	103	125	147	
SL0800					97	122	147	174					92	115	140	165					98	122	148	175	
SL1000					113	141	171	202					107	134	162	191					104	131	158	187	
SL1200					126	159	192	227					120	151	181	214					117	146	177	209	
SL1400	158	197	241	284	141	177	215	253	153	192	232	274	132	166	201	237	149	187	227	268	127	160	194	229	
SL1600	176	220	267	315	155	194	235	278	168	211	255	302	145	182	220	260	164	205	249	294	140	175	212	251	
SL1800	192	240	291	344	167	210	255	301	182	228	277	327	157	197	238	281	177	222	269	318	151	189	229	271	
SL2000	206	259	314	371	179	225	273	322	195	245	297	351	168	210	253	301	190	238	289	341	162	203	246	290	
SL1408	224	281	340	402	187	234	283	335	215	270	327	386	179	224	272	320	208	261	316	373	173	217	262	310	
SL1608	248	311	377	445	210	263	319	377	240	301	365	431	200	251	301	359	230	289	350	413	192	241	292	345	
SL1808	260	326	395	466	223	280	339	401	253	317	384	453	214	268	325	384	244	306	371	438	208	261	316	374	
SL2008	275	345	419	494	246	309	374	441	271	340	412	486	271	340	412	486	239	299	363	428	267	334	405	478	

Dissipated power inside the ArTu switchgear according to the admissible overtemperature.

ArTu distribution switchgear

Dissipated power

ArTu IP 65 switchgear

	Separate housing exposed on all sides				Separate housing wall-mounted				First or last housing exposed				First or last housing wall-mounted				Central housing exposed				Central housing wall-mounted							
Overtemperature	25 °C	30 °C	35 °C	40 °C	25 °C	30 °C	35 °C	40 °C	25 °C	30 °C	35 °C	40 °C	25 °C	30 °C	35 °C	40 °C	25 °C	30 °C	35 °C	40 °C	25 °C	30 °C	35 °C	40 °C				
ArTu M																												
SM 6061					70	88	107	126																				
SM 8061					71	90	108	128																				
SM 8062					83	104	126	149																				
SM 1062					95	119	145	171																				
SM 1262					107	134	162	192																				
SM 1462	159	200	242	278	141	177	215	254	153	192	233	275	132	166	201	237	149	187	227	268	127	160	194	229				
SM 1662	175	219	265	313	154	193	234	276	167	209	253	299	144	180	218	258	162	204	247	291	138	174	210	248				
SM 1682	221	277	336	396	194	244	295	348	215	269	326	385	184	230	279	329	212	265	321	380	179	224	272	321				
SM 1862	189	237	287	339	165	207	251	297	180	225	273	322	154	194	235	277	175	219	265	313	149	186	226	267				
SM 1882	240	301	365	431	210	263	319	376	232	291	353	417	198	249	301	355	229	287	348	410	193	242	294	347				
SM 2062	203	254	308	364	176	221	268	316	192	240	291	344	164	206	250	295	186	233	282	334	158	199	241	284				
SM 2082	259	324	393	464	224	282	341	403	249	312	379	447	212	266	322	380	245	307	372	440	207	259	314	371				
ArTu K																												
H 1600mm																												
SK 6025	182	228	276	326	161	202	245	289	175	219	266	314	151	189	229	271	170	214	259	306	145	182	221	261				
SK 8025	232	291	353	416	203	255	309	365	225	282	342	404	192	241	292	345	222	278	337	398	189	237	287	338				
ArTu K																												
H 1800mm																												
SK 6025	199	250	303	357	175	220	266	315	190	239	289	342	164	206	249	294	185	233	282	333	158	198	240	283				
SK 8025	251	315	382	451	221	277	335	396	244	307	371	439	209	262	317	375	241	302	366	432	204	256	310	365				
SK 4040	193	242	293	346	179	224	271	320	178	223	270	319	160	201	243	287	165	207	251	296	146	184	222	263				
SK 6040	254	318	385	455	230	289	350	413	238	299	362	428	210	264	320	378	227	285	345	407	198	249	301	356				
SK 8040	316	397	481	568	284	356	431	509	302	378	458	541	263	330	400	472	291	365	442	521	252	316	383	452				
SK 4050	223	284	344	406	213	267	323	381	206	258	313	370	188	236	286	338	188	236	286	338	170	213	258	305				
SK 6050	292	366	443	524	268	336	407	481	271	341	413	488	242	304	368	435	279	319	386	456	226	284	343	406				
SK 8050	346	435	526	622	326	409	496	586	332	417	505	596	301	378	458	540	324	407	493	581	286	358	434	413				
SK 4060	260	326	395	466	247	310	375	443	235	294	357	421	217	272	329	389	212	266	322	381	194	243	295	348				
SK 6060	331	415	502	593	306	384	465	549	305	383	464	548	275	344	417	493	282	353	428	505	254	319	386	456				
SK 8060	377	473	572	676	369	463	561	663	363	456	552	659	339	426	516	609	358	449	544	642	320	401	486	574				
SK 4080	328	411	498	588	317	398	482	569	290	364	440	520	274	344	417	492	259	325	394	465	243	304	369	435				
SK 6080	381	478	579	684	379	476	577	681	362	455	551	650	345	433	524	619	341	428	519	612	314	393	477	563				
SK 8080	435	546	661	781	425	533	646	763	412	517	626	739	400	502	608	718	404	507	614	725	386	484	586	692				
SK 4010	386	484	586	692	373	468	567	669	341	428	518	612	322	405	491	579	305	382	464	547	286	358	434	512				
SK 6010	448	562	681	805	446	560	679	801	426	535	648	765	406	509	616	728	401	504	611	720	369	462	561	662				
SK 8010	512	642	778	919	500	627	760	898	485	608	736	869	471	591	715	845	475	596	722	853	454	569	689	814				
ArTu K																												
H 2000mm																												
SK 6025	216	270	328	387	189	237	287	338	205	257	312	368	176	221	268	316	199	250	303	358	170	213	258	305				
SK 8025	273	343	415	490	239	299	362	428	265	332	402	475	225	283	343	404	261	327	396	467	220	276	334	395				
SK 4040	209	262	317	375	192	241	292	345	191	240	291	343	172	216	262	309	178	223	270	319	157	197	239	282				
SK 6040	271	340	412	486	246	309	374	442	255	320	388	458	225	282	342	404	243	305	369	436	211	265	321	379				
SK 8040	328	411	498	588	303	380	460	543	322	404	490	578	280	352	426	503	310	389	471	557	268	337	408	481				
SK 4050	244	306	371	438	228	287	347	410	221	278	337	397	202	254	307	363	202	254	308	363	241	302	366	432				
SK 6050	305	383	464	548	287	361	437	516	290	364	442	521	260	342	395	466	272	342	414	459	241	302	366	432				
SK 8050	358	448	543	641	339	404	515	609	346	406	527	622	319	400	485	573	339	425	515	608	303	380	461	544				
SK 4060	279	351	425	501	265	333	403	476	252	316	383	452	232	292	353	417	227	285	346	408	207	260	315	372				
SK 6060	340	426	517	610	329	413	500	590	326	409	496	585	295	402	448	528	302	379	459	542	271	339	411	485				
SK 8060	388	486	589	695	376	472	571	675	371	466	565	667	358	449	544	643	368	462	559	660	338	424	514	607				
SK 4080	354	444	537	634	341	428	519	612	314	394	478	564	295	370	448	529	278	349	423	499	258	324	393	464				
SK 6080	393	493	597	705	387	486	589	695	370	464	562	664	363	455	552	651	361	453	549	648	332	416	504	595				
SK 8080	456	572	693	818	440																							


ArTu distribution switchgear

Handling


Handling with transpallet

Palletisable base strip for ArTu M and ArTu K

15TCB02079F0001

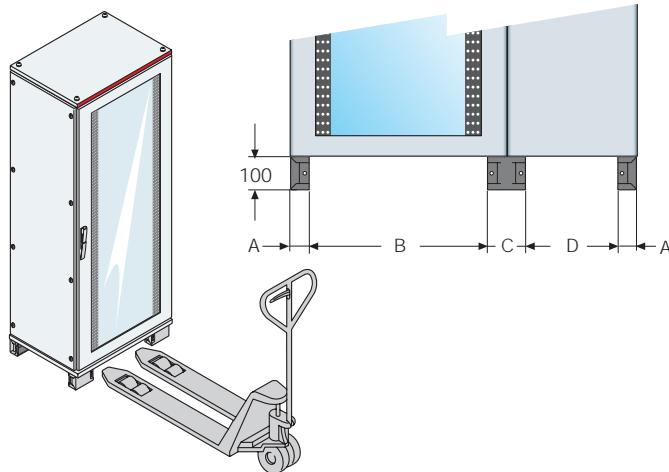

For greater safety during transport using a fork-lift truck, it is advisable to anchor the switchgear to the truck:

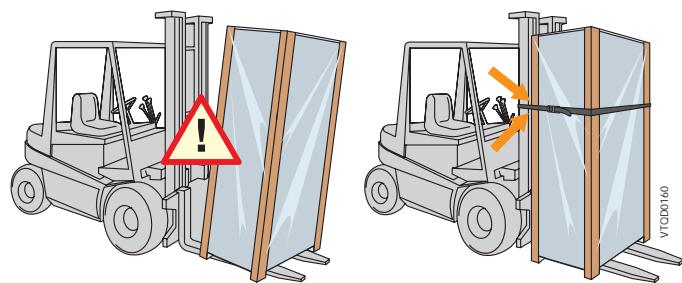


VTC00160

Structure	A (mm)	B (mm)	C (mm)	D (mm)
ArTu L				
Width 600mm	47	596	97	296
ArTu M				
Width 600mm	125,5	469	251	
Width 800mm	125,5	669	251	
ArTu K				
Width 400mm	125,5	259	251	
Width 600mm	125,5	469	251	
Width 800mm	125,5	669	251	
Width 200mm (cable container)	125,5	251	69	
Width 300mm (cable container)	125,5	251	169	

6


For switchgear with reduced depth, the following type of handling is recommended:

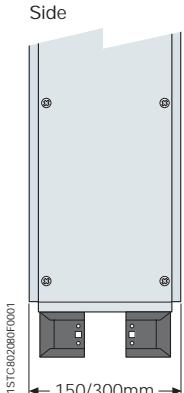

Handling ArTu K structures by means of rollers: only with **ZR...reinforced plinth**



In the case of structures W=800mm (with internal or external cable container) containing busbar systems, check the centre of gravity before handling.

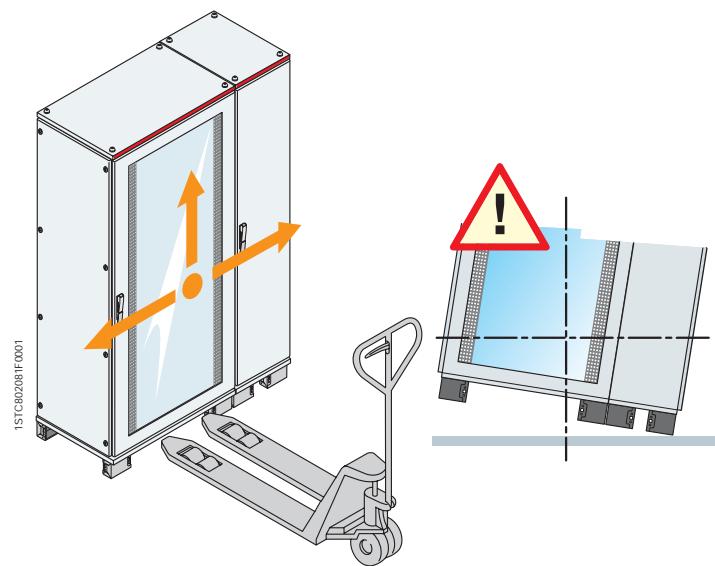

ArTu distribution switchgear


Handling

Handling with overhead travelling crane

To handle using a crane or overhead travelling crane, check the following conditions before lifting the switchgear:

- excellent state of the ropes or chains;
- the angle between the lifting ropes and the switchgear roof must be $\geq 45^\circ$;
- the maximum number of columns transported is 3;
- **ArTu L** maximum weight lifted as per DIN 580 (M8);
- **ArTu M - K** maximum weight lifted as per DIN 580 (M12) Standard.

To respect the conditions described above, a lifting beam with appropriate characteristics can be used when there are several columns side by side.

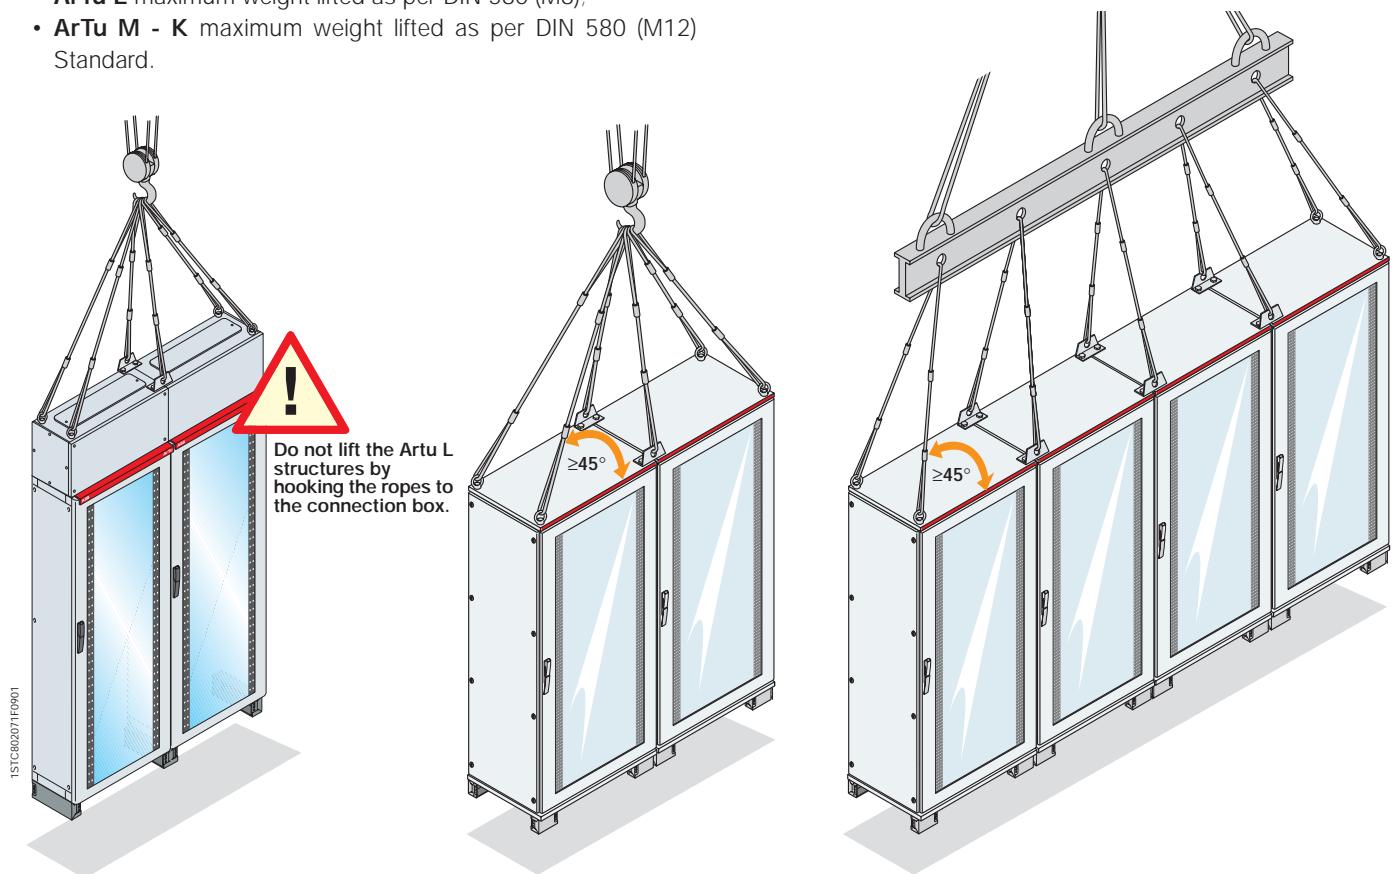

6

DIN 580 Standard regarding mechanical connection elements (only for lifting eyebolts)

Lifting eyebolts		Lifting reinforcements							
A	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	Load 1 kg	Load 2 kg	Tightening Nm
Lifting eyebolts									
ArTu L	M8	30	8	18	6	15	20	140	95
ArTu M - K	M12	54	12	28	10	22	30	340	240
Lifting reinforcements									
ArTu L	M8	ø20	30	60	28	ø10	40	210	140
ArTu M - K	M12	ø40	37	80	25	ø14	60	510	350

* Close by hand without mechanical elements in order to avoid overvoltage in the stem that will reduce the capacity of the lifting eyebolts.

ArTu distribution switchgear

Electrical continuity

Electrical continuity of the structure and of the fixed and mobile parts

Pic. 1

Electrical continuity in ArTu switchgear is guaranteed automatically just with assembly of the structure without the use of dedicated accessories.

Pic. 2

In the case of mobile parts (e.g. front panels), electrical continuity is guaranteed in the closed position by the special shape of the hinge (ABB patent) which is always supplied with the panels.


Pic. 3

The special shape of the hinge allows connection even using a traditional copper braid.


Pic. 4

The blind door, side panels and rear panels are fitted with copper M6 captive screws. Panel earthing is obtained thanks to the fixing screws.


Pic. 1

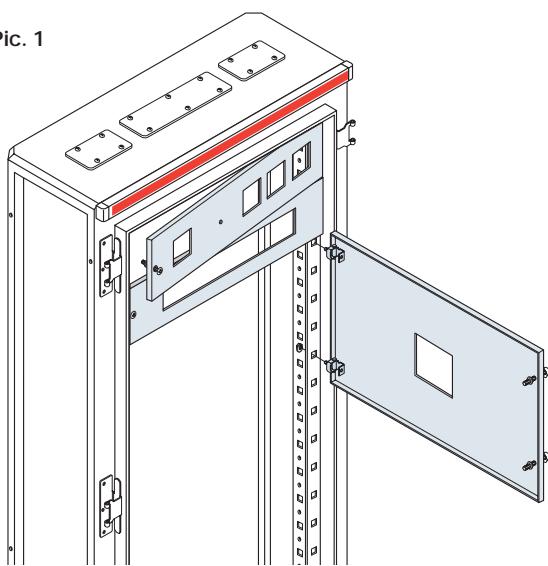


Pic. 2

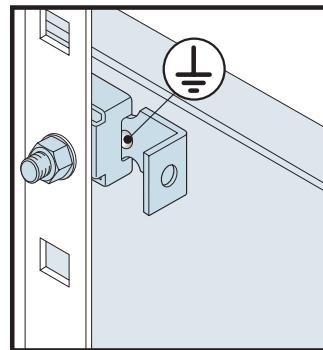

Pic. 3

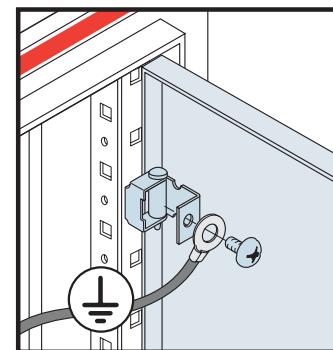

Pic. 4

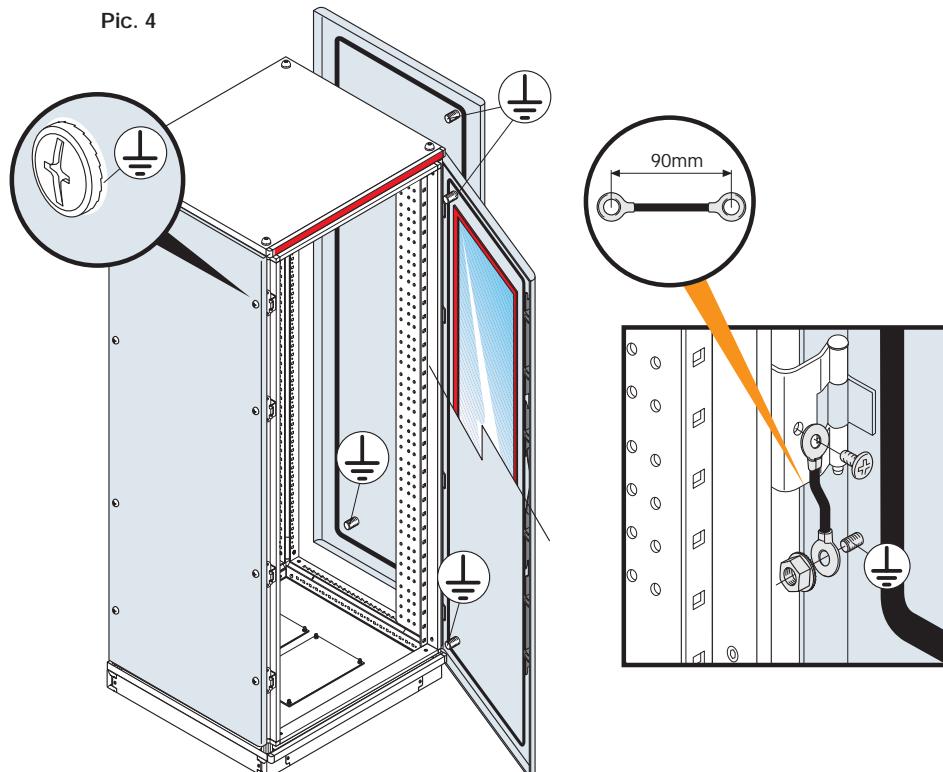

1STC802038E-0901

ArTu distribution switchgear

Equipotential conductors

Calculation of the PE protection conductor

The IEC 60439-1 Standard indicates the methods of calculation for the cross-section of the PE protection conductor which must be suitably sized to withstand the thermal and dynamic components of the fault currents.

In identifying the fixing position of the busbar, check the following conditions:

- the busbar must be connected directly to the switchgear exposed conductive parts (structure);
- the busbar must be connected in an easily accessible position.

For sizing, use the values in the table, taken from the IEC 60439-1 Standard (P.7.4.3.1.7).

Section of the phase conductors		Minimum section of the corresponding protection conductor	
S (mm ²)	S _p (mm ²)	S	S _p
16 < S ≤ 35	16	16	
35 < S ≤ 400	S/2		
400 < S ≤ 800	200		
S > 800	S/4		


Wall-mounted ArTu L
Protection conductor section (25x4) 100mm² (art. BR0400)

Floor-mounted ArTu L
Protection conductor section (25x4) 100mm² (art. BR0400)

Wall-mounted ArTu M
Certified ACAE/LOVAG No. IT 99.024 with protection conductor section (25x4) 100 mm² (art. BR0400)

Floor-mounted ArTu M
Certified ACAE/LOVAG No. IT 99.022 with protection conductor section (25x4) 100 mm² (art. BR6305)

ArTu K
Certified ACAE/LOVAG No. IT 99.025 with protection conductor section (50x5) 250 mm² (art. BR6305)

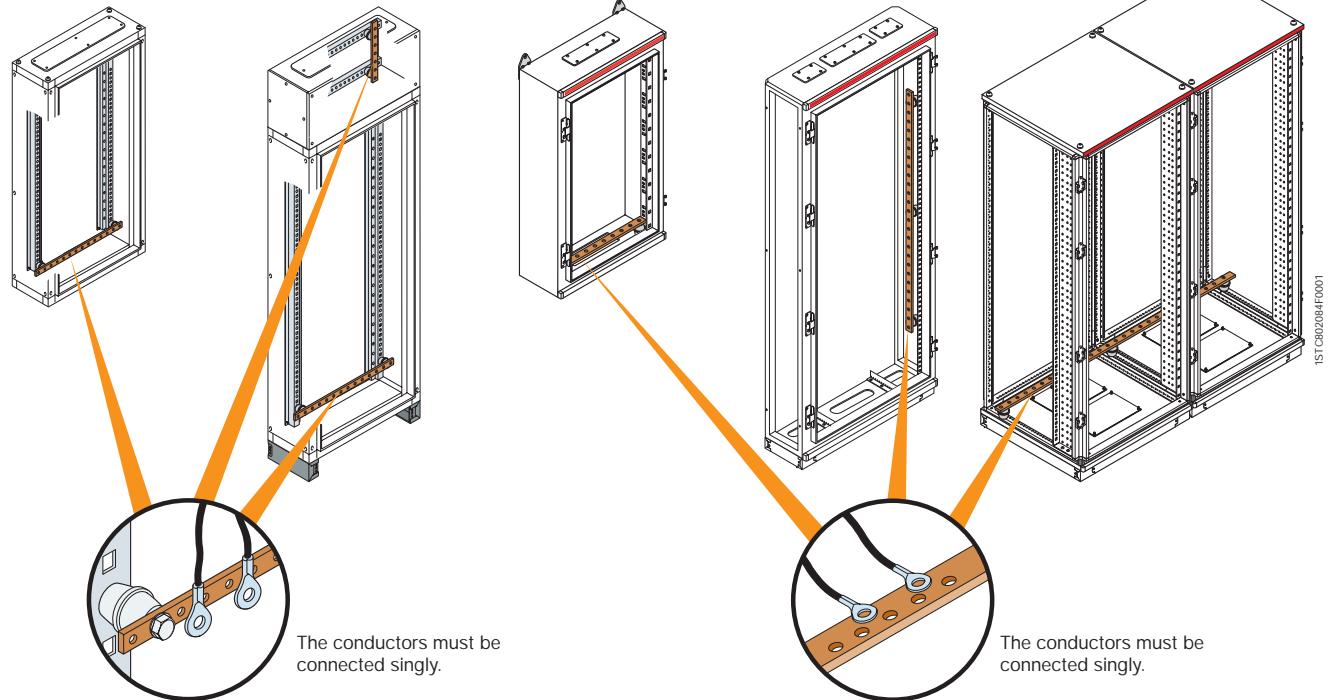

Equipotentiality

The accessible conductive parts of a device, which cannot be connected to the protection circuit by their own means of connection, must be connected to the protection circuit of the apparatus for equipotentiality of the protection by means of an equipotential conductor, whose section must be selected according to the table given below.

Rated service current (A)	Minimum section of the equipotential protective conductor (mm ²)
20 < I _e ≤ 20	S
20 < I _e ≤ 25	2,5
25 < I _e ≤ 32	4
32 < I _e ≤ 63	6
63 < I _e	10

S = section of the phase conductor (mm²)

PEN conductor

The section of the PEN conductors of the apparatus must be determined using the same procedure followed for the neutral conductor (N).

The minimum section of a copper conductor must be 10mm².

The PEN conductor does not need to be insulated.

The parts of the structure must not be used as a PEN conductor. However, the assembly tracks, made of copper or aluminium, can be used as PEN conductors.

For conductors not made of copper, the sections above are replaced with equivalent conductivity sections, which may require larger sized terminals.

ArTu distribution switchgear

Degrees of protection

1st NUMBER: protection against solid bodies

2nd NUMBER: protection against liquids

IP


0

No protection

IP

0

No protection




1

Protected against solid bodies larger than 50mm (accidental contact with hands)




1

Protected against vertical fall of drops of water (condensation)




2

Protected against solid bodies larger than 12 mm (fingers)



2

Protected against drops of water up to 15° from vertical



3

Protected against solid bodies larger than 2.5mm (tools, wires)



3

Protected against drops of water up to 60° from vertical




4

Protected against solid bodies larger than 1 mm



4

Protected against splashes of water from all directions




5

Protected against dust (no harmful deposit)




5

Protected against jets of water from all directions by means of a hose




6

Totally protected against dust




6

Protection against jets of water similar to sea waves



7

Protected against the effects of temporary immersion



8

Protected against the effects of continual immersion

1st number defined by the CEI EN 60529 – IEC 529 Standards

2nd number defined by the CEI EN 60529 – IEC 529 Standards

ArTu distribution switchgear

Degrees of protection

PROTECTION AGAINST PENETRATION OF SOLID BODIES

1 st characteristic number	Brief description	Complete description
0	Unprotected is provided	No particular protection
1	Protected against solid bodies larger than 50mm	No large surface of the human body must be able to penetrate, for example a hand (voluntary protection is not provided) or solid bodies larger than 50mm in diameter.
2	Protected against solid bodies larger than 12mm	Fingers or similar objects of length not exceeding 80mm or solid bodies of diameter higher than 12 mm must not penetrate
3	Protected against solid bodies larger than 2.5mm	Tools, wires, etc. with diameter or thickness greater than 2.5mm or solid bodies with diameter greater than 2.5mm must not be able to penetrate
4	Protected against solid bodies larger than 1.0mm	Wires or plates thicker than 1.0mm or solid bodies with diameter greater than 1.0mm must not be able to penetrate
5	Protected against dust	Penetration of dust is not totally excluded, but the amount penetrating is not enough to harm correct operation of the material
6	Totally protected against dust	No penetration of dust is allowed

PROTECTION AGAINST PENETRATION OF WATER

2 nd characteristic number	Brief description	Complete description
0	Unprotected	No particular protection is provided
1	Protected against vertical fall of drops of water	The drops of water which fall vertically must not cause harmful effects
2	Protected against drops of water up to 15° from vertical	The drops of water which fall vertically must not cause harmful effects when the housing is leaned at any angle up to 15° in relation to its normal position
3	Protected against rain	The water which falls like rain from a direction with an angle of up to 60° to vertical must not cause harmful effects
4	Protected against splashes of water	Water splashed over the housing from all directions must not cause harmful effects
5	Protected against jets	Water sprayed with a nozzle onto the housing from all direction must not cause harmful effects
6	Protected against waves	In the case of waves or strong jets of water, the water must not enter the housing in a harmful amount
7	Protected against the effects of temporary immersion	Water in a harmful amount must not be able to penetrate inside the housing immersed in certain pressure and duration conditions
8	Protected against the effects of continual immersion	The material is suited to remaining immersed in water in the conditions specified by the manufacturer


Degrees of protection which can be obtained with ArTu switchgear

ArTu L IP31

Without door

IP43

With door

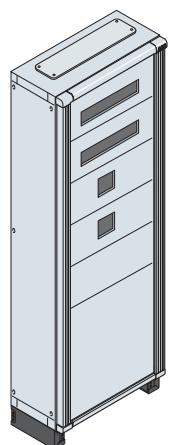


ArTu M - K IP31

Without door




IP41 (only ArTu K)

Without door with IP41 kit and side ventilated panels

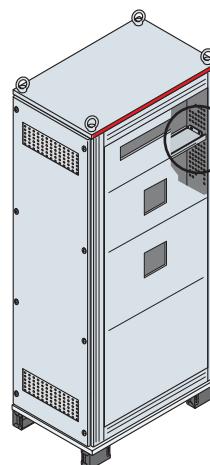


IP41 (only ArTu K)

With door and side ventilated panels

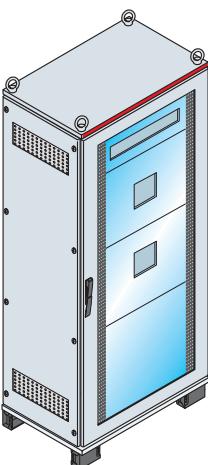

IP65

With door and blind panels

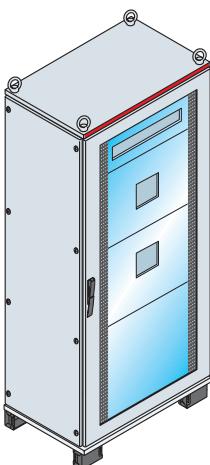

ArTu distribution switchgear

IK mechanical resistance to impact


IK mechanical resistance

IK 0




Unprotected

IK 01




Impact energy in Joules 0,140

IK 02




Impact energy in Joules 0,200

IK 03




Impact energy in Joules 0,350

IK 04




Impact energy in Joules 0,500

IK 05




Impact energy in Joules 0,700

IK 06




Impact energy in Joules 1,00

IK 07



Impact energy in Joules 2,00


IK 08



ArTu L
Impact energy in Joules 5,00

IK 09


With glazed door



ArTu M - K
Impact energy in Joules 10,00

IK 10

With blind door



ArTu M - K
Impact energy in Joules 20,00

Figure defined by the CEI EN 50102 Standard

1STC8020394E901

Busbars with shaped section and flat bars

Mechanical and electrical characteristics

Compliance with IEC 60439-1 Standard

The ArTu switchgear has undergone the type tests foreseen by the IEC 60439-2 (CEI 17/13-2 3rd edition) Standards in the ABB laboratories. The results of these tests guarantee the performances of the ArTu switchgear and, by using the ABB SACE metalwork structures and accessories, such as the modular and moulded-case circuit-breakers, allow the end switchgear constructor not to carry out any further type tests by following the selection criteria and the assembly instructions for the various components, and only carrying out the individual tests foreseen under the IEC 60439 Standard. These results, which are indicated below, can be referred to for making out the declaration of conformity of the switchgear..

Technical characteristics

Components	Material									
Components	Material									
Busbars	electrolytic copper 99.9% CU-ETP									
Busbar holders	self-extinguishing thermoplastic VO									
Tightening screws	Mad. class 8.8									
Busbars	Code	Length (mm)	IP 31	IP 41	IP 65	Icw (kA)	IpK (kA)	Dimensions (mm)	Section (mm ²)	Weight (Kg)
In 400	BA400	1730	630	520	400	35	74	20x20	200	4
In 800	BA800	1730	970	830	800	35	74	20x20	283	4.4
In 1250	BA1250	1730	1400	1330	1250	75	165	20x60	603	9.3
In 1600	BA1600	1730	1820	1710	1600	75	165	20x60	703	10
In 2000	BA2000	1730	2350	2200	2000	100	220	25x60	1000	14.8
Tightening torque			Screws M6 - 10N.m							
			Screws M8 - 20N.m							
			Screws M10 - 30N.m							





Ambient characteristics

Type of installation	indoors
Installation conditions	Wall / Floor-mounted
Service climate (t°/r.h.%)	constant 23 °C/83% - 40 °C/93% variable 23 °C/98% - 40 °C/98%
Ambient temperature limits	for operation -5 °C +40 °C for storage -25 °C +55 °C

Busbars with shaped section

Characteristics of the components


Busbar holders for busbars with shaped section up to 100 kA

Type	Icc (kA)	Code	Busbar					Application			
			400A BA0400	800A BA0800	1250A BA1250	1600A BA1600	3200A BA2000	ArTu L struct.	cable cont. drawer	ArTu M struct.	cable cont.
	35	PB0802	L1-L2-L3	3x BA0400	3x BA0800						
			N 100%	1x BA0400	1x BA0800			•		•	•
			N. reduced		1x BA0400						
	35	PB0803	L1-L2-L3	3x BA0400	3x BA0800						
			N 100%	1x BA0400	1x BA0800			•	•	•	•
			N. reduced		1x BA0400						
	75	PB1600⁽¹⁾	L1-L2-L3		3x BA1250	3x BA1600					
			N 100%		1x BA1250	1x BA1600				D≥800	D≥800
			N. reduced			1x BA1250					
	65	PB1603⁽¹⁾	L1-L2-L3		3x BA1250	3x BA1600					
			N 100%		1x BA1250	1x BA1600				D≥600	D≥600
			N. reduced			1x BA1250					
	75	PB1601⁽¹⁾	L1-L2-L3		3x BA1250	3x BA1600					
			N 100%		1x BA1250	1x BA1600				D≥600	D≥600
			N. reduced			1x BA1250					
	100	PB3201	L1-L2-L3				6x BA2000				
			N 100%				2x BA2000				
			N. reduced				1x BA2000			D≥800	D≥800


⁽¹⁾ It is possible to mount the 400/800A busbars with the special adapter **AD1066** see example on page 4/29.

6


Example of use of adapter for busbars

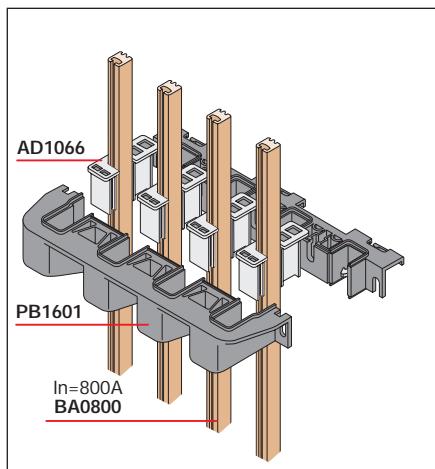

Example of use of 2 busbars per phase (3200A)

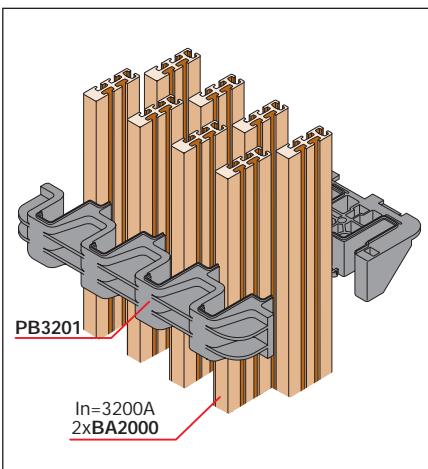











Example of use of the busbar with reduced neutral

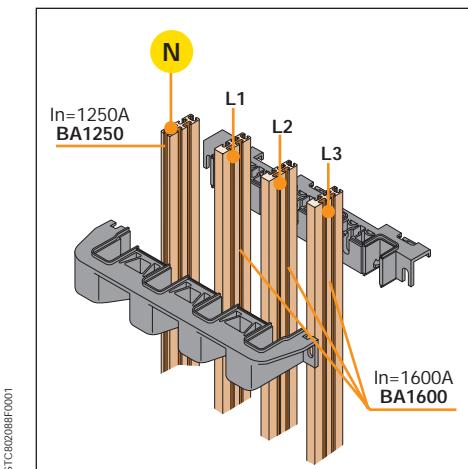

Busbars with shaped section

Characteristics of the components

Components



Note
branches headed with cable terminal
with the following dimensions:

Cable section mm ²	Dimensions A, B, C, D (mm)				
	A	B	C	D	
16	9	13	6	32	
25	10.5	13	7	35	
35	14	17	9	41	
50	15	20	10	42	

Flat busbars

Characteristics of the components

Busbar holders for flat busbars up to 32 kA

Type	Icc (kA)	Code	Busbars			Application
			250A BR0250	400A BR0400	630A BR0630	
Scaled	23	BP0634				
			L1-L2-L3	3x BR0250	3x BR0400	3x BR0630
			Neutral 100%	1x BR0250	1x BR0400	1x BR0630
Linear	32	BP0630				
			L1-L2-L3	3x BR0250	3x BR0400	3x BR0630
			Neutral 100%	1x BR0250	1x BR0400	1x BR0630


Busbar holders for flat busbars up to 100 kA

Type	Icc (kA)	Code	Busbar					Application
			400A BR4005	630A BR6305	800A BR8005	1250A BR1250	1600A BR1600	
Linear	50	BP1250						
			L1-L2-L3	3x BR4005	3x BR6305	3x BR8005	3x BR1250	
			Neutral 100%	1x BR4005	1x BR6305	1x BR8005	1x BR1250	
Linear	75	BP1600						
			L1-L2-L3				3x BR1600	
			Neutral 100%				1x BR1600	
Linear	105	BP2500						
			L1-L2-L3				6x BR1600	
			Neutral 100%				2x BR1600	
Linear	105	BP3200						
			L1-L2-L3				9x BR1600	
			Neutral 100%				3x BR1600	


Flat busbars

Characteristics of the components


Components




The 25mm pitch drilling allows branching between flat busbars at any point.




Branch between pre-drilled 3200A flat busbars and 1250/1600A busbars with shaped section (only with PB1601).




Branch between flat busbar and flexible busbar by means of tightening plate.




A self-locking hammer screw (M8) allows fixing between conductors in any position along the busbar with shaped section, ensuring a large contact surface.




Busbar holder for flat busbars (one busbar per phase).



Single-phase divider with possibility of connection, which can be mounted on DIN rail.



Single-phase dividers up to 400A, which can be mounted on DIN rail.




Four-pole 250A divider.

Unifix cabling system

Examples of connections - Unifix H


Unifix H frame with 400A 24 and 36 module busbars

Busbar power supply from the top by means of 4P feeder module placed laterally

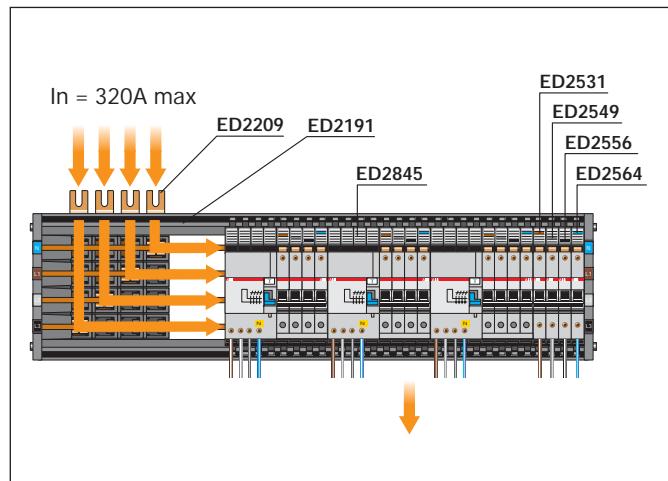


Unifix H frame with 400A 24 and 36 module busbars


Busbar power supply from the top by means of main row circuit-breaker

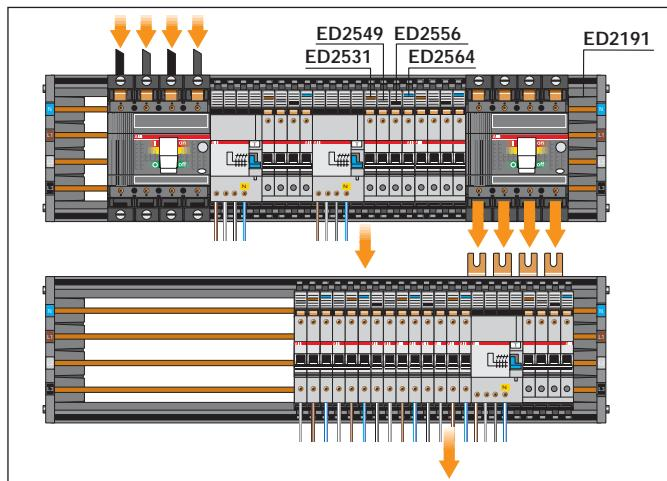


Busbar power supply from the bottom by means of 4P feeder module placed laterally

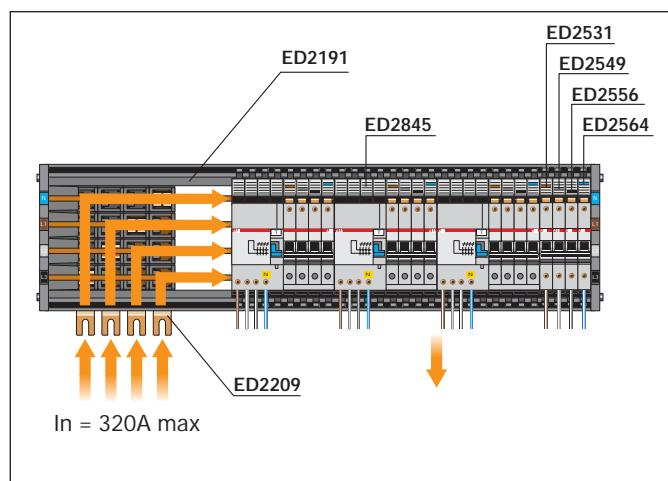


Busbar power supply from the bottom by means of main row circuit-breaker

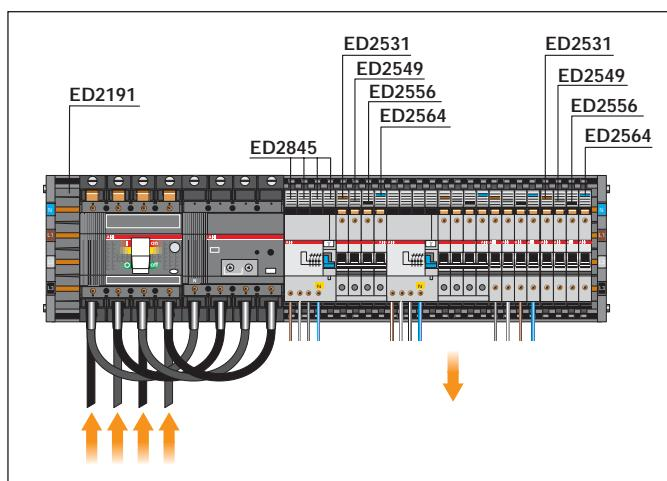

Busbar power supply from the top by means of 4P feeder module placed centrally

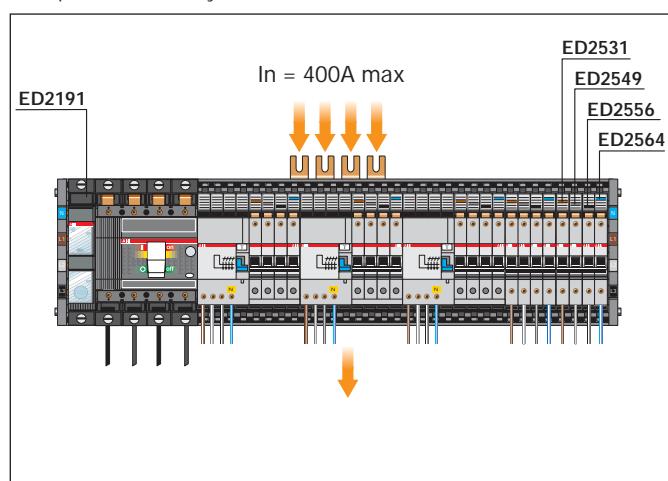

Covers for IP 20 degree of protection

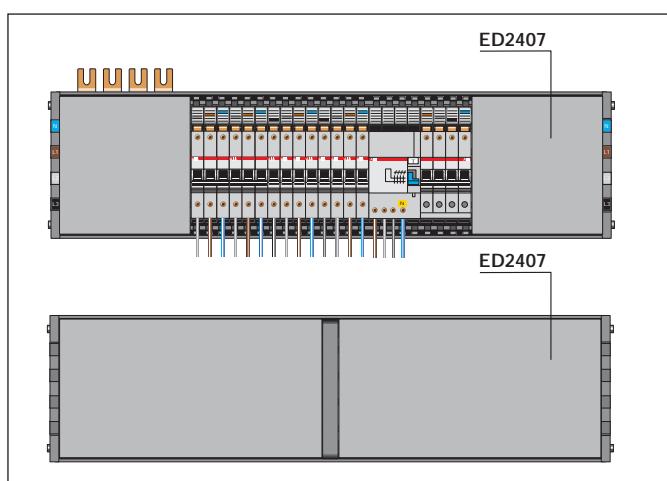


Unifix cabling system

Examples of connections - Unifix H

Unifix L frame with 100A 12/18/24 module busbars


Two different single-phase circuits on a single 24 module DIN rail

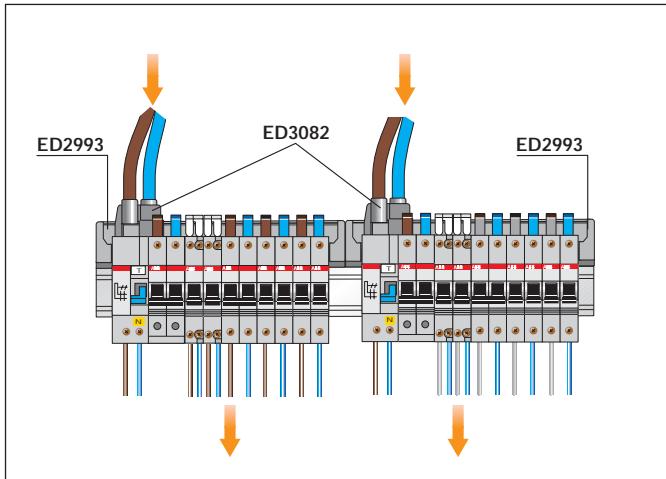


Example of main and shunted power supply

Unifix L frame with 100A 12/18/24 module busbars


Busbar power supply by means of power supply terminals placed centrally

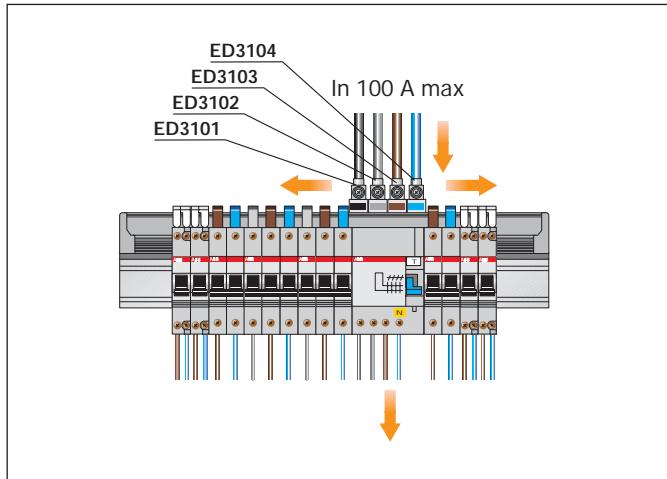



Busbar power supply by means of power supply terminals placed laterally

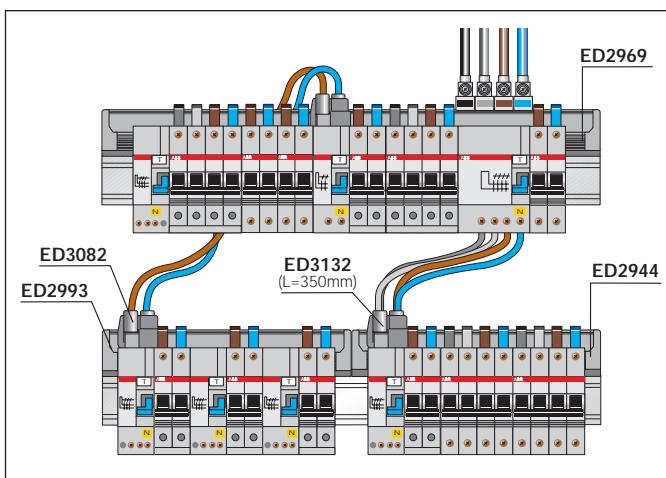

Busbar power supply by means of cable terminal placed under the head of the circuit-breaker terminal and branch with parallel module

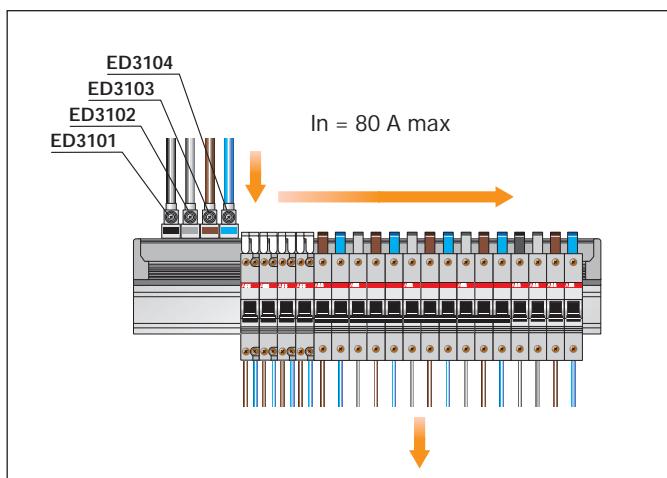


Direct busbar power supply by means of feeder module (supplied without cables) and branch by means of feeder module.

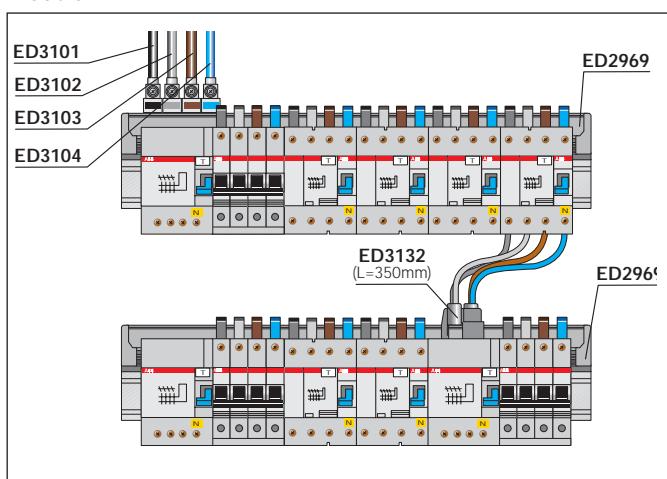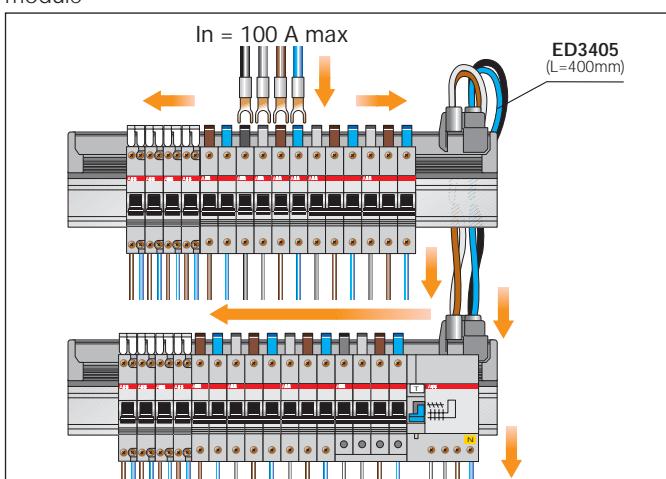

Segregations

Examples of ArTu segregation


Form 1
(no internal segregation)

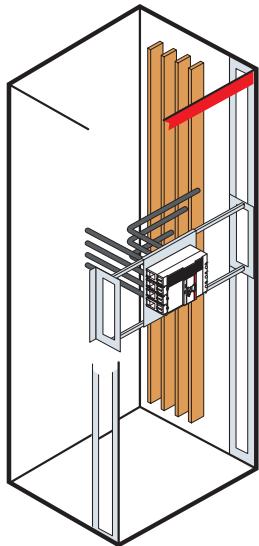

Form 3
(separation of the busbars from the functional units + separation of the functional units from each other)

Form 3a
Terminals not separated from the busbar


Form 3b
Terminals separated from the busbar

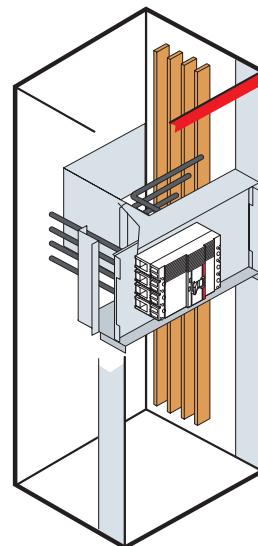

Form 2
(segregation of the busbars from the functional units)

Form 2a
Terminals not separated from the busbar


Form 2b
Terminals separated from the busbar

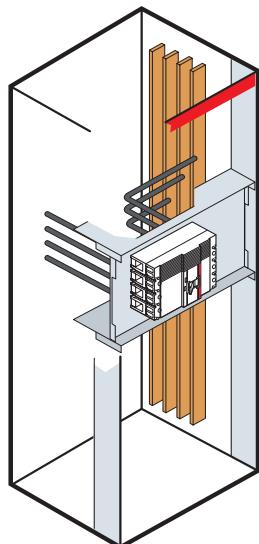

Form 4
(separation of the busbars from the functional units + separation of the functional units from each other + separation of the terminals from each other)

Form 4a
Terminals in the same the associated functional unit

Form 4b
Terminals not in the same the associated functional unit

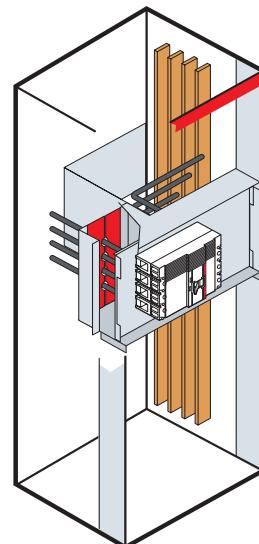

1STC802070F001



Index

Operational flexibility, services and consultancy: a complete offer	7/3
T.C.T. (Technical Collection Tools)	7/3
Instruction manuals.....	7/4
Training: an essential tool for professionals.....	7/5
Business on line	7/5



Selection and design tools

TCTWin 4.0 - Technical Collection Tools

The new 4.0 version of ABB Sace's TCTWin includes seven very useful pieces of technical software which make calculations, design and estimates easier, ensuring conformity of the installations with the Standards and reducing the risk of errors. It is also provided with ABB Software Desktop which, apart from being a useful console for launching all the software in the collection, allows access



to a series of convenient and practical functions which, over time, are enriched by updating via Internet. In fact, all the software can be updated over the net with just a simple click: the most convenient, simple and safe way to have the novelties ABB Sace makes available for professionals always to hand.

The software, collected on CD-Roms in a practical box, consists of the following:



DOCWin 3.0, for sizing electrical networks powered with low or medium voltage, offers: design and definition of the network, network calculations, conductor sizing, selection and coordination of switching and protection devices, representation of the curves, checks, printout of diagrams, diagrams and reports;

DMBWin 4.6, structured in interconnected modules which allow the project to be developed and to prepare the estimate for ABB Sace's ArTu and Gemini switchgear. It supports the user, from selection of the apparatus and metalwork structures, to designing the front of the switchgear, from making the estimate to documentation of the offer;

SPECs 1.3, to produce the specifications regarding the electrical installations of business structures, hotels, schools, hospitals, tunnels, garages, tourist ports, public entertainment rooms and other environments, constantly updated by means of an automatic procedure. With the internal text processor, it allows personalisation of the specifications and their exportation in the most commonly used text formats;

CAT 5.0, allows a product among the 25000 ABB Sace codes to be found and fitted with accessories, enriching the module for producing offers with management of discounts and mark-ups, personalised archives and detailed printouts;


PICOWin 3.0, to make out specifications and estimates for any civil, service sector or small industry electrical installation. It develops projects on layouts relative to lighting points, sockets, lamps, switches, and distribution channels, and allows configuration of control boxes (front and single-line) with ABB Sace apparatus up to 125A;

Prosoft 2.0, dedicated to selection of the PSS and PST stepped starters. Once the load and ABB motor have been selected, the programme selects the most suitable soft starter, taking into consideration the current, the torque and the start-up time;

DriveSize 2.4, allows the optimal motor, frequency converter and transformer solution to be defined, especially when selection from a catalogue is not possible. It can also be used to calculate current and network harmonic values and to create documents relative to sizing on the basis of the effective load.

Some Screenshots of the DMBCab and DMBWin for the design of automation or distribution switchboards and for the configuration of ArTu distribution switchboards.

Selection and design tools

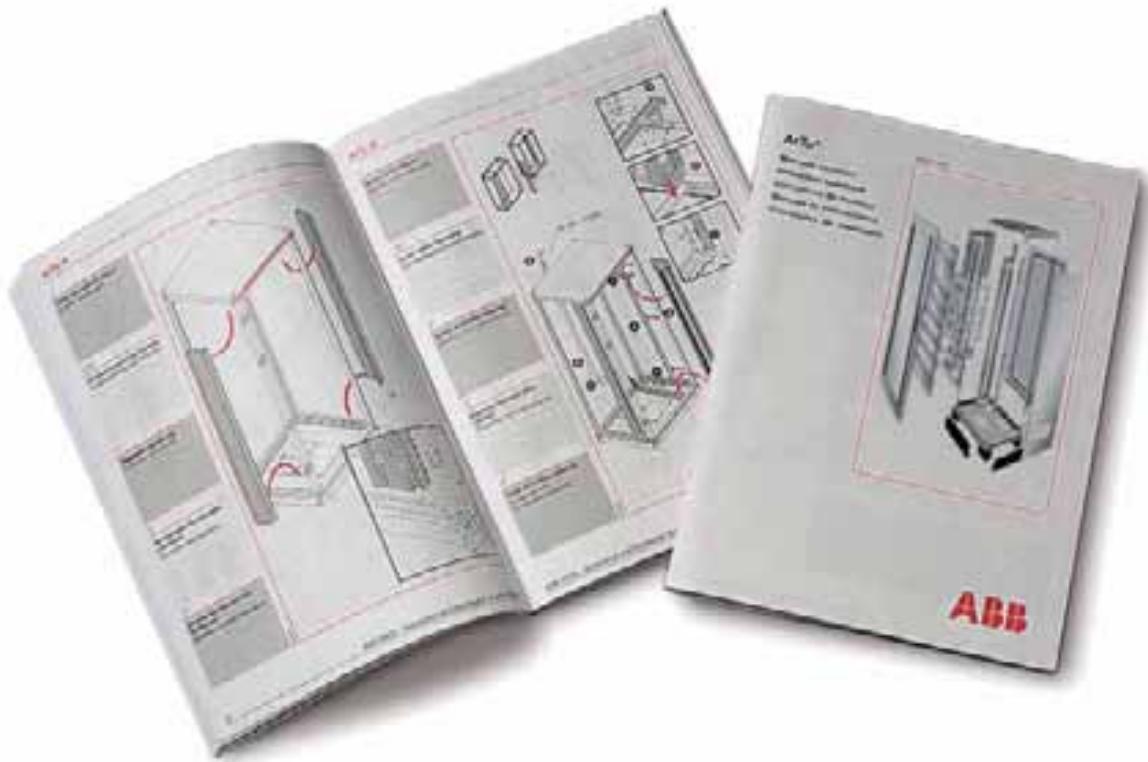

Instruction manual

A detailed multi-lingual instruction manual, complete with drawings and films, indicates correct assembly of the switchgear and of the components inside it.

When users follow the indications given by the manufacturer, they can construct correctly selected and assembled AS type switchgear which complies with the EN 60439-1 (CEI 17/13-1) Standard, on the basis of what is foreseen by the Low Voltage Directive of the European Community (Directive 73/23/EEC, Law 791/1977).

Selection and design tools

Training: an essential tool for professionals

ABB SACE makes the experience it has gained in more than 60 years' of activity available by means of technical training courses, which is an occasion for being brought up to date and comparing notes with expert professionals for all the operators in the sector. The aim is to meet all the requirements for information professionals may have, converting the technical-standard and legislative concepts into practical terms which can be applied directly to the different products and installations: in particular, the Tur1 (introductory) and Tur2 (advanced) courses, reserved for switchgear experts, installers and designers, aim at illustrating the procedure for designing and constructing low voltage switchgear on the basis of the CEI Standards and European Community Directives in force.



Business on line (<http://bol.it.abb.com>) is the portal created by ABB SACE to provide its customers with a work tool built around the requirements of professionals, offering an innovative approach to the world of low voltage electrical installations and industrial automation. By means of guided paths or by choosing free navigation, each user can easily reach the information wanted.

Work tools

All the tools needed to make your daily work easier can be found on line: estimates and designing complex installations, software to select and correctly size motors and actuators, specific interactive catalogues for home automation and selection of the Élos wiring accessories series... and still a lot more.

Guided paths

The "guided paths" which you can access from the home page facilitate navigations among ABB SACE products:

- Electrical distribution: particularly dedicated to those who design and install low voltage installations in the industrial and in the medium-to-large-sized service sector;
- Civil and service sector installation: ABB SACE's offer for installations in the residential and small service sectors;
- Automation and control: actuators, motors and control and protection apparatus for all industrial applications on machines and plants;
- Process measuring sensors: ABB's whole vast range of field instruments for industrial processes;
- Home and building automation, i.e. the most advanced solutions for integrated automation and management of buildings and home and service sector environments, as well as those of particular historical and artistic value.

Using the guided paths, centred on the product and its use, it is easy to orientate yourself among the offer of apparatus and systems which interest you and to find all the relevant information and work material: catalogues, certificates, and design tools.

"Smart catalogue"

This is a virtual catalogue on line which, by means of selecting the technical characteristics, allows you to find each individual product rapidly and easily. Product cards and family cards are available with detailed descriptions and all the relative documentation. The cards can be printed and filed on your own PC so that you can consult the data at any time.

"My Documentation"

A personalized collection of documents can be created: "My Documentation" allows you to add all the documentation you like to your own library, saving the documents you are interested in to a personalized directory to be able to use them again whenever needed. A registered user can check for any updates in the material in his own library, display the document, print it, or order the paper version. You must login to be able to use this function.

Customer Care

The new Customer Care Service which allows specific and in-depth information to be obtained on subjects of interest in a rapid and competent way by filling in a form

New Search Engine

The new search engine allows advanced type searches, by means of the "FILTER THE RESULTS FOR" section.





Overall dimensions


Index

Gemini	8/2
ArTu L	8/6
ArTu M	8/10
ArTu K	8/14
ArTu L - M - K - Kits for apparatus	8/19
ArTu L - M - K - Distribution systems	8/21

Gemini


Overall dimensions

Structures

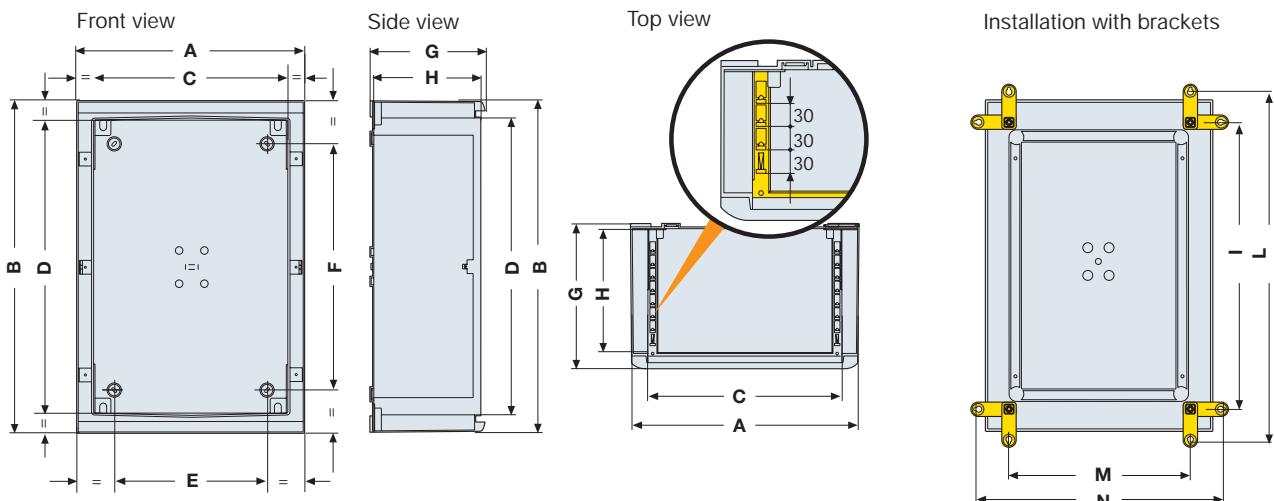


Size	Code	A	B	C	D	E	F	G	H	I	L	M	N
1	1SL0201A00-1SL0211A00-1SL0221A00	335	400	250	300	150	180	210	180	270	470	195	395
2	1SL0202A00-1SL0212A00-1SL0222A00	460	550	375	450	250	270	260	230	420	620	320	520
3	1SL0203A00-1SL0213A00-1SL0223A00	460	700	375	600	270	475	260	230	570	770	320	520
4	1SL0204A00-1SL0214A00-1SL0224A00	590	700	500	600	286	385	260	230	570	770	445	645
5	1SL0205A00-1SL0215A00-1SL0225A00	590	855	500	750	390	558	360	330	720	920	445	645
6	1SL0206A00-1SL0216A00-1SL0226A00	840	1005	750	900	640	706	360	330	870	1070	695	895

Uprights

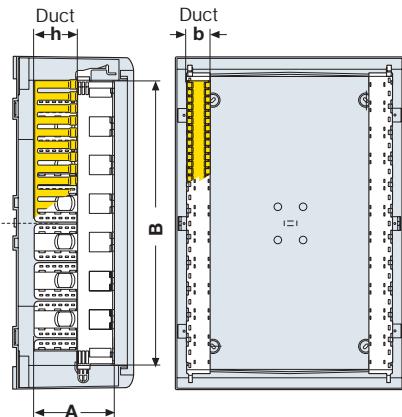

Size	Code	A	B	b	Duct
1	1SL0283A00	132	300	18	46
2	1SL0284A00	152	450	27	46
3	1SL0285A00	152	600	27	46
4	1SL0285A00	152	600	27	46
5	1SL0286A00	152	750	36	46
6	1SL0287A00	152	900	55	46

Front opaque and transparent doors

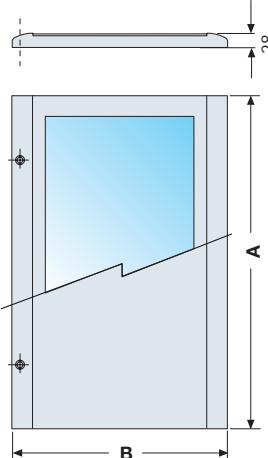

Size	Code	A	B
1	1SL0241A00-1SL0231A00	349	325
2	1SL0242A00-1SL0232A00	499	450
3	1SL0243A00-1SL0233A00	649	450
4	1SL0244A00-1SL0234A00	649	575
5	1SL0245A00-1SL0235A00	799	575
6	1SL0246A00-1SL0236A00	949	825


The measurements are in millimetres

1SLC06007E0901


Gemini

Overall dimensions

Base plates

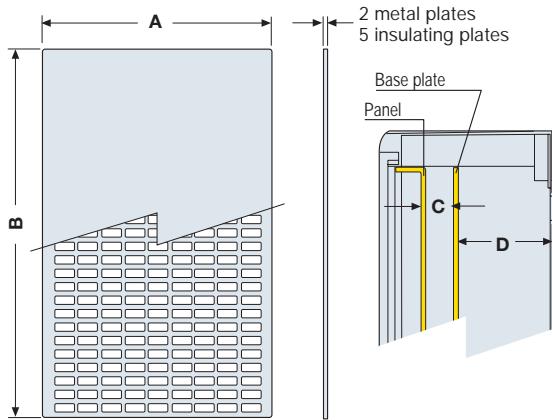


Inner doors

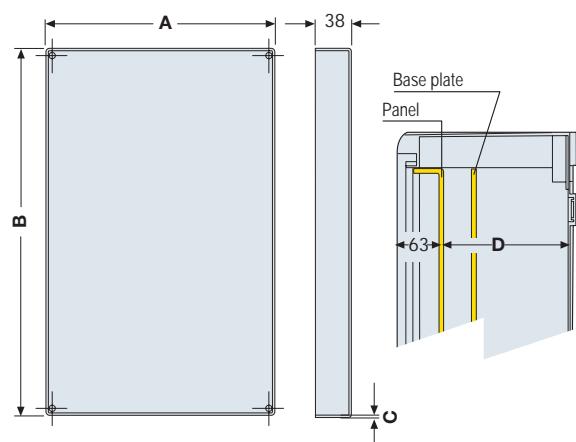


Size	Code	A	B	C	D
1	1SL0259A00-1SL0275A00-1SL0267A00	235	285	16.3+91	33.5+110
2	1SL0260A00-1SL0276A00-1SL0268A00	360	435	34.6+140	33.5+139
3	1SL0261A00-1SL0277A00-1SL0269A00	360	585	34.6+140	33.5+139
4	1SL0262A00-1SL0278A00-1SL0270A00	485	585	34.6+140	33.5+139
5	1SL0263A00-1SL0279A00-1SL0271A00	485	735	47+244	33.5+228
6	1SL0264A00-1SL0280A00-1SL0272A00	735	885	47+244	33.5+228

Size	Code	A	B	C	D
1	1SL0251A00	250	300	3	128
2	1SL0252A00	375	450	4	177
3	1SL0253A00	375	600	4	177
4	1SL0254A00	500	600	4	177
5	1SL0255A00	500	750	5	277
6	1SL0256A00	750	900	5	277

DIN rail


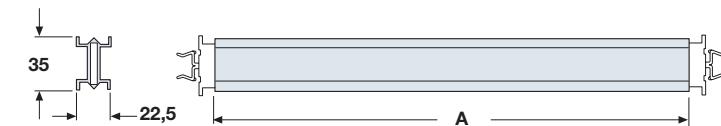


Size	Code	A	d = pos. 1	d = pos. 2	d = pos. 3	d = pos. 4	d = pos. 5	d = pos. 6
1	1SL0290A00	210	51	63,5	76	88,5	-	-
2	1SL0291A00	318	51	63,5	76	88,5	101	113,5
3	1SL0291A00	318	51	63,5	76	88,5	101	113,5
4	1SL0292A00	443	51	63,5	76	88,5	101	113,5
5	1SL0292A00	443	51	63,5	76	88,5	101	113,5
6	1SL0293A00	663	51	63,5	76	88,5	101	113,5

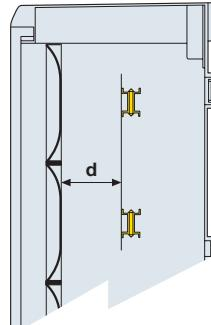

The distances of the DIN rail from the panel depend on the depth at which the DIN rail is regulated by using fixing devices.

Panels for modular apparatus mounted on DIN rail

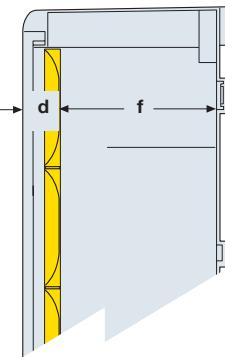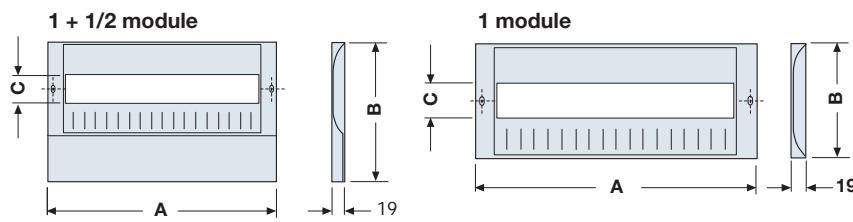



Size	Code	1 mod.		1+1/2 mod.		modules			
		A	B	A	B	C	DIN	d	
1	1SL0307A00	250	150	-	-	46	12	44	145
2	1SL0308A00-1SL0313A00	375	150	375	225	46	18	44	197
3	1SL0308A00-1SL0313A00	375	150	375	225	46	18	44	197
4	1SL0309A00-1SL0314A00	500	150	500	225	46	24	44	197
5	1SL0309A00-1SL0314A00	500	150	500	225	46	24	44	297
6	1SL0310A00-1SL0315A00	750	150	750	225	46	36	44	297

The measurements are in millimetres

Gemini


Overall dimensions

Blank panels

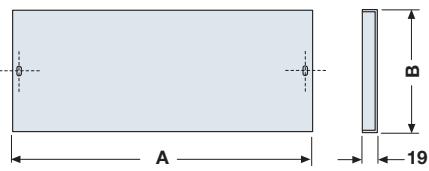


Size	Code	1/2 mod.		1 mod.		2 mod.		d	f
		A	B	A	B	A	B		
1	1SL0318A00-1SL0324A00-1SL0330A00	250	75	250	150	250	300	26,5	162
2	1SL0319A00-1SL0325A00-1SL0331A00	375	75	375	150	375	300	26,5	214
3	1SL0319A00-1SL0325A00-1SL0331A00	375	75	375	150	375	300	26,5	214
4	1SL0320A00-1SL0326A00-1SL0332A00	500	75	500	150	500	300	26,5	214
5	1SL0320A00-1SL0326A00-1SL0232A00	500	75	500	150	500	300	26,5	314
6	1SL0321A00-1SL0327A00-1SL0233A00	750	75	750	150	750	300	26,5	314

Modular plates


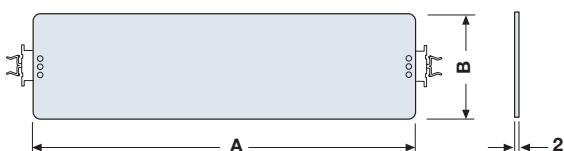


Size	Code	1 mod.		2 mod.	
		A	B	A	B
1	1SL0296A00	210	130	210	280
2	1SL0297A00-1SL0302A00	318	130	318	280
3	1SL0297A00-1SL0302A00	318	130	318	280
4	1SL0298A00-1SL0303A00	443	130	443	280
5	1SL0298A00-1SL0303A00	443	130	443	280
6	1SL0299A00-1SL0304A00	663	130	663	280

Mounting distances between front panel and plate

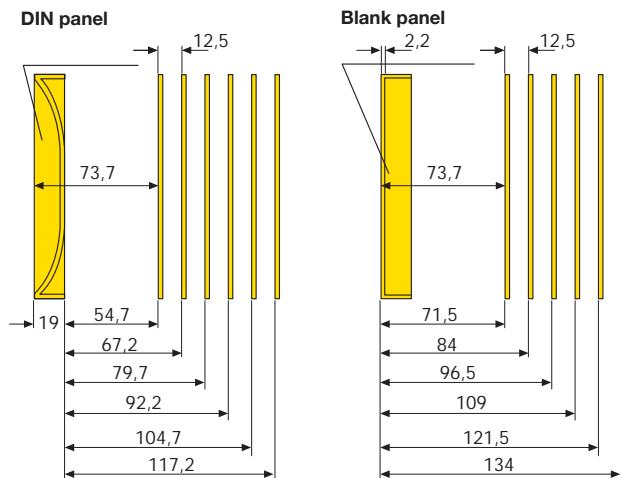

Kit for Tmax

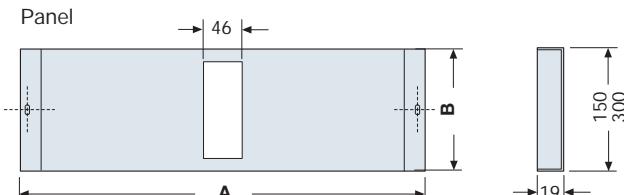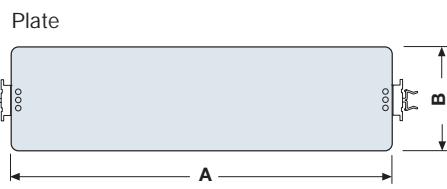

Size	Code	Plate		Panel	
		1 mod.	2 mod.	1 mod.	2 mod.
		A	B	A	B
1					
2	1SL0336A00-1SL0370A00	318	130	318	280
3	1SL0336A00-1SL0370A00	318	130	318	280
4	1SL0337A00-1SL0371A00	443	130	443	280
5	1SL0337A00-1SL0371A00	443	130	443	280
6	1SL0338A00-1SL0372A00	663	130	663	280



The measurements are in millimetres

Gemini

Overall dimensions



Wiring kit

Duct 25x60 mm

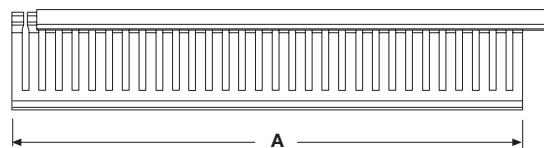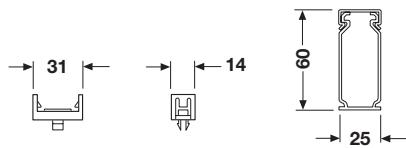


size	A
1	210
2	318
3	318
4	443
5	443
6	663


Duct 40x60 mm

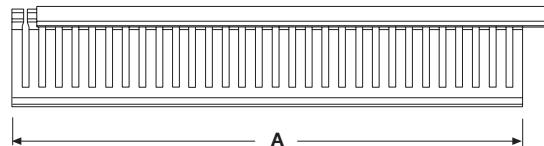


Ventilation kit

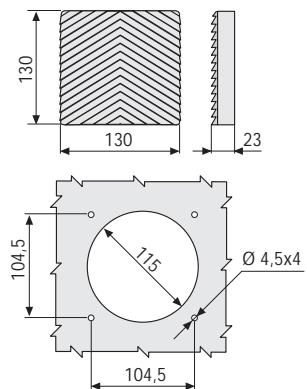



Anti-condensation kit

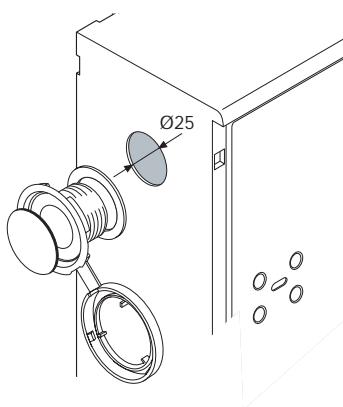

Pedestal

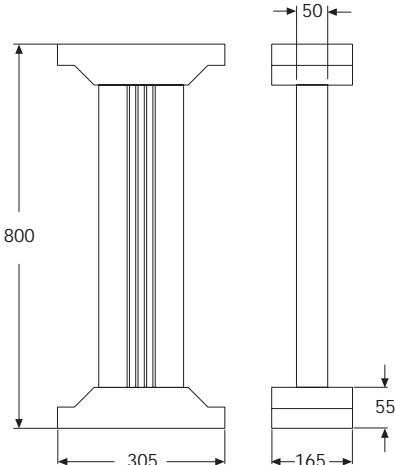

Pole installation kit

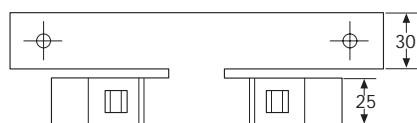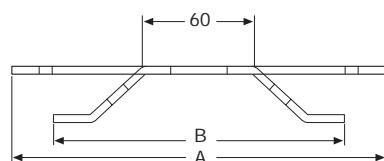




size	A	B
1	232	206
2-3	358	332
4-5	483	457
6	733	707

The measurements are in millimetres

ArTu L


Overall dimensions

Wall-mounted ArTu L

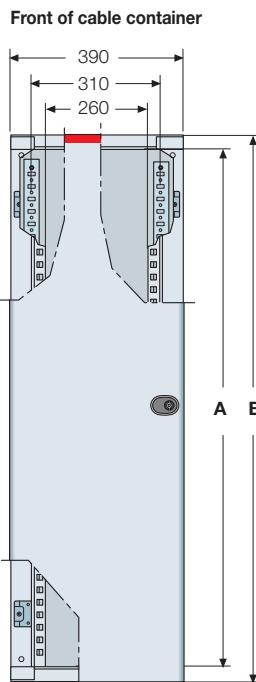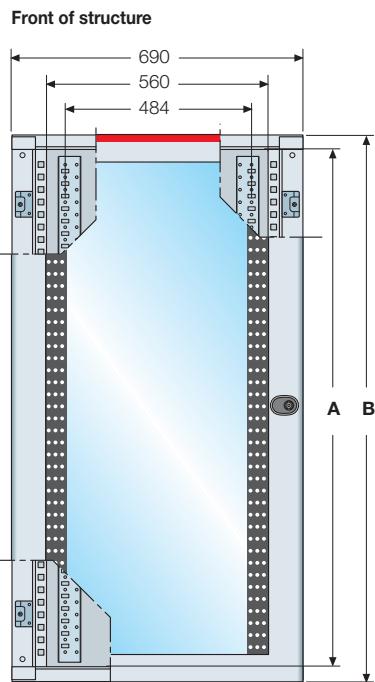


	A	B
Structure		
SL0600	600	650
SL0800	800	850
SL1000	1000	1050
SL1200	1200	1250
Cable container		
VC0600	600	650
VC0800	800	850
VC1000	1000	1050
VC1200	1200	1250

Base of structure

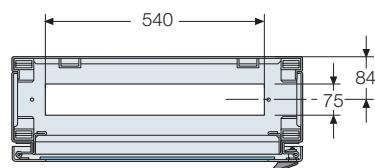

Base of cable container




ArTu L

Overall dimensions

Wall-mounted ArTu L


Fixing to wall

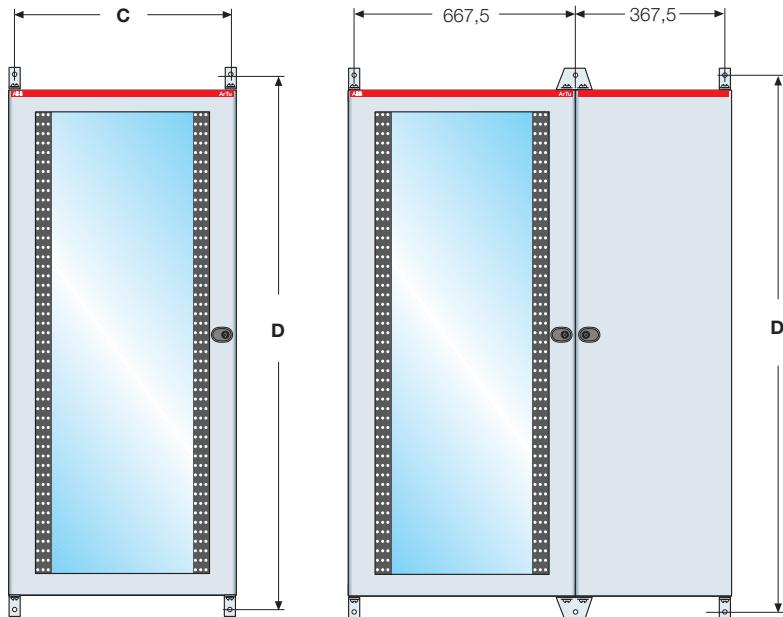


	C	D
Structure		
SL0600	645	700
SL0800	645	900
SL1000	645	1100
SL1200	645	1300
Cable container		
VC0600	345	700
VC0800	345	900
VC1000	345	1100
VC1400	345	1300

Useful space inside wall-mounted switchgear

Structure

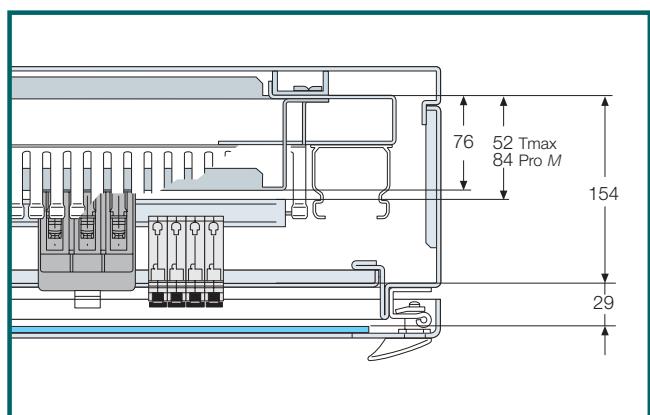

Cable container

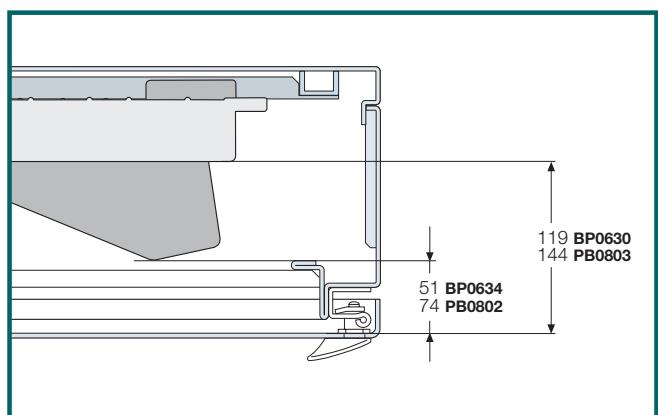


The measurements are in millimetres

ArTu L


Overall dimensions

Floor mounted ArTu L

Front of structure

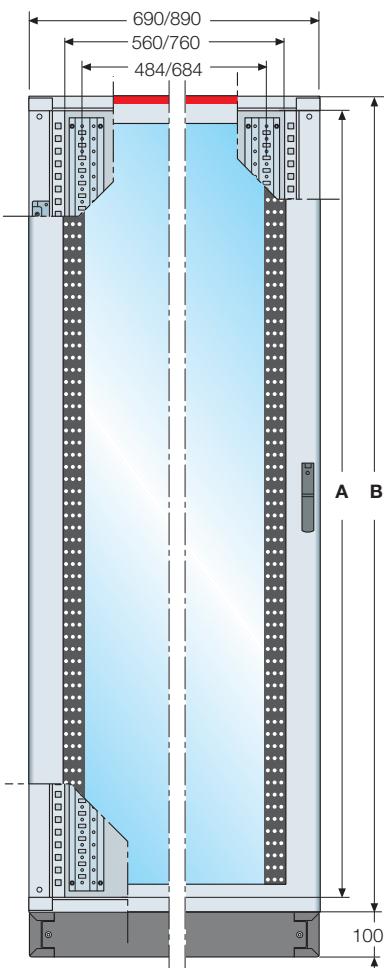


Front of structure with internal cable container

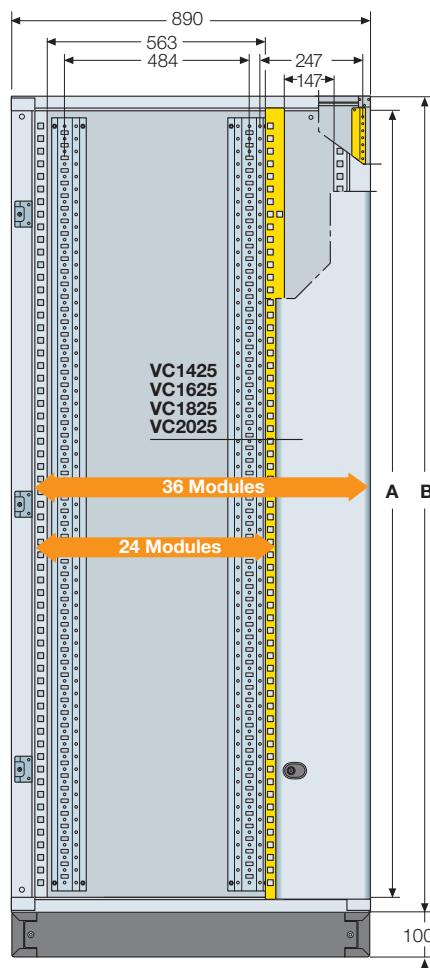


Front of external cable container




Side

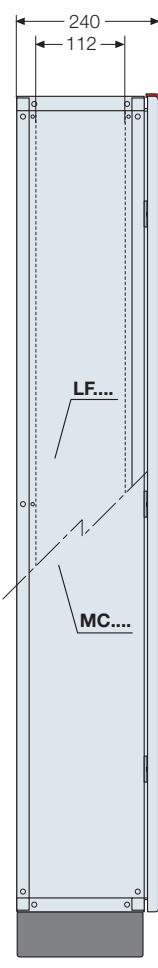

Base of structure

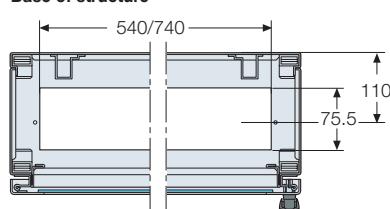

Base of cable container




Structure	A	B
SL1400 - SL1408	1400	1450
SL1600 - SL1608	1600	1650
SL1800 - SL1808	1800	1850
SL2000 - SL2008	2000	2050


External cable container	A	B
VC1400	1400	1450
VC1600	1600	1650
VC1800	1800	1850
VC2000	2000	2050

Cable connection box


Front view

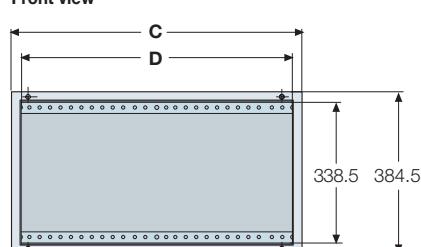

Side view



Top view

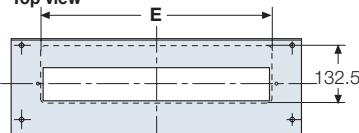

Connection box for structure

RC1000	690	644	550
--------	-----	-----	-----

Connection box for cable container

RC2000	390	344	250
--------	-----	-----	-----


The measurements are in millimetres

ArTu L

Overall dimensions


Floor-mounted ArTu L

Fixing to wall/floor

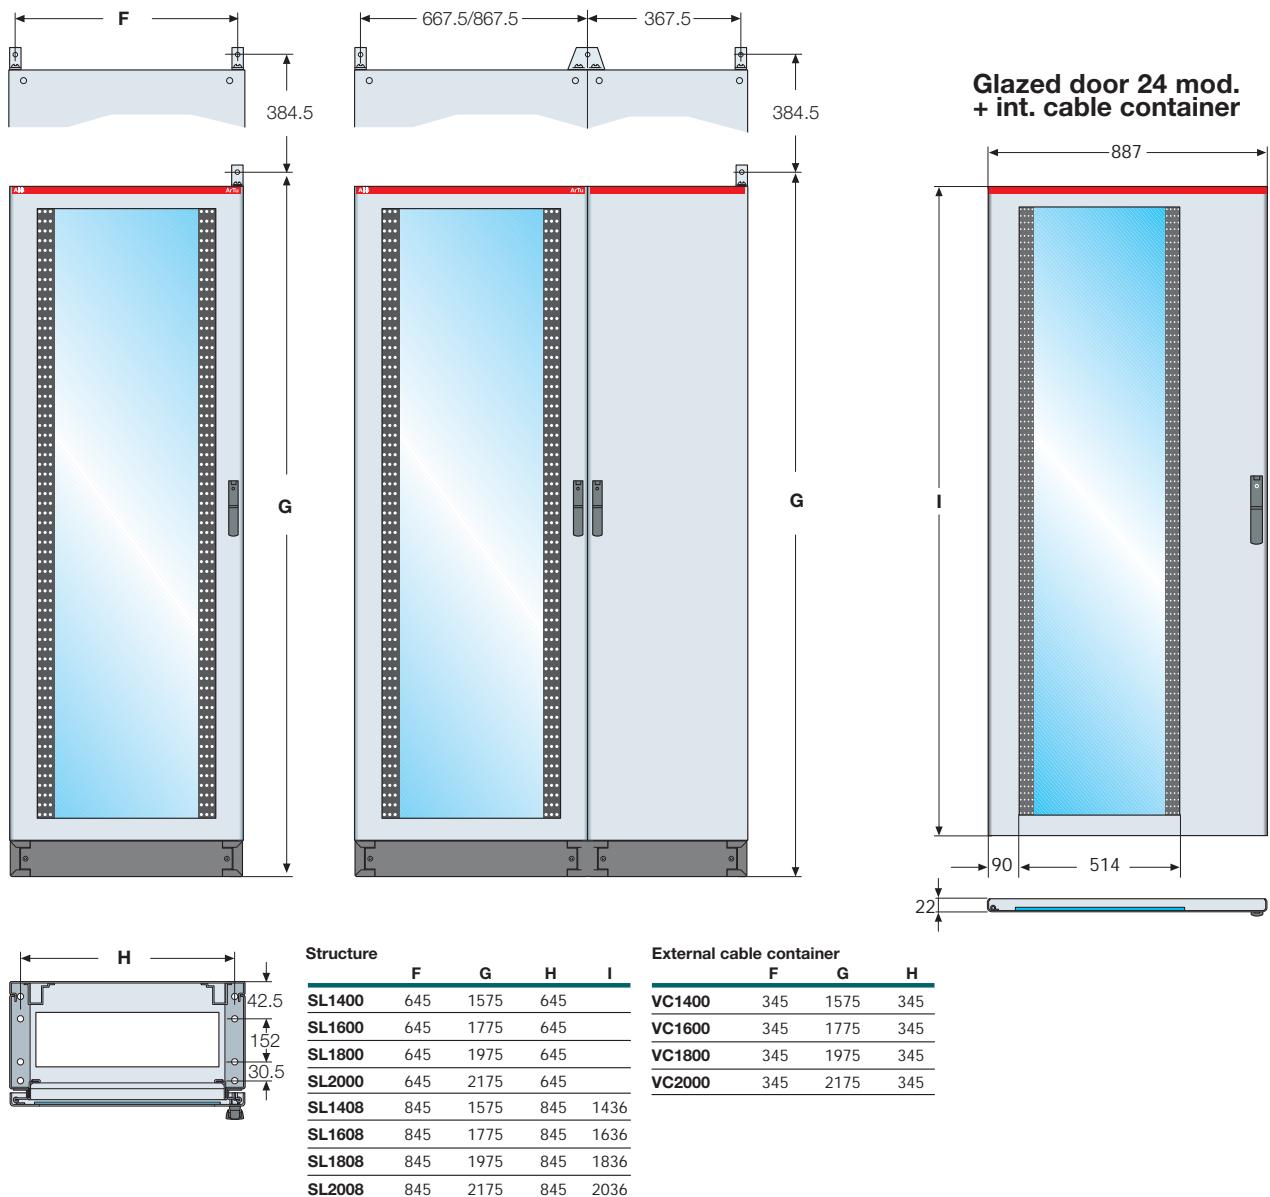


Useful space inside floor-mounted switchgear


Structure

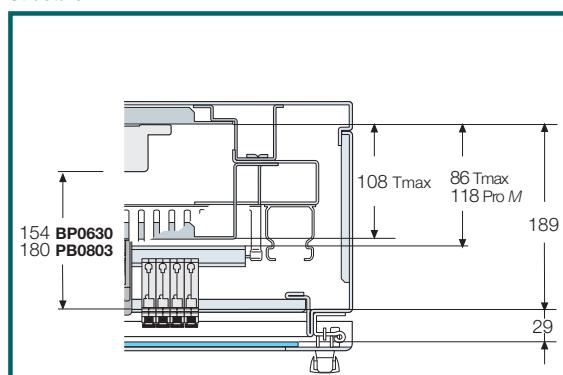

Cable container

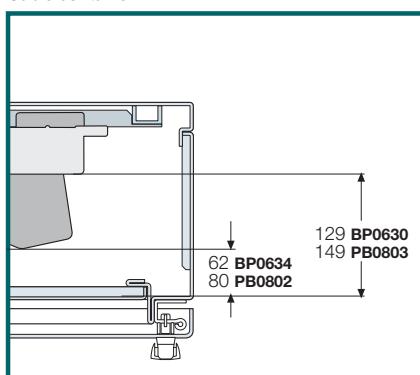

Connection box

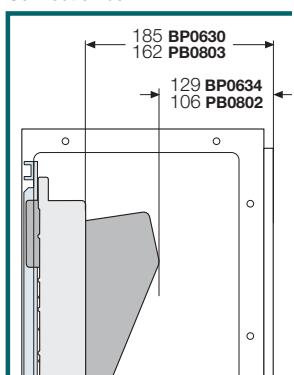


The measurements are in millimetres

ArTu M


Overall dimensions

Wall-mounted ArTu M

Structure

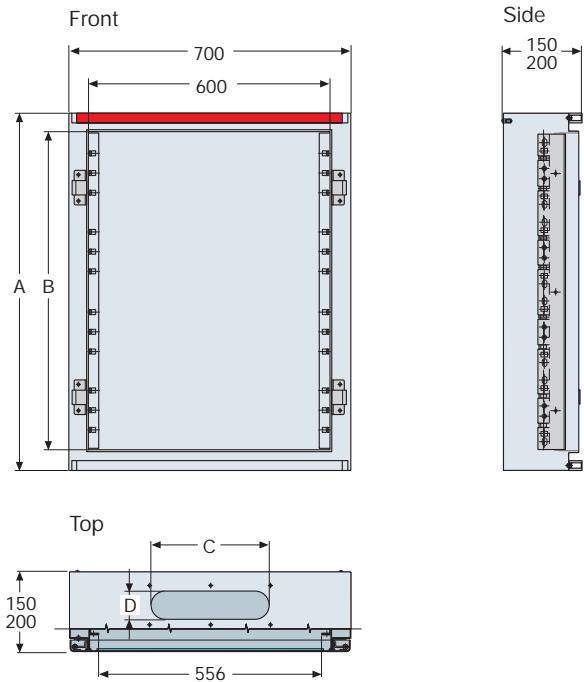

Blind or transparent front door

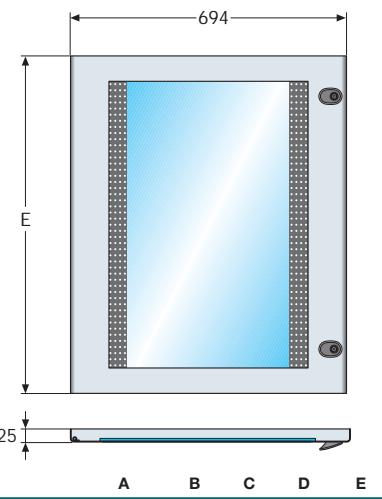


Depth 150mm

SM6061	700	600	183	60	640
SM8061	900	800	183	60	840

Depth 200mm

SM8062	900	800	320	70	840
SM1062	1100	1000	320	70	1040
SM1262	1300	1200	320	70	1240

Switchgear for operating theatre SM 1069

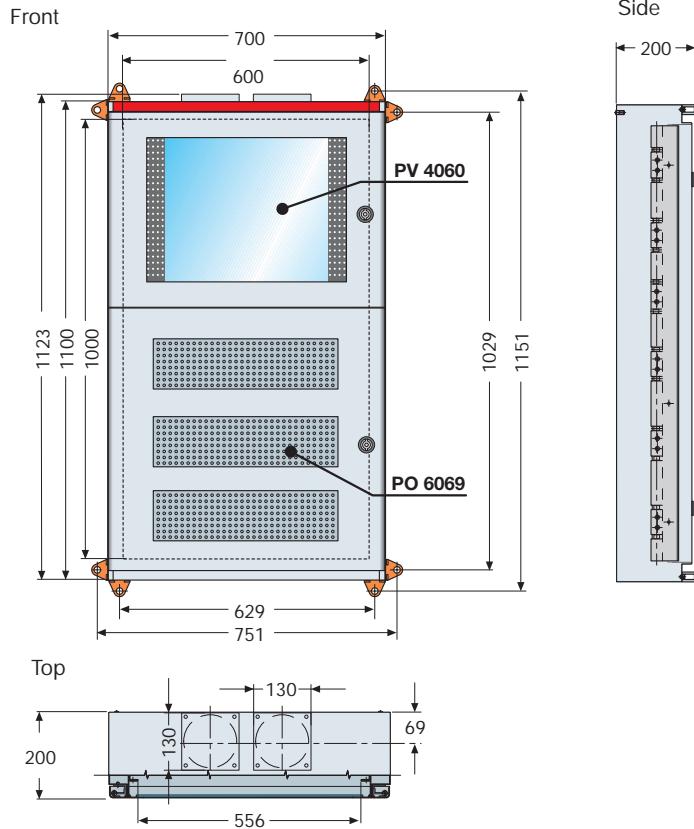


The measurements are in millimetres

ArTu M

Overall dimensions

Wall-mounted ArTu M

Fixing to wall

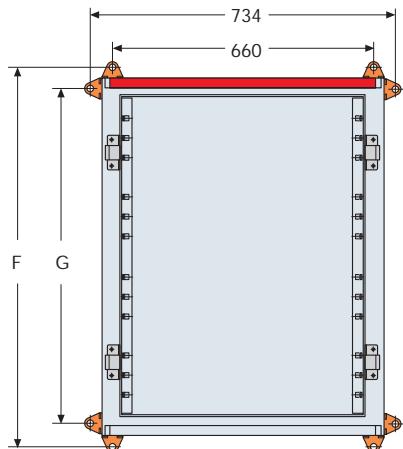

Depth 150 mm


	F	G
SM6061	734	661
SM8061	934	861

Depth 200 mm


	F	G
SM8062	934	861
SM1062	1134	1061
SM1262	1334	1261

Useful space inside wall-mounted switchgear

Depth 150 mm

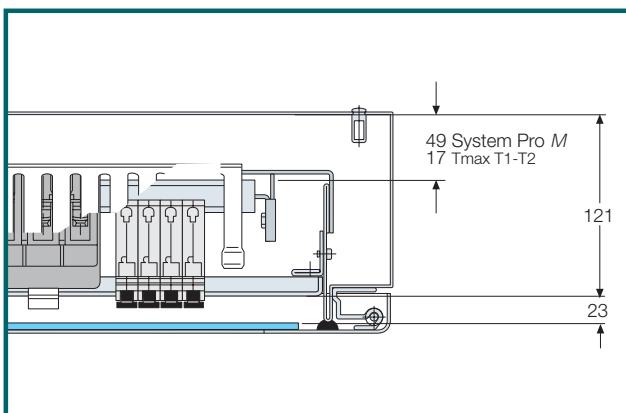

Depth 200 mm

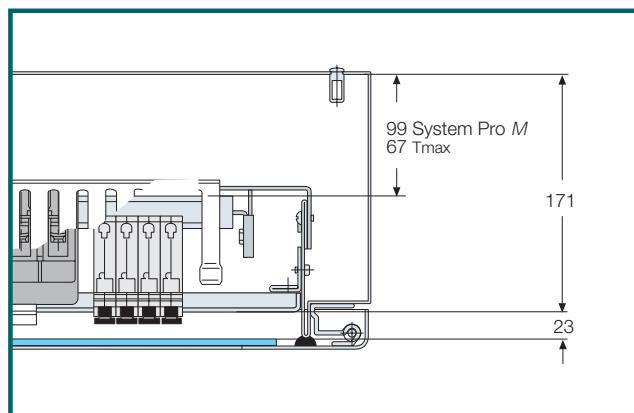


The measurements are in millimetres

ArTu M

Overall dimensions

Floor-mounted ArTu M

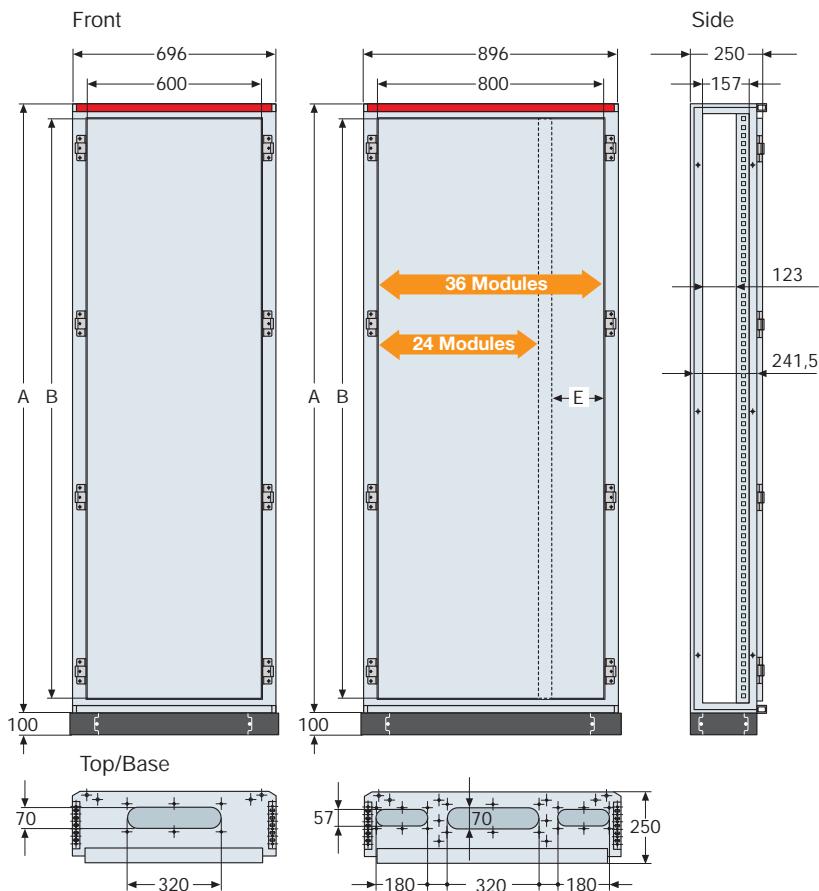

	A	B	C	D	E
Structures without cable container					
SM1462	1496	1400	1490	1436	
SM1662	1696	1600	1690	1636	
SM1862	1896	1800	1890	1836	
SM2062	2096	2000	2090	2036	
Structures with cable container					
SM1682	1696	1600	1690	1636	157
SM1882	1896	1800	1890	1836	157
SM2082	2096	2000	2090	2036	157
Additional cable container					
VC1632	1696	1600			
VC1832	1896	1800			
VC2032	2096	2000			

Overall dimensions for several structures side by side


$$L \times N + 28 = X \text{mm}$$

W = Column width


N = Number of columns

28 = Overall dimensions 2 side panels

Blind or transparent front doors

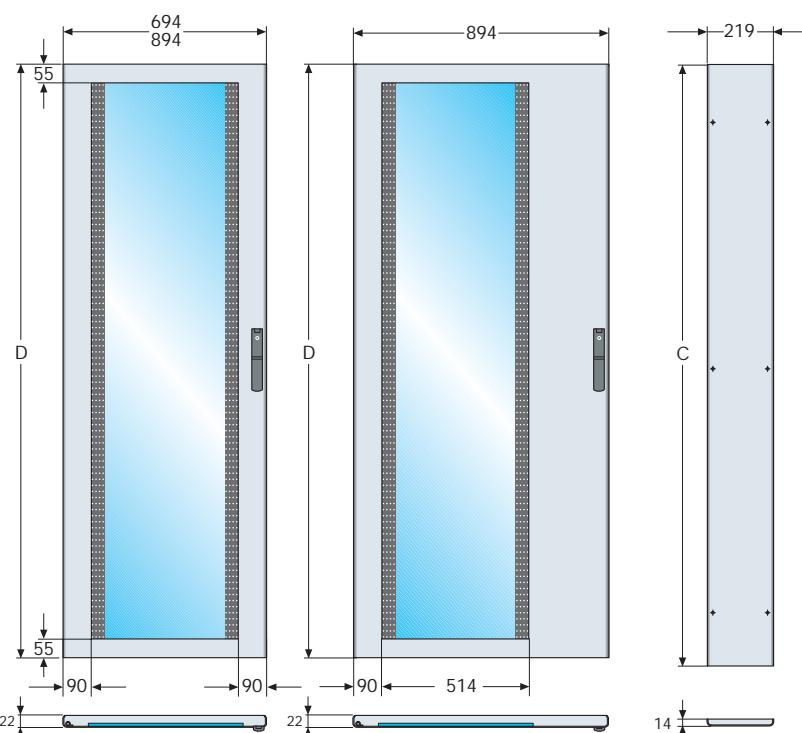

Additional cable

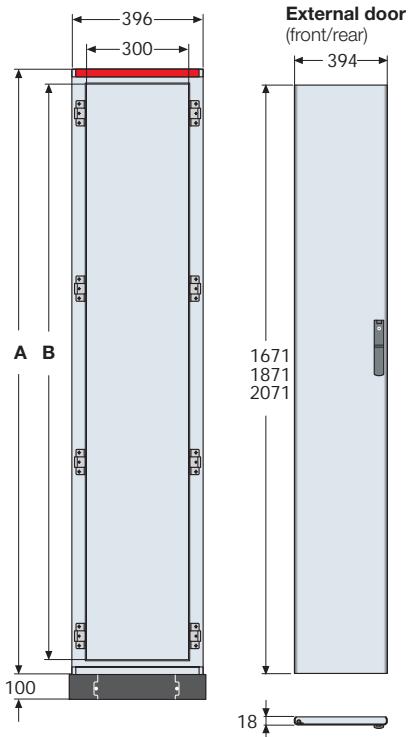


The measurements are in millimetres

ArTu M

Overall dimensions

Floor-mounted ArTu M


Fixing to wall/floor

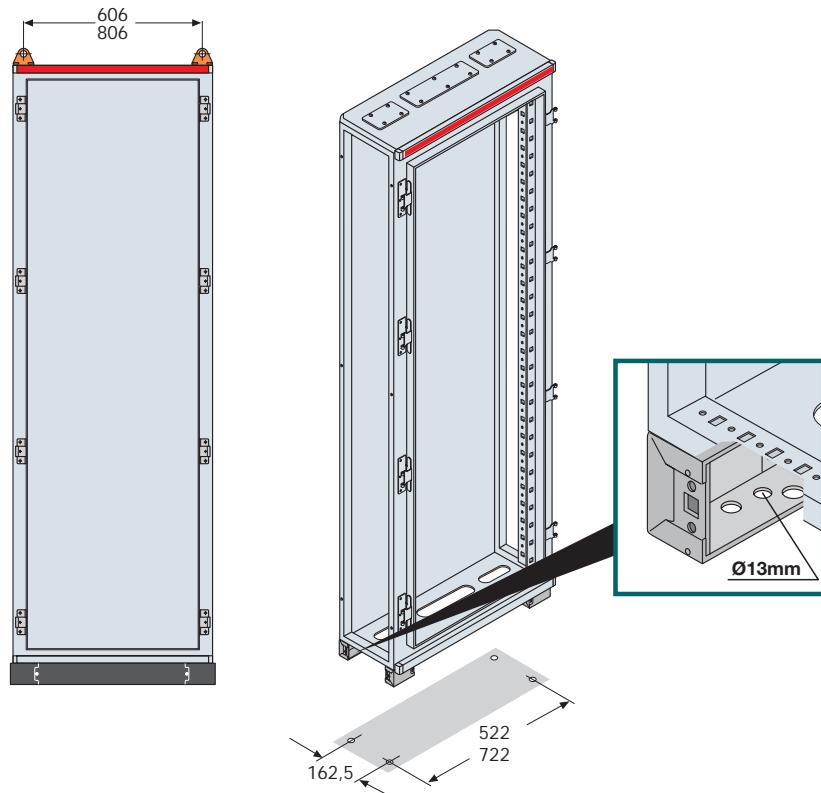


Useful space inside floor-mounted switchgear

	F	G	H	I
System Pro M	72	129,5	120 max	81
Tmax T1-T2		78	108	

Structure

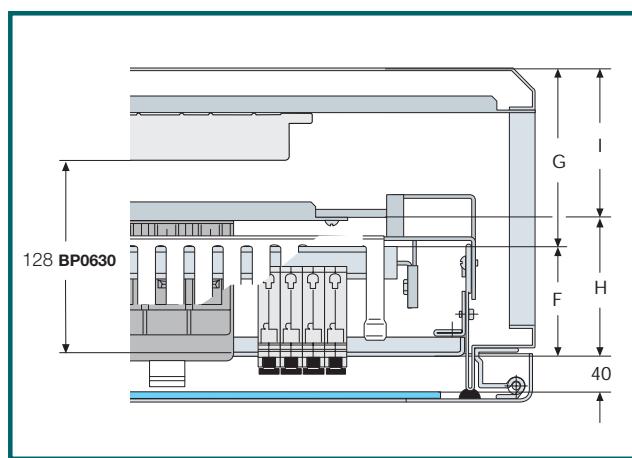

Cable container

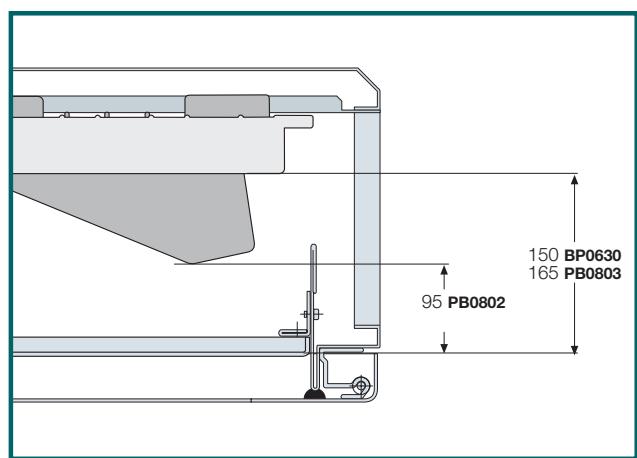


The measurements are in millimetres

ArTu K



Overall dimensions

ArTu K

Structure without cable container

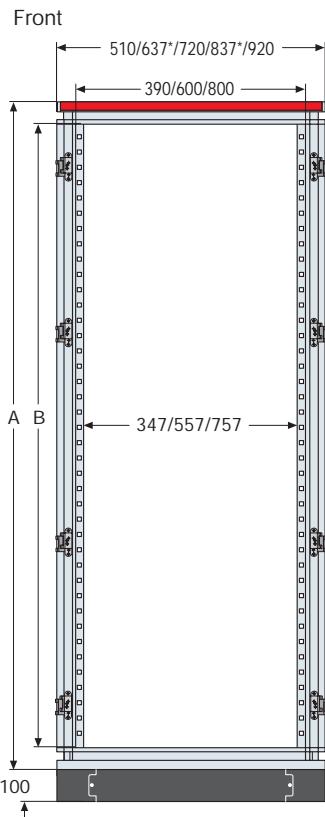

Structure with cable container

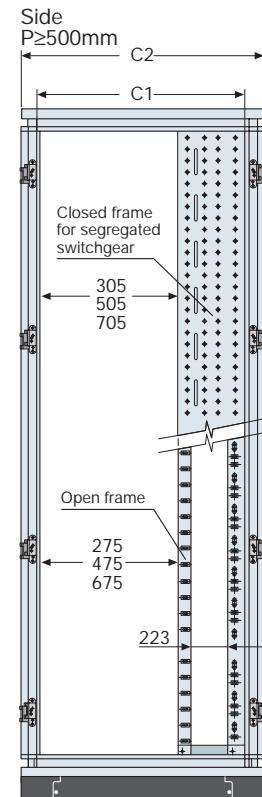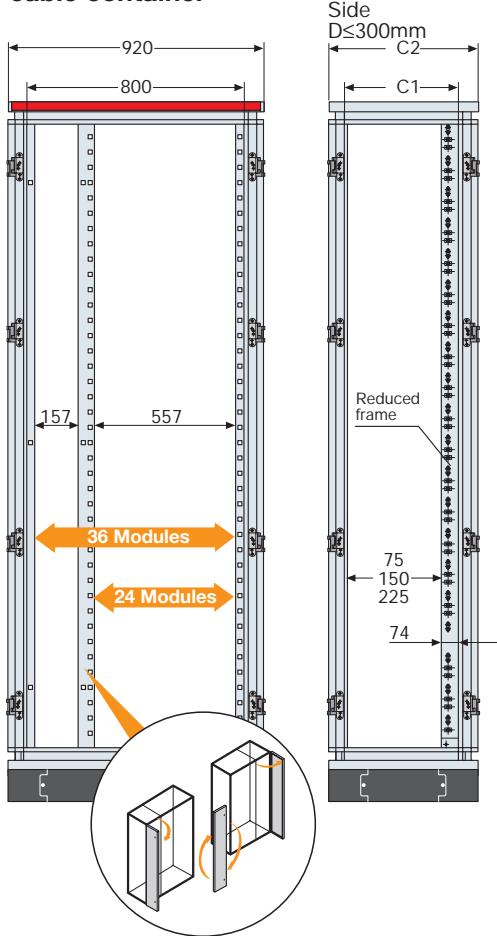

Structure height 1600mm

	A	B	C1	C2
SK6025/SK8025	1731	1600	150	287

Structure height 1800mm

	A	B	C1	C2
SK6025/SK8025	1931	1800	150	287
SK4040/SK6040/SK8040	1931	1800	225	362
SK4050/SK6050/SK8050	1931	1800	300	437
SK4060/SK6060/SK8060/SK6600*	1931	1800	500	637
SK4080/SK6080/SK8080/SK8800*	1931	1800	700	837
SK4010/SK6010/SK8010	1931	1800	900	1037

Structure height 2000mm

	A	B	C1	C2
SK6025/SK8025	2131	2000	150	287
SK4040/SK6040/SK8040	2131	2000	225	362
SK4050/SK6050/SK8050	2131	2000	300	437
SK4060/SK6060/SK8060/SK6600*	2131	2000	500	637
SK4080/SK6080/SK8080/SK8800*	2131	2000	700	837
SK4010/SK6010/SK8010	2131	2000	900	1037

Overall dimensions for several structures side by side

$$L \times N + 28 = X \text{mm}$$

W = Column width

N = Number of columns

28 = Overall dimensions 2 side panels

* Angled structures


The measurements are in millimetres

ArTu K


Overall dimensions

Bases


SK6025 (W600xD150)
SK8025 (W800xD150)
VC3025 (W300xD150)




SK4040 (W390xD225)
SK6040 (W600xD225)
VC3040 (W300xD225)




VC3050 (W300xD300)
VC3060 (W300xD500)
VC3080 (W300xD700)




SK4050 (W390xD300)
SK4060 (W390xD500)
SK4080 (W390xD700)
SK6050 (W600xD300)
SK6060 (W600xD500)
SK8050 (W800xD300)




SK6060 (W600xD500)
SK6080 (W600xD700)




SK8040 (W800xD225)




SK8060 (W800xD500)



SK8080 (W800xD700)

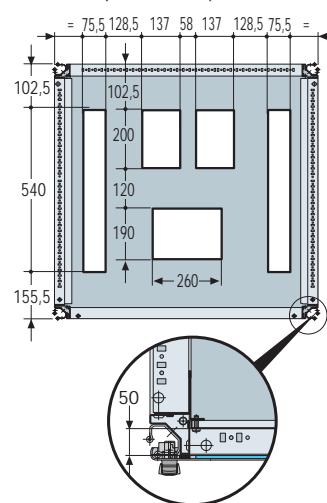

SK4010 (W390xD900)
SK6010 (W600xD900)
SK8010 (W800xD900)
VC3010 (W300xD900)

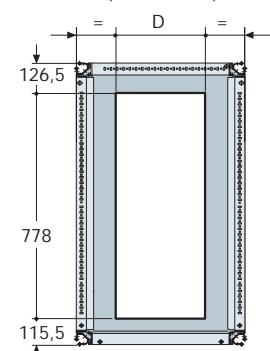


	D	E	F
SK6025 (W600xD150)	180	140	57
SK8025 (W800xD150)	320	140	70
SK4040 (W390xD225)	200	108	137
SK4050 (W390xD300)	320	94,5	220
SK4060 (W390xD500)	320	99	420
SK4080 (W390xD700)	320	99	620
SK4010 (W390xD900)	270		
SK6040 (W600xD225)	540	123,5	75,5
SK6050 (W600xD300)	540	94,5	220
SK6060 (W600xD500)	93	163	
SK6080 (W600xD700)	123	333	
SK6010 (W600xD900)	467		
SK8050 (W800xD900)	740	94,5	220
SK8010 (W800xD300)	467		
VC3025 (W300xD150)	180	140	57
VC3040 (W300xD225)	200	103	137
VC3050 (W300xD300)	230	99	220
VC3060 (W300xD500)	200	99	420
VC3080 (W300xD700)	230	99	620
VC3010 (W390xD900)	200		

ArTu K


Overall dimensions

ArTu K


Transparent front doors

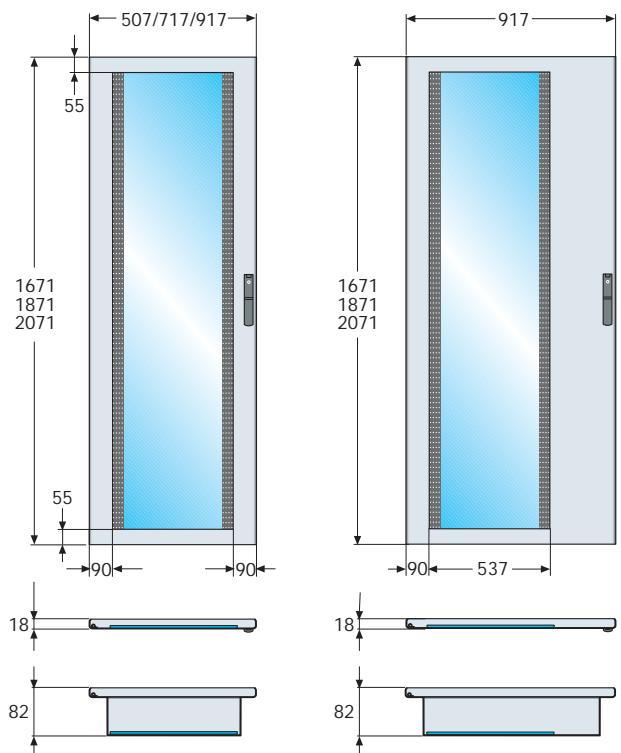


Side door

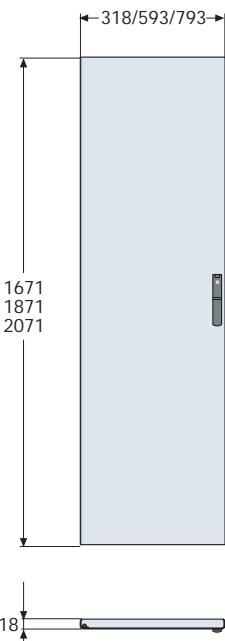


Rear and front blind doors

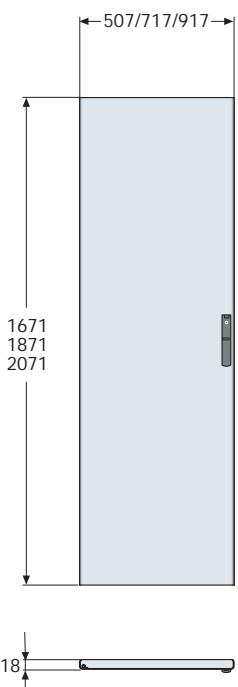

Blind side or ventilated panels

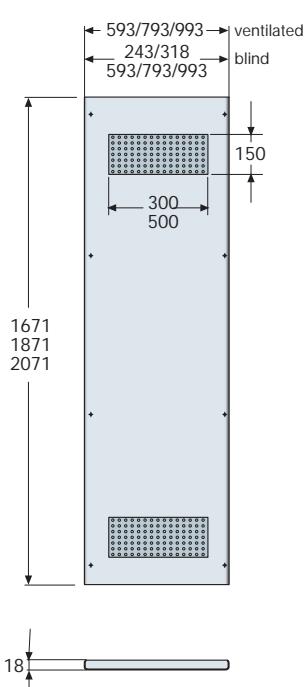

Rear panels

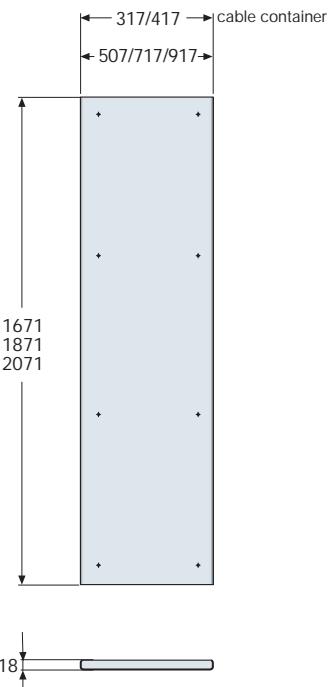


The measurements are in millimetres

ArTu K


Overall dimensions

ArTu K

Fixing to wall/floor

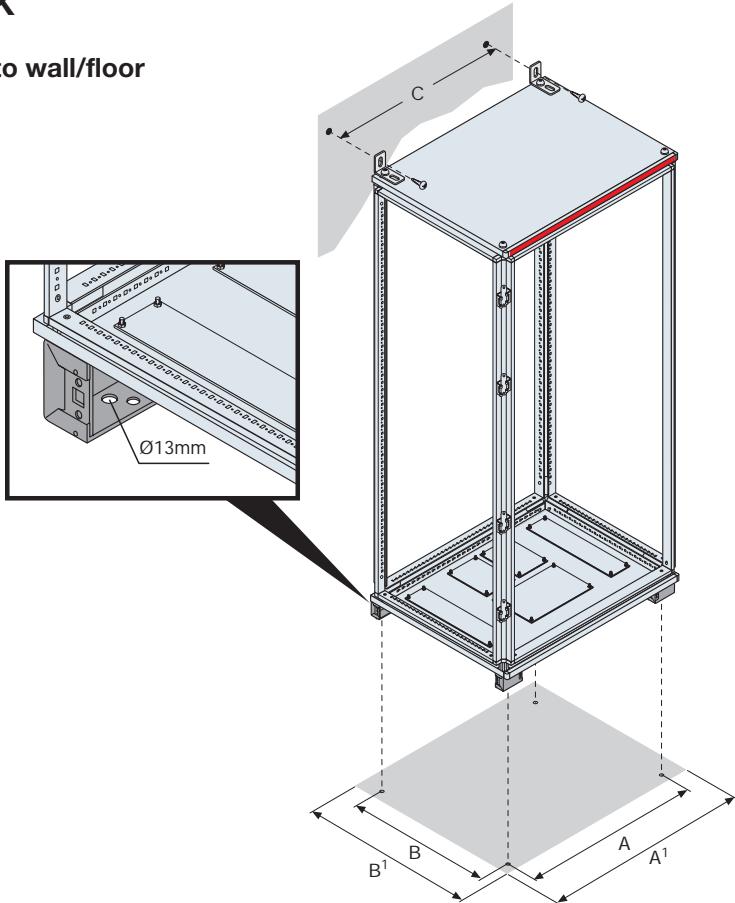

Additional cable container

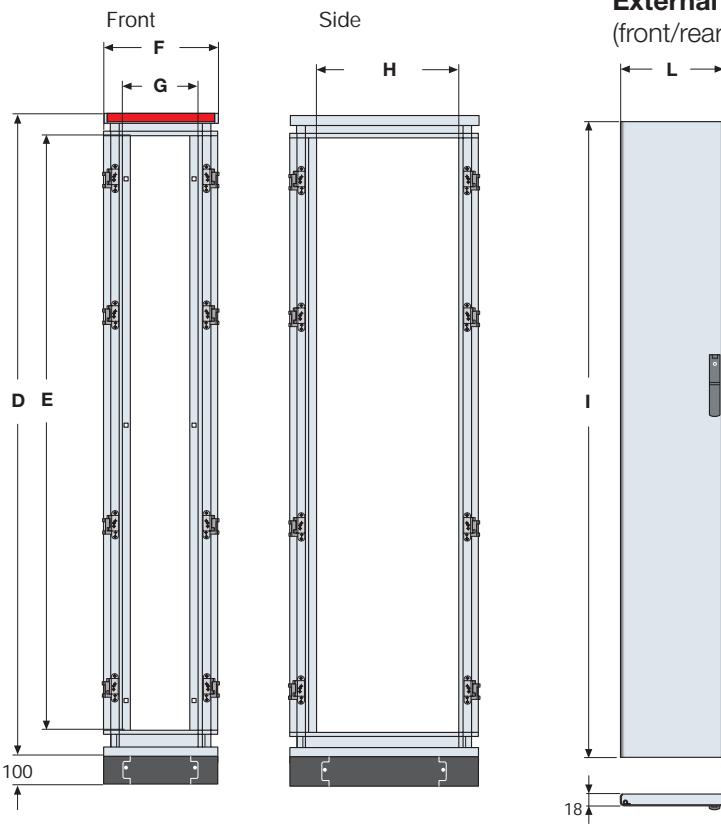

External door (front/rear)

Structure		A	A¹	B	B¹	C
W600xD150	SK6025	546	720	189	287	620
W800xD150	SK8025	746	920	189	287	820
W390xD225	SK4040	336	520	264	362	410
W390xD300	SK4050	336	520	339	437	410
W390xD500	SK4060	336	520	539	637	410
W390xD700	SK4080	336	520	739	837	410
W390xD900	SK4010	336	520	939	1037	410
W600xD225	SK6040	546	720	264	362	620
W600xD300	SK6050	546	720	339	437	620
W600xD500	SK6060	546	720	539	637	620
W600xD700	SK6080	546	720	739	837	620
W600xD900	SK6010	546	720	939	1037	620
W800xD225	SK8040	746	920	264	362	820
W800xD300	SK8050	746	920	339	437	820
W800xD500	SK8060	746	920	539	637	820
W800xD700	SK8080	746	920	739	837	820
W800xD900	SK8010	746	920	939	1037	820

Additional cable container

Additional cable container		A	A¹	B	B¹	C
W300xD150	VC3025	246	420	739	287	320
W300xD225	VC3040	246	420	264	362	320
W300xD300	VC3050	246	420	339	437	320
W300xD700	VC3060	246	420	539	637	320
W300xD700	VC3080	246	420	739	837	320
W300xD900	VC3010	246	420	939	1037	320

height 1600mm	D	E	F	G	H	I	L
VC3025	1731	1600	420	300	150	1671	417

height 1800mm	D	E	F	G	H	I	L
VC3025	1931	1800	420	300	150	1871	417
VC3040	1931	1800	420	300	225	1871	417
VC3050	1931	1800	420	300	300	1871	417
VC3060	1931	1800	420	300	500	1871	417
VC3080	1931	1800	420	300	700	1871	417
VC3010	1931	1800	420	300	900	1871	417

height 2000mm	D	E	F	G	H	I	L
VC3025	2131	2000	420	300	150	2071	417
VC3040	2131	2000	420	300	225	2071	417
VC3050	2131	2000	420	300	300	2071	417
VC3060	2131	2000	420	300	500	2071	417
VC3080	2131	2000	420	300	700	2071	417
VC3010	2131	2000	420	300	900	2071	417

The measurements are in millimetres


ArTu K

Overall dimensions


ArTu K

Useful space inside the switchgear


Depth 150mm

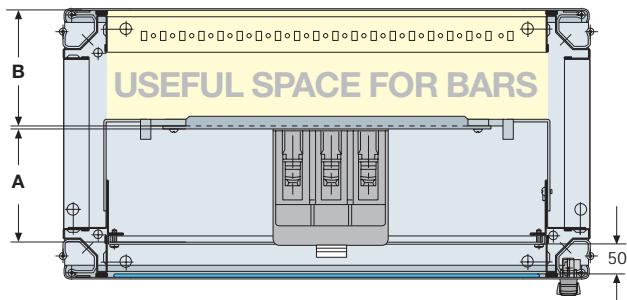


Depth 225/300mm

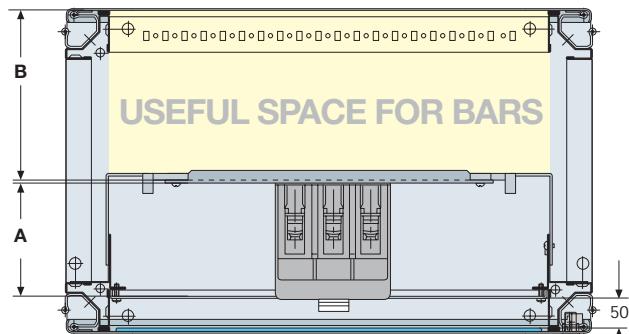

Depth 500mm

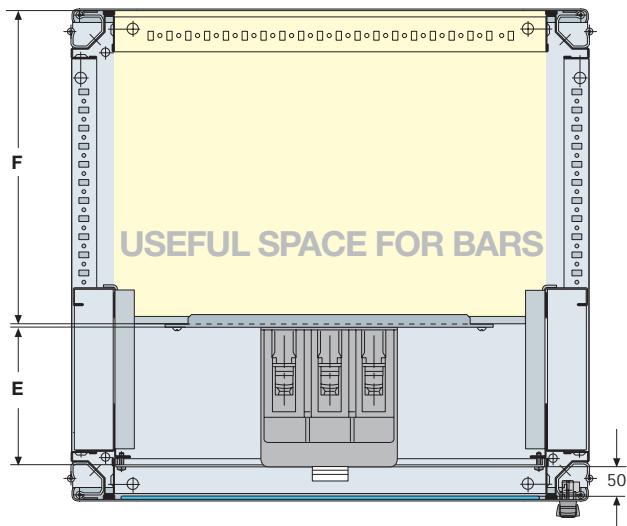

Depth 700/900mm

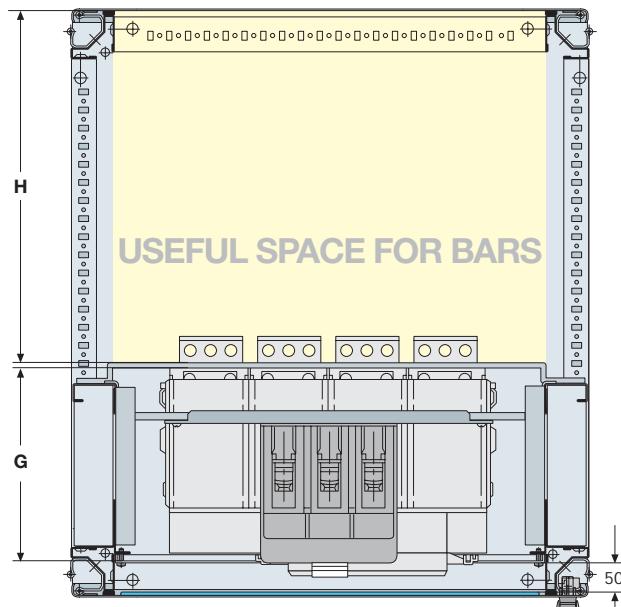

Depth 900

	FIXED G	H	PLUG-IN G	H	WITHDRAWABLE G	H
T1-T2	78	896	-	-	-	-
T4-T5-S6	107	867	156	819	190	784
T7	146	828	-	-	241	740
X1						
E1-E2-E3-E4	236	738	-	-	378	603

The measurements are in millimetres


ArTu L - M - K

Kits for apparatus

ArTu L - M - K - Panels for apparatus mounted on DIN rail


1 DIN row

W=390mm (12 DIN mod.)
W=600mm (24 DIN mod.)
W=800mm (36 DIN mod.)




2 DIN rows

W=600mm (48 DIN mod.)
W=800mm (72 DIN mod.)




3 DIN rows


W=600mm (72 DIN mod.)

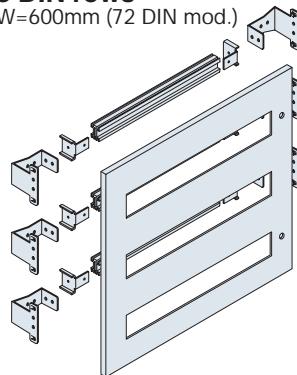


Width 390mm




Width 600/800mm

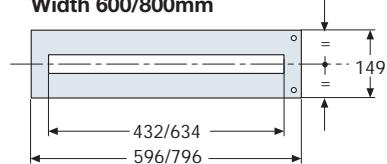


Width 600/800mm

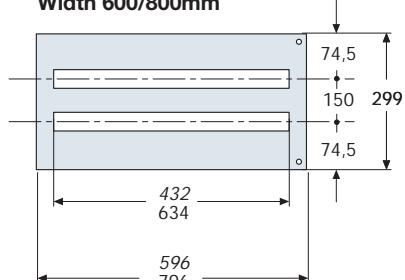


Width 600mm

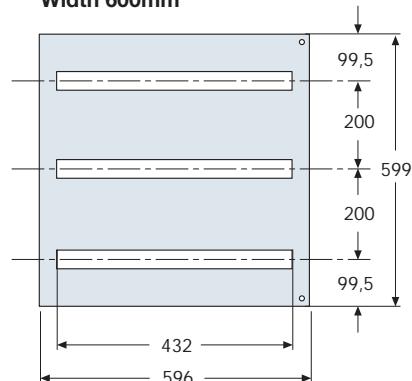

Width 600/800mm

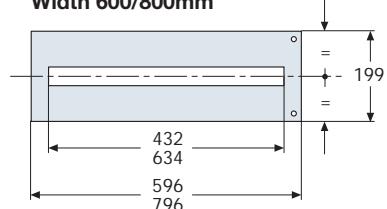

Version for Tmax with diff. mod.

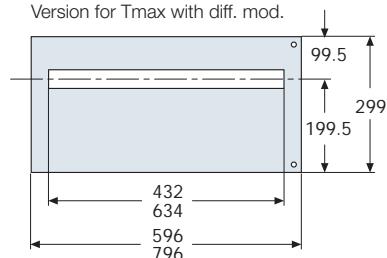

Version for Unifix H




ArTu L - M - K


Kits for apparatus

ArTu L - M - K - Blind flat and blind recessed plates


Useful dimensions of blind flat plates - PF




ArTu L



ArTu M - K d=150mm




ArTu K without segregation




ArTu K segregated

H functional (mm)	W=600mm		W=800mm		W=600mm		W=800mm		W=390mm		W=600mm		W=800mm		W=390mm		W=600mm		W=800mm	
	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B
200	187	400	187	600	184	449	184	649	184	284	184	440	184	640	190	374	190	584	190	784
300	287	400	287	600	-	-	-	-	234	284	234	450	284	650	290	374	290	584	290	784
400	387	400	387	600	384	449	384	649	384	284	384	440	384	640	390	374	390	584	390	784
600	587	400	587	600	-	-	-	-	584	284	584	470	584	650	590	374	590	584	590	784
800	787	400	787	600	-	-	-	-	-	-	-	-	-	-	-	-	790	584	790	784

Useful dimensions of blind recessed plates - FR



ArTu L




ArTu M - K d=150mm

ArTu K without segregation


ArTu K segregated

ArTu K - Adjustable back plate

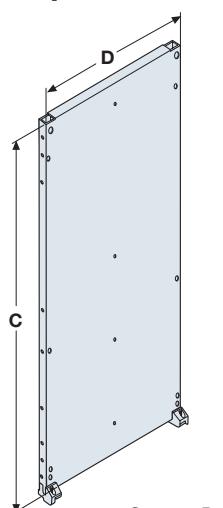


PF1806	1776	580
PF1808	1776	780
PF2006	1966	580
PF2008	1966	780



ArTu L - M - K - Blind and ventilated panels

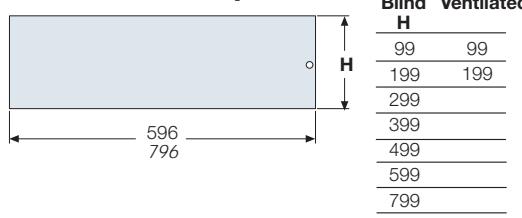

ArTu L - M - K - Panels for instruments

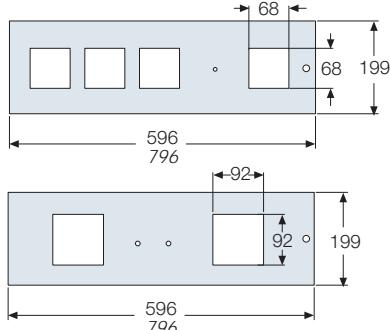

ArTu L - M - K - Blind and recessed panels

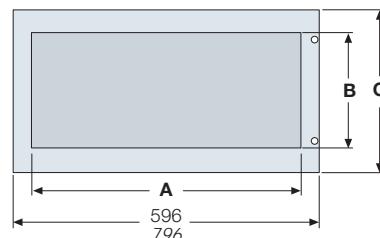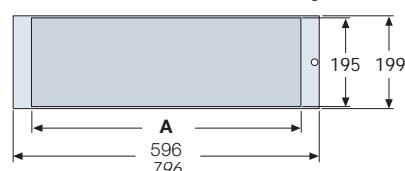

Code	A	B	C
PR2600	506		
PR2800	706		
PR4600	506	308	399
PR4800	706	308	399
PR6600	506	508	599
PR6800	706	508	599


ArTu L - M - K

Distribution systems


ArTu L - M - K - Busbar with shaped section

Busbars


BA0400




BA0800




BA1250

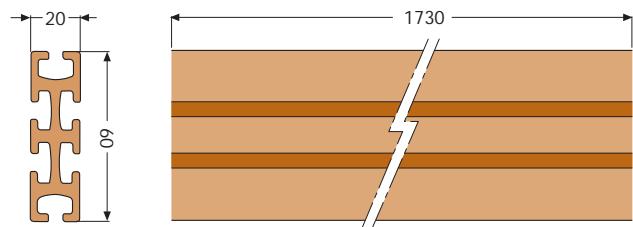

BA1600

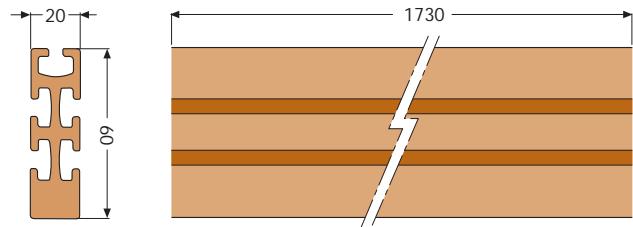


BA2000

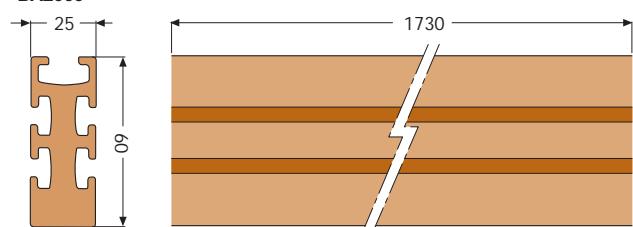


Insulators


PB 0803




PB 0802

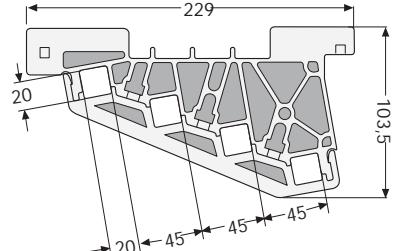


PB 1601

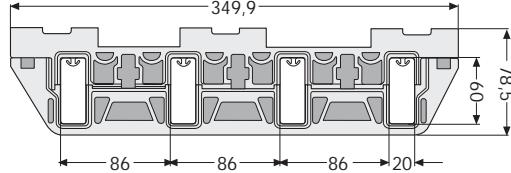


PB 1600

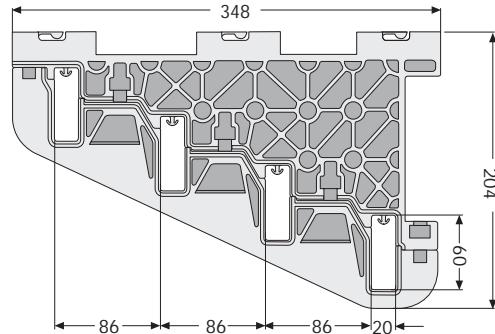

PB 1603

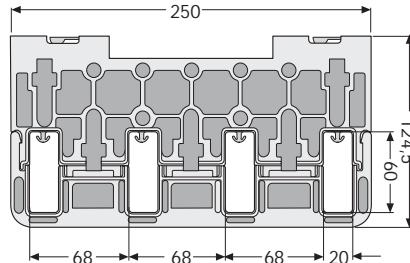


PB 3201

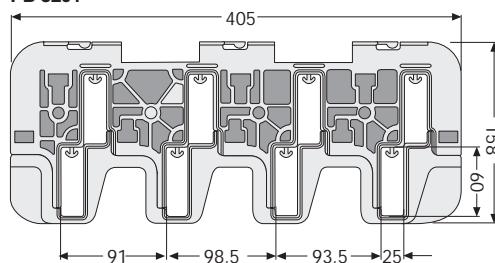

Accessories

AD1077



1STCB0269F0901


The measurements are in millimetres

ArTu L - M - K


Distribution systems

ArTu L - M - K - Flat busbars


Busbars up to 630A

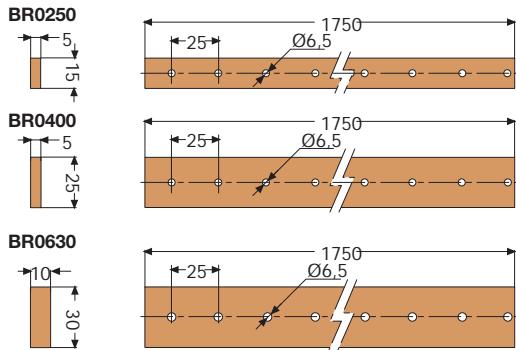


Busbars up to 4000A

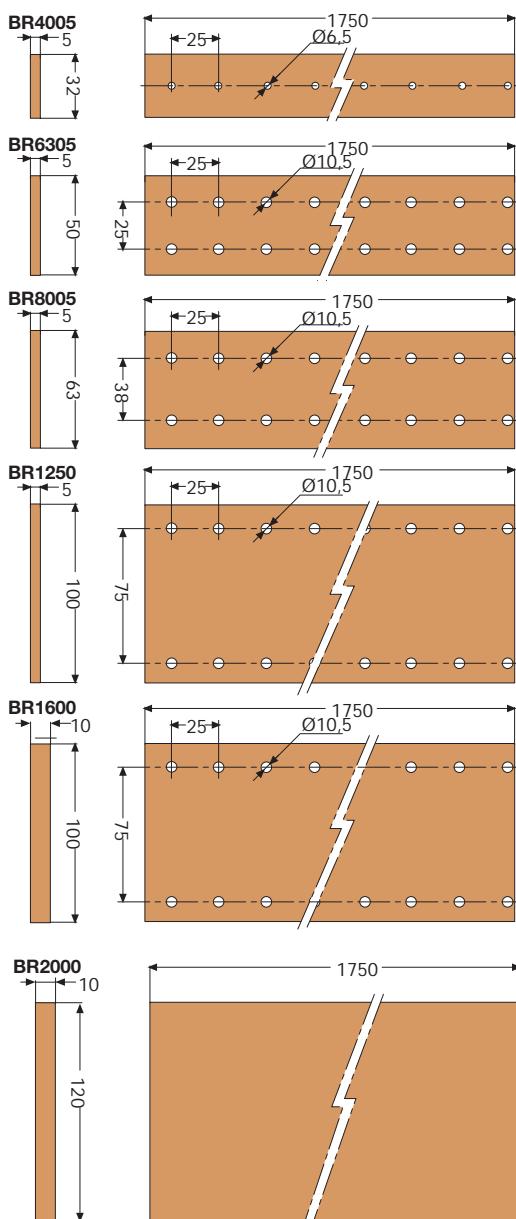

Insulators for busbars up to 630A

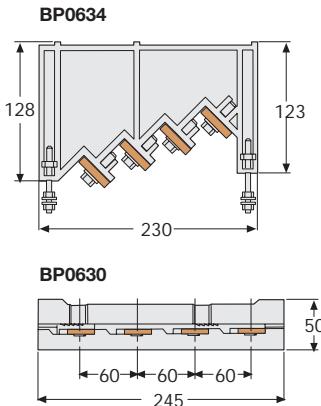

Insulators for busbars up to 4000A

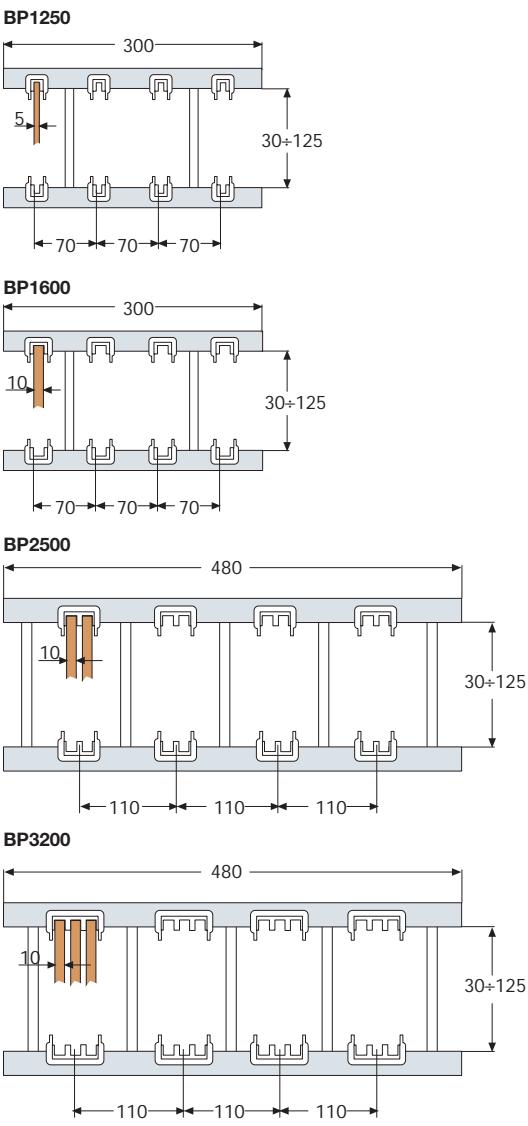


The measurements are in millimetres

ArTu L - M - K


Distribution systems

Unifix cabling system

Unifix H

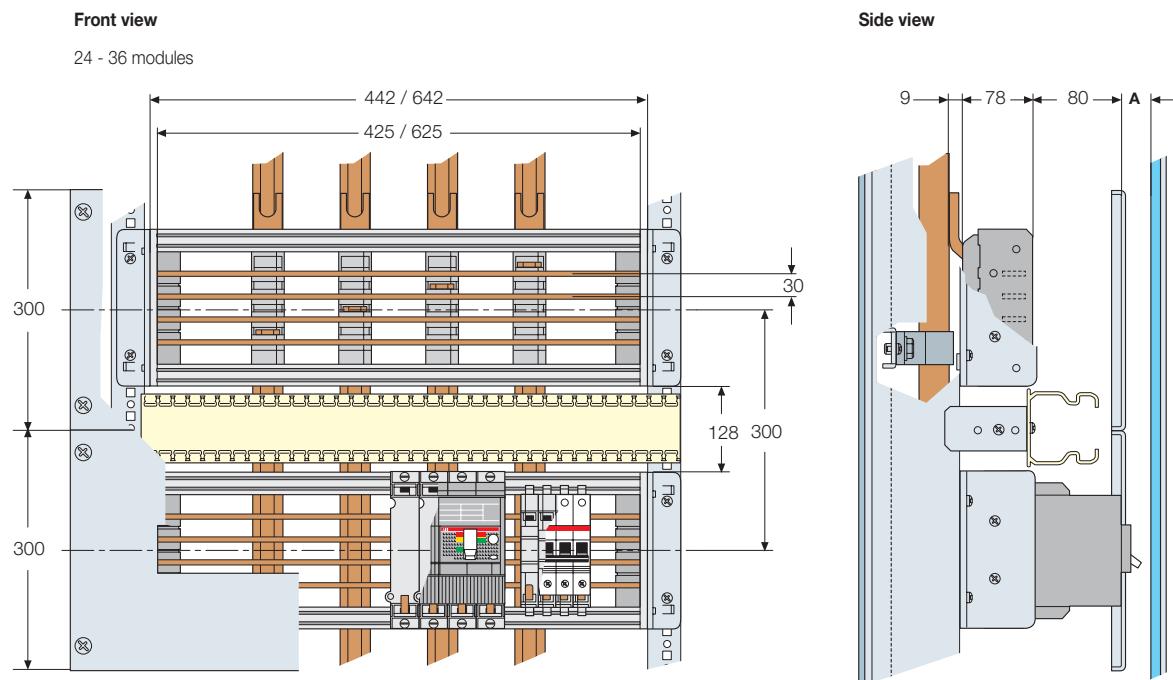

Unifix L

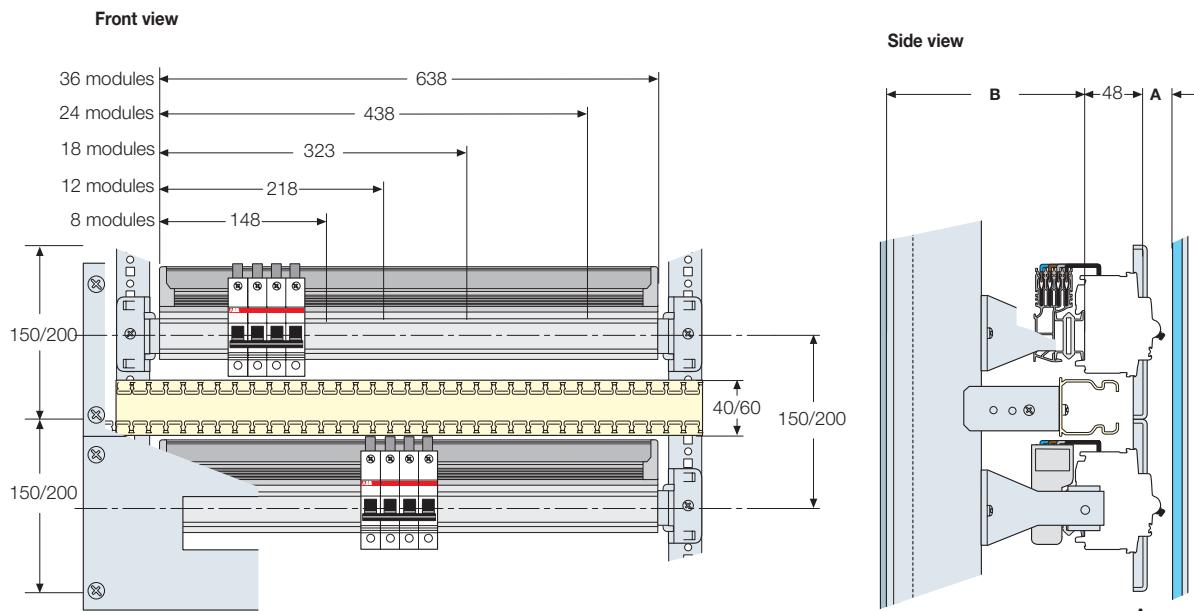

ArTu L Wall-mounted	29	104
ArTu L Floor mounted	29	140
ArTu M Wall-mounted (D=150)	21	73
ArTu M Wall-mounted (D=200)	21	123
ArTu M Floor mounted	40	152
ArTu K (D=150)	50	173
ArTu K (D=225)	50	248
ArTu K (D=300)	50	323
ArTu K (D=500)	50	523
ArTu K (D=700)	50	723
ArTu K (D=900)	50	923


The measurements are in millimetres

ArTu L - M - K


Distribution systems

Accessories


Aluminium section EV1050

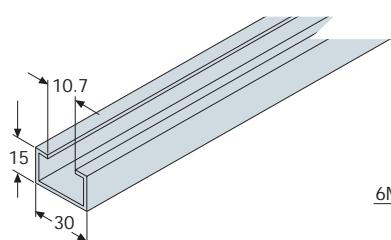


Aluminium nuts for EV1050

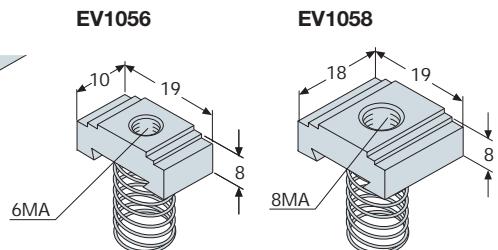

Angles for busbars EV1051




Brackets for cables EV1090 / EV1091

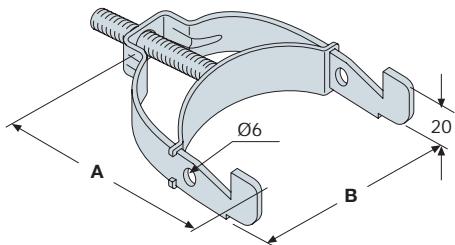


	A	B
EV1090	49	20
EV1091	65	36
EV1092	85	51
EV1093	106	80

Terminal box supports

EV1110

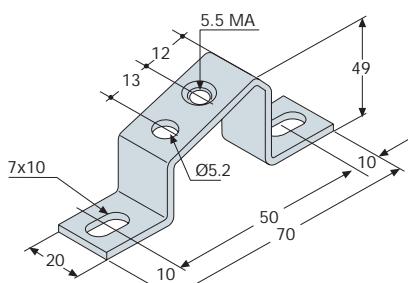

EV1112

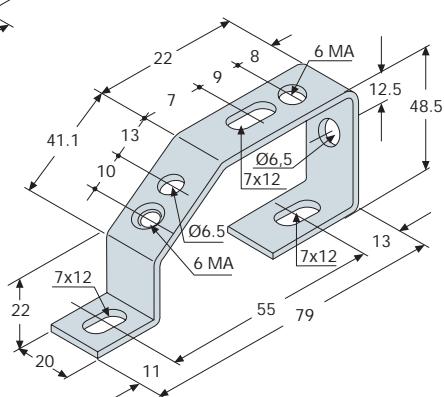

The measurements are in millimetres

Index

Gemini switchboards

Structure	9/2
Completion of structure	9/4
Accessories	9/9

ArTu L modular structures

Structure	9/12
Kits for apparatus	9/18
Distribution system	9/22
Accessories	9/28

ArTu M monobloc structures

Structure	9/18
Kits for apparatus	9/22
Distribution system	9/25
Accessories	9/30

Modular structures ArTu K

Structure (without segregation/segregated switchgear)	9/51
Kit for apparatus (without segregation/segregated switchgear)	9/57
Kit for reduced frame apparatus (without segregation switchgear d=150-225-300mm)	9/60
Kit for standard frame apparatus (without segregation switchgear d=225mm)	9/61
Kit for apparatus (segregated switchgear)	9/64
Segregation	9/67
Distribution system	9/68
Accessories	9/78

ArTu L - M - K

Kits which can be managed at time of offer	9/83
--	------

List of codes

9/90


Gemini

ArTu L

ArTu M


ArTu K

9

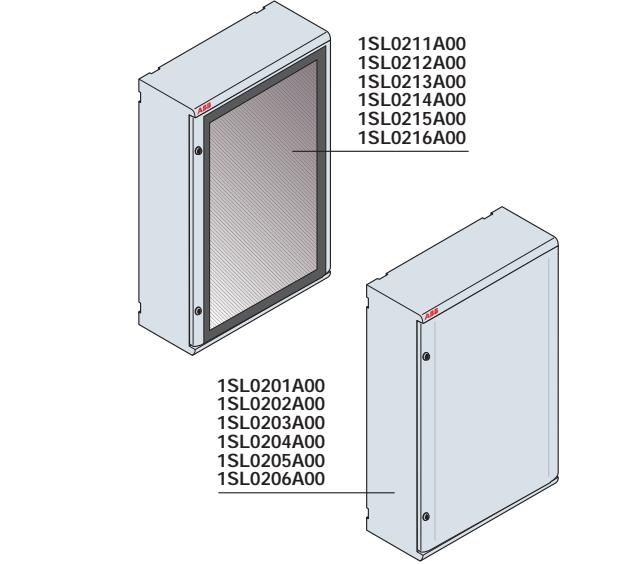

Gemini switchboards

Structure

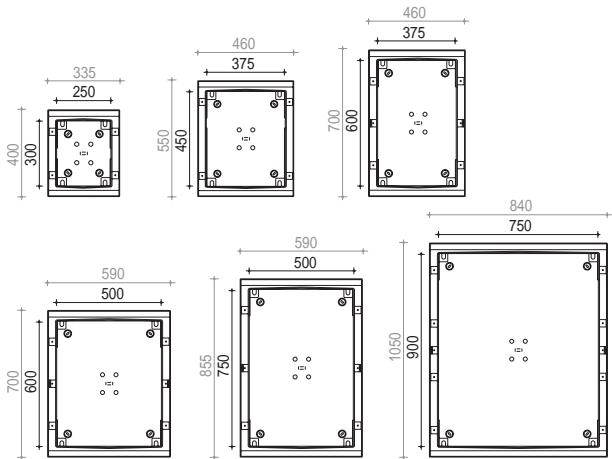


Boxes and doors

- Available in 6 sizes
- Single order code combined with box and transparent and opaque door
- Pack with door dismounted and wrapped separately
- Door designed so that it can be hooked onto hinges at both vertical sides and mounted without the use of tools
- To be mounted to the wall using internal holes or fixing brackets supplied as accessories
- Door opening at an angle of more than 180°
- RAL 7035 grey color
- Doors supplied with 2 standard double bit locks (3 for sizes 5 and 6) that can be replaced with locks for ciphered key or with square/triangular impression (the standard triplex key is suitable for use with three types of impressions).

Size	Code	Description	N° vertical mod.	Useful dimensions	
				WxHxD (mm)	Unit./Pack
			H=150mm		
1	1SL0211A00 1SL0201A00	Structure with door	2	250x300x180	1/1
2	1SL0212A00 1SL0202A00	Structure with door	3	375x250x230	1/1
3	1SL0213A00 1SL0203A00	Structure with door	4	375x600x230	1/1
4	1SL0214A00 1SL0204A00	Structure with door	4	500x600x230	1/1
5	1SL0215A00 1SL0205A00	Structure with door	5	500x750x330	1/1
6	1SL0216A00 1SL0206A00	Structure with door	6	750x900x330	1/1


Gemini switchboards

Structure

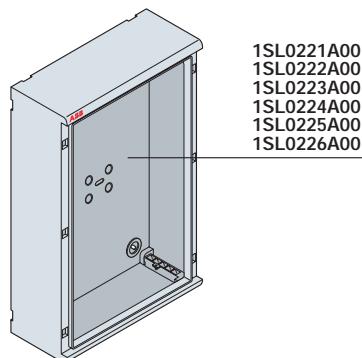


Single box

Size	Code	Description	N° vertical mod. H=150mm	Useful dimensions WxHxD (mm)	Unit./Pack
1	1SL0221A00	Box without door	2	250x300x180	1/1
2	1SL0222A00	Box without door	3	375x250x230	1/1
3	1SL0223A00	Box without door	4	375x600x230	1/1
4	1SL0224A00	Box without door	4	500x600x230	1/1
5	1SL0225A00	Box without door	5	500x750x330	1/1
6	1SL0226A00	Box without door	6	750x900x330	1/1

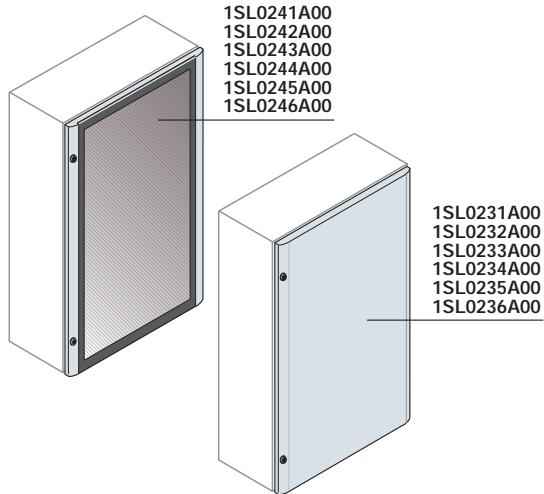

Single doors

Size	Code	Description	Box dimensions WxHxD (mm)	Unit./Pack
		Transparent door Opaque door		
1	1SL0241A00	1SL0231A00 Frontal door	250x300x180	1/1
2	1SL0242A00	1SL0232A00 Frontal door	375x250x230	1/1
3	1SL0243A00	1SL0233A00 Frontal door	375x600x230	1/1
4	1SL0244A00	1SL0234A00 Frontal door	500x600x230	1/1
5	1SL0245A00	1SL0235A00 Frontal door	500x750x330	1/1
6	1SL0246A00	1SL0236A00 Frontal door	750x900x330	1/1

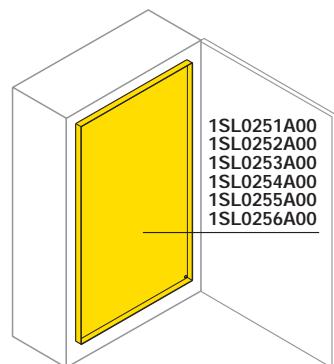

Inner doors

- Made in insulating material
- IP40 degree of protection with door open
- Designed so that door can be hinged onto both vertical sides
- Snap-on mounting and fixing

Size	Code	Description	Useful dimensions WxHxD (mm)	Unit./Pack
1	1SL0251A00	Internal inner door	250x300x180	1/4
2	1SL0252A00	Internal inner door	375x250x230	1/4
3	1SL0253A00	Internal inner door	375x600x230	1/2
4	1SL0254A00	Internal inner door	500x600x230	1/2
5	1SL0255A00	Internal inner door	500x750x330	1/2
6	1SL0256A00	Internal inner door	750x900x330	1/1


Fixing kit

- For fixing inner doors with screws

Code	Description	Unit./Pack
1SL0400A00	Kit for fixing inner doors with screws	1/2

Gemini switchboards


Completion of structure

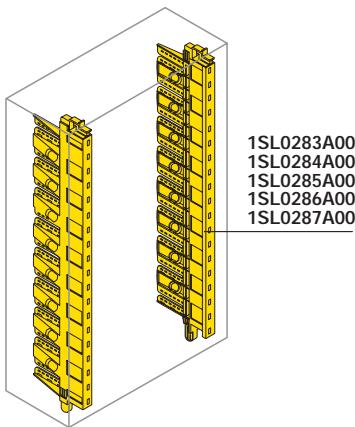

Uprights

- Incorporated vertical wiring duct (ABB patent)
- Snap-on mounting of all components (installation pitch of 75 mm)
- Snap-on insertion into box
- Depth of installed components adjusted at a pitch of 12.5 mm (4 positions for uprights of size 1 and 6 positions for the remaining ones)
- Ergonomic grip to make it easy to insert and extract


Size	Code	Description	Useful dimensions	
			H (mm)	Unit./Pack
1	1SL0283A00	Upright with integrated wiring duct	300	1/4
2	1SL0284A00	Upright with integrated wiring duct	450	1/4
3/4	1SL0285A00	Upright with integrated wiring duct	600	1/4
5	1SL0286A00	Upright with integrated wiring duct	750	1/2
6	1SL0287A00	Upright with integrated wiring duct	900	1/1

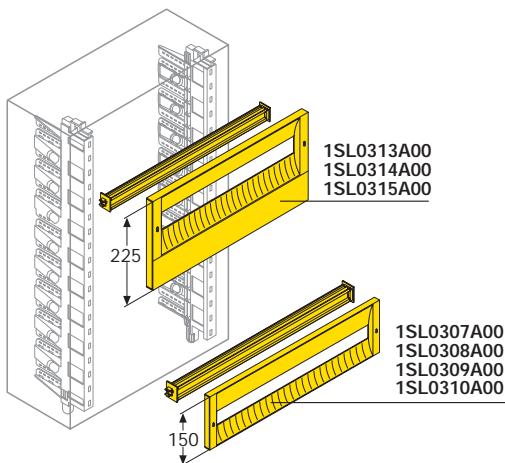

DIN rail kit

- Supplied with DIN rail complete with supports to snap onto uprights and adjustable in depth
- Available in 1 module (H 150 mm) and 1+1/2 module (H 225 mm, sizes 2-6) dimensions
- Designed to be hinged onto both vertical sides
- Snap-on mounting onto uprights (in compliance with reference Standards a tool must be used for removing the panel)
- Document pocket for storing descriptions of installed devices

Size	Code	Description	N° horiz.	Dimensions	Unit./Pack
			mod.	W (mm)	
1 module		1+1/2 modules			
1	1SL0307A00	Panel + DIN rail	12	250	1/8
2/3	1SL0308A00	1SL0313A00 Panel + DIN rail	18	375	1/8
4/5	1SL0309A00	1SL0314A00 Panel + DIN rail	24	500	1/4
6	1SL0310A00	1SL0315A00 Panel + DIN rail	36	700	1/2

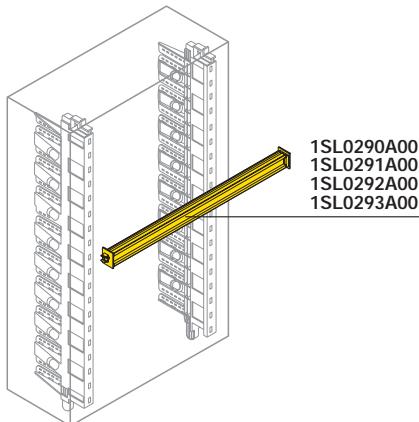


DIN rail

- Two-sided version
- Supplied with mounting supports that snap onto uprights
- Depth adjustment on uprights
- Designed so that rapid Unifix L mounting bars can be snapped on

Size	Code	Description	N° horiz.	Dimensions	Unit./Pack
			mod.	W (mm)	
1	1SL0290A00	DIN rail	12	250	1/10
2/3	1SL0291A00	DIN rail	18	375	1/10
4/5	1SL0292A00	DIN rail	24	500	1/10
6	1SL0293A00	DIN rail	36	700	1/10

Gemini switchboards

Completion of structure

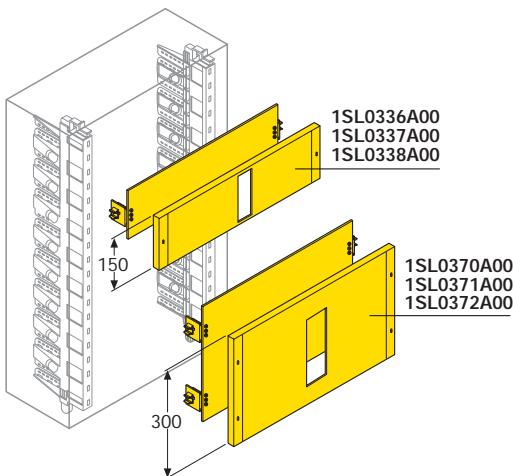


Kit for installing Tmax moulded-case circuit breakers

- For installing Tmax moulded-case circuit breakers in fixed version with front terminals
- Composed of a plate with special drilled holes and a protection panel with vertical slots that can be hinged on both sides and snap-on mounted (in compliance with reference Standards a tool must be used for removing the panel)
- Available for sizes 2-6
- Version H 150 with drillings for Tmax T1 3 poles (with and without residual current releaser), Tmax T1 4 poles (with and without residual current releaser), Tmax T2 3 poles (with and without residual current releaser), Tmax T2 4 poles (without residual current releaser)
- Version H 300 with drillings for Tmax T2 4 poles (with residual current releaser), Tmax T3 3 poles (with and without residual current releaser), Tmax T3 4 poles (with and without residual current releaser)
- Snap-on mounting onto uprights with the possibility of adjusting the plate depth

Size	Code	Description	Dimensions	
			W (mm)	Unit./Pack
1 module H=150mm	2 modules H=300mm			
2/3 1SL0336A00	1SL0370A00	Plate + panel	375	1/4
4/5 1SL0337A00	1SL0371A00	Plate + panel	500	1/4
6 1SL0338A00	1SL0372A00	Plate + panel	700	1/2

When choosing the correct kit, see table on page 2/4.

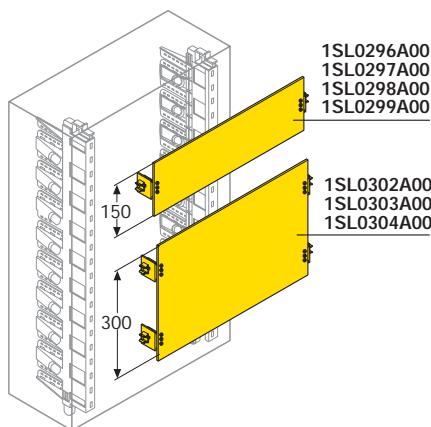


Partial modular plates

- Available in 1 module (H 150 mm) and 2 module (H 300 mm, sizes 2-6) dimensions
- Snap-on mounting onto uprights with depth adjustment

Size	Code	Description	Dimensions	
			W (mm)	Unit./Pack
1 module H=150mm				
1	1SL0296A00	Modular back plate	250	1/6
2/3	1SL0297A00	Modular back plate	375	1/4
4/5	1SL0298A00	Modular back plate	500	1/4
6	1SL0299A00	Modular back plate	700	1/2
2 modules H=300mm				
2/3	1SL0302A00	Modular back plate	375	1/4
4/5	1SL0303A00	Modular back plate	500	1/4
6	1SL0304A00	Modular back plate	700	1/2

Gemini switchboards

Completion of structure

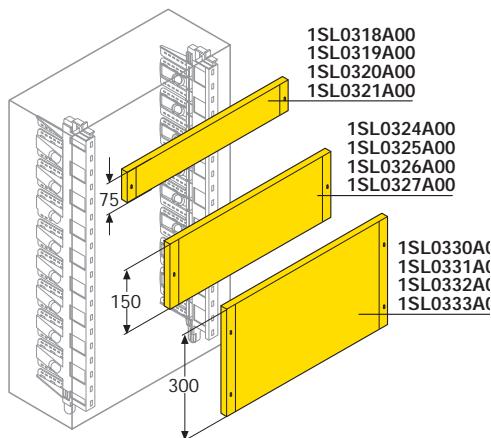

Blank panels

- Available in 1/2 module (H 75 mm), 1 module (H 150 mm) and 2 modules (H 300 mm) dimensions
- H 150 mm and H 300 panels designed to be hinged onto both vertical sides
- Snap-on mounting onto uprights (in compliance with reference Standards a tool must be used for removing the panel)

Size	Code	Description	Dimensions W (mm)	Unit./Pack
1/2 module H=75mm				
1	1SL0318A00	Blind front panel	250	1/10
2/3	1SL0319A00	Blind front panel	375	1/10
4/5	1SL0320A00	Blind front panel	500	1/6
6	1SL0321A00	Blind front panel	700	1/4

1 module H=150mm


1	1SL0324A00	Blind front panel	250	1/8
2/3	1SL0325A00	Blind front panel	375	1/8
4/5	1SL0326A00	Blind front panel	500	1/4
6	1SL0327A00	Blind front panel	700	1/4

2 module H=200mm

1	1SL0330A00	Blind front panel	250	1/6
2/3	1SL0331A00	Blind front panel	375	1/6
4/5	1SL0332A00	Blind front panel	500	1/4
6	1SL0333A00	Blind front panel	700	1/4

Wiring kit


- Composed of wiring duct in versions 25x60 mm and 40x60 mm (WxH, 8-12 mm slots) and Fix-O-Rapid device for the rapid snap-on hooking of the ducts on the DIN rail
- Snap-on mounting on uprights with depth adjustment

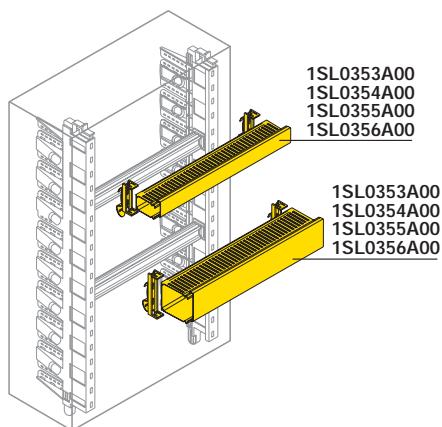

Size	Code	Description	Dimensions W (mm)	Unit./Pack
Wiring duct 25x60mm 40x60mm				
1	1SL0353A00 1SL0360A00	Wiring duct + Fix-O-Rapid	250	1/4
2/3	1SL0354A00 1SL0361A00	Wiring duct + Fix-O-Rapid	375	1/4
4/5	1SL0355A00 1SL0362A00	Wiring duct + Fix-O-Rapid	500	1/4
6	1SL0356A00 1SL0363A00	Wiring duct + Fix-O-Rapid	700	1/4

Gemini switchboards

Completion of structure

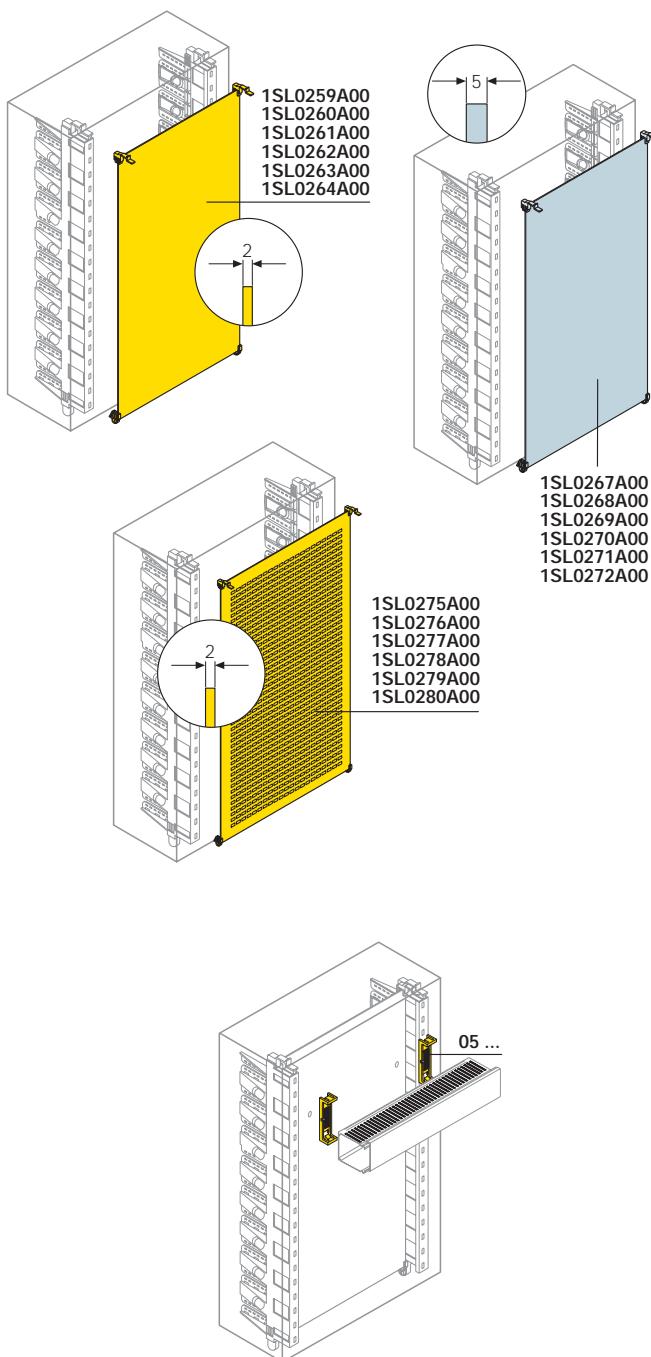

Base plates

- Available in three versions in blank or drilled metal and insulating material
- Positioning at 3 different depths for size 1, 4 different depths for sizes 2-3-4 and 7 different depths for sizes 5-6 (adjustments with 30 mm pitch)
- Supplied with feet and hooks adjustable at three further positions (with 7.5 mm pitch)
- Snap-on mounting
- Plates can also be mounted directly on the base with the special kit

Size	Code	Box dimensions WxHxD (mm)			Unit./Pack	
		In blank metal	In drilled metal	Insulating material		
1	1SL0259A00	1SL0275A00	1SL0267A00	Base plate	250x300x180	1/6
2	1SL0260A00	1SL0276A00	1SL0268A00	Base plate	375x250x230	1/6
3	1SL0261A00	1SL0277A00	1SL0269A00	Base plate	375x600x230	1/4
4	1SL0262A00	1SL0278A00	1SL0270A00	Base plate	500x600x230	1/4
5	1SL0263A00	1SL0279A00	1SL0271A00	Base plate	500x750x330	1/4
6	1SL0264A00	1SL0280A00	1SL0272A00	Base plate	750x900x330	1/2

Code	Description	Unit./Pack
1SL0383A00	Base mounting kit for metal plate	1/10

Fix-O-Rapid

Rapid mounting device for attaching wiring ducts to the base plate: it snaps onto the plate after drilling a Ø 7 mm hole.

Two Fix-O-Rapid devices are enough for each wiring duct section.



Fix-O-Rapid guarantees maximum insulation since it does not involve the use of any metal component inside the wiring duct.

If the wrong wiring duct is selected, it can be dismounted and a version with the same base and a different height can be attached to the Fix-O-Rapid.

Code	Description	Unit./Pack
05 270	Rapid mounting device for wiring duct, W 25mm	20/600
05 272	Rapid mounting device for wiring duct, W 40mm	20/600
05 274	Rapid mounting device for wiring duct, W 60mm	20/600
05 276	Rapid mounting device for wiring duct, W 80mm	20/240
05 278	Rapid mounting device for wiring duct, W 100mm	20/240
05 280	Rapid mounting device for wiring duct, W 125mm	20/240
05 282	Rapid mounting device for wiring duct, W 150mm	20/240

Gemini switchboards


Completion of structure

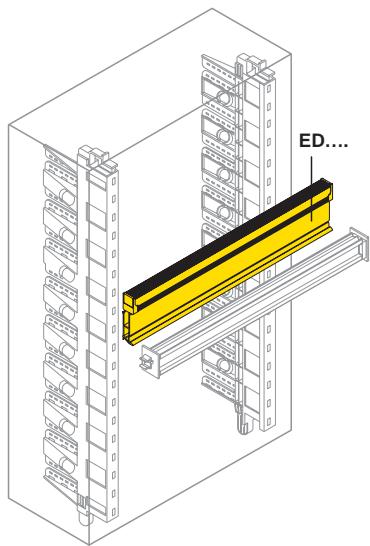


Unifix L

2-poles busbars

Code	Description	Dimensions W (mm)	Unit./Pack
ED2993	100A 2P 12 module busbar	400	1/6
ED3009	100A 2P 18 module busbar	450	1/6
ED3017	100A 2P 24 module busbar	600	1/6
ED3025	100A 2P 36 module busbar	800	1/6

**4-poles busbars**

Code	Description	Dimensions W (mm)	Unit./Pack
ED2944	100A 4P 12 module busbar	400	1/6
ED2951	100A 4P 18 module busbar	450	1/6
ED2969	100A 4P 24 module busbar	600	1/6
ED2977	100A 4P 36 module busbar	800	1/6

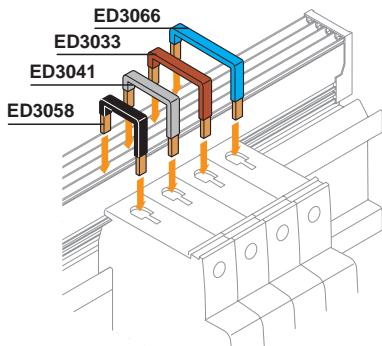**Connections for various apparatus**

Code	Description	Unit./Pack
ED3108	Connection with 2 conductors L/N 16A	1/6
ED3116	Connection with 3 conductors L1/L2/L3 16A	1/6
ED3124	Connection with 4 conductors L1/L2/L3/N 16A single phase	1/6
ED3355	Connection with 2 conductors L1/N 40A	1/6
ED3363	Connection with 3 conductors L1/L2/L3 40A	1/6
ED3371	Connection with 4 conductors L1/L2/L3/N 40A	1/6

Connections for apparatus


Code	Description	Unit./Pack
ED3272	N°10 connections L1-N 40 A	1/10
ED3280	N°10 connections L2-N 40 A	1/10
ED3298	N°10 connections L3-N 40 A	1/10
ED3033	N°10 connections L 1 100A	1/10
ED3041	N°10 connections L 2 100A	1/10
ED3058	N°10 connections L 3 100A	1/10
ED3066	N°10 connections N 100A	1/10
ED3132	Feeder with 4P 100A cable (W=350mm)	1/10
ED0026	Feeder with 4P 100A cable (W=1500mm)	1/10
ED0025	Feeder with 4P 100A cable (W=1500mm)	1/10

Power supply modules with cable

Code	Description	Unit./Pack
ED3082	Parallel module 2P 100A with cable	1/6
ED3405	Parallel module 4P 100A with cable	1/6
ED3090	Parallel module 4P 100A with cable	1/6
ED3413	Parallel module 4P 100A with cable	1/6
ED3439	Parallel module 4P 100A with cable	1/6


Power supply modules without cable In 100A

Code	Description	Unit./Pack
ED3101	N°10 single-pole power supply terminals L1	1/10
ED3102	N°10 single-pole power supply terminals L2	1/10
ED3103	N°10 single-pole power supply terminals L3	1/10
ED3104	N°10 single-pole power supply terminals N	1/10

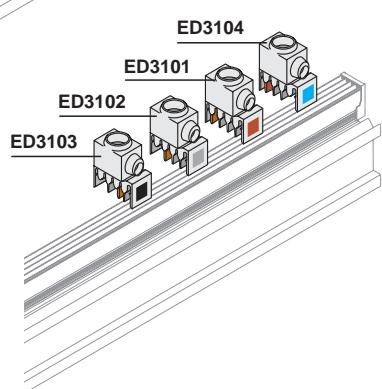ED3090
ED3405
ED3413
ED3439

Gemini switchboards


Accessories

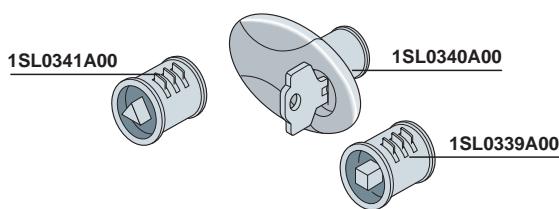

Locks

Available in three versions with ciphered key and handle, with triangular and square impressions

Code	Description	Unit./Pack
1SL0340A00	Lock with Yale type ciphered key and handle	1/10
1SL0341A00	Lock with triangular impression	1/10
1SL0339A00	Lock with square impression	1/10

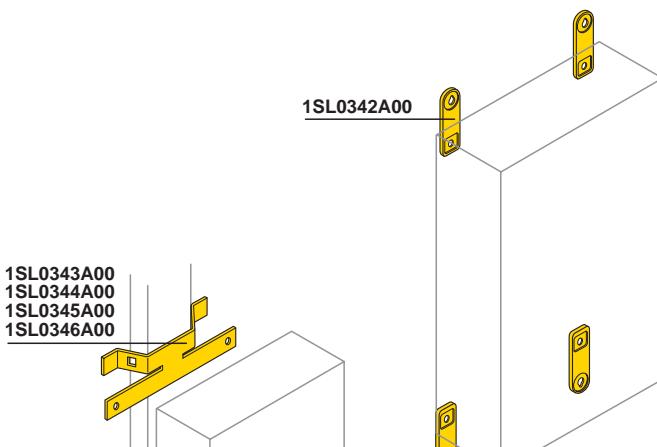


Mounting elements

Guarantee optimum wall, pole and floor mounting conditions.

Code	Description	Unit./Pack
1SL0342A00	(4) horizontal and vertical wall brackets ^(*)	1/10
1SL0343A00	Pole mounting kit for sizes 1 switchboards	1/4
1SL0344A00	Pole mounting kit for sizes 2-3 switchboards	1/4
1SL0345A00	Pole mounting kit for sizes 4-5 switchboards	1/2
1SL0346A00	Pole mounting kit for size 6 switchboards	1/2
1SL0352A00	Floor mounting pedestal for sizes 1-4	1/1

^(*) There are two types of inserts for adapting brackets to ø 6 e 8 mm fixing devices.

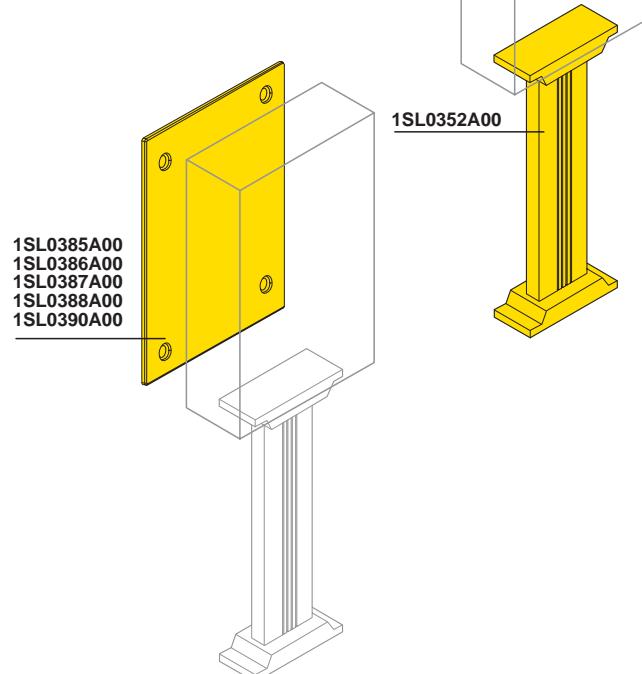


Base cover

For aesthetic as well as functional purposes, in particular for pedestal installations.

Size	Code	Description	Unit./Pack
1	1SL0385A00	Back plugging plate	1/4
2	1SL0386A00	Back plugging plate	1/4
3	1SL0387A00	Back plugging plate	1/2
4	1SL0388A00	Back plugging plate	1/2
6	1SL0390A00	Back plugging plate	1/2

Gemini switchboards

Accessories

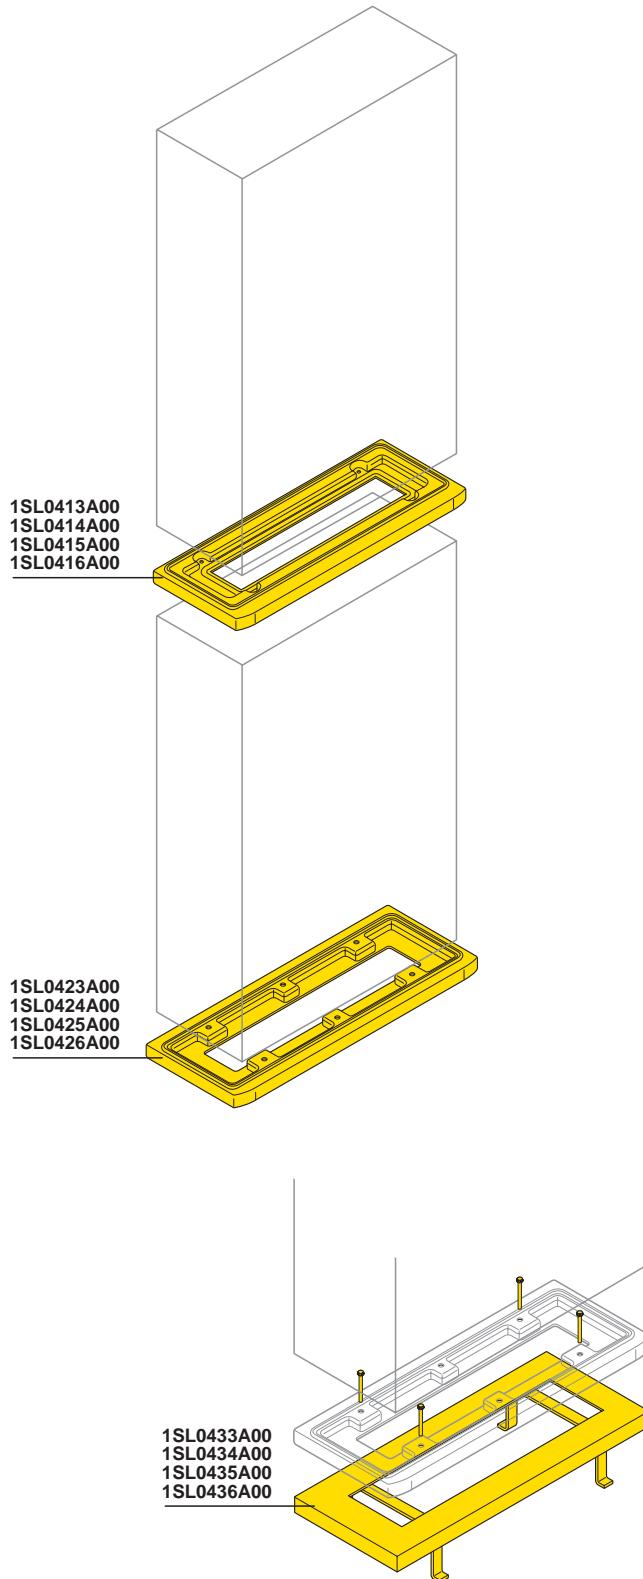

Coupling kit

It follows the aesthetic outline of the boxes. Upon request, contact ABB for minimum order quantities.

Size	Code	Description	Unit./Pack
2/3	1SL0413A00	Vertical coupling kit for sizes	1/2
4	1SL0414A00	Vertical coupling kit for sizes	1/2
5	1SL0415A00	Vertical coupling kit for sizes	1/2
6	1SL0416A00	Vertical coupling kit for sizes	1/2

Bottom base H 30

For fixing the Gemini switchboard directly to the floor.
Upon request, contact ABB for minimum order quantities.

Size	Code	Description	Unit./Pack
3	1SL0423A00	Bottom base	1/2
4	1SL0424A00	Bottom base	1/2
5	1SL0425A00	Bottom base	1/2
6	1SL0426A00	Bottom base	1/2


Fixed frame

In combination with bottom base H 30. For fixing onto poured concrete floors and bases. Upon request, contact ABB for minimum order quantities.

Size	Code	Description	Unit./Pack
3	1SL0433A00	Frame for fixing to floor	1/2
4	1SL0434A00	Frame for fixing to floor	1/2
5	1SL0435A00	Frame for fixing to floor	1/2
6	1SL0436A00	Frame for fixing to floor	1/2

Gemini switchboards

Accessories

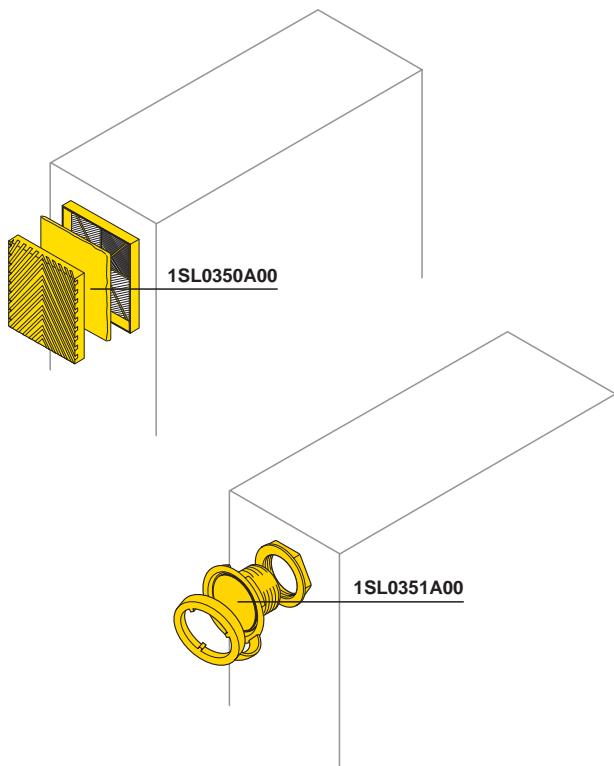

Ventilation kit

- Composed of plastic grills and filter to ensure switchboard ventilation
- IP42
- The filter must be cleaned periodically

Code	Description	Unit./Pack
1SL0350A00	Ventilation kit	1/1

Anti-condensation kit

• Kit in special material to prevent condensation from forming inside the switchboard: it include

GORE™ MEMBRANE VENTING

- Impermeable to water (pressure): 1,5 bar
- Air flow: 68/h ($\Delta p = 70$ mbar)
- 1 kit for sizes 1-2, 2 kits for sizes 3-4 and 3 kits for sizes 5-6 are recommended to guarantee adequate dissipation; in any case the number of kits to be installed depend on the number and type of devices installed inside the switchboard.



Code	Description	Unit./Pack
1SL0351A00	Anti-condensation kit	1/6

Other accessories

Code	Description	Unit./Pack
12 849	Universal drill bit	1/30
12 863	Module covers in RAL 7035 grey, 4 modules	25/300
12 851	Deep adapters	10/80
1SL0380A00	Small bag for base plates	1/10
1SL0381A00	Small bag for DIN supports	1/10
1SL0382A00	Small bag for partial plate supports	1/10
1SL0379A00	Small bag with screws and inserts	1/10

ArTu L

Structure

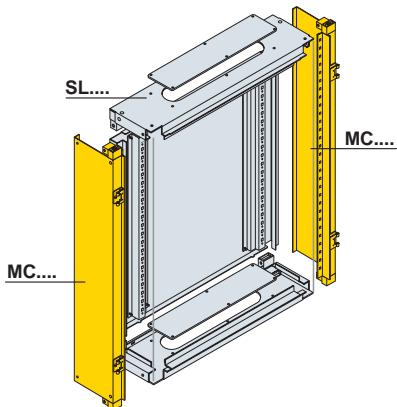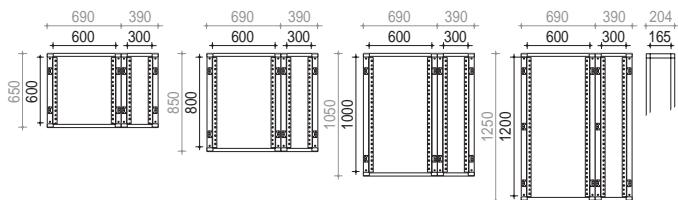

Wall-mounted switchgear

Wall-mounted switchgear structure

Code	Description	Useful dimension HxD (mm)
24 mod DIN		
W=600mm		
SL0600	Back, roof and base for structure	600x165
SL0800	Back, roof and base for structure	800x165
SL1000	Back, roof and base for structure	1000x165
SL1200	Back, roof and base for structure	1200x165

Additional wall-mounted cable container structure

External cable container

Can be mounted on the right and left of the basic structure, can be used as cable container or as incoming column which can be equipped with kit for Tmax circuit-breakers.


Code	Description	Useful dimension WxHxD (mm)
VC0600	Back, roof and base for cable container	300X600x165
VC0800	Back, roof and base for cable container	300X800x165
VC1000	Back, roof and base for cable container	300X1000x165
VC1200	Back, roof and base for cable container	300X1200x165

Intermediate uprights for lateral side-by-side positioning or external cable container

Allows several structures side-by-side on the right and left of the basic one.


Code	Description	Dimensions H (mm)
MI0600	Intermediate upright for placing structures side by side	600
MI0800	Intermediate upright for placing structures side by side	800
MI1000	Intermediate upright for placing structures side by side	1000
MI1200	Intermediate upright for placing structures side by side	1200

1STC802701F0001




Side closure with blind panel

Code	Description	Dimensions HxD (mm)
MC0600	N°2 side closures for wall-mounted structures	600x165
MC0800	N°2 side closures for wall-mounted structures	800x165
MC1000	N°2 side closures for wall-mounted structures	1000x165
MC1200	N°2 side closures for wall-mounted structures	1200x165

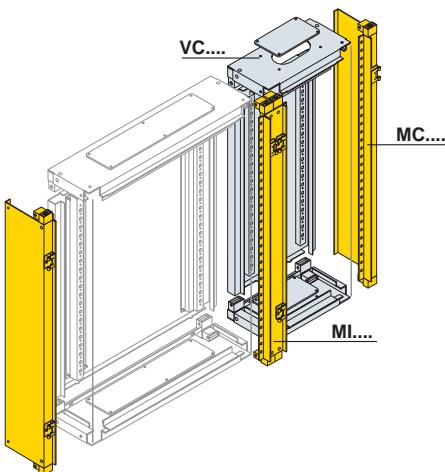

ArTu L


Structure

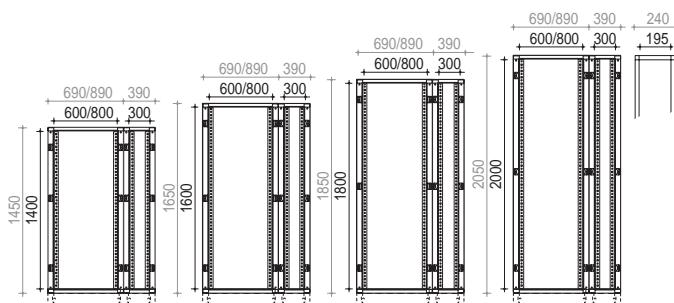

Floor-mounted switchgear

Floor-mounted structure

Code	Description	Useful dimensions HxD (mm)
24 DIN mod	36 DIN mod	
W=600mm	W=800mm	
SL1400	SL1408 Back, roof and base for structure	1400x195
SL1600	SL1608 Back, roof and base for structure	1600x195
SL1800	SL1808 Back, roof and base for structure	1800x195
SL2000	SL2008 Back, roof and base for structure	2000x195

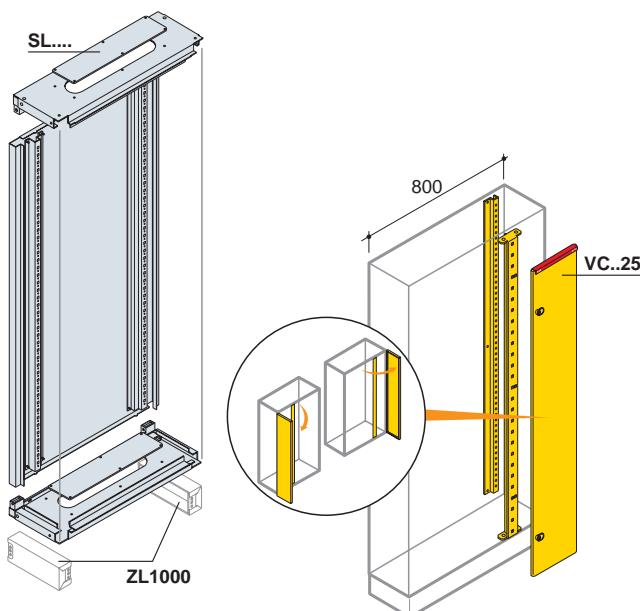


Floor-mounted cable container

Internal cable container structure 36 mod. (W=800mm)

Only to be ordered for the 36 DIN mod. structures (W=800mm). Consisting of a pair of functional uprights and a blind door complete with two key locks. Can be mounted either on the right or left.

Code	Description	Dimensions WxHxD (mm)
VC1425	Internal cable container structure SL1408	200x1400x195
VC1625	Internal cable container structure SL1608	200x1600x195
VC1825	Internal cable container structure SL1808	200x1800x195
VC2025	Internal cable container structure SL2008	200x2000x195

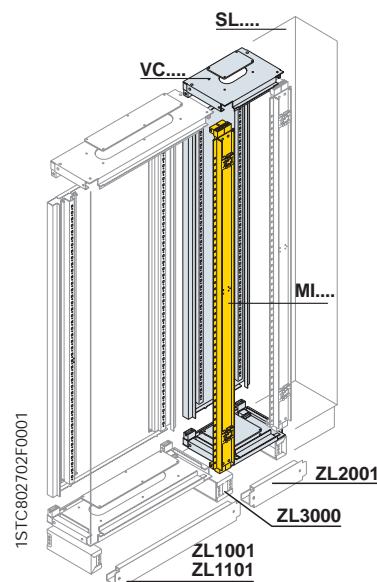

External cable container

Can be mounted on the right and left of the basic structure, can be used as cable container or as incoming column which can be equipped with kit for Tmax circuit-breakers.

Code	Description	Dimensions WxHxD (mm)
VC1400	Back, roof and base for cable container	300x1400x195
VC1600	Back, roof and base for cable container	300x1600x195
VC1800	Back, roof and base for cable container	300x1800x195
VC2000	Back, roof and base for cable container	300x2000x195

Note: the palletisable base strips (ZL1000 or ZL3000) and the flanges (ZL1001, ZL1101 or ZL2001) must be ordered separately, see page 9/14.


Intermediate uprights for lateral side-by-side positioning or external cable container

Allows several structures side-by-side on the right and left of the basic one.

Code	Description	H (mm)
MI1400	Intermediate upright for placing structures side by side	1400
MI1600	Intermediate upright for placing structures side by side	1600
MI1800	Intermediate upright for placing structures side by side	1800
MI2000	Intermediate upright for placing structures side by side	2000

ArTu L

Structure

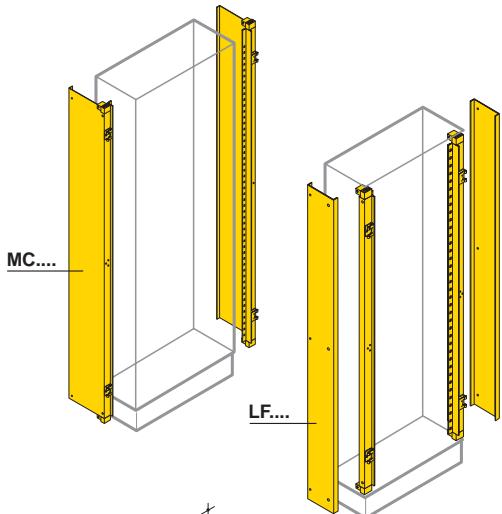

Side closure with blind panel

Code	Description	Dimensions HxD (mm)
MC1400	N°2 side closures for floor-standing structures	1400x195
MC1600	N°2 side closures for floor-standing structures	1600x195
MC1800	N°2 side closures for floor-standing structures	1800x195
MC2000	N°2 side closures for floor-standing structures	2000x195



Side closure with removable panel

Code	Description	Dimensions HxD (mm)
LF1400	N°2 side closures for floor-standing structures	1400x195
LF1600	N°2 side closures for floor-standing structures	1600x195
LF1800	N°2 side closures for floor-standing structures	1800x195
LF2000	N°2 side closures for floor-standing structures	2000x195

Base strips

Angles

Code	Description	Dimensions H (mm)
ZL1000	N°2 angle pieces for structure or cable container	100
ZL3000	Intermediate angle for side-by-side structures	100

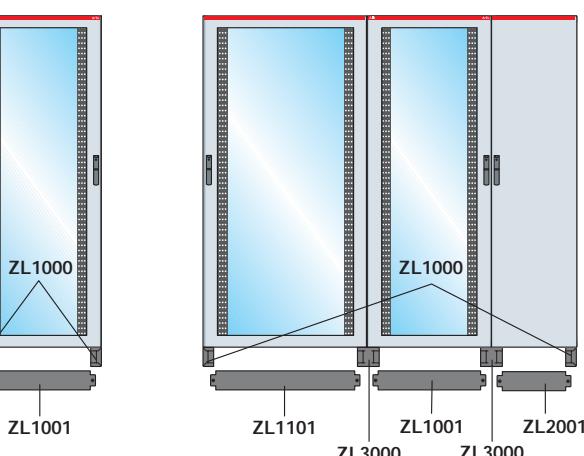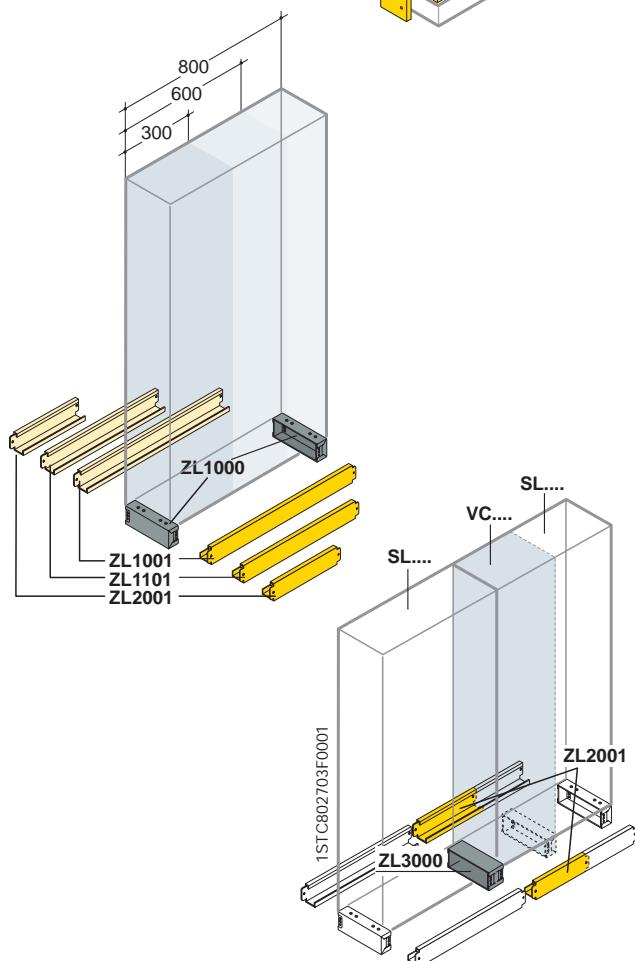


Example of base strip composition for structures

Type of structure	External angle pieces	Side-by-side angle piece	Flanges
W=600mm	ZL1000	ZL3000	ZL1001
W=800mm	ZL1000	ZL3000	ZL1101
W=300mm (external cable container)	ZL1000	ZL3000	ZL2001

ArTu L

Structure

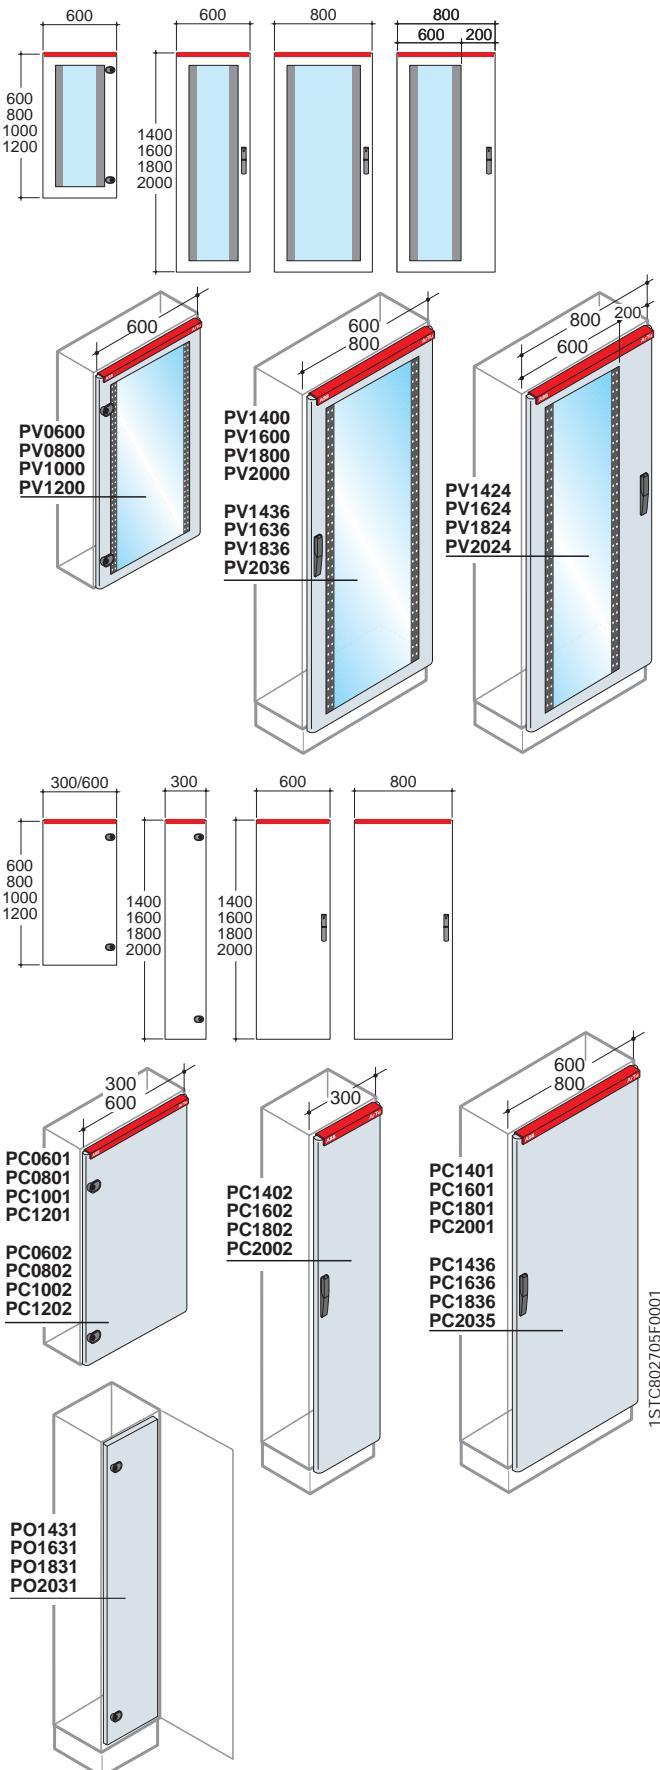

Front IP43 doors for structures

Glass doors 24/36 mod.

Steel sheet door 15/10 thick with 4mm thick safety glass fitted with polyurethane gasket complete with handle with key with double tab.
Reversible, hinged on the right or left.

Code	Description			Dimensions H (mm)
	36 DIN mod+	internal	cable cont.	
24 DIN mod	36 mod DIN			
W=600mm	W=800mm	W=800mm		
PV0600			IP43 glass door wall-mounted	600
PV0800			IP43 glass door wall-mounted	800
PV1000			IP43 glass door wall-mounted	1000
PV1200			IP43 glass door wall-mounted	1200
PV1400	PV1436	PV1424	IP43 glass door floor-standing	1400
PV1600	PV1636	PV1624	IP43 glass door floor-standing	1600
PV1800	PV1836	PV1824	IP43 glass door floor-standing	1800
PV2000	PV2036	PV2024	IP43 glass door floor-standing	2000

IP43 blind doors

Steel sheet door 15/10 thick fitted with polyurethane gasket complete with handle with key with double tab.
Reversible, hinged on the right or left.


Code	Description			Dimensions H (mm)
	External			
24 DIN mod	36 mod DIN	cable cont.		
W=600mm	W=800mm	W=300mm		
PC0601	PC0602		IP43 blind door wall-mounted	600
PC0801	PC0802		IP43 blind door wall-mounted	800
PC1001	PC1002		IP43 blind door wall-mounted	1000
PC1201	PC1202		IP43 blind door wall-mounted	1200
PC1401	PC1436	PC1402	IP43 blind door floor-standing	1400
PC1601	PC1636	PC1602	IP43 blind door floor-standing	1600
PC1801	PC1836	PC1802	IP43 blind door floor-standing	1800
PC2001	PC2035	PC2002	IP43 blind door floor-standing	2000

Internal door for external cable container

Code	Description	Dimensions H (mm)
PO1431	Internal door for external cable container W=300mm	1400
PO1631	Internal door for external cable container W=300mm	1600
PO1831	Internal door for external cable container W=300mm	1800
PO2031	Internal door for external cable container W=300mm	2000

ArTu L

Structure

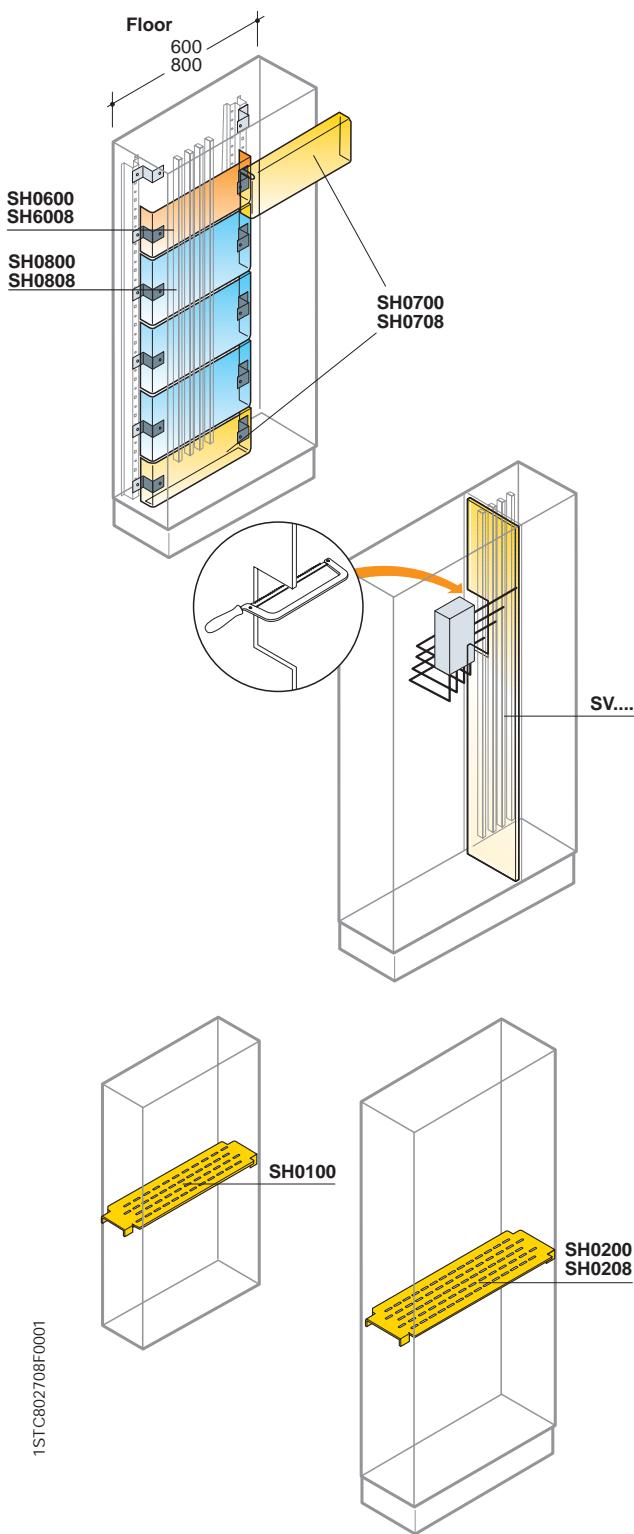

Form 2 segregation

Code	Description	Dimensions H (mm)
24 DIN mod	36 DIN mod	
W=600mm	W=800mm	
SH0600	SH0608	Form 2 segregation kit 200
SH0800	SH0808	Form 2 segregation kit 300
SH0700	SH0708	Form 2 base/head segregation kit 200

Vertical segregations


Code	Description	Dimensions HxD (mm)
SV0600	Vertical segregation kit	600x165
SV0800	Vertical segregation kit	800x165
SV1000	Vertical segregation kit	1000x165
SV1200	Vertical segregation kit	1200x165
SV1400	Vertical segregation kit	1400x195
SV1600	Vertical segregation kit	1600x195
SV1800	Vertical segregation kit	1800x195
SV2000	Vertical segregation kit	2000x195

Horizontal shelves

Code	Description
24 DIN mod	36 DIN mod
W=600mm	W=800mm
SH0100	Horizontal shelf for wall-mounted structure
SH0200	Horizontal shelf for floor-mounted structure

ArTu L

Structure

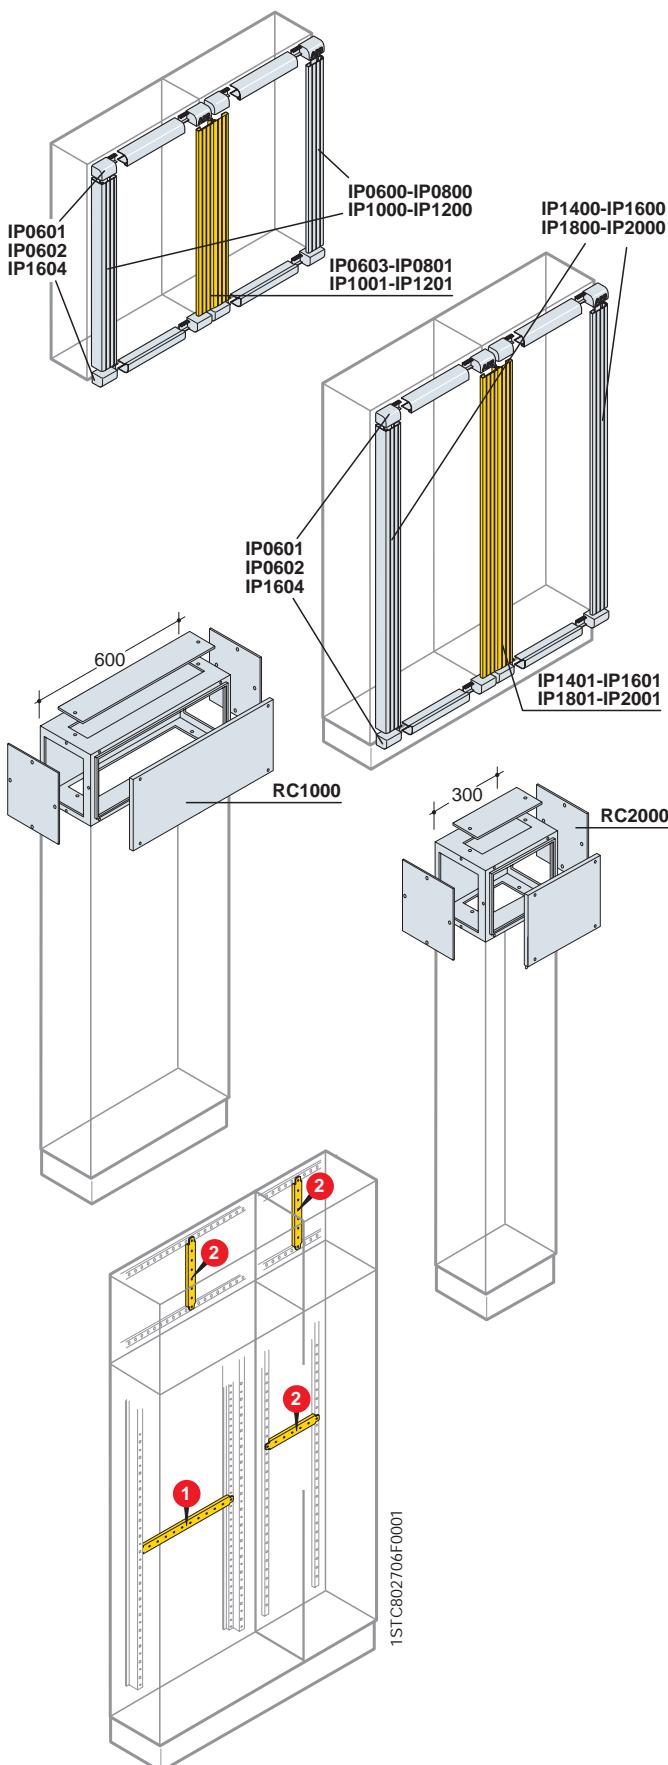

IP31 Finishing profiles

Vertical finishing profile for structure and wall-mounting cable container

Code	Description			
	Dimensions H (mm)			
	600	800	1000	1200
IP0600	IP0800	IP1000	IP1200	N°2 vertical finishing profiles for structure and cable
IP0603	IP0801	IP1001	IP1201	N°1 vertical finishing profiles for side-by-side

Vertical finishing profile for structure and floor-mounting cable container

Code	Description			
	Dimensions H (mm)			
	1400	1600	1800	2000
IP1400	IP1600	IP1800	IP2000	N°2 vertical finishing profiles for structure and cable cont.
IP1401	IP1601	IP1801	IP2001	N°1 vertical finishing profiles for side-by-side structures

Horizontal finishing profile for structure and cable container

Code	Description			
	External cable cont.			
	24 DIN mod	36 DIN mod	cable cont.	
W=600mm	W=800mm	W=300mm		
IP0601	IP0604	IP0602	N°2 horizontal finishing profiles	

Connection box

Code	Description	Dimensions HxD (mm)
RC1000	External 24 DIN mod cable cont. W=600mm W=300mm	
RC2000	Roof box for floor-mounted structures	400x195


Crosspieces for accessories

Code	Description	Assembly position
TL1000	N°2 structure rear crosspieces W=600mm	1
TL1100	N°2 structure rear crosspieces W=800mm	1
TL3000	N°2 cable container and box rear crosspieces W=300mm	2
TL2000	N°2 fixing crosspieces W=300mm for scaled busbar holder PB0802	2
TL2100	N°2 fixing crosspieces W=200mm for scaled busbar holder PB0802	2

Can be mounted on the structure to anchor cables or to mount accessories. They can be mounted on the side, on the rear or in the cable container of the structure.

ArTu L

Kits for apparatus

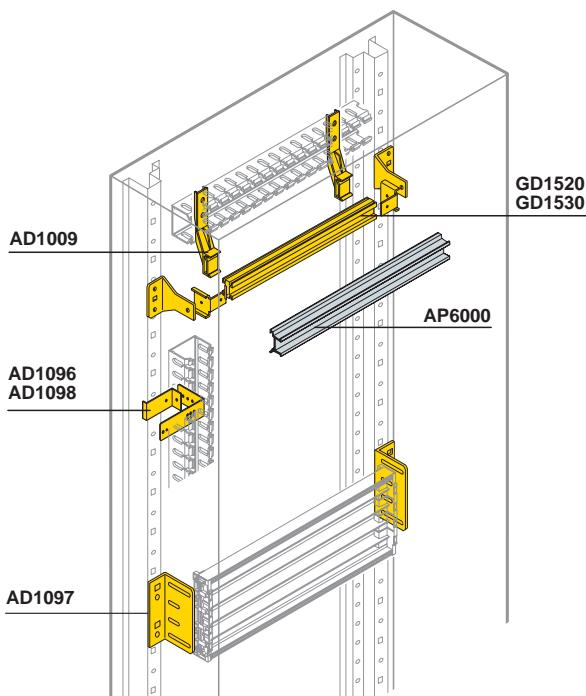

DIN rail kits for System Pro-M modular apparatus, Tmax T1-T2-T3, moulded-case circuit-breakers
Kit consisting of double aluminium profile (DIN35) complete with fixing brackets.

Code	Description
24 DIN mod 36 DIN mod W=600mm	W=800mm
GD1520	GD1530 DIN rail kit (aluminium)


Supports for Unifix H

Code	Description
AD1097	for panel H=300mm

Depth adapters


kit consisting of double aluminium profile (DIN 35) complete with fixing brackets.

Code	Description	Dimensions W (mm)
AP6000	N°1 depth adapter for Tmax T1-T2-T3	600

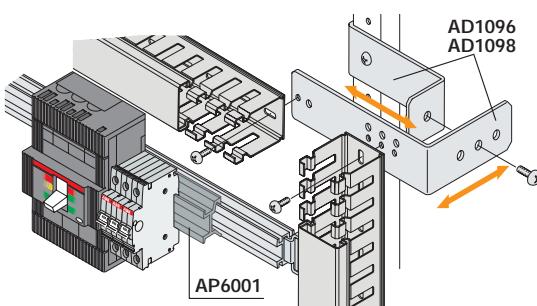


Supports for duct

Codice	Descrizione
AD1009	N°4 plastic supports for horizontal duct
AD1096	N°4 metal supports for horizontal/vertical wall-mounted duct
AD1098	N°4 metal supports for horizontal/vertical floor-standing duct

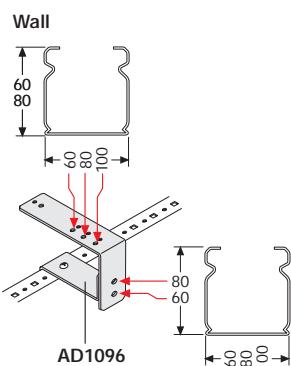

ArTu L

Kits for apparatus

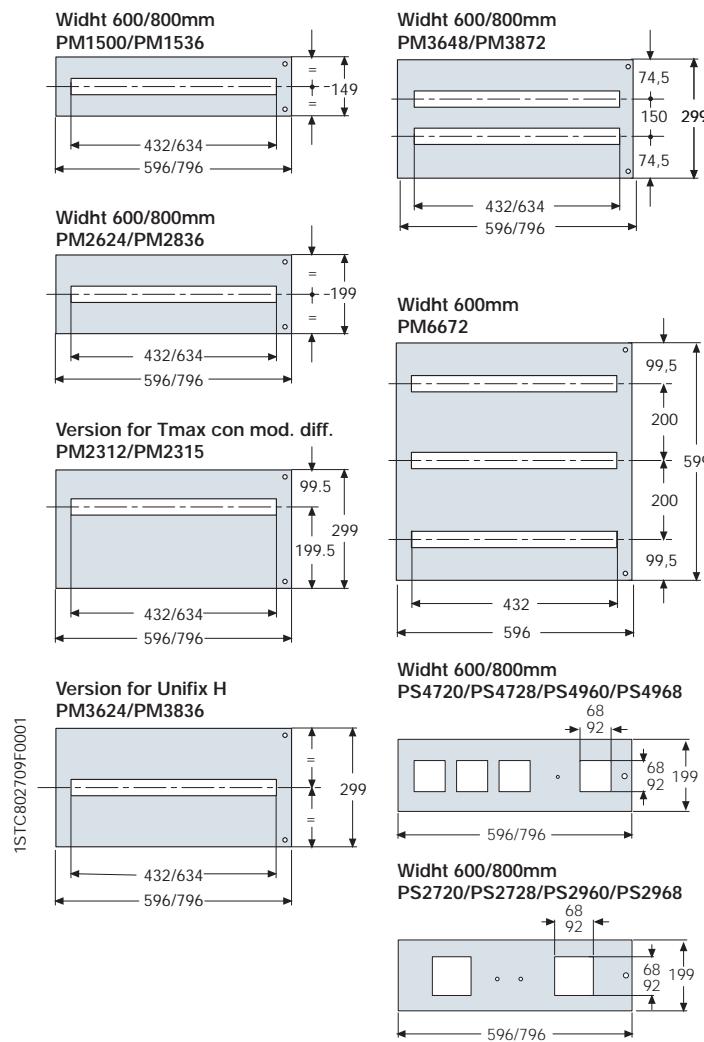

1STC802709F0001

1STC802720F0001

Panels for square measuring instruments

Steel sheet panels complete with hinges positioned on the right or left

Code	Description	Dimensions H (mm)
24 DIN mod	36 DIN mod	
W=600mm	W=800mm	
PS2720	PS2728	Panel for 2 instruments 72x72mm
PS2960	PS2968	Panel for 2 instruments 96x96mm
PS4720	PS4728	Panel for 4 instruments 72x72mm
PS4960	PS4968	Panel for 4 instruments 96x96mm

Modular panels

Steel sheet panels complete with hinges positioned on the right or left


Code	Description	Dimensions H (mm)
24 DIN mod	36 DIN mod	
W=600mm	W=800mm	
PM1500	PM1536	Modular panel 1 DIN row
PM2624	PM2836	Modular panel 1 DIN row
PM2312	PM2315	Modular panel 1 DIN row Tmax RC
PM3624	PM3836	Modular panel 1 DIN row only for Unifix H
PM3648	PM3872	Modular panel 2 DIN rows
PM6672		Modular panel 3 DIN rows

ArTu L

Accessories for panels





Code	Description
AD1086	N°10 holes covers W=2000mm grey RAL 7035 colour
AD1088	N°3 holes covers 36 Din modules grey RAL 7035 colour
AD1089	N°3 holes covers 36 Din modules grey RAL 7035 colour
EV1135	N°10 closing caps for instrument panel 72x72mm
EV1136	N°5 closing caps for instrument panel 96x96mm
AD1600	N°20 label-holders 24 DIN mod.
AD1800	N°20 label-holders 36 DIN mod.
AD1101 ⁽¹⁾	N°288 labels 1 mod. 15x17mm (HxW)
AD1102 ⁽¹⁾	N°192 labels 2 mod. 15x27mm (HxW)
AD1103 ⁽¹⁾	N°96 labels 3 mod. 15x50mm (HxW)
AD1104 ⁽¹⁾	N°96 labels 4 mod. 15x67mm (HxW)

⁽¹⁾ Labels can be written with Grafoplast compatible plotter system.

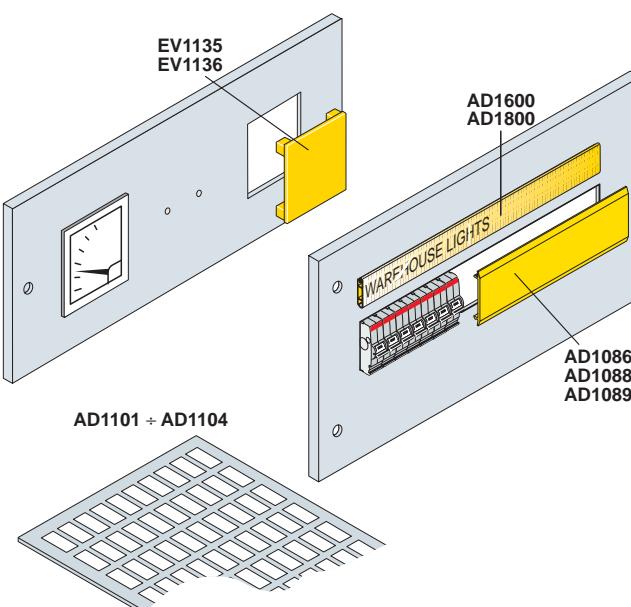

ArTu L

Kits for apparatus

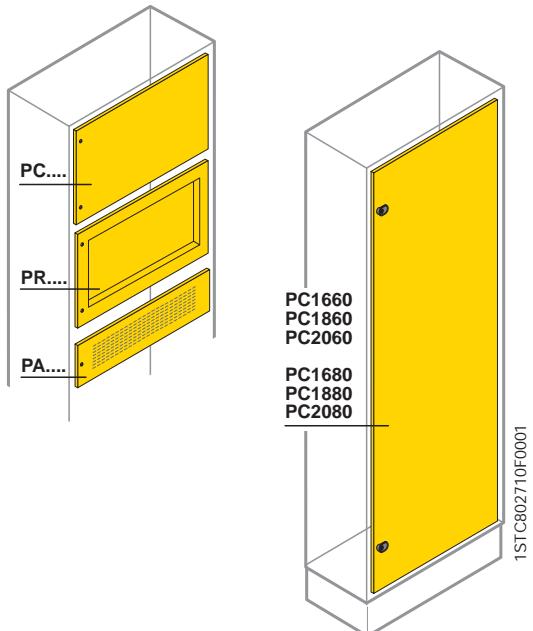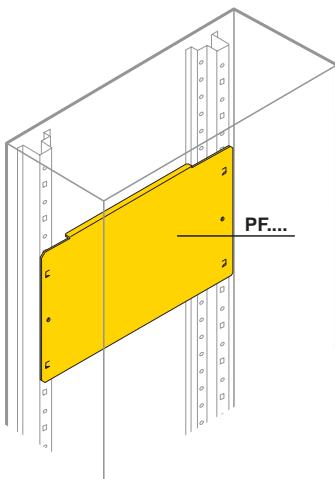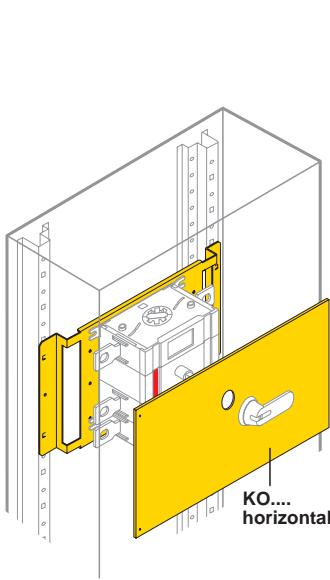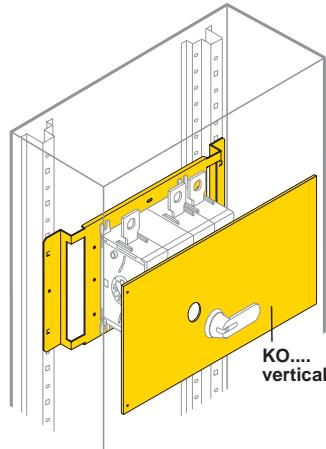

Kit for OT200/250/315/400

Code	Description			Dimensions H (mm)
External				
24 DIN mod	36 DIN mod	cable cont.		
W=600mm	W=800mm	W=300mm		
KO1260	KO1280	KO1262	Kit for vertical OT200/250/315/400	300
KO1261	KO1281		Kit for horizontal OT200/250/315/400	300

Standard blind for general apparatus

Code	Description			Dimensions H (mm)
External				
24 DIN mod	36 DIN mod	cable cont.		
W=600mm	W=800mm	W=300mm		
PF1002	PF1102		Blind back plate	200
PF1003	PF1103		Blind back plate	300
PF1004	PF1104		Blind back plate	400
PF1006	PF1106		Blind back plate	600
PF1008	PF1108		Blind back plate	800
PC0600	PC0300		Blind back plate box/cable container	300



The panels must be ordered separately.

Standard blind, recessed and ventilated panels for general apparatus

Code	Description			Dimensions H (mm)
External				
24 DIN mod	36 DIN mod	cable cont.		
W=600mm	W=800mm	W=300mm		
PC1403		Blind panel for external cable container		100
PC2401		Blind panel for external cable container		200
PC3401		Blind panel for external cable container		300
PC4401		Blind panel for external cable container		400
PC6401		Blind panel for external cable container		600
PR4401		Blind panel for external cable container		400
PC8401		Blind panel for external cable container		800
PC1050	PC0580	Blind panel		50
PC1600	PC1800	Blind panel		100
PC1150	PC1580	Blind panel		150
PC2600	PC2800	Blind panel		200
PC3600	PC3800	Blind panel		300
PC4600	PC4800	Blind panel		400
PC6600	PC6800	Blind panel		600
PC8600	PC8800	Blind panel		800
PC1660	PC1680	Blind panel (Inner door)		1600
PC1860	PC1880	Blind panel (Inner door)		1800
PC2060	PC2080	Blind panel (Inner door)		2000
PR2600	PR2800	Blind recessed panel		200
PR4600	PR4800	Blind recessed panel		400
PR6600	PR6800	Blind recessed panel		600
PA1600		Ventilated panel		100
PA2600		Ventilated panel		200

ArTu L

Kits for apparatus

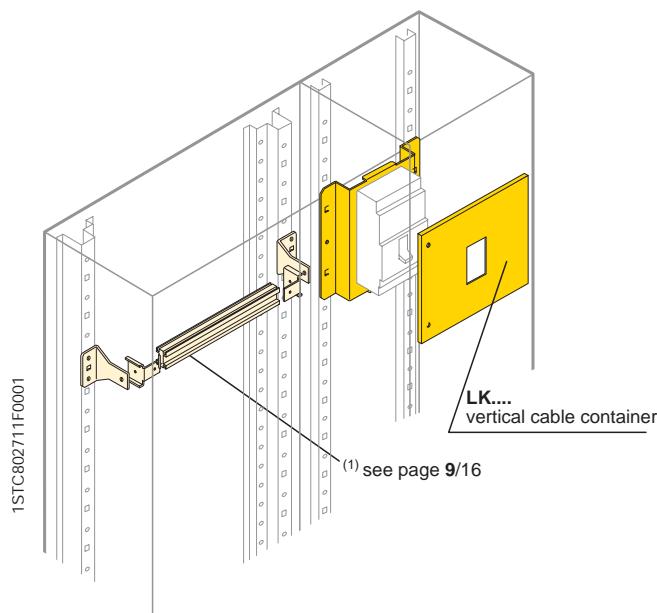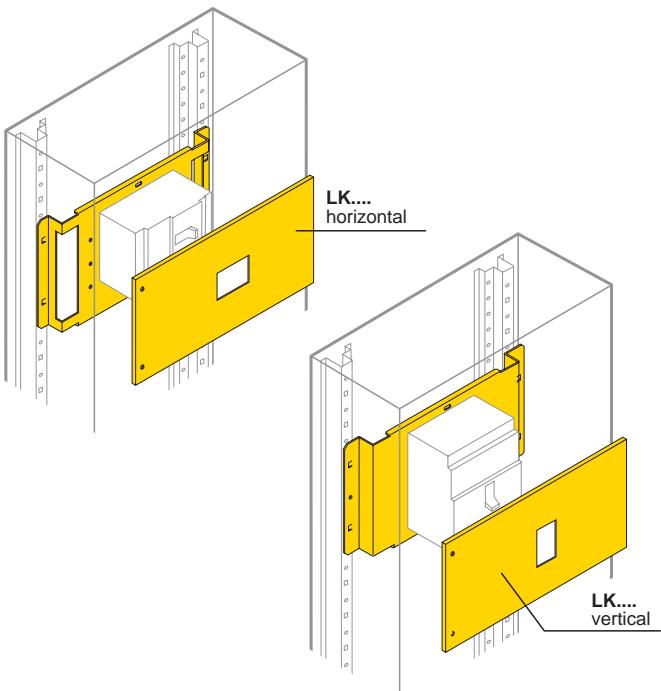

Kits for installation of Tmax circuit-breakers

Horizontal installation (front terminals)

Code	Description		Dimensions H (mm)
	24 DIN mod W=600mm	36 DIN mod W=800mm	
Wall/	Floor	Floor	
LK1000	LK1100	Kit T1 4 poles, fixed	200
LK1004	LK1104	Kit T1 4 poles, fixed	200
LK2000	LK2100	Kit T2 3/4 poles fixed + RC mod.	200
LK2004	LK2104	Kit T2 4 poles fixed + RC mod.	200
LK3000	LK3110	Kit T3 3/4 poles fixed	200
LK3004	LK3104	Kit T4 4 poles fixed + RC mod.	300
LK3301		Kit T3 3/4 poles with divider	200
LK4003	LK4103	Kit T4 3/4 poles fixed	200
LK4004	LK4104	Kit T4 4 poles fixed + RC mod.	200
LK5003	LK5103	Kit T5 3/4 poles fixed	300
LK5004	LK5104	Kit T5 4 poles fixed + RC mod.	300


Vertical installation (front terminals)

Code	Description			Dimensions H (mm)	
	24 DIN mod W=600mm	36 DIN mod W=800mm	cable container W=300mm		
Wall/	Floor	Floor	Wall	Wall	
GD...⁽¹⁾	GD...⁽¹⁾	GD...⁽¹⁾		Kit DIN T1-T2-T3, 3/4 poles fixed + RC mod. 150-600	
LK1001	LK1101	LK1002	Kit T1 3/4 poles fixed	200	
		LK1008	Kit T1 4 poles fixed + RC mod.	300	
LK4100			Kit n° 4 T1 3/4 poles side by side	200	
	LK4108		Kit n° 5 T1 3/4 poles side by side	200	
LK2001	LK2101	LK2002	Kit T2 3/4 poles fixed	200	
		LK2008	Kit T2 4 poles fixed + RC mod.	300	
LK3200			Kit n° 3 T2 3/4 poles side by side	200	
	LK3111		Kit n° 4 T2 3/4 poles side by side	200	
LK3001	LK3101	LK3003	LK3002	Kit T3 3/4 poles fixed	300
LK3005	LK3105		LK3008	Kit T3 4 poles fixed + RC mod.	300
LK3300				Kit n° 3 T3 3/4 poles side by side	300
	LK3102			Kit n° 4 T3 3/4 poles side by side	300
LK4005	LK4105		LK4007	Kit T4 3/4 poles fixed	400
LK4006	LK4106			Kit T4 4 poles fixed + RC mod.	500
LK5005	LK5105		LK5007	Kit T5 3/4 poles fixed	400
LK5006	LK5106		LK5008	Kit T5 4 poles fixed + RC mod.	500
LK6011	LK6012			Kit T6 3/4 poles fixed	500

For kit Isomax see page 9/83.

ArTu L

Distribution system

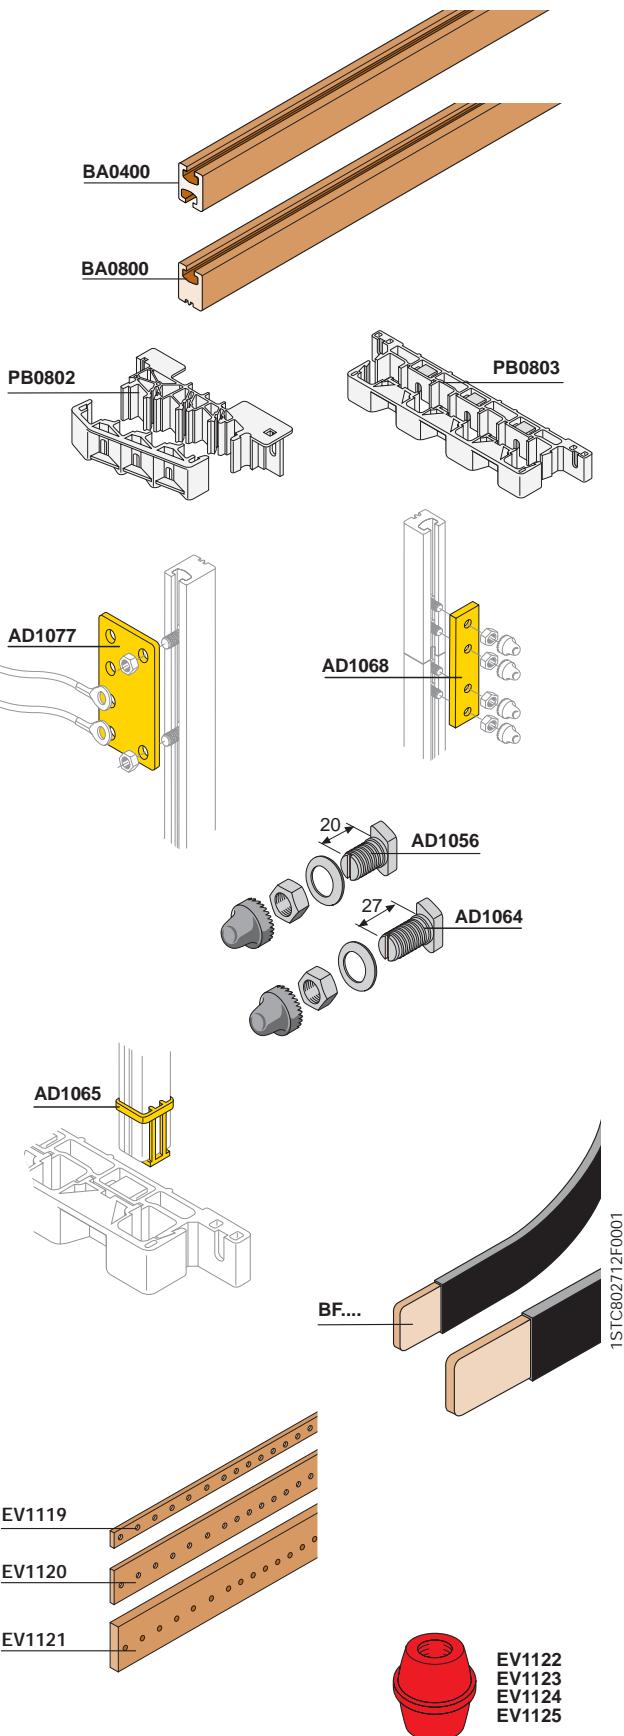

Distribution busbars with shaped section

Code	Description	Dimensions W (mm)
BA0400	Busbar In=400A	1730
BA0800	Busbar In=800A	1730

Busbar holders for busbars with shaped section

Code	Description
------	-------------

Scaled

PB0802 Scaled busbar holder In=800A - 35kA

Linear

PB0803 Linear busbar holder In=800A - 35kA

Joints for busbars with shaped section

Code	Description
AD1077	N°4 copper 400A branch joints
AD1068	N°4 joints for joining busbars with shaped section 400/800A

Hammer seal screws for busbars with shaped section

Code	Description
AD1056	N°12 M8 screws L=20mm for cable terminal
AD1064	N°12 M8 screws L=20mm for flat busbars up to 10mm, complete with screw-covering cap

Resting bases for busbars with shaped section

Code	Description
AD1065	N°4 resting bases for 400/800A busbars

Flexible busbars

Flexible busbars insulated with self-extinguishing material.

Code	Description	In (A)	Dimensions W (mm)
BF1602	N°2 flexible busbars, section 20x3	250	2000
BF2502	N°2 flexible busbars, section 20x5	400	2000
BF4002	N°2 flexible busbars, section 24x6	500	2000
BF4012 ⁽¹⁾	N°2 flexible busbars, section 32x5	630	2000

⁽¹⁾ Only for circuit-breakers with front extended terminals or rear terminals

Earthing busbars

Copper busbars drilled and threaded for rapid connection of the conductors.






Code	Description	Dimensions W (mm)
EV1119	N°2 earthing busbars 20x5 threaded M6	2000
EV1120	N°2 earthing busbars 25x5 threaded M6	2000
EV1121	N°2 earthing busbars 50x5 threaded M6	2000

Insulators and copper busbars for neutral/earthing


Code	Description
EV1122	N°50 hexagonal insulators 30x30mm M6
EV1123	N°50 hexagonal insulators 30x30mm M8
EV1124	N°25 hexagonal insulators 36x50mm M6
EV1125	N°25 hexagonal insulators 36x50mm M8

ArTu L


Distribution system

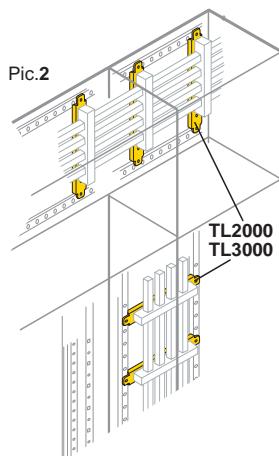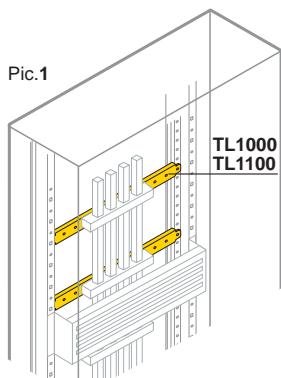


Mounting 1




Mounting 3



Mounting 2



Mounting 4



Crosspieces for 400/800A busbars with shaped section

Vertical busbars at back of structure and connection to the Unifix H system

Code	Mounting Pic.	Description
TL1000	1	N°2 Fixing crosspieces W=600mm for linear busbar holder PB0803
TL1100	1	N°2 Fixing crosspieces W=800mm for linear busbar holder PB0803

Vertical busbars at back of the external cable container or horizontal in the cable connection box

Code	Mounting Pic.	Description
TL3000	2	N°2 Fixing crosspieces W=300mm for linear busbar holder PB0803
TL2000	2	N°2 Fixing crosspieces W=300mm for scaled busbar holder PB0802

Vertical busbars at back del cable container internal

Code	Mounting Pic.	Description
TL2100	3	N°2 Fixing crosspieces W=200mm for scaled busbar holder PB0802

Prefabricated kit for connection between apparatus and busbars with shaped section 400/800A

Horizontal circuit-breaker

Code	Position Tmax/busbar	Structure	Mounting	
			Type	Position
KB1001 ⁽¹⁾	T1 -T2 in the structure and busbars in the cable cont	floor-standing	B	1
KB1002	T3 in the structure and busbars in the cable cont	wall/floor-mounted	B	1
KB1020	T5 in the structure and busbars in the cable cont	floor-standing	B	1
KB1021	RC in the struc. and busbars in the cable cont.	floor-standing	B	1

Vertical circuit-breaker



Code	Position Tmax/busbar	Structure	Mounting	
			Type	Position
KB1006	T3 in the structure and busbars in the cable container	wall/floor-mounted	B	1
KB1022	T5 and T5 resid.cur. in the struc. and busb. in the cable cont.	floor-standing	B	1
KB1010	T3 in the cable container and busbars in the structure	wall/floor-mounted	B	2
KB1019	Resid. current T3 in the cable cont. and busb. in the structure	wall/floor-mounted	B	2
KB1024	Resid. current T5 and T5 in the cab. cont. and bus. in the structure	floor-standing	B	2
KB1014 ⁽²⁾	T3 in the structure/cable container and busbars at back	wall/floor-mounted	A	3-4
KB1018 ⁽²⁾	T3 in the structure/cable container busbars at back	wall/floor-mounted	A	3-4

⁽¹⁾ For Tmax T1 fit the circuit-breaker with extended terminals.

⁽²⁾ Only with flat busbars and scaled busbar holder.

ArTu L

Distribution system



Flat busbar

Copper with 1750mm drilled length. Can be used with both linear BP0630 and scaled BP0634 busbar holder.

Cde	Description	In (A)	Dimensions W (mm)
BR0250	N°2 copper busbar 15x5	250	1750
BR0400	N°2 copper busbar 25x5	400	1750
BR0630	N°2 copper busbar 30x10	630	1750

Busbars holders

Busbar holders made of insulating self-extinguishing material, certified in conformity with the EN 60439-1 Standard for $Icc \leq 35kA$.

Code	Description
BP0630	N°2 linear busbar holders In=630A - 32kA
BP0632	N°2 terminal covers for linear busbar holders BP0630
BP0634	N°2 scaled busbar holder In=630A - 23kA

Flexible busbars

Flexible busbars insulated in self-extinguishing material.

Code	Description	In (A)	Dimensions W (mm)
BF1602	N°2 flexible busbars, section 20x3	250	2000
BF2502	N°2 flexible busbars, section 20x5	400	2000
BF4002	N°2 flexible busbars, section 24x6	500	2000
BF4012 ⁽¹⁾	N°2 flexible busbars, section 32x5	630	2000

⁽¹⁾ Only for circuit-breakers with front extended terminals or rear terminals

Crosspieces for flat busbars

Crosspieces for fixing the busbar holders to the structure with various installation possibilities.

Busbar vertically on back of structure or of cable container

Code	Mounting Pic.	Description
TL1000	1	N°2 crosspieces back of structure W=600mm with BP4466
TL1100	1	N°2 crosspieces back of structure W=800mm with BP4466
TL3000	2	N°2 crosspieces back of cable container W=300mm with BP4466 or scaled BP4477






Earthing busbars

Copper busbars drilled and threaded for rapid connection of the conductors.

Code	Description	Dimensions W (mm)
EV1119	N°2 earthing busbars 20x5 threaded M6	2000
EV1120	N°2 earthing busbars 25x5 threaded M6	2000
EV1121	N°2 earthing busbars 50x5 threaded M6	2000


Insulators and copper busbars for neutral/earthing

Code	Description
EV1122	N°50 hexagonal insulators 30x30mm M6
EV1123	N°50 hexagonal insulators 30x30mm M8
EV1124	N°50 hexagonal insulators 36x50mm M6
EV1125	N°50 hexagonal insulators 36x50mm M8

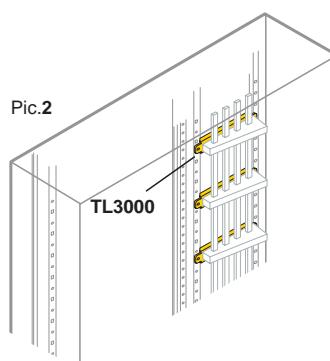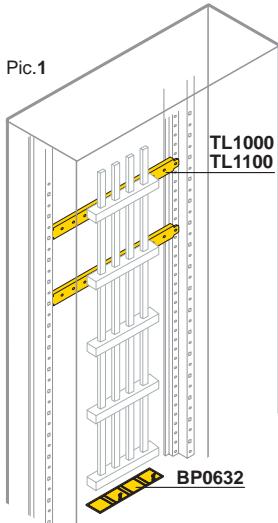

ArTu L

Distribution system

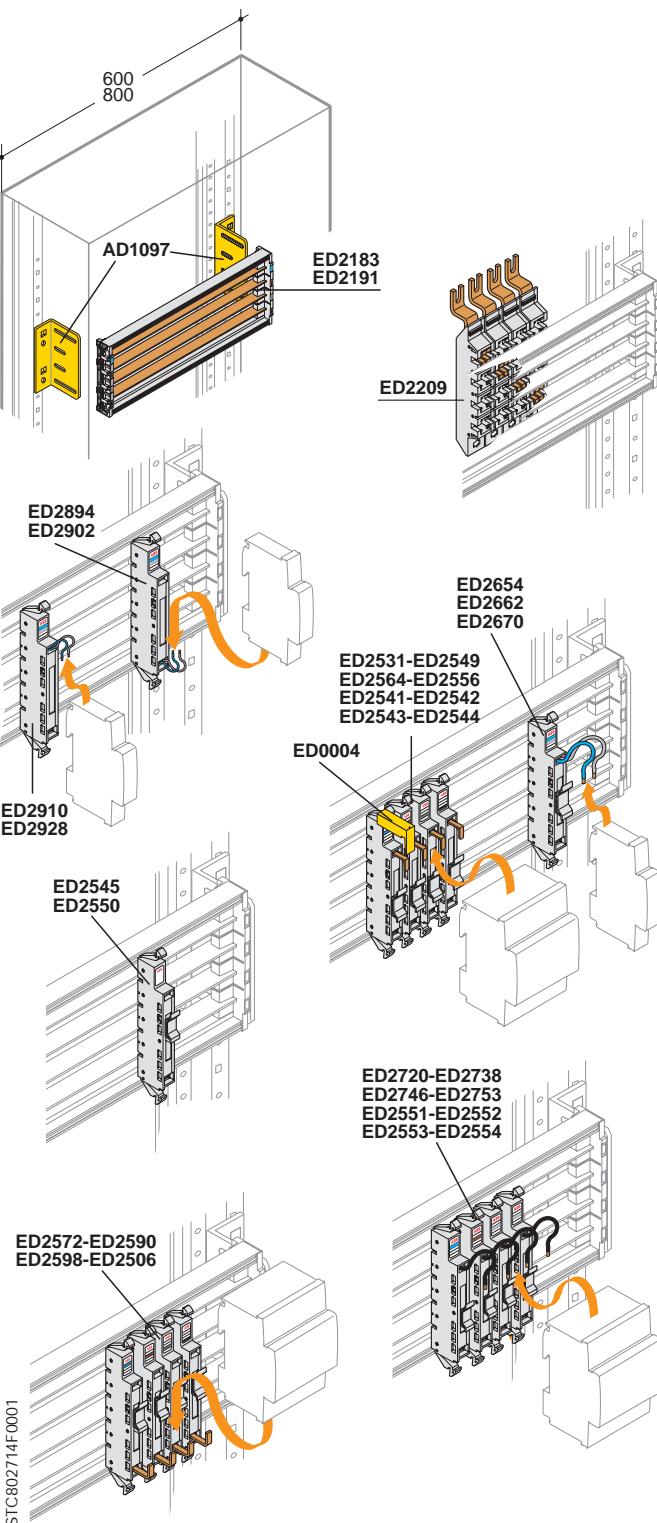

1STC802714F0001

Unifix H

Frames for Tmax

Code	Description	Dimensions W (mm)
ED2183	Frame with 24 DIN module busbar	600
ED2191	Frame with 36 DIN module busbar	800
AD1097	N°2 fixing brackets onto the structure for ED2183 or ED2091	

Feeder modules

Code	Description
ED2209	4P 400A feeder module (for ED2183-ED2191)

Basic modules I_n 16A

Code	Description
ED2894	Basic module for DIN L1-N top 16A
ED2902	Basic module for DIN L1-L2 top 16A
ED2910	Basic module for DIN L1-N bottom 16A
ED2928	Basic module for DIN L1-L2 bottom 16A

Basic modules I_n 40A

Code	Description
ED2654	Basic module L1/Neutral top 40A
ED2662	Basic module L2/Neutral top 40A
ED2670	Basic module L3/Neutral top 40A

Basic modules I_n 63A

Code	Description
ED2531	Basic module L1 top 63A
ED2549	Basic module L2 top 63A
ED2556	Basic module L3 top 63A
ED2564	Basic module Neutral top 63A
ED2572	Basic module L1 bottom 63A
ED2590	Basic module L2 bottom 63A
ED2598	Basic module L3 bottom 63A
ED2606	Basic module Neutral bottom 63A

Basic modules I_n 100A

Code	Description
ED2720	Basic module with cable L1 top 100A
ED2738	Basic module with cable L2 top 100A
ED2746	Basic module with cable L3 top 100A
ED2753	Basic module with cable Neutral top 100A

Basic modules ≤I_n 40A S800


Code	Description
ED2557	Basic module L1 top ≤40A
ED2558	Basic module L2 top ≤40A
ED2559	Basic module L3 top ≤40A
ED2560	Basic module Neutral top ≤40A

Basic modules I_n 125A S800

Code	Description
ED2551	Basic module L1 top 125A
ED2552	Basic module L2 top 125A
ED2553	Basic module L3 top 125A
ED2554	Basic module Neutral bottom 125A
ED2550	Basic module false pole W=27mm

ArTu L

Distribution system

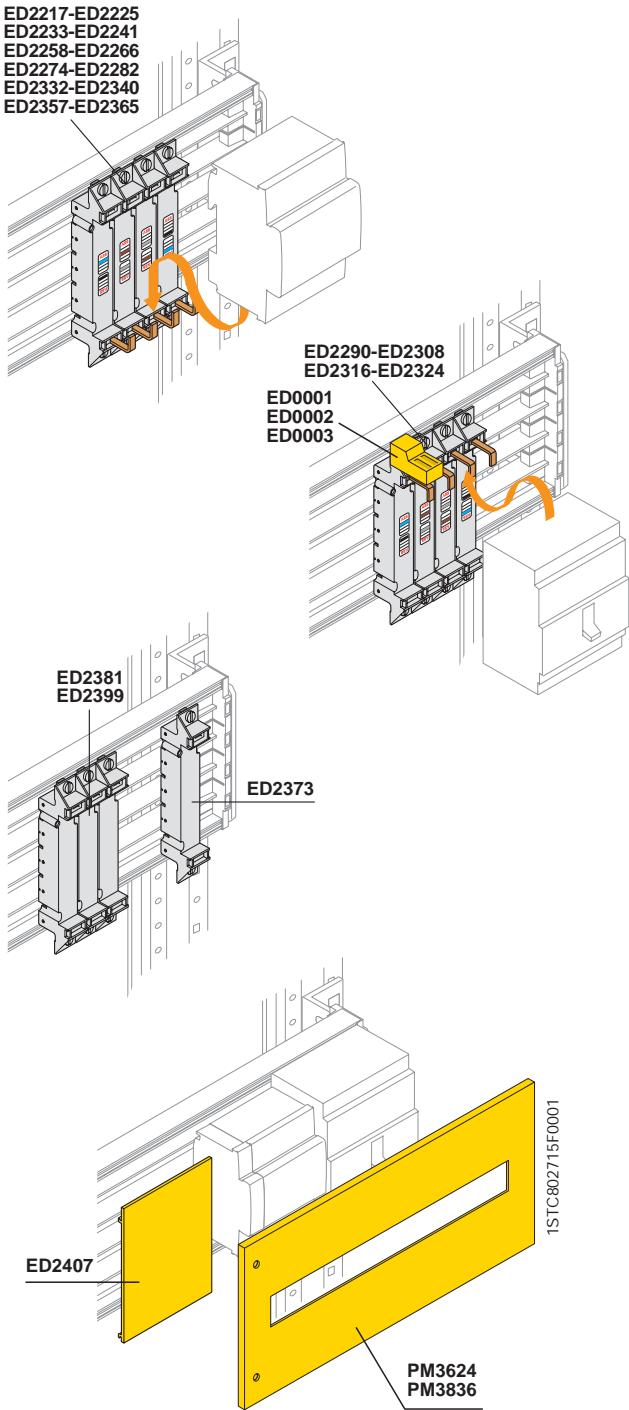

Unifix H

Basic modules I_n 160A Tmax T1

Code	Description
ED2217	Basic module L1 top L2 bottom
ED2225	Basic module L2 top L1 bottom
ED2233	Basic module L3 top Neutral bottom
ED2241	Basic module Neutral top L3 bottom
ED2373	Basic module false pole for residual current release RC221
ED2381	Basic module false pole for solenoid operator

Basic modules I_n 160A Tmax T2

Code	Description
ED2258	Basic module L1 top L2 bottom
ED2266	Basic module L2 top L1 bottom
ED2274	Basic module L3 top N bottom
ED2282	Basic module N top L3 bottom
ED2373	Basic module false pole for residual current release RC221
ED2399	Basic module false pole for solenoid operator

Basic modules I_n 250A Tmax T3

Code	Description
ED2290	Basic module L1 top
ED2308	Basic module L2 top
ED2316	Basic module L3 top
ED2324	Basic module N top
ED2332	Basic module L1 bottom
ED2340	Basic module L2 bottom
ED2357	Basic module L3 bottom
ED2365	Basic module N bottom
ED2373	Basic module false pole for residual current release RC221

Accessories


Code	Description
ED2845	Basic module false pole for DDA
ED2852	Basic module false pole for modular MDRC
ED2407	N°2 IP20 covers (for ED2183-ED2191) W=173mm (10 DIN modules)
ED2936	N°6 duct supports
PM3624	Modular front panel 300x600mm (hwx)
PM3836	Modular front panel 300x800mm (hwx)

Spare parts

Code	Description
ED0001	N°10 terminal covers for T1
ED0002	N°10 terminal covers for T2
ED0003	N°10 terminal covers for T3
ED0004	N°10 terminal covers for S200/F200

ArTu L

Distribution system

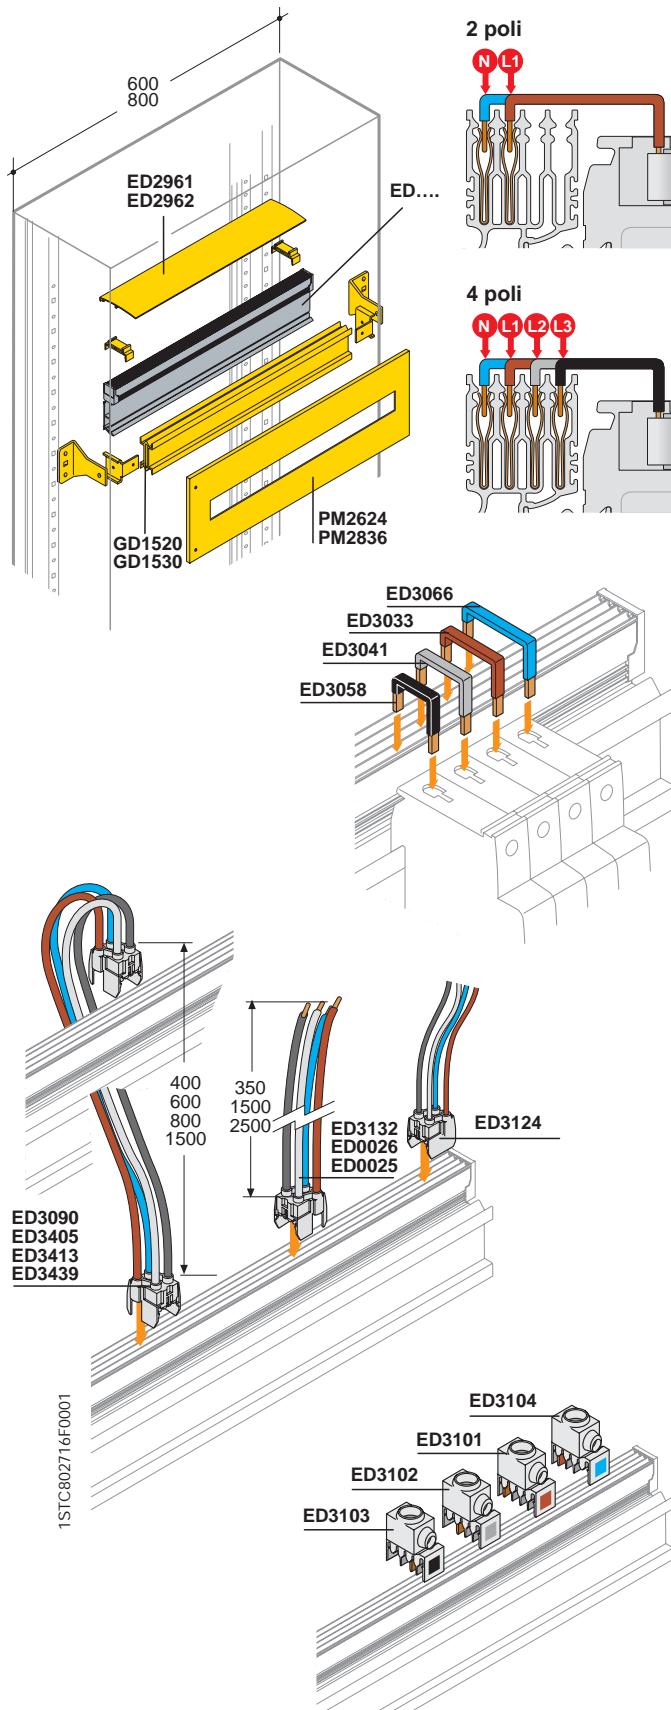

Unifix L

2-pole busbars

Code	Description	Dimensions w (mm)
ED2985	100A 2P 8 module busbar	200
ED2993	100A 2P 12 module busbar	400
ED3009	100A 2P 18 module busbar	450
ED3017	100A 2P 24 module busbar	600
ED3025	100A 2P 36 module busbar	800

4-pole busbars

Code	Description	Dimensions w (mm)
ED2944	100A 4P 12 module busbar	400
ED2951	100A 4P 18 module busbar	450
ED2969	100A 4P 24 module busbar	600
ED2977	100A 4P 36 module busbar	800

Connections for various apparatus

Code Description

ED3108	Connection with 2 conductors L/N 16A
ED3116	Connection with 3 conductors L1/L2/L3 16A
ED3124	Connection with 4 conductors L1/L2/L3/N 16A single phase
ED3355	Connection with 2 conductors L1/N 40A
ED3363	Connection with 3 conductors L1/L2/L3 40A
ED3371	Connection with 4 conductors L1/L2/L3/N 40A

Connections for apparatus

Code Description

ED3272	N°10 connections L1-N 40 A
ED3280	N°10 connections L2-N 40 A
ED3298	N°10 connections L3-N 40 A
ED3033	N°10 connections L 1 100A
ED3041	N°10 connections L 2 100A
ED3058	N°10 connections L 3 100A
ED3066	N°10 connections N 100A
ED3132	Feeder with 4P 100A cable (W=350mm)
ED0026	Feeder with 4P 100A cable (W=1500mm)
ED0025	Feeder with 4P 100A cable (W=1500mm)

Power supply modules with cable

Code Description

ED3082	Parallel module 2P 100A with cable
ED3405	Parallel module 4P 100A with cable
ED3090	Parallel module 4P 100A with cable
ED3413	Parallel module 4P 100A with cable
ED3439	Parallel module 4P 100A with cable

Power supply modules without cable In 100A

Code Description

ED3101	N°10 single-pole power supply terminals L1
ED3102	N°10 single-pole power supply terminals L2
ED3103	N°10 single-pole power supply terminals L3
ED3104	N°10 single-pole power supply terminals N


Accessories

Code Description

Code	Description	Dimensions W (mm)
ED2961	N°10 busbar covers	600
ED2962	N°2 busbar covers	800
GD1520	DIN rail Kit and supports	600
GD1530	DIN rail Kit and supports	800
PM2624	Modular front panel 200x600mm (hwx)	
PM2836	Modular front panel 200x800mm (hwx)	

ArTu L

Accessories

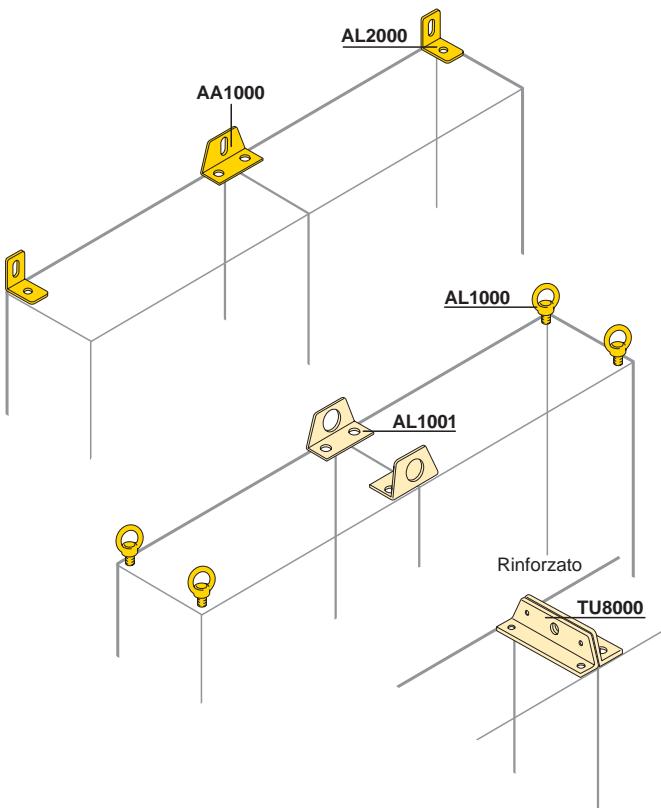


Brackets for wall fixing

Code	Description
AL2000	N°2 brackets for wall fixing
AA1000	Bracket for wall fixing of 2 side-by-side structures

For the wall-mounted version, order 2 x AL2000.

Eyebolts and lifting reinforcements

Code	Description
AL1000	N°4 M8 steel eyebolts
AL1001	N°2 lifting reinforcements for side-by-side structures W=300/600mm
TU8000	N°2 lifting/coupling reinforcements

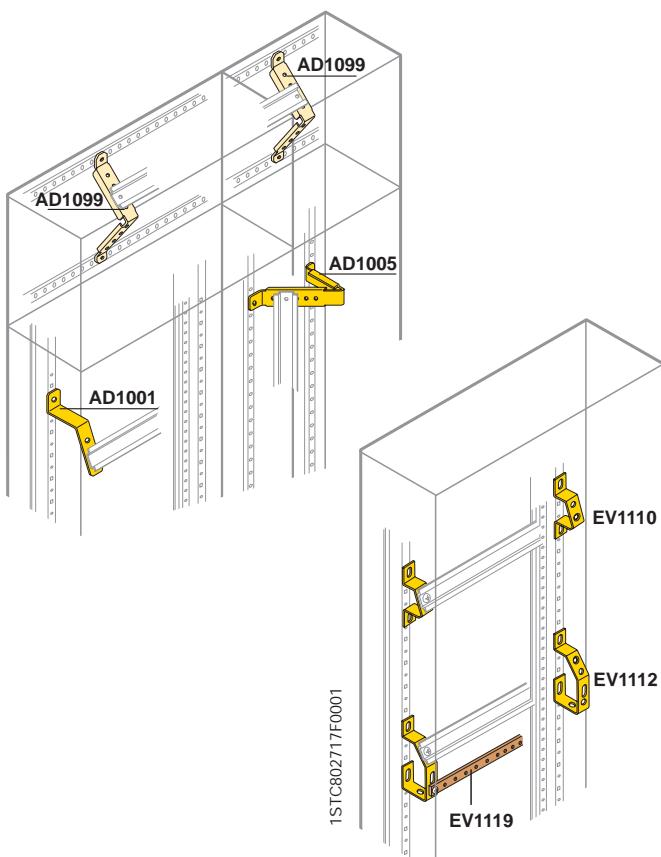

Supports for terminal boxes

Structure

Code	Description
AA1001	N°2 supports for horizontal 45° angled terminal box

Cable container

Code	Description
AD1099	N°2 supports for vertical terminal box in cable container, horizontal in the ArTu L horizontal in the ArTu L box
AD1005	N°2 supports for vertical terminal box in internal cable container

Angled supports for terminal boxes and earthing busbars

Code	Description
EV1110	N°50 angled supports 1 row of terminals
EV2110	N°10 angled supports 1 row of terminals
EV1112	N°50 angled supports 1 row of terminals + earth
EV2112	N°10 angled supports 1 row of terminals + earth

ArTu L

Accessories


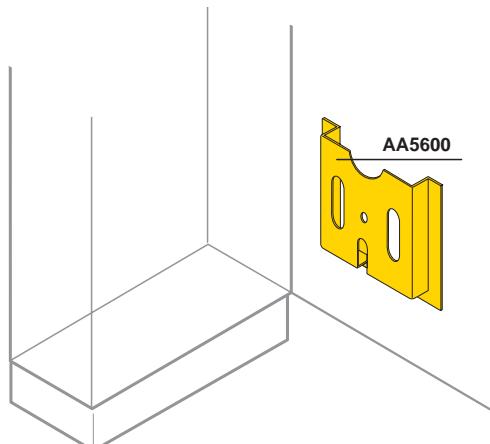


Diagram holder pocket


The diagram holder pocket (made of RAL 2004 colour plastic, dim. HxL 237x265mm type A4) is applied to the inside of doors/blind panels of suitable size using the adhesive provided.

Code	Description	Dimensions
		W (mm)
AA5600	Plastic diagram pocket	

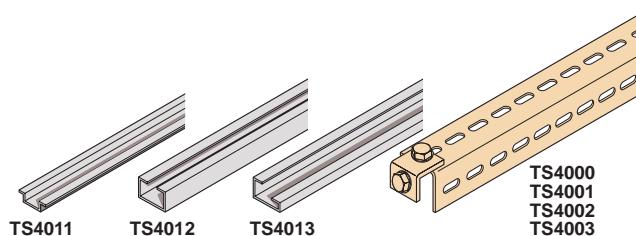

Sections for accessories

Code	Description	Dimensions
		W (mm)
TS4011	N°2 sections EN50024 C30	2000
TS4012	N°2 sections EN50035 G32	2000
TS4013	N°2 DIN sections EN50022	2000

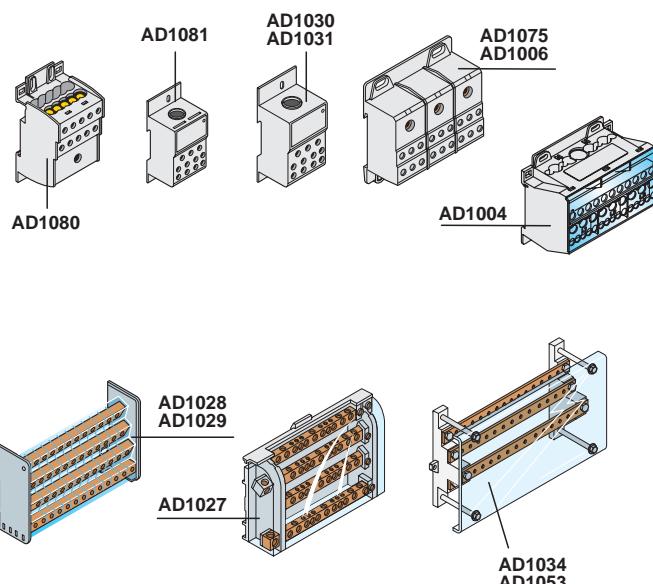

Dividers

Code	Description
Single-pole	Three-pole
AD1076 ⁽¹⁾	Four-pole
AD1080 ⁽²⁾	AD1075 AD1004 Modular 125A
AD1028	Modular 125A-medium-89x93x48 (LxWxH)
AD1029	Modular 125A-large-126x93x48 (LxWxH)
AD1007 ⁽¹⁾	AD1006 AD1027 Modular 160A
AD1081 ⁽²⁾	Modular 250A
AD1030	AD1034 Horizontal 250A for structures W=600mm
AD1034	AD1053 Horizontal 250A for structures W=800mm
AD1031	Modular 400A

⁽¹⁾ 10 outputs

⁽²⁾ 6 outputs


Mounting accessories

Code	Description
AD1038	Supports for fixing to the structure for AD1034 and AD1053
AD1083	Connection accessory between two AD1080

1STC802718F0001


ArTu L

Accessories

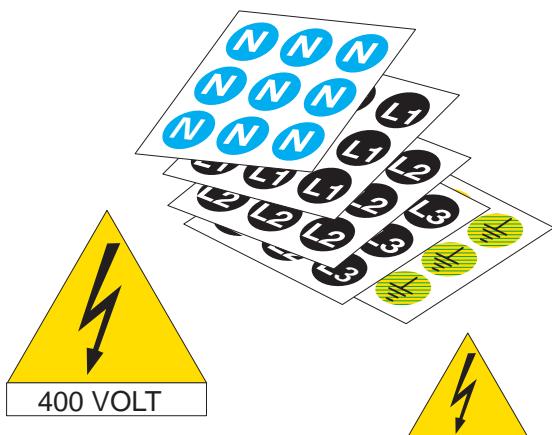

Marking

Code	Description
EV1150	N°490 adhesive labels ø12mm symbol N
EV1151	N°490 adhesive labels ø12mm symbol L1
EV1152	N°490 adhesive labels ø12mm symbol L2
EV1153	N°490 adhesive labels ø12mm symbol L3
EV1154	N°490 adhesive labels ø12mm symbol T
EV1155	N°10 triangular adhesive labels 125mm with 400V lightning arrow symbol
EV1156	N°100 triangular adhesive labels 50mm with lightning arrow symbol

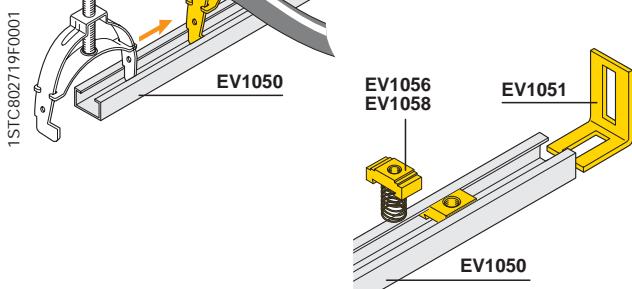

Brackets for anchoring cables

Adjustable cable blocking bracket can be mounted on sections with 10mm slot EV1050.

Code	Description
EV1090	N°10 cable blocking brackets min= max ø 9÷16mm
EV1091	N°10 cable blocking brackets min= max ø 16÷30mm
EV1092	N°5 cable blocking brackets min= max ø 30÷48mm
EV1093	N°5 cable blocking brackets min= max ø 48÷72mm

Aluminium sliding guides for universal uses

Codice	Descrizione
EV1050	N°10 aluminium supporting sections 30x15 – W=2000mm
EV1051	N°25 fixing brackets for EV1050
EV1056	N°100 aluminium M6 nuts for EV1050
EV1058	N°100 aluminium M8 nuts for EV1050

ArTu L

Accessories

Accessories


Code	Description
AA6200	ArTu W floor-mounted insert + Yale type key
EV1036	ArTu W wall-mounted insert + Yale type key
AA6120	Triangular iron insert
AA6140	Square insert
AA6160	FIAT type insert
AA6180	Hexagonal insert
AD1036	N°20 cage nuts
VB7035	Spray paint for touching up RAL 7035 colour (400 ml can)

Spare parts

Code	Description
AD1090	N°10 hinges + screws for panels (spare part ACP468)
AD1091	N°10 plug + door key kits (spare part APT002)
EV1008	Box for closing doors with double-tab insert
AD1058	Zn+Al+Mg alloy key with double tab
AA6100	Double tab insert
AD1022	N°10 Artu handle covers
AD1070	N°10 Artu handle covers
AD1033	N°50 three-lobed M6 spare screws

ArTu M


Structure

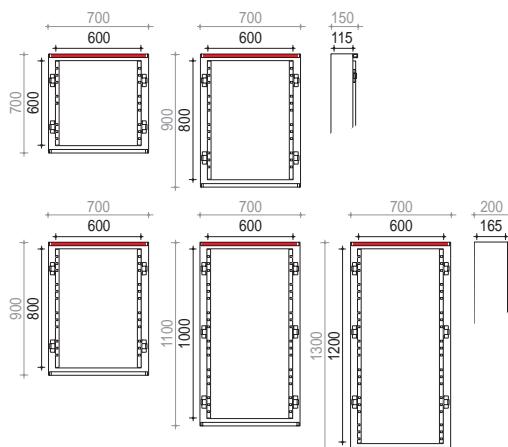

ArTu M wall-mounted structures

Basic version

Code	Description	Useful dimensions HxD (mm)
24 DIN mod	W=600mm	
SM6061	Monobloc structure	600x115
SM8061	Monobloc structure	800x115
SM8062	Monobloc structure	800x165
SM1062	Monobloc structure	1000x165
SM1262	Monobloc structure	1200x165

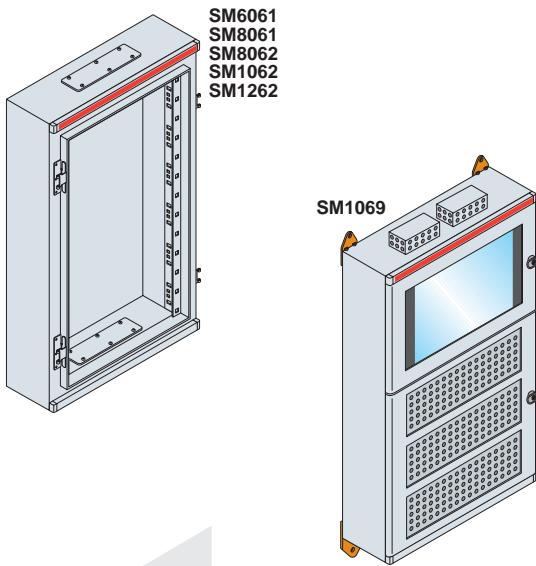


IP40 version for operating theatre

Code Description

Code	Description	Useful dimensions HxD (mm)
24 DIN mod	W=600mm	
SM1069	Monobloc structure for constructing switchgear for operating theatres	1000x165

The QSO switchgear for operating theatres are complete with brackets (AD1009 n° 4 pieces) for installation of the duct, two DIN rail kits (GD6001 and PM2624 n° 2 pieces) and relative wall fixing brackets (4 pieces).

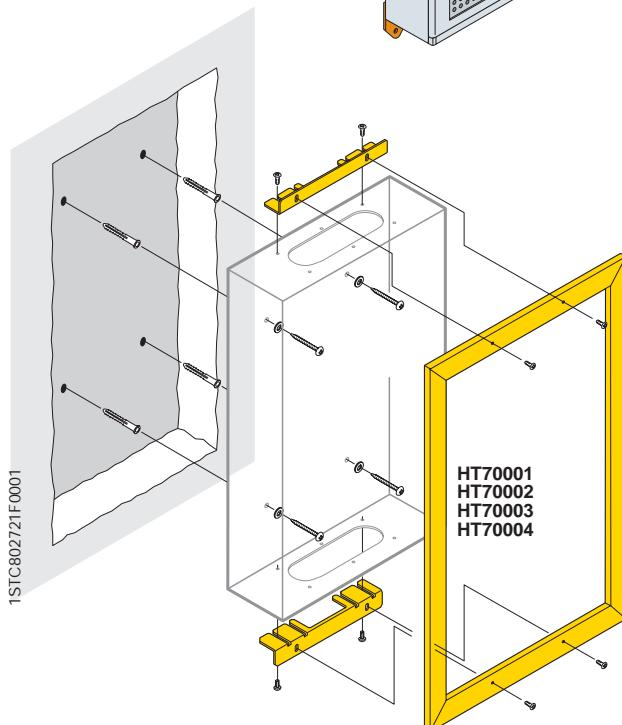


Embedding frame

Code Description

Code	Description	Dimensions HxD (mm)
H70001	Frame and squares for embedding structure	600x600
H70002	Frame and squares for embedding structure	800x600
H70003	Frame and squares for embedding structure	1000x600
H70004	Frame and squares for embedding structure	1200x600

ArTu M

Structure

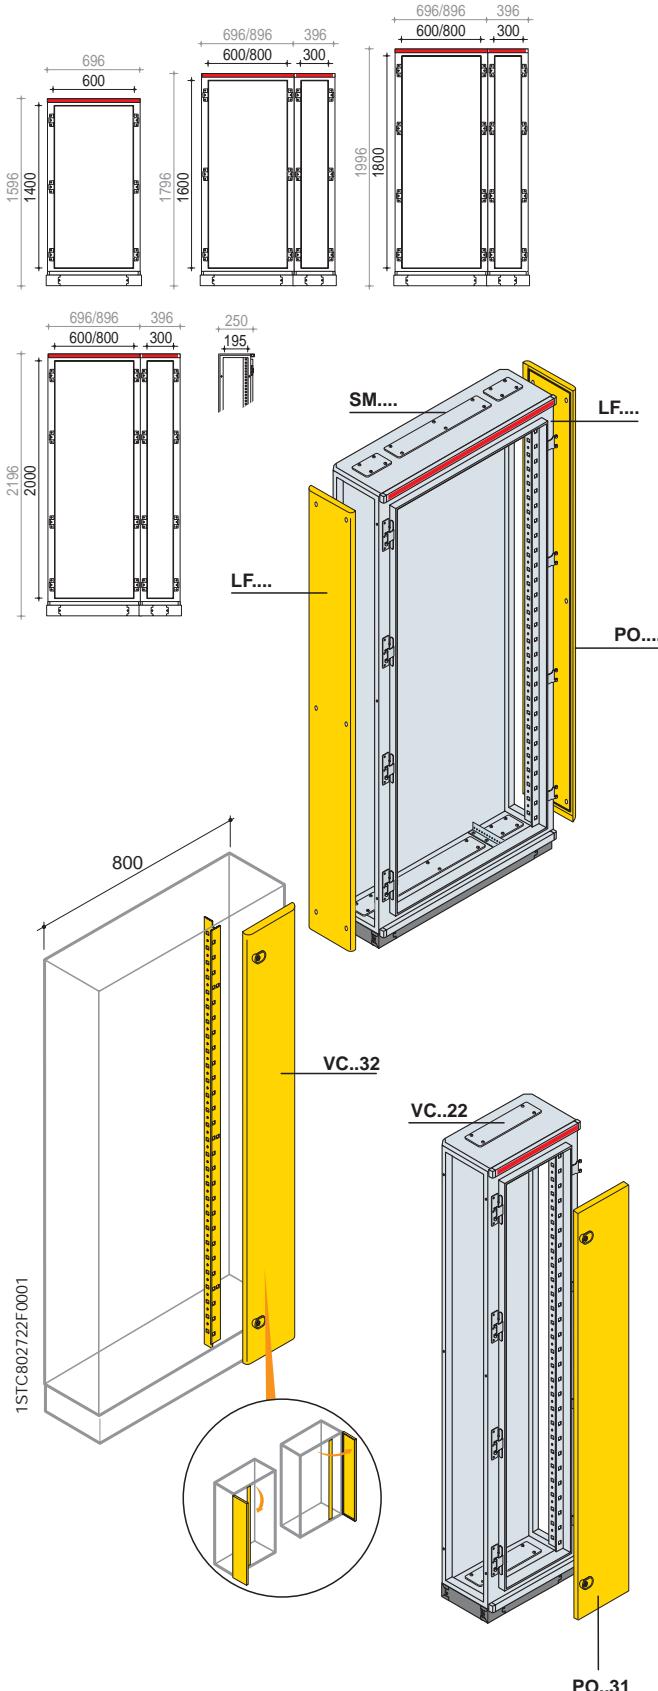

ArTu M floor-standing structures

Basic version

Code	Description	Dimensions HxW (mm)
24 DIN mod	36 DIN mod	
W=600mm	W=800mm	
SM1462	Floor standing monobloc structure	1400x195
SM1662	SM1682 Floor standing monobloc structure	1600x195
SM1862	SM1882 Floor standing monobloc structure	1800x195
SM2062	SM2082 Floor standing monobloc structure	2000x195

Additional cable container for floor-mounted structures

Only to be ordered for the 36 DIN mod. structures (W=800mm). Consisting of a functional upright and a blind door complete with two key locks. Can be mounted either on the right or left.

Internal cable container

Code	Description	Dimensions HxWxL (mm)
VC1622	Internal cable container for structure SM1682	1600x200x195
VC1822	Internal cable container for structure SM1882	1800x200x195
VC2022	Internal cable container for structure SM2082	2000x200x195

External cable container for structure 36 mod. (W=800mm)

Can be mounted either on the right or left.

Code	Description	Dimensions HxWxL (mm)
VC1632	External cable container	1600x300x195
VC1832	External cable container	1800x300x195
VC2032	External cable container	2000x300x195

The additional cable container can be completed in the following ways:

- IP65 version with external door (internal optional) (see page 9/34).
- IP31 version with internal door and finishing section (see page 9/35).

IP65 side panels for structures and additional cable container


Code	Description	Dimensions HxW (mm)
LF1425	N°2 floor-standing side panels	1400x195
LF1625	N°2 floor-standing side panels	1600x195
LF1825	N°2 floor-standing side panels	1800x195
LF2025	N°2 floor-standing side panels	2000x195

Front coverings IP31 for additional cable container

Code	Description	Dimensions HxW (mm)
PO1631	Internal door for additional cable container	1600x300
PO1831	Internal door for additional cable container	1800x300
PO2031	Internal door for additional cable container	2000x300

ArTu M

Structure

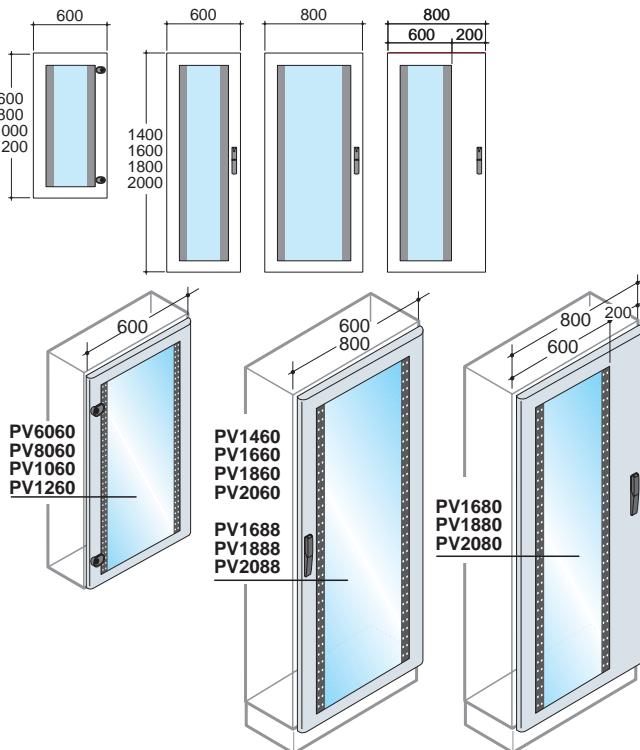

IP65 front doors for structures


Glass door 24 mod.

Door made of 15/10 thick steel sheet with 4 mm thick safety glass fitted with polyurethane gasket complete with handle with key with double tab. Reversible, can be hinged on the right or left.

Code	Description	Dimensions H (mm)
36 DIN mod+ internal cable cont.		
24 DIN mod	36 DIN mod	cable cont.
W=600mm	W=800mm	W=800mm
PV6060		Wall-mounted IP65 glass door 600
PV8060		Wall-mounted IP65 glass door 800
PV1060		Wall-mounted IP65 glass door 1000
PV1260		Wall-mounted IP65 glass door 1200
PV1460		Floor-standing IP65 glass door 1400
PV1660	PV1688	PV1680 Floor-standing IP65 glass door 1600
PV1860	PV1888	PV1880 Floor-standing IP65 glass door 1800
PV2060	PV2088	PV2080 Floor-standing IP65 glass door 2000

Blind door


Code	Description	Dimensions H (mm)
External cable cont.		
24 DIN mod	36 DIN mod	cable cont.
W=600mm	W=800mm	W=300mm
PO6060		Wall-mounting IP65 blind door 600
PO8060		Wall-mounting IP65 blind door 800
PO1060		Wall-mounting IP65 blind door 1000
PO1260		Wall-mounting IP65 blind door 1200
PO1460		Floor-standing IP65 blind door 1400
PO1660	PO1680	PO1630 Floor-standing IP65 blind door 1600
PO1860	PO1880	PO1830 Floor-standing IP65 blind door 1800
PO2060	PO2080	PO2030 Floor-standing IP65 blind door 2000

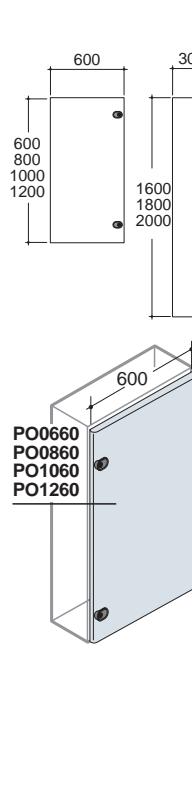

1STC802723F0001

ArTu M

Structure

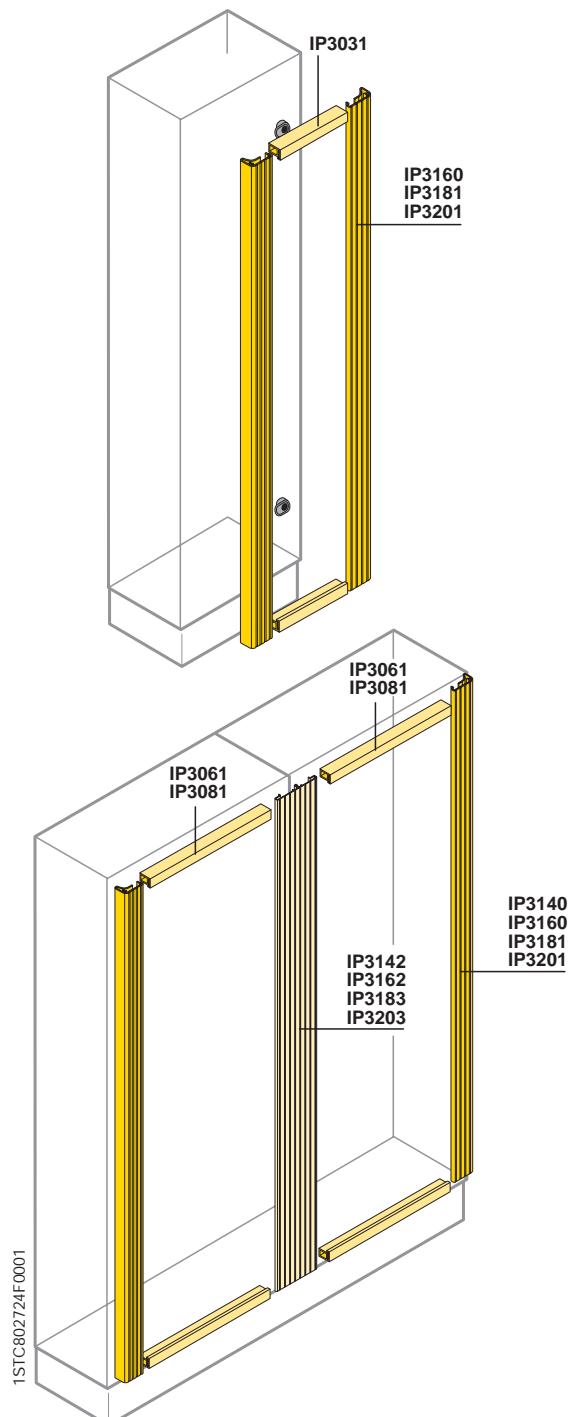

IP31 finishing section

Vertical section

Code	Dimensions H (mm)				Description
	1400	1600	1800	2000	
IP3140	IP3160	IP3181	IP3201	N°2 IP31 vertical finishing sections	
IP3142	IP3162	IP3183	IP3203	IP31 double vertical finishing section	








For IP31 version switchgear (without door), use the special finishing kits already sized for the standard heights and widths of the ArTu switchgear. In the case of switchgear side by side, use the special IP31 double kit on the joining uprights.

Horizontal sections for structures and cable container


Code	External cable cont.			Description
	24 DIN mod W=600mm	36 DIN mod W=800mm	W=300mm	
IP3061	IP3081	IP3031	N°2 IP31 horizontal finishing sections	

ArTu M

Kits for apparatus



1STC802725F0001

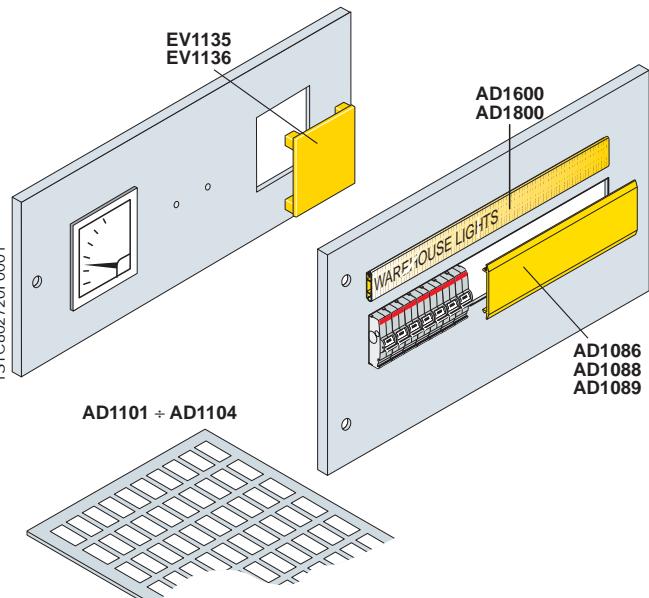

Panels for square measuring instruments

Steel sheet panels complete with hinges placed on the right or left

Code	Description	Dimensions H (mm)
24 DIN mod	36 DIN mod	
W=600mm	W=800mm	
PS2720	PS2728	Panel for 2 instruments 72x72mm 200
PS2960	PS2968	Panel for 2 instruments 96x96mm 200
PS4720	PS4728	Panel for 4 instruments 72x72mm 200
PS4960	PS4968	Panel for 4 instruments 96x96mm 200

Modular panels

Steel sheet panels complete with hinges placed on the right or left

Code	Description	Dimensions H (mm)
24 DIN mod	36 DIN mod	
W=600mm	W=800mm	
PM2624	PM2836	Modular panel 1 DIN row 200
PM2312	PM2315	Modular panel 1 DIN row - Tmax RC 300
PM3624	PM3836	Modular panel 1 DIN row only for Unifix H 300
PM3648	PM3872	Modular panel 2 DIN rows interaxis 150mm 300
PM6672		Modular panel 3 DIN rows 600


Accessories for panels

Code	Description
AD1086	N°10 holes covers W=2000mm grey RAL 7035 colour
AD1088	N°3 holes covers 36 Din modules grey RAL 7035 colour
AD1089	N°3 holes covers 36 Din modules grey RAL 7035 colour
EV1135	N°10 closing caps for instrument panel 72x72mm
EV1136	N°5 closing caps for instrument panel 96x96mm
AD1600	N°20 label-holders 24 DIN mod.
AD1800	N°20 label-holders 36 DIN mod.
AD1101 ⁽¹⁾	N°288 labels 1 mod. 15x17mm (HxW)
AD1102 ⁽¹⁾	N°192 labels 2 mod. 15x27mm (HxW)
AD1103 ⁽¹⁾	N°96 labels 3 mod. 15x50mm (HxW)
AD1104 ⁽¹⁾	N°96 labels 4 mod. 15x67mm (HxW)

⁽¹⁾ Labels can be written with Grafoplast compatible plotter system.

ArTu M

Kits for apparatus

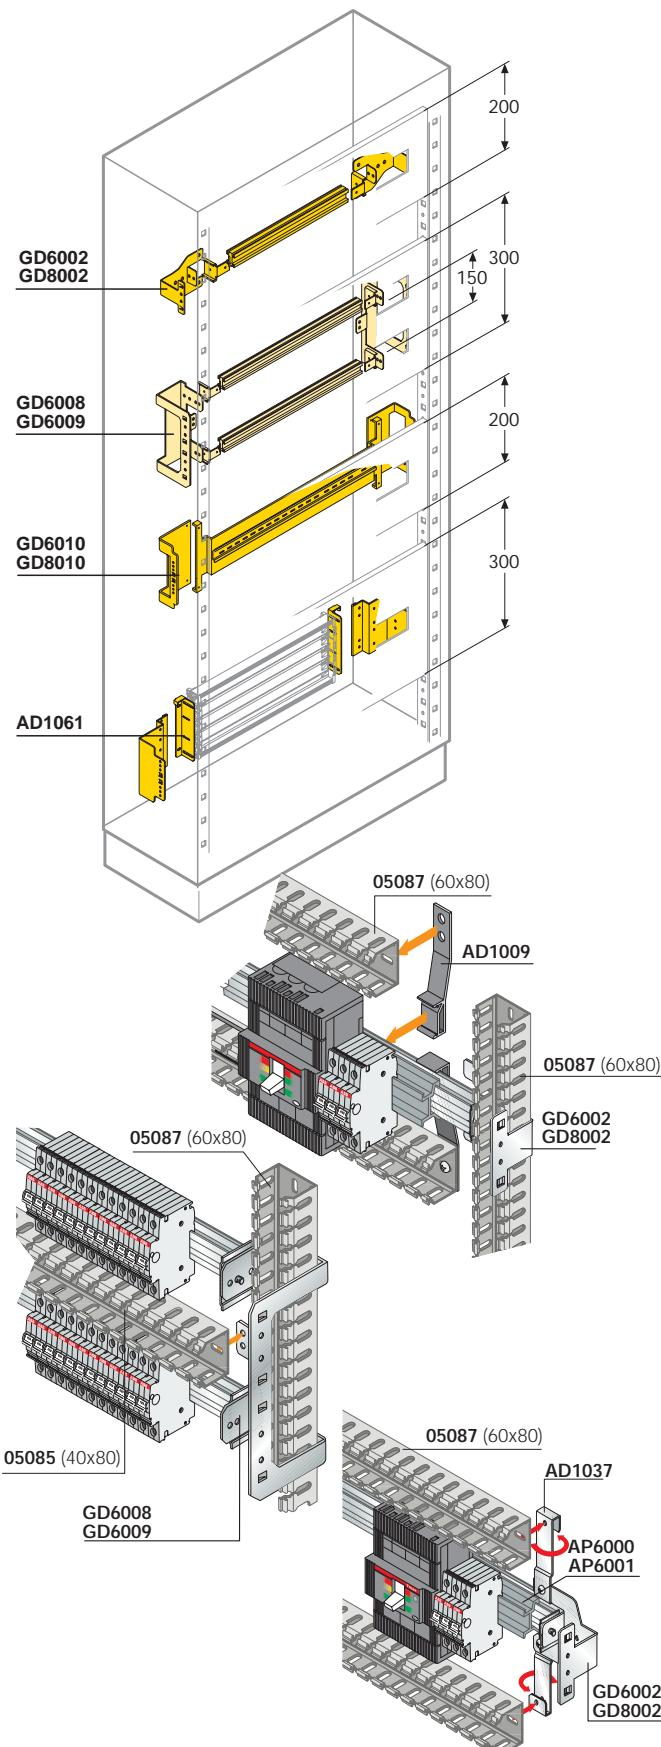

DIN rail kits for System Pro-M modular apparatus, Tmax T1-T2-T3, moulded-case circuit-breakers and supports for Unifix H

DIN rail kit

Code	Description
24 DIN mod	36 DIN mod
W=600mm	W=800mm
GD6002	GD8002 DIN rail kit (aluminium)
GD6008	GD6009 DIN rail kit centre dist. 150mm (2 DIN rows)
GD6010	GD8010 DIN rail kit reinforced for Tmax RC
GC6002 ⁽¹⁾	GC8002 ⁽¹⁾ DIN rail kit with accessories

⁽¹⁾ The DIN rail kit fitted with accessories includes the 60x80 cabling duct and relative fixing supports AD1037.

Supports for Unifix H



Code	Description	Dimensions W(mm)
AD1061	Fixing supports for Unifix H series for panel H=300mm	600/800

Depth adapters

Code	Description	Dimensions W (mm)
AP6001	N°1 depth adapter for Tmax T1-T2-T3 floor-standing	600
AP6000	N°1 depth adapter for Tmax T1-T2-T3 wall-mounting	600

ArTu M

Kits for apparatus

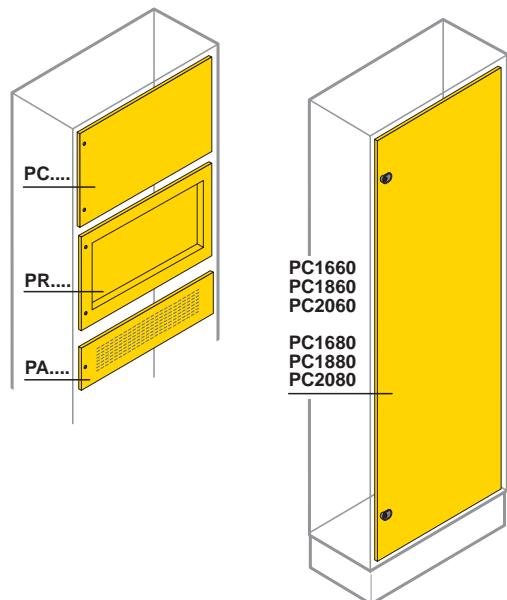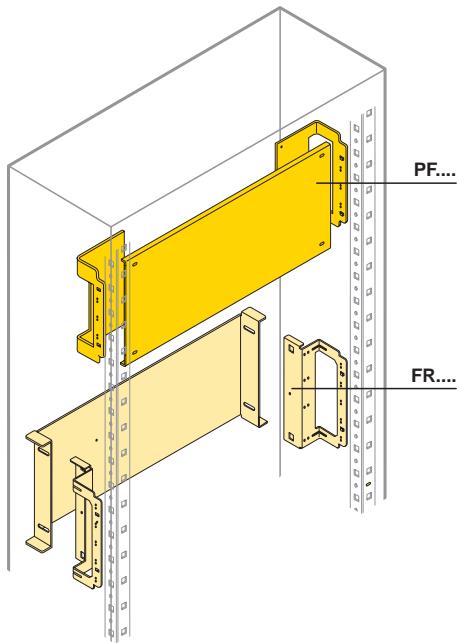

Blind back plates for and general apparatus

Code	Description	Dimensions H (mm)
24 DIN mod 36 DIN mod W=600mm W=800mm		
PF2610 ⁽¹⁾ PF2810	Blind back plate	200
PF4610 PF4810	Blind back plate	400
FR2601 FR2801	Recessed blind back plate	200
FR4601 FR4801	Recessed blind back plate	400


⁽¹⁾ Also for wall-mounted ArTu M. The panels must be ordered separately.

Blind, recessed and ventilated panels for and general apparatus

Code	Description	Dimensions H (mm)
24 DIN mod 36 DIN mod W=600mm W=800mm		
PC1600 PC1800	Blind panel	100
PC2600 PC2800	Blind panel	200
PC3600 PC3800	Blind panel	300
PC4600 PC4800	Blind panel	400
PC6600 PC6800	Blind panel	600
PC8600 PC8800	Blind panel	800
PC1660 PC1680	Blind panel (Inner door)	1600
PC1860 PC1880	Blind panel (Inner door)	1800
PC2060 PC2080	Blind panel (Inner door)	2000
PR2600 PR2800	Blind recessed panel	200
PR4600 PR4800	Blind recessed panel	400
PR6600 PR6800	Blind recessed panel	600
PA1600	Ventilated panel	100
PA2600	Ventilated panel	200

ArTu M

Kits for apparatus

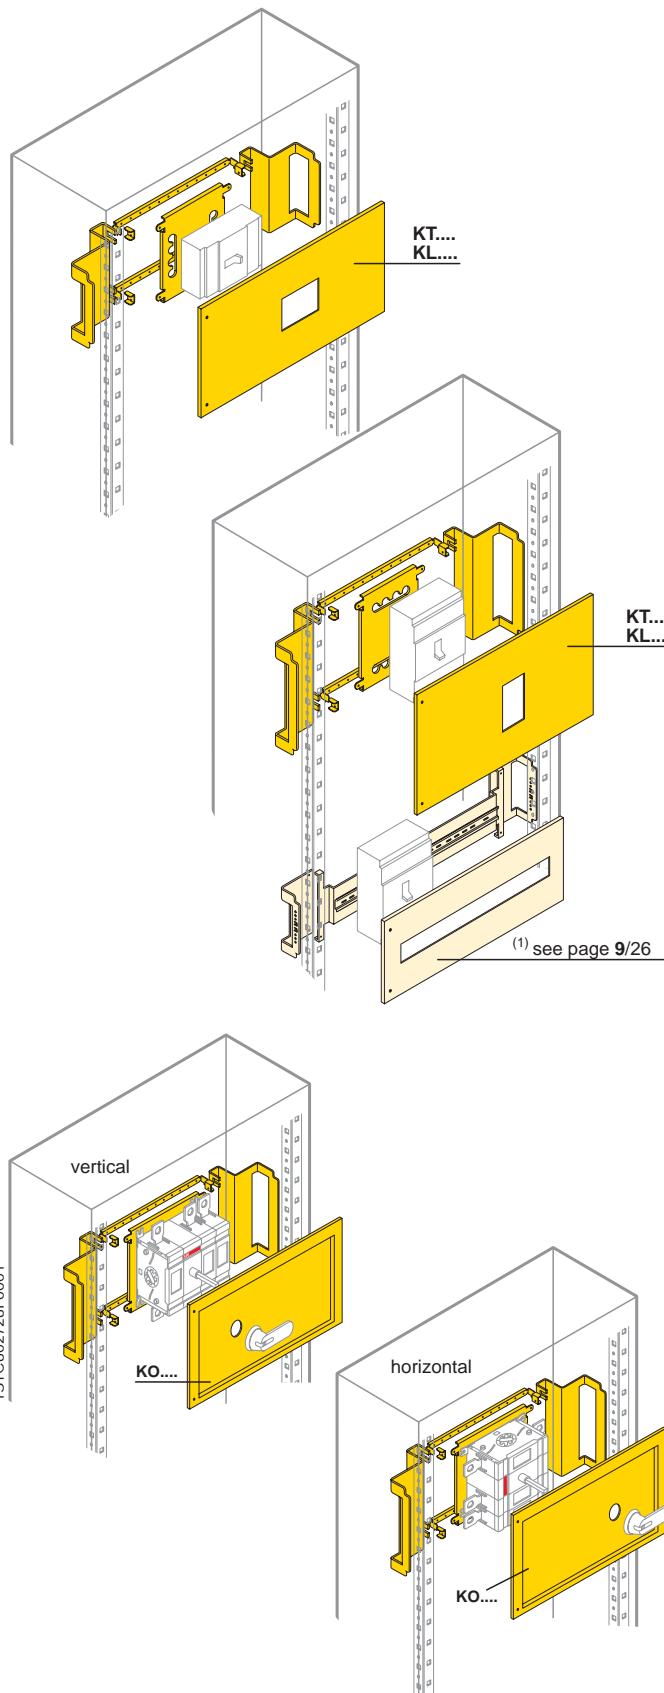

Kits for installing Tmax and Isomax circuit-breakers

Horizontal installation (front terminal)

Code	Description	Dimensions H (mm)
24 DIN mod	36 DIN mod	
W=600mm	W=800mm	
KT1117	Kit for T1 3-4 poles fixed	200
KT1102	Kit for T1 4 poles fixed + RC mod.	200
KT2117	Kit for T2 3-4 poles fixed	200
KT2102	KL2103 Kit for T2 4 poles fixed + RC mod.	200
KT3112	KL3113 Kit for T3 3-4 poles fixed	200
KT3102	KL3103 Kit for T3 4 poles fixed + RC mod.	300
KT3118	Kit for T3 4 poles fixed + RC mod. wall-mounted ArTu M	200
KT4112	KL4115 Kit for T4 3-4 poles fixed	200
KT4110	KL4116 Kit for T4 4 poles fixed + RC mod.	200
KT5112	KL5114 Kit for T4 3-4 poles fixed	300
KT5110	KL5116 Kit for T5 4 poles fixed + RC mod.	300
KT6113	KL6113 Kit for T6 3-4 poles fixed	500

Vertical installation (front terminal)

Code	Description	Dimensions H (mm)
24 DIN mod	36 DIN mod	
W=600mm	W=800mm	
GD.... ⁽¹⁾	GD.... ⁽¹⁾ Kit on DIN rail for T1-T2-T3 3-4 poles fixed/RC	200÷600
KT3212	Kit for T3 3-4 poles fixed	300
KT4212	Kit for T4 3-4 poles fixed	400
KT4102	Kit for T4 4 poles fixed + RC mod.	500
KT5212	KL5212 Kit for T5 3-4 poles fixed	400
KT5102	KL5102 Kit for T5 4 poles fixed + RC mod.	500
KT6213	KL6213 Kit for T6 3-4 poles fixed	500

⁽¹⁾ For selection of installation kits on DIN rail see page 9/27.


For the Isomax kits see page 9/83.

Kit for OT

Code	Description	Dimensions H (mm)
24 DIN mod	36 DIN mod	
W=600mm	W=800mm	
KO1201	Kit for OT200/250/315/400 - vertical installation	300
KO2260	KO2280 Kit for OT200/250/315/400 - horizontal installation	300
KO2261	KO2281 Kit for OT200/250/315/400 - vertical installation	300

ArTu M

Distribution system

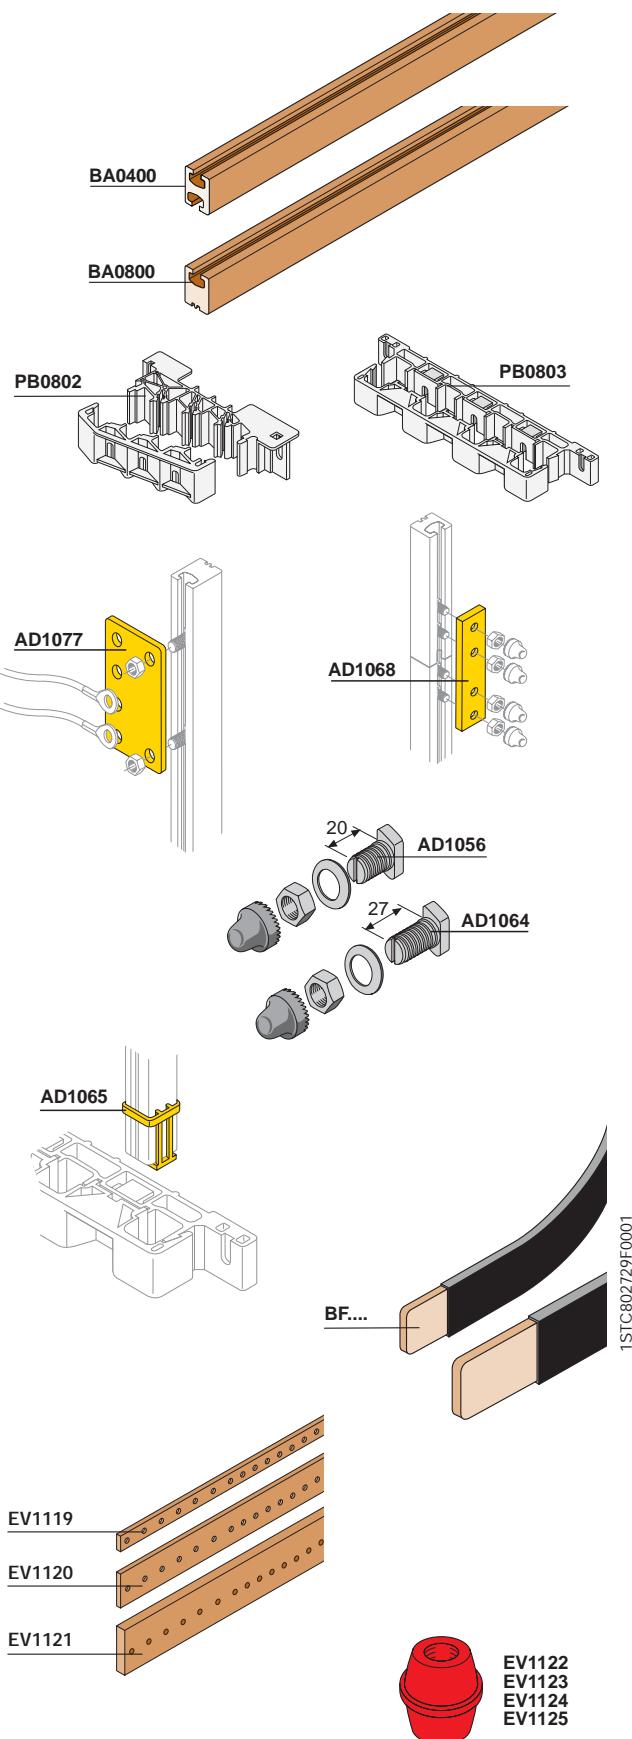

Distribution busbars with shaped section

Code	Description	Dimensions W (mm)
BA0400	Busbar In=400A	1730
BA0800	Busbar In=800A	1730

Busbar holders for busbars with shaped section

Code	Description
------	-------------

Scaled

PB0802 Scaled busbar holder In=800A - 35kA

Linear

PB0803 Linear busbar holder In=800A - 35kA

Joints for busbars with shaped section

Code	Description
AD1077	N°4 copper 400A branch joints
AD1068	N°4 joints for joining busbars with shaped section 400/800A

Hammer seal screws for busbars with shaped section

Code	Description
AD1056	N°12 M8 screws L=20mm for cable terminal
AD1064	N°12 M8 screws L=20mm for flat busbars up to 10mm, complete with screw-covering cap

Resting bases for busbars with shaped section

Code	Description
AD1065	N°4 resting bases for 400/800A busbars

Flexible busbars

Flexible busbars insulated in self-extinguishing material

Code	Description	In (A)	Dimensions W (mm)
BF1602	N°2 flexible busbars, section 20x3	250	2000
BF2502	N°2 flexible busbars, section 20x5	400	2000
BF4002	N°2 flexible busbars, section 24x6	500	2000
BF4012 ⁽¹⁾	N°2 flexible busbars, section 32x5	630	2000

⁽¹⁾ Only for circuit-breakers with front extended terminals or rear terminals

Earthing busbars

Copper busbars drilled and threaded for rapid connection of the conductors.

Code	Description	Dimensions W (mm)
EV1119	N°2 earthing busbars 20x5 threaded M6	2000
EV1120	N°2 earthing busbars 25x5 threaded M6	2000
EV1121	N°2 earthing busbars 50x5 threaded M6	2000


Insulators and copper busbars for neutral/earthing

Code	Description
EV1122	N°50 hexagonal insulators 30x30mm M6
EV1123	N°50 hexagonal insulators 30x30mm M8
EV1124	N°25 hexagonal insulators 36x50mm M6
EV1125	N°25 hexagonal insulators 36x50mm M8


ArTu M

Distribution system

Pic.1

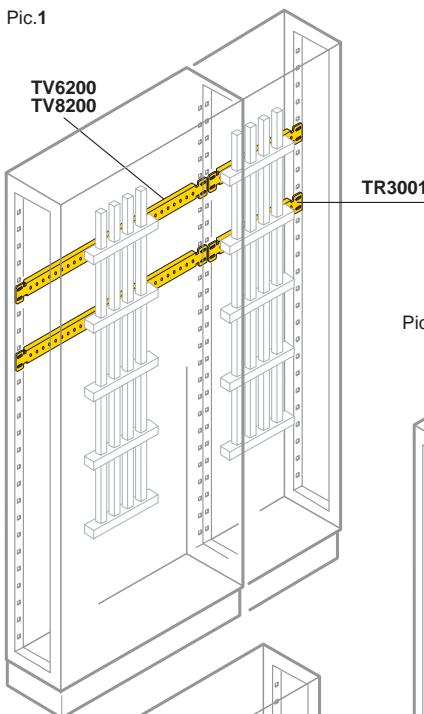


Pic. 3

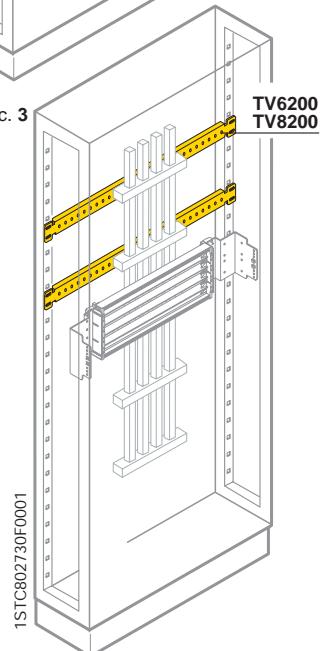

1STC80273DF0001

Pic. 2

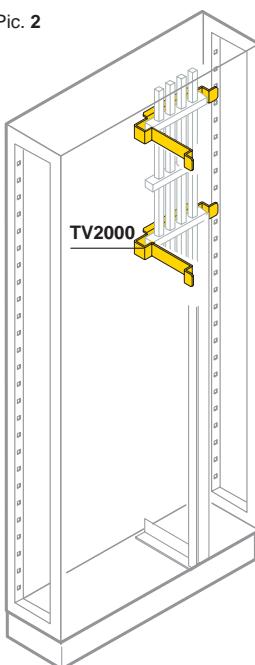

Crosspieces for flat busbars 400/800A

Busbars vertically on back of structure

Code	Mounting Pic.	Description
TV6200	1	N°2 crosspieces structure W=600mm with BP0630
TV8200	1	N°2 crosspieces structure W=800mm with BP0630

Busbars vertically on back of structure of external cable container

Code	Mounting Pic.	Description
TR3001	1	N°2 crosspieces back of cable container W=300mm with PB0802

Busbars vertically in internal cable container


Code	Mounting Pic.	Description
TV2000	2	N°2 internal cable container crosspieces W=200mm with PB0802

Connection to Unifix H system

Code	Mounting Pic.	Description
TV6200	3	N°2 structure crosspieces W=600mm with PB0803
TV8200	3	N°2 structure crosspieces W=800mm with PB0803

ArTu M

Distribution system

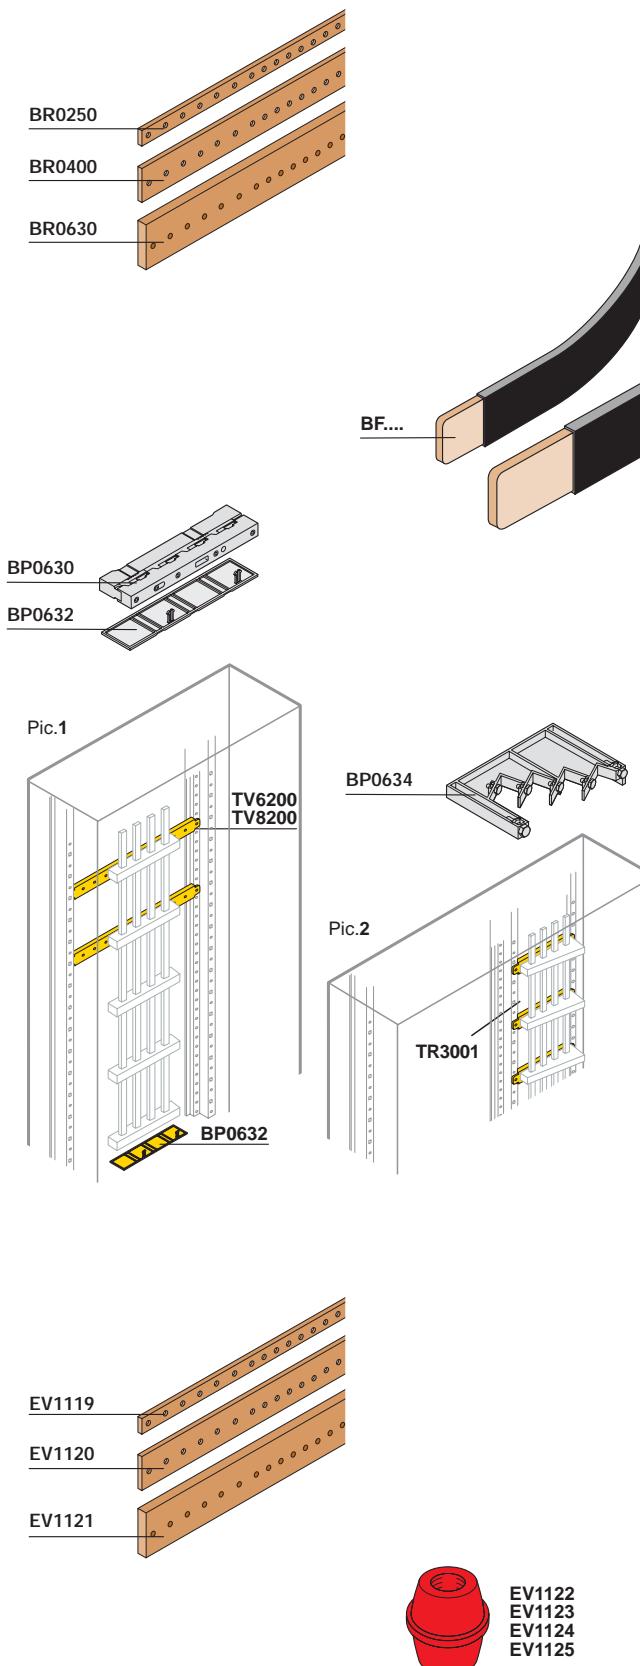

Flat busbar

Copper busbars 1750mm in length drilled. Can be used both with linear BP0630 and scaled BP0634 busbar holders.

Code	Description	In (A)	Dimensions W (mm)
BR0250	N°2 copper busbars 15x5	250	1750
BR0400	N°2 copper busbars 25x5	400	1750
BR0630	N°2 copper busbars 30x10	630	1750

Busbar holders

Busbar holders in insulating self-extinguishing material, certified in conformity with the EN 60439-1 Standard for an $I_{cc} \leq 35kA$

Code	Description
BP0630	N°2 linear busbar holders In=630A - 32kA
BP0632	N°2 terminal covers for linear busbar holders BP0630
BP0634	N°2 scaled busbar holders In=630A - 23kA

Flexible busbars

Flexible busbars insulated in self-extinguishing material

Code	Description	In (A)	Dimensions W (mm)
BF1602	N°2 flexible busbars, section 20x3	250	2000
BF2502	N°2 flexible busbars, section 20x5	400	2000
BF4002	N°2 flexible busbars, section 24x6	500	2000
BF4012 ⁽¹⁾	N°2 flexible busbars, section 32x5	630	2000

⁽¹⁾ Only for circuit-breakers with front extended terminals or rear terminals

Crosspieces for flat busbars

Crosspieces for fixing the busbar holders to the structure with various installation possibilities

Busbar vertically on back of structure or of cable container

Code	Mounting Pic.	Description
TL1000	1	N°2 crosspieces back of structure W=600mm with BP4466
TL1100	1	N°2 crosspieces back of structure W=800mm with BP4466
TL3000	2	N°2 crosspieces back of cable container W=300mm with BP4466 or scaled BP4477

Earthing busbars

Copper busbars drilled and threaded for rapid connection of the conductors.


Code	Description	Dimensions W (mm)
EV1119	N°2 earthing busbars 20x5 threaded M6	2000
EV1120	N°2 earthing busbars 25x5 threaded M6	2000
EV1121	N°2 earthing busbars 50x5 threaded M6	2000

Insulators and copper busbars for neutral/earthing

Code	Description
EV1122	N°50 hexagonal insulators 30x30mm M6
EV1123	N°50 hexagonal insulators 30x30mm M8
EV1124	N°25 hexagonal insulators 36x50mm M6
EV1125	N°25 hexagonal insulators 36x50mm M8

ArTu M

Distribution system

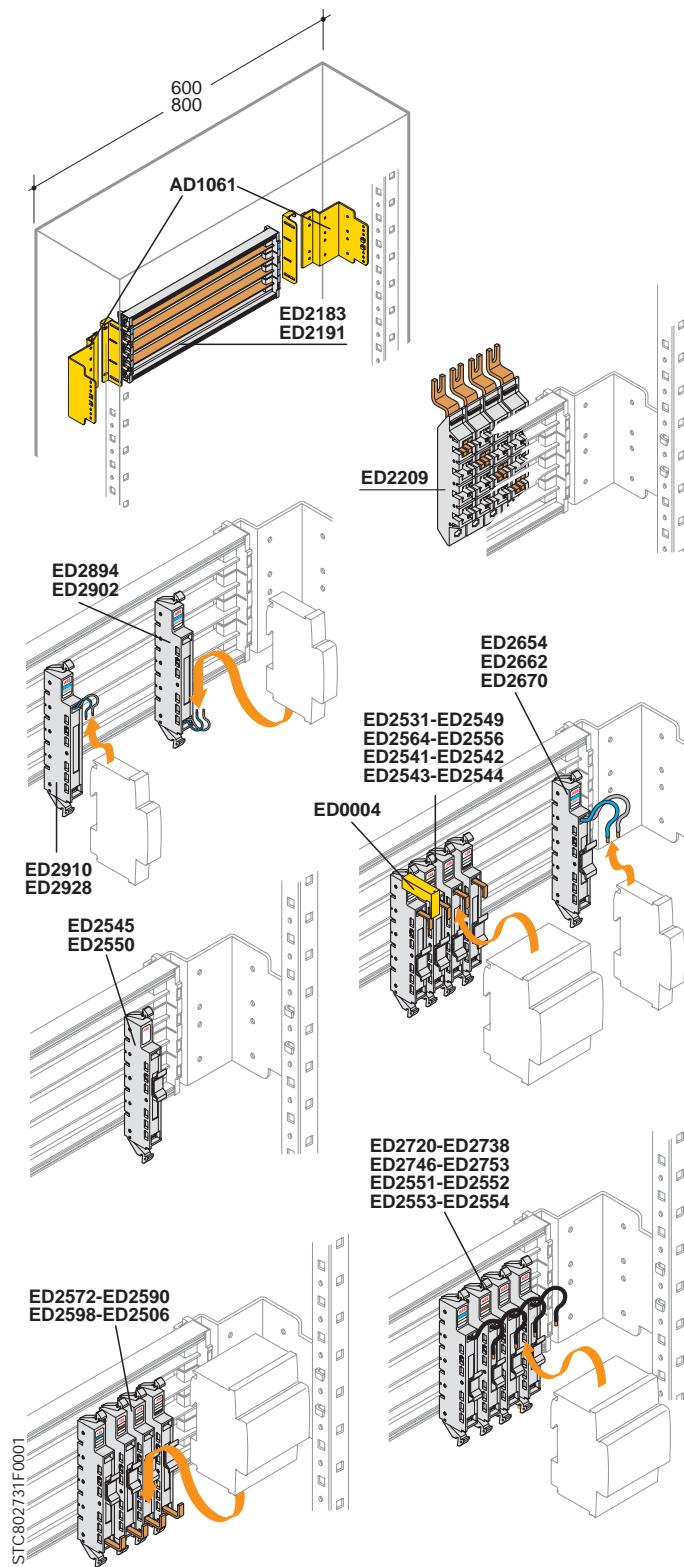

Unifix H

Frames for Tmax

Code	Description	Dimensions W (mm)
ED2183	Frame with 24 DIN module busbar	600
ED2191	Frame with 36 DIN module busbar	800
AD1097	N°2 fixing brackets onto structure for ED2183 o ED2091	

Feeder modules

Code	Description
ED2209	4P 400A feeder module (for ED2183-ED2191)

Basic modules I_n 16A

Code	Description
ED2894	Basic module for DIN L1-N top 16A
ED2902	Basic module for DIN L1-L2 top 16A
ED2910	Basic module for DIN L1-N bottom 16A
ED2928	Basic module for DIN L1-L2 bottom 16A

Basic modules I_n 40A

Code	Description
ED2654	Basic module L1/Neutral top 40A
ED2662	Basic module L2/Neutral top 40A
ED2670	Basic module L3/Neutral top 40A

Basic modules I_n 63A

Code	Description
ED2531	Basic module L1 top 63A
ED2549	Basic module L2 top 63A
ED2556	Basic module L3 top 63A
ED2564	Basic module Neutral top 63A
ED2572	Basic module L1 bottom 63A
ED2590	Basic module L2 bottom 63A
ED2598	Basic module L3 bottom 63A
ED2606	Basic module Neutral bottom 63A

Basic modules I_n 100A

Code	Description
ED2720	Basic module with cable L1 top 100A
ED2738	Basic module with cable L2 top 100A
ED2746	Basic module with cable L3 top 100A
ED2753	Basic module with cable Neutral top 100A

Basic modules $\leq I_n$ 40A S800


Code	Description
ED2557	Basic module L1 top \leq 40A
ED2558	Basic module L2 top \leq 40A
ED2559	Basic module L3 top \leq 40A
ED2560	Basic module Neutral top \leq 40A

Basic modules I_n 125A S800

Code	Description
ED2551	Basic module L1 top 125A
ED2552	Basic module L2 top 125A
ED2553	Basic module L3 top 125A
ED2554	Basic module Neutral bottom 125A
ED2550	Modulo base falso polo L=27mm

ArTu M

Distribution system

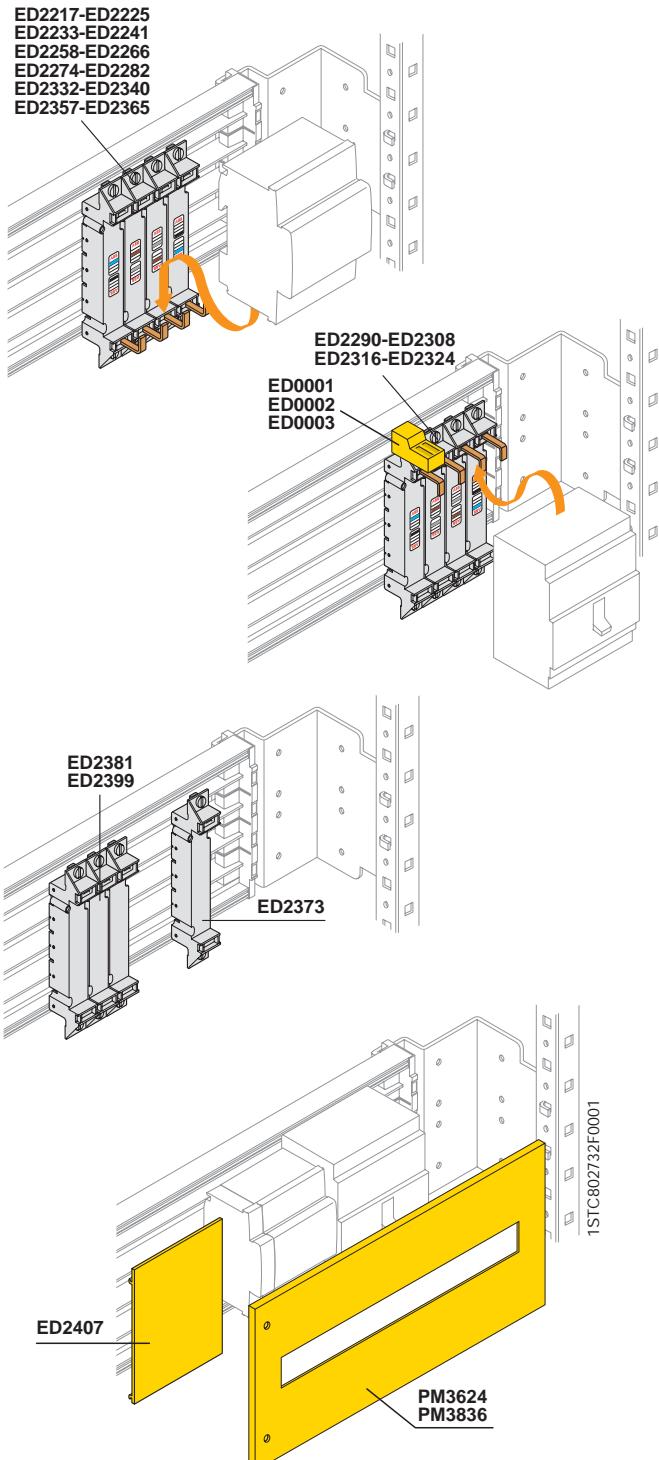

Unifix H

Basic modules I_n 160A Tmax T1

Code	Description
ED2217	Basic module L1 top L2 bottom
ED2225	Basic module L2 top L1 bottom
ED2233	Basic module L3 top Neutral bottom
ED2241	Basic module Neutral top L3 bottom
ED2373	Basic module false pole for residual current release RC221
ED2381	Basic module false pole for solenoid operator

Basic modules I_n 160A Tmax T2

Code	Description
ED2258	Basic module L1 top L2 bottom
ED2266	Basic module L2 top L1 bottom
ED2274	Basic module L3 top N bottom
ED2282	Basic module N top L3 bottom
ED2373	Basic module false pole for residual current release RC221
ED2399	Basic module false pole for solenoid operator

Basic modules I_n 250A Tmax T3

Code	Description
ED2290	Basic module L1 top
ED2308	Basic module L2 top
ED2316	Basic module L3 top
ED2324	Basic module N top
ED2332	Basic module L1 bottom
ED2340	Basic module L2 bottom
ED2357	Basic module L3 bottom
ED2365	Basic module N bottom
ED2373	Basic module false pole for residual current release RC221

Accessories


Code	Description
ED2845	Basic module false pole for DDA
ED2852	Basic module false pole for modular MDRC
ED2407	N°2 IP20 covers (for ED2183-ED2191) W=173mm (10 DIN modules)
ED2936	N°6 duct supports
PM3624	Modular front panel 300x600mm (hwx)
PM3836	Modular front panel 300x800mm (hwx)

Spare parts

Code	Description
ED0001	N°10 terminal covers T1
ED0002	N°10 terminal covers T2
ED0003	N°10 terminal covers T3
ED0004	N°10 terminal covers S200/F200

ArTu M

Distribution system

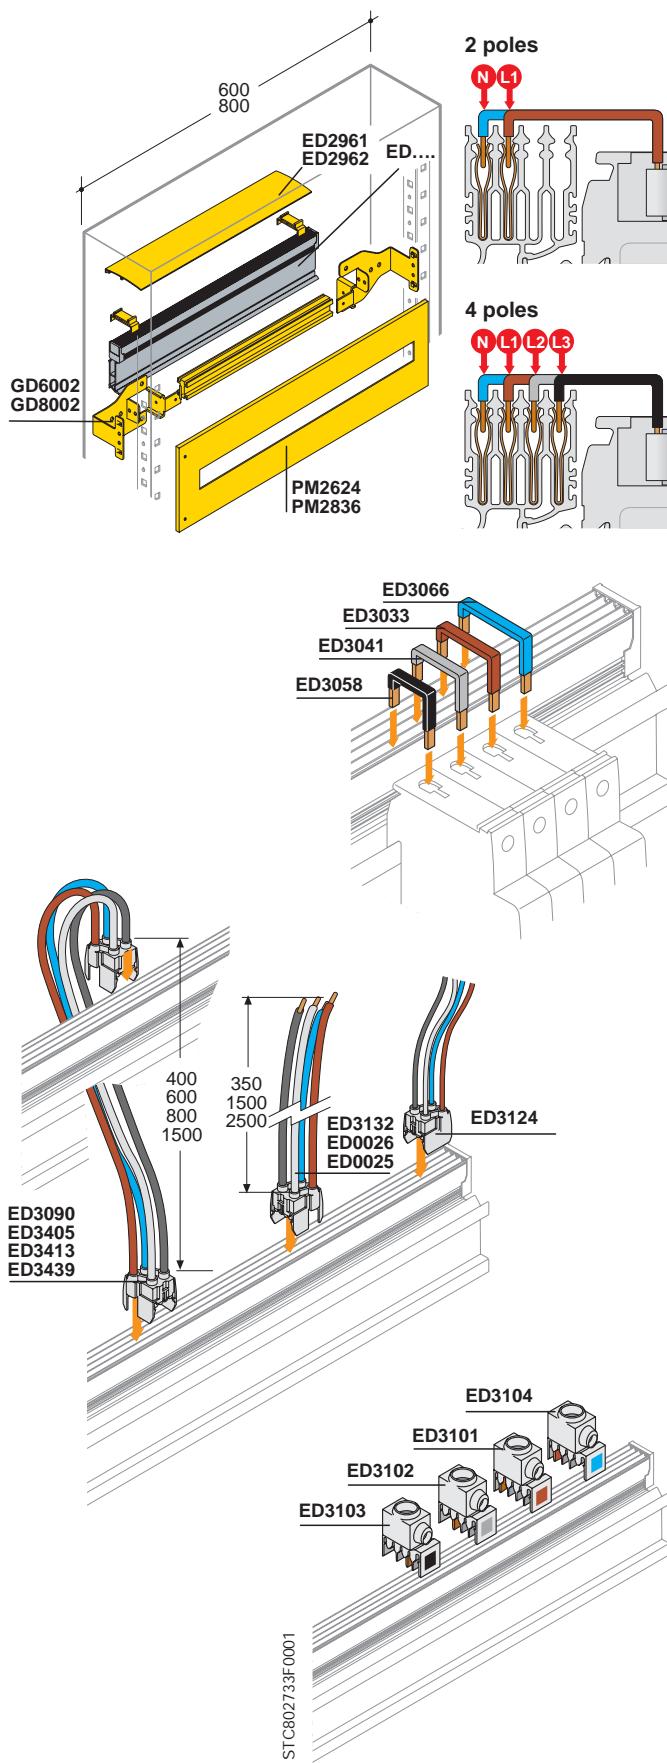

Unifix L

2-poles busbars

Code	Description	Dimensions w (mm)
ED2985	100A 2P 8 module busbar	200
ED2993	100A 2P 12 module busbar	400
ED3009	100A 2P 18 module busbar	450
ED3017	100A 2P 24 module busbar	600
ED3025	100A 2P 36 module busbar	800

4-poles busbars

Code	Description	Dimensions w (mm)
ED2944	100A 4P 12 module busbar	400
ED2951	100A 4P 18 module busbar	450
ED2969	100A 4P 24 module busbar	600
ED2977	100A 4P 36 module busbar	800

Connections for various apparatus

Code Description

ED3108	Connection with 2 conductors L/N 16A
ED3116	Connection with 3 conductors L1/L2/L3 16A
ED3124	Connection with 4 conductors L1/L2/L3/N 16A single phase
ED3355	Connection with 2 conductors L1/N 40A
ED3363	Connection with 3 conductors L1/L2/L3 40A
ED3371	Connection with 4 conductors L1/L2/L3/N 40A

Connections for apparatus

Code Description

ED3272	N°10 connections L1-N 40 A
ED3280	N°10 connections L2-N 40 A
ED3298	N°10 connections L3-N 40 A
ED3033	N°10 connections L 1 100A
ED3041	N°10 connections L 2 100A
ED3058	N°10 connections L 3 100A
ED3066	N°10 connections N 100A
ED3132	Feeder with 4P 100A cable (W=350mm)
ED0026	Feeder with 4P 100A cable (W=1500mm)
ED0025	Feeder with 4P 100A cable (W=1500mm)

Power supply modules with cable

Code Description

ED3082	Parallel module 2P 100A with cable
ED3405	Parallel module 4P 100A with cable
ED3090	Parallel module 4P 100A with cable
ED3413	Parallel module 4P 100A with cable
ED3439	Parallel module 4P 100A with cable

Power supply modules without cable In 100A

Code Description

ED3101	N°10 single-pole power supply terminals L1
ED3102	N°10 single-pole power supply terminals L2
ED3103	N°10 single-pole power supply terminals L3
ED3104	N°10 single-pole power supply terminals N


Accessories

Code Description

Code	Description	Dimensions W (mm)
ED2961	N°10 busbar covers	600
ED2962	N°2 busbar covers	800
GD1520	DIN rail Kit and supports	600
GD1530	DIN rail Kit and supports	800
PM2624	Modular front panel 200x600mm (hxw)	
PM2836	Modular front panel 200x800mm (hxw)	

ArTu M

Accessories

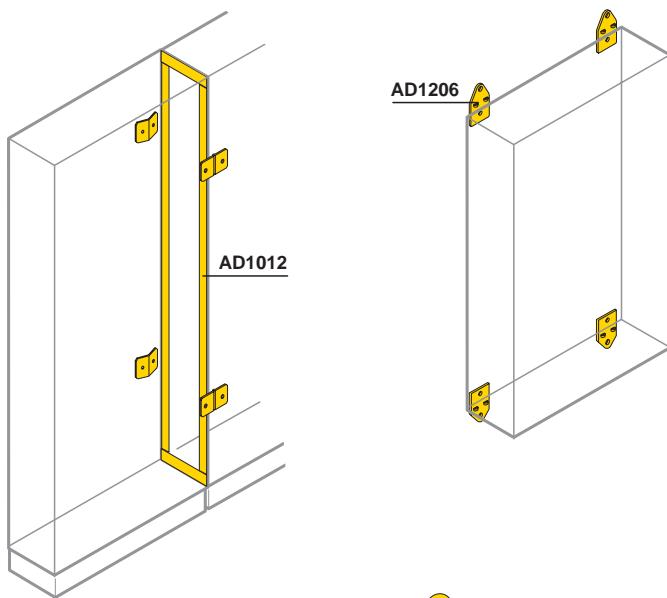

Kits for placing structures side by side

The ArTu M switchgear can be placed side by side laterally. The IP65 side-by-side kit consists of a set of supports and a gasket for keeping the degree of protection. In the IP31 version, in addition to kit AD1012, order the double finishing section (see table on page 9/25).

Code	Description
AD1012	Kit for laterally placing structures side by side H=1400-1600-1800-2000mm

Brackets for wall fixing

These allow ArTu M switchgear to be fixed to the wall.

Code	Description
AA1206	N° 4 wall fixing brackets

Lifting eyebolts



These allow cabled switchgear to be lifted. They are made of steel treated with white passivated galvanisation.

Code	Description
AA9600	N° 2 steel M12 lifting eyebolts

Lifting reinforcements

Allow several pieces of ArTu M switchgear to be handled side by side.

Code	Description
SA1350	N°2 lifting reinforcements for side-by-side structures

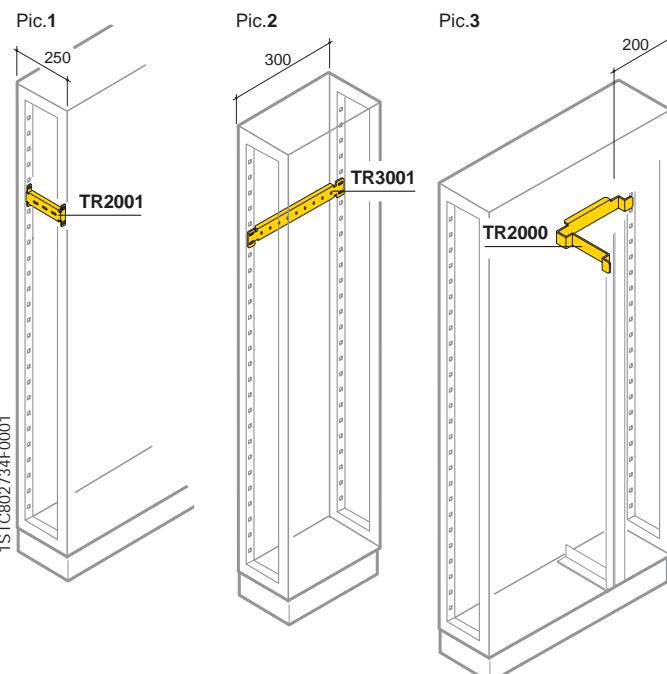


Crosspieces for accessories

Can be mounted on the structure to anchor the cables or to mount accessories. The crosspieces for accessories can be mounted on the side, on the rear or in the cable container of the structure.

Code	Mounting Pic.	Description
TR2001	1	N° 2 Structure lateral crosspieces D=250mm
TR3001	2	N° 2 External cable container rear crosspieces W=300mm
TV2000	3	N° 2 Internal cable container crosspieces W=200mm

ArTu M

Accessories

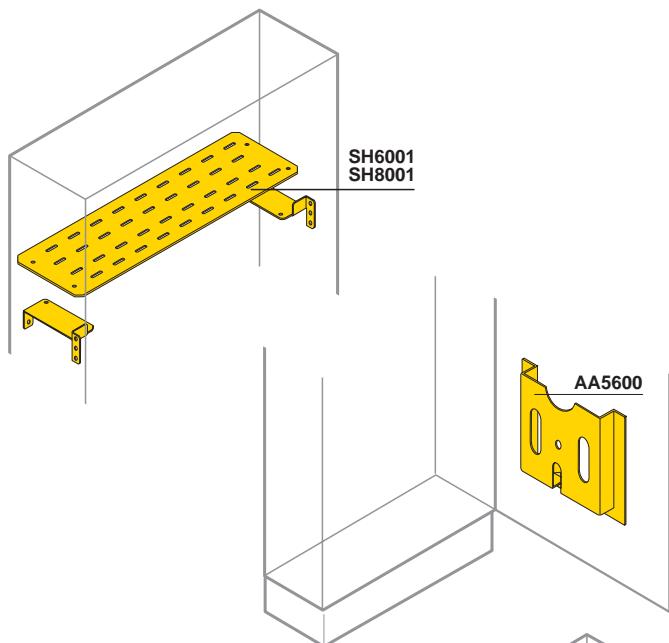

Horizontal shelf


Non-supporting horizontal shelf which allows separations to be made inside floor-mounted ArTu M switchgear.
In structure with W=800 with internal cable container, use SH6001.

Code	Description	Dimensions P (mm)
24 DIN mod W=600mm	36 DIN mod W=800mm	
SH6001	SH8001 Horizontal shelf for structure	195

Diagram pocket

The diagram pocket (made of plastic RAL 2004 colour, dim. HxW 237x265mm type A4) is applied inside the blind doors/panels of suitable dimensions, using the adhesive provided.

Code	Description
AA5600	Plastic diagram pocket

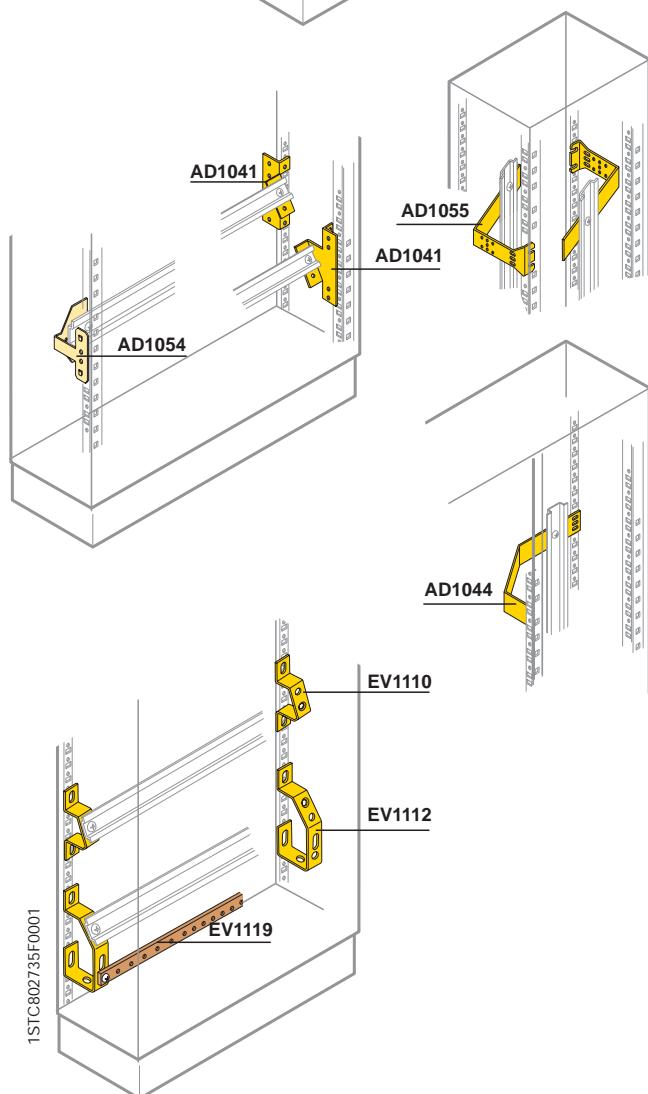

Supports for terminal boxes

Structure

Code	Description
AD1041	N° 2 supports for horizontal 45° angled terminal box
AD1054	N° 2 supports for horizontal terminal box

Internal cable container

Code	Description
AD1044	N°4 supports for vertical terminal box

Additional cable container


Code	Description
AD1055	N° 4 supports for vertical terminal box in internal/additional cable container

Angled supports for terminal boxes and earthing busbars

Code	Description
EV1110	N°50 angled supports 1 row of terminals
EV2110	N°10 angled supports 1 row of terminals
EV1112	N°50 angled supports 1 row of terminals + earth
EV2112	N°10 angled supports 1 row of terminals + earth


ArTu M

Accessories

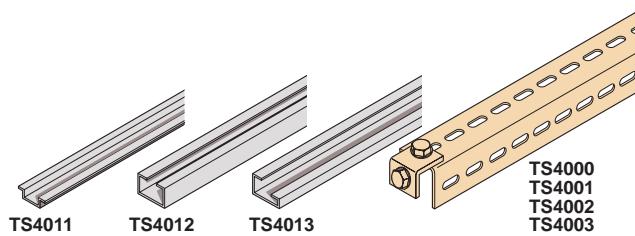

Sections for accessories

Code	Description	Dimensions W (mm)
TS4011	N°2 sections EN50024 C30	2000
TS4012	N°2 sections EN50035 G32	2000
TS4013	N°2 DIN sections EN50022	2000

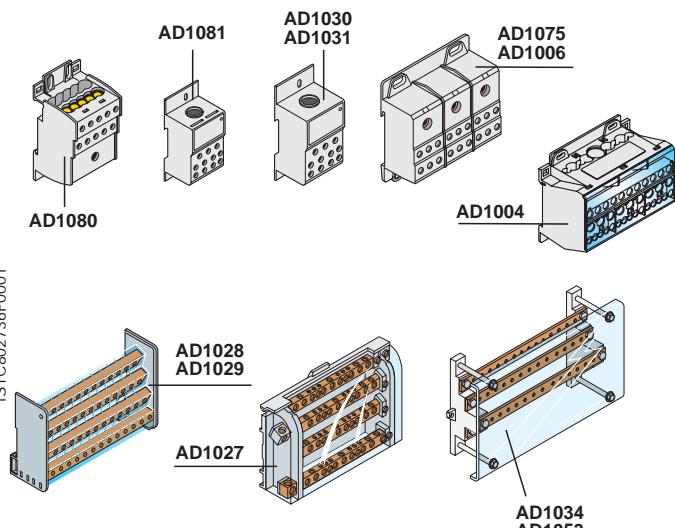


Dividers

Code	Description		
Single-pole	Three-pole	Four-pole	
AD1076 ⁽¹⁾	AD1075	AD1004	Modular 125A
AD1080 ⁽²⁾	AD1028	AD1029	Modular 125A-medium-89x93x48 (LxWxH)
AD1007 ⁽¹⁾	AD1006	AD1027	Modular 160A
AD1030			Modular 250A
AD1034			Horizontal 250A for structures W=600mm
AD1053			Horizontal 250A for structures W=800mm
AD1031			Modular 400A
(1) 10 outputs			
(2) 6 outputs			
Code	Description		
AD1038	Supports for fixing to the structure for AD1034 and AD1053		
AD1083	Connection accessory between two AD1080		


ArTu M

Accessories

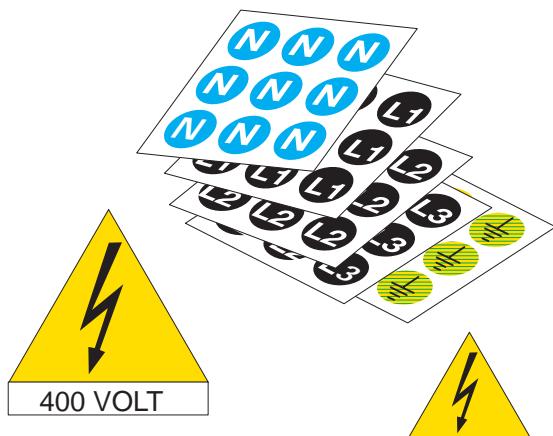

Marking

Code	Description
EV1150	N°490 adhesive labels ø12mm symbol N
EV1151	N°490 adhesive labels ø12mm symbol L1
EV1152	N°490 adhesive labels ø12mm symbol L2
EV1153	N°490 adhesive labels ø12mm symbol L3
EV1154	N°490 adhesive labels ø12mm symbol T
EV1155	N°10 triangular adhesive labels 125mm with 400V lightning arrow symbol
EV1156	N°100 triangular adhesive labels 50mm with lightning arrow symbol

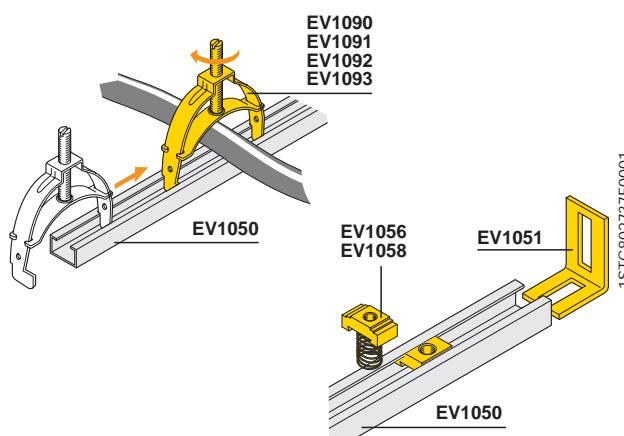

Brackets for anchoring cables

Adjustable cable blocking bracket can be mounted on sections with 10mm slot EV1050.

Code	Description
EV1090	N°10 cable blocking brackets min= max ø 9÷16mm
EV1091	N°10 cable blocking brackets min= max ø 16÷30mm
EV1092	N°5 cable blocking brackets min= max ø 30÷48mm
EV1093	N°5 cable blocking brackets min= max ø 48÷72mm


Aluminium sliding guides for universal uses

Code	Description
EV1050	N°10 aluminium supporting sections 30x15 – W=2000mm
EV1051	N°25 fixing brackets for EV1050
EV1056	N°100 aluminium M6 nuts for EV1050
EV1058	N°100 aluminium M8 nuts for EV1050

ArTu M

Accessories

1STC802738F0001

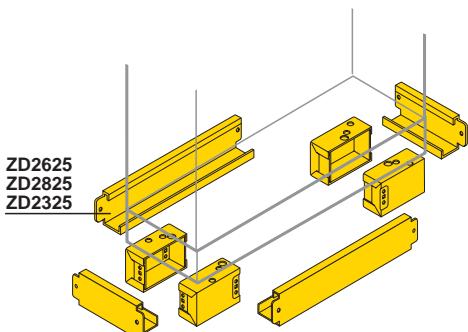

Accessories


Code	Description
AA6200	ArTu M/K floor-mounted Yale type insert
EV1036	ArTu M/K wall-mounted Yale type insert
AA8005	Ronis type Box (E739) for wall-mounted ArTu M
AA8004	Ronis type Box (E739) for floor-mounted ArTu M and ArTu K
AA6120	Triangular iron insert
AA6140	Square insert
AA6160	FIAT type insert
AA6180	Hexagonal insert
AD1036	N°20 cage nuts
VB7035	RAL 7035 colour spray paint for touching up (400 ml spray can)

Spare parts

Code	Description
AD1090	N°10 hinges + screws for panels (spare part ACP468)
AD1091	N°10 plug + door key kits (spare part APT002)
CA1401	Chimes for door H=1400mm (spare part)
CA1600	Chimes for door H=1600mm (spare part)
CA1800	Chimes for door H=1800mm (spare part)
CA2000	Chimes for door H=2000mm (spare part)
EV1008	Box for closing doors with double-tab insert
AD1058	Zn+Al+Mg alloy key with double tab
AA6100	Double tab insert
AD1033	N°50 three-lobed M6 spare screws
VB7035	RAL 7035 colour spray paint for touching up (400 ml spray can)
AD1057	"ArTu Survival Kit" - Accessories and small items for spare parts
PV4060	Glass door for switchgear for operating theatres
PO6069	Blind door for switchgear for operating theatres
AD1022	ArTu handle complete with lock and cover
AD1070	N°10 Artu handle covers
AZ4000	N°4 base strip angle pieces H=100mm
ZD2625	Base strip consisting of 4 angle pieces and 4 flanges
ZD2825	Base strip consisting of 4 angle pieces and 4 flanges
ZD2325	Base strip consisting of 4 angle pieces and 4 flanges

To construct a base strip 200mm high, order a H=100mm kit, which includes four additional angle pieces and four additional flanges.



ArTu K (without segregation/segregated) Structure

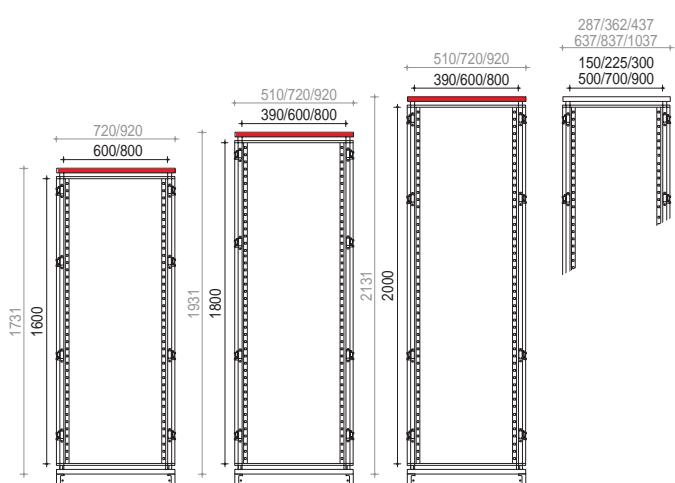

Base-Top-Base strip

Preassembled structure complete with cable input flange, base strip angle pieces and front flanges – the lateral ones must be ordered separately.

Code	Description	Useful dimensions D (mm)
12 DIN mod	24 DIN mod	36 DIN mod
W=390mm	W=600mm	W=800mm
SK6025	SK8025	Base-Top-Base strip
SK4040	SK6040	Base-Top-Base strip
SK4050	SK6050	Base-Top-Base strip
SK4060	SK6060	Base-Top-Base strip
SK4080	SK6080	Base-Top-Base strip
SK4010	SK6010	Base-Top-Base strip

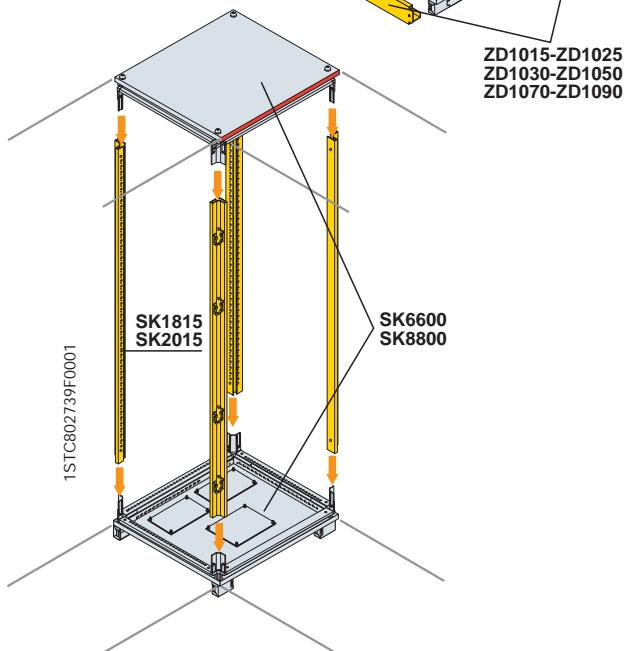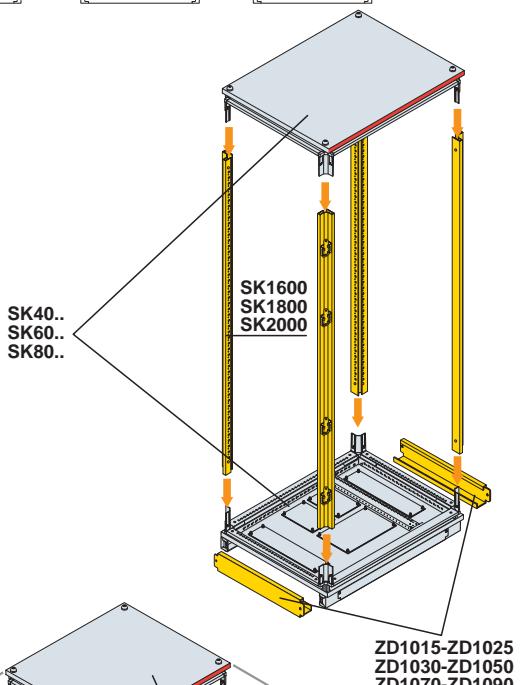

Uprights

Code	Description	Useful dimensions H (mm)
SK1600	N° 4 uprights	1600
SK1800	N° 4 uprights	1800
SK2000	N° 4 uprights	2000

Base strip lateral flanges

Code	Description	Useful dimensions H (mm)
ZD1015	N°2 base strip lateral flanges	150
ZD1025	N°2 base strip lateral flanges	225
ZD1030	N°2 base strip lateral flanges	300
ZD1050	N°2 base strip lateral flanges	500
ZD1070	N°2 base strip lateral flanges	700
ZD1090	N°2 base strip lateral flanges	900


Base-Top-Base strip for corner switchgear

Code	Description	Useful dimensions WxD (mm)
SK6600	Corner base-Top-Base strip	500x500
SK8800	Corner base-Top-Base strip	700x700

Uprights for corner switchgear

Code	Description	Useful dimensions H (mm)
SK1815	N° 4 corner uprights	1800
SK2015	N° 4 corner uprights	2000

ArTu K (without segregation/segregated) Structure

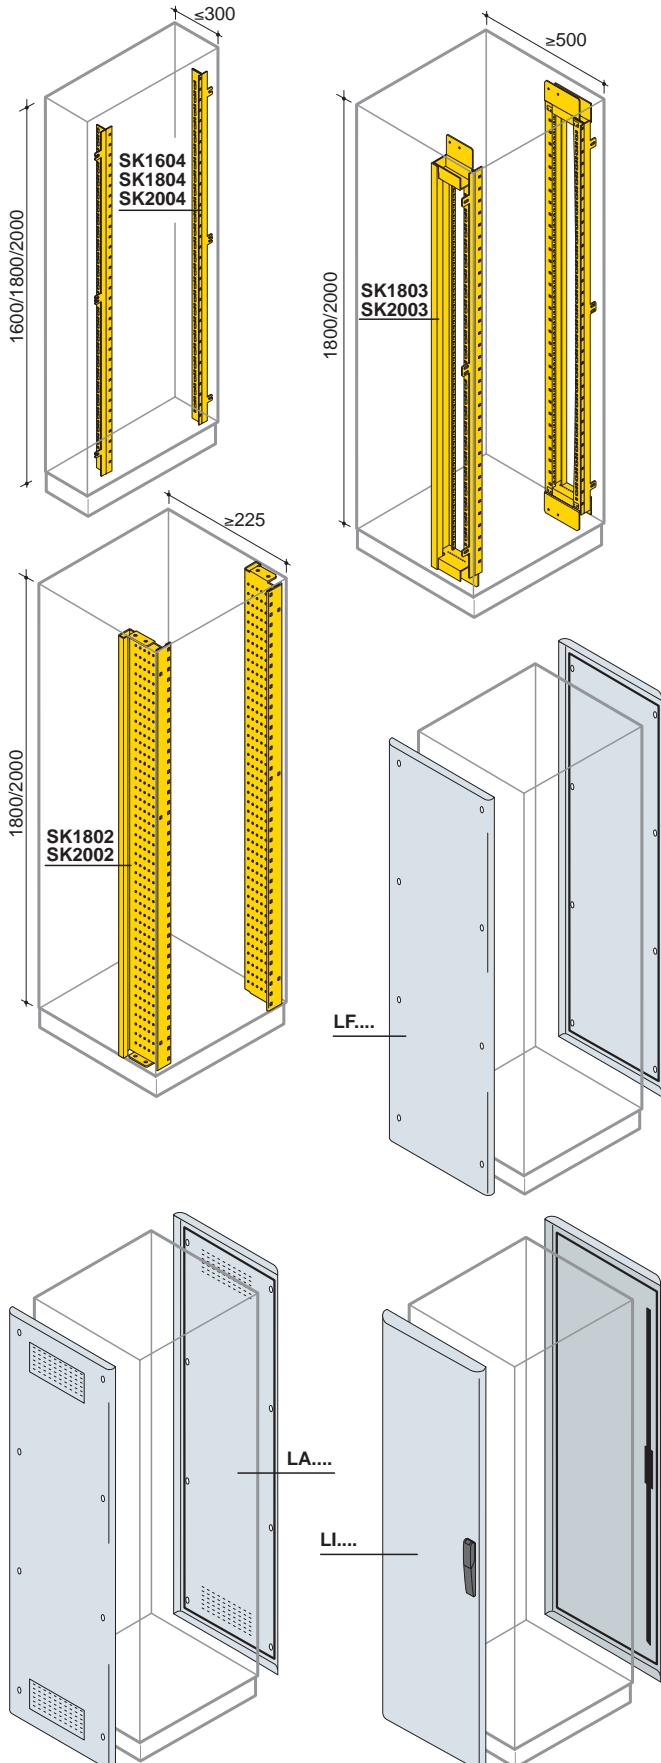

Functional frames for switchgear without segregation (open frame)

Allow the circuit-breaker door kit to be mounted in the combinations shown in the table

Code	Description	Dimensions H (mm)
Reduced frame	Standard frame D≤300mm	D≥225mm
SK1604	N°2 functional frames	1600
SK1804	N°2 functional frames	1800
SK2004	N°2 functional frames	2000

To make structures with internal cable container (switchgear W=800mm) the functional frame is already included in the internal cable container kit (see page 8/38)

		Switchgear depth [mm]					
Type of frame	Horiz busbars	150	225	300	500	700	900
Moulded-case circuit-breakers	Reduced	no	≤T6	≤T6			
		yes			≤T6	≤T6	≤T6
	Standard	no		≤T6	≤T7		
		yes			≤T7	≤T7	≤T7
		yes			≤T7	≤T7	≤T7
Air circuit-breakers	Fixed	no		X1			
	Withdrawable				X1	X1	X1
	With accessori.					≤E3	≤E4
		Maximum circuit-breaker installable					

Functional frames for segregated switchgear (closed frame)

Code	Description	Dimensions H (mm)
Segregated frame D≥500mm		
SK1802	N°2 segregated functional frames	1800
SK2002	N°2 segregated functional frames	2000

To make structures with internal cable container (switchgear W=800mm), the functional frame is already included in the kit for internal cable container (see page 9/38).

IP65 Side panels

Code	Description	Dimensions D (mm)
H=1600mm H=1800mm H=2000mm		
LF1626	LF1826 LF2026 N°2 side panels IP65	150
LF1840	LF2040 N°2 side panels IP65	225
LF1850	LF2050 N°2 side panels IP65	300
LF1860	LF2060 N°2 side panels IP65	500
LF1880	LF2080 N°2 side panels IP65	700
LF1810	LF2010 N°2 side panels IP65	900



IP41 Ventilated side panels

Code	Description	Dimensions D (mm)
H=1800mm H=2000mm		
LA1860	LA2060 N°2 ventilated side panels IP41	500
LA1880	LA2080 N°2 ventilated side panels IP41	700
LA1810	LA2010 N°2 ventilated side panels IP41	900

IP65 Blind side doors

Code	Description	Dimensions D (mm)
H=1800mm H=2000mm		
LI1840	LI2040 N°2 side doors IP65	225
LI1860	LI2060 N°2 side doors IP65	500
LI1880	LI2080 N°2 side doors IP65	700

ArTu K (without segregation/segregated) Structure

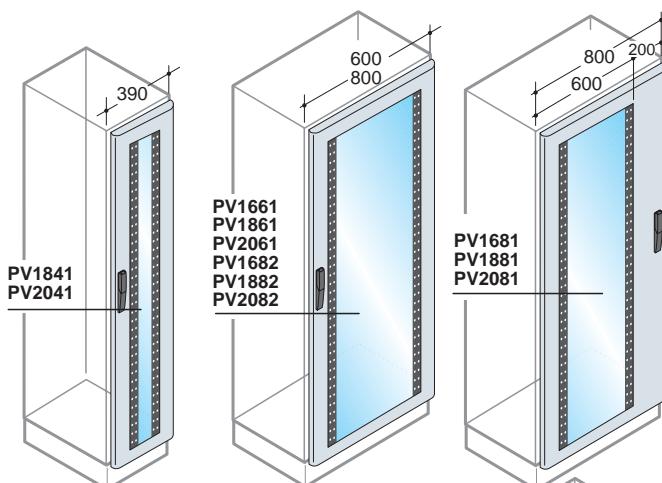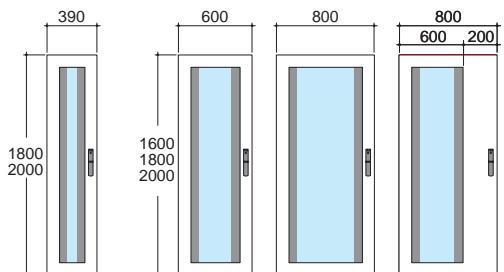

IP65 Front or rear glass doors

Glass doors 12/24/36 mod.



Door made of 15/10 thick steel sheet with 4 mm thick safety glass fitted with polyurethane gasket complete with handle with key with double tab. Reversible, can be hinged on the right or left.

Code	Description			Dimensions H (mm)
	24 DIN mod + internal	24 DIN mod	36 DIN mod	cable cont. (1)
12 DIN mod W=390mm	PV1661	PV1682	PV1681	Glass door IP65 1600
24 DIN mod W=600mm	PV1861	PV1882	PV1881	Glass door IP65 1800
36 DIN mod W=800mm	PV2061	PV2082	PV2081	Glass door IP65 2000

(1) Only to be ordered for structures W=800mm consisting of 24 mod. + internal cable container.

IP65 Front extending glass doors

Code	Description		Dimensions H (mm)
	24 DIN mod W=600mm	36 DIN mod W=800mm	
PV1863	PV1883	External extending glass door IP65	1800
PV2063	PV2083	External extending glass door IP65	2000

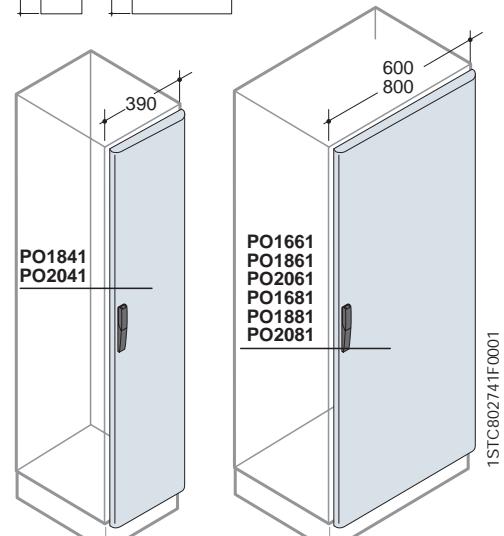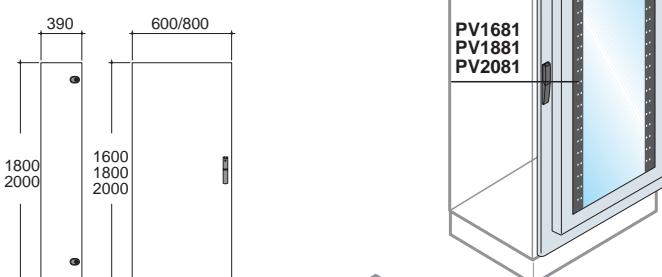


IP65 Front or rear glass doors

Door made of 15/10 thick steel sheet with 4 mm thick safety glass fitted with polyurethane gasket complete with handle with key with double tab. Reversible, can be hinged on the right or left.

Code	Description			Dimensions H (mm)
	12 DIN mod W=390mm	24 DIN mod W=600mm	36 DIN mod W=800mm	
PO1661	PO1681	Blind door IP65		1600
PO1841	PO1861	Blind door IP65		1800
PO2041	PO2061	Blind door IP65		2000

ArTu K (without segregation/segregated) Structure

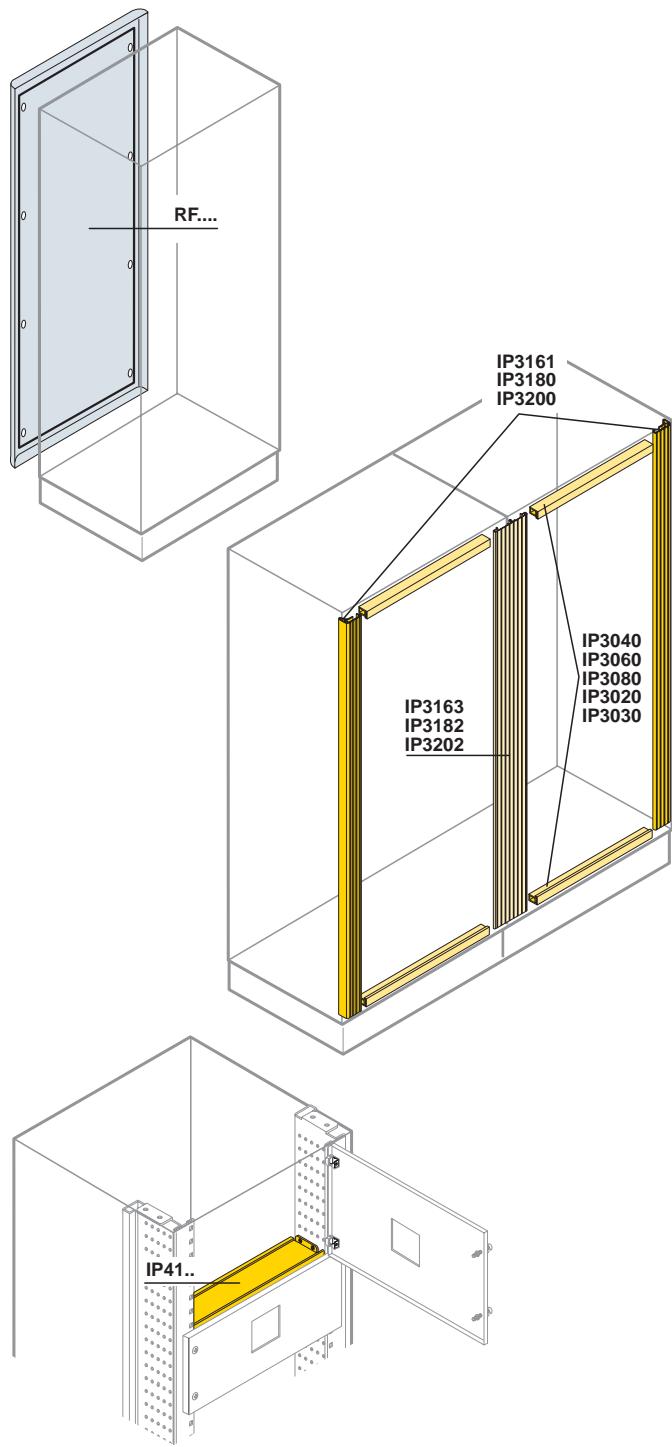

IP65 Rear panels

Code	Description			Dimensions H (mm)
12 DIN mod	24 DIN mod	36 DIN mod		
W=390mm	W=600mm	W=800mm		
RF1660	RF1680	RF1680	Rear panel IP65	1600
RF1840	RF1860	RF1880	Rear panel IP65	1800
RF2040	RF2060	RF2080	Rear panel IP65	2000

IP 31 Finishing section

For IP31 version switchgear (without door), use the special finishing kits already sized for the standard heights and widths of ArTu switchgear. In the case of switchgear placed side by side, use the special double IP31 kit on the joining uprights.

Horizontal section

Code	Description			
12 DIN mod	24 DIN mod	36 DIN mod	Addit. cable cont.	
W=390mm	W=600mm	W=800mm	W=300mm	
IP3040	IP3060	IP3080	IP3030	N°2 IP31 horizontal finishing sections

Vertical section

Code	Description	Dimensions H (mm)
IP3161	N°2 IP31 horizontal finishing sections	1600
IP3180	N°2 IP31 horizontal finishing sections	1800
IP3200	N°2 IP31 horizontal finishing sections	2000
IP3163	Double vertical finishing profile IP31 for side-by-side switchgear	1600
IP3182	Double vertical finishing profile IP31 for side-by-side switchgear	1800
IP3202	Double vertical finishing profile IP31 for side-by-side switchgear	2000

IP41 Kits


Not segregated structures

Code	Description		
12 DIN mod	24 DIN mod	36 DIN mod	
W=390mm	W=600mm	W=800mm	
IP4140	IP4160	IP4180	N°4 IP41 horizontal kits for segregated structures

Segregated structures

Code	Description		
12 DIN mod	24 DIN mod	36 DIN mod	
W=390mm	W=600mm	W=800mm	
IP4141	IP4161	IP4181	N°4 IP41 horizontal kits for segregated structures

ArTu K (without segregation/segregated) Structure

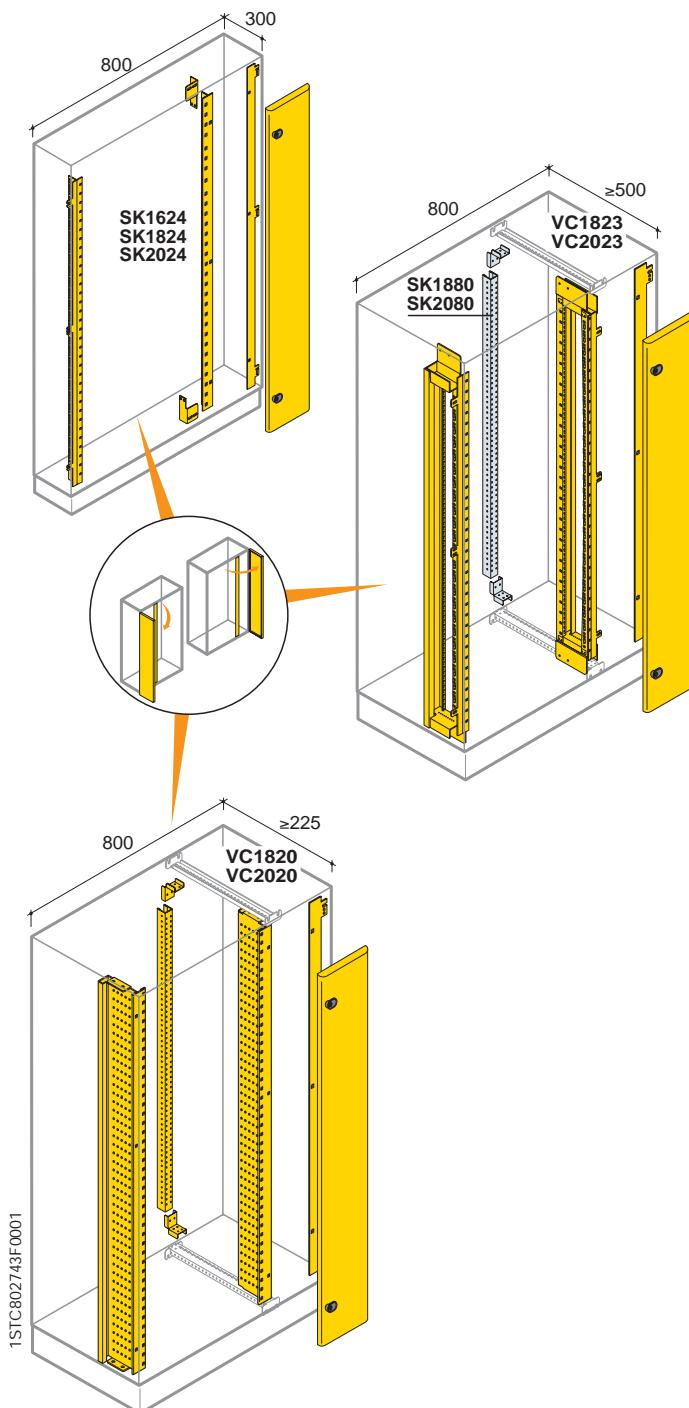

Internal cable container for switchgear without segregation (open frame)

Only to be ordered for the 36 DIN mod. structures (W=800mm). Consisting of a pair of functional uprights and a blind door complete with two key locks. Can be mounted either on the right or left.

Code	Description	Dimensions HxW(mm)
Reduced frame D≤300mm	Standard frame D≥225mm	
VC1624	Internal cable container	1600x200
VC1824	Internal cable container	1800x200
VC2024	Internal cable container	2000x200

Only to be ordered for the W=800mm structures.

Kit consisting of 2 functional frames without segregations and a blind door. The SK1880 (H=1800mm) and SK2080 (H=2000mm) rear upright in the structures without segregations must be ordered separately if required for fixing onto the back of crosspieces, accessories, busbars, etc.

Internal cable container for segregated switchgear (closed frame)


Only to be ordered for the W=800mm structures.

Kit consisting of 2 functional segregated frames, a blind door and a rear upright for fixing onto the back of crosspieces, accessories, busbars, etc.

Montabile indifferentemente a destra o a sinistra.

Code	Description	Dimensions HxW (mm)
VC1820	Internal cable container for segregated switchgear D≥500mm	1800x200
VC2020	Internal cable container for segregated switchgear D≥500mm	2000x200

ArTu K (without segregation/segregated) Structure

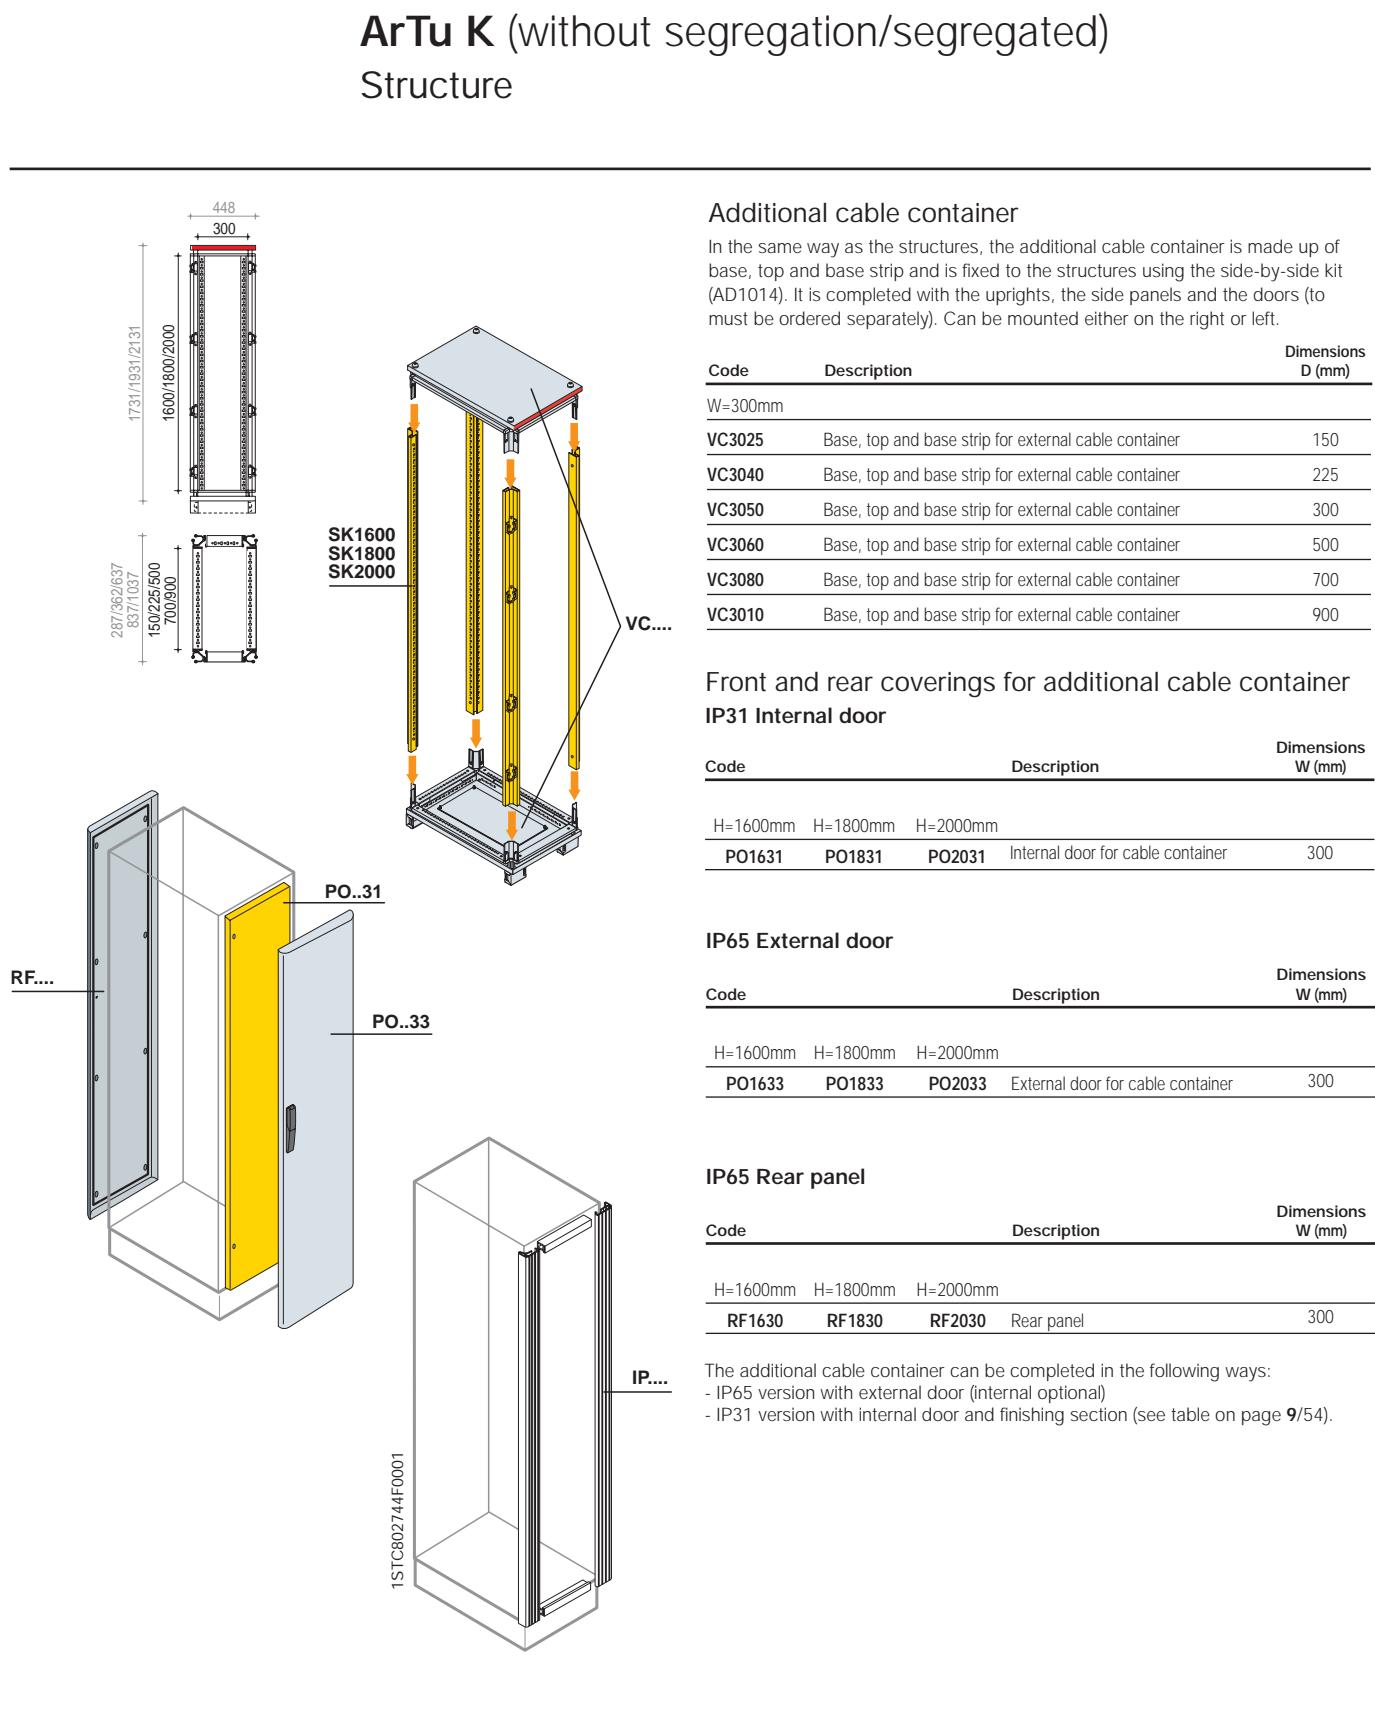

Additional cable container

In the same way as the structures, the additional cable container is made up of base, top and base strip and is fixed to the structures using the side-by-side kit (AD1014). It is completed with the uprights, the side panels and the doors (to must be ordered separately). Can be mounted either on the right or left.

Code	Description	Dimensions D (mm)
W=300mm		
VC3025	Base, top and base strip for external cable container	150
VC3040	Base, top and base strip for external cable container	225
VC3050	Base, top and base strip for external cable container	300
VC3060	Base, top and base strip for external cable container	500
VC3080	Base, top and base strip for external cable container	700
VC3010	Base, top and base strip for external cable container	900

Front and rear coverings for additional cable container IP31 Internal door

Code	Description	Dimensions W (mm)		
H=1600mm H=1800mm H=2000mm				
PO1631	PO1831	PO2031	Internal door for cable container	300

IP65 External door

Code	Description	Dimensions W (mm)		
H=1600mm H=1800mm H=2000mm				
PO1633	PO1833	PO2033	External door for cable container	300


IP65 Rear panel

Code	Description	Dimensions W (mm)		
H=1600mm H=1800mm H=2000mm				
RF1630	RF1830	RF2030	Rear panel	300

The additional cable container can be completed in the following ways:

- IP65 version with external door (internal optional)
- IP31 version with internal door and finishing section (see table on page 9/54).

ArTu K (without segregation/segregated) Kits for apparatus

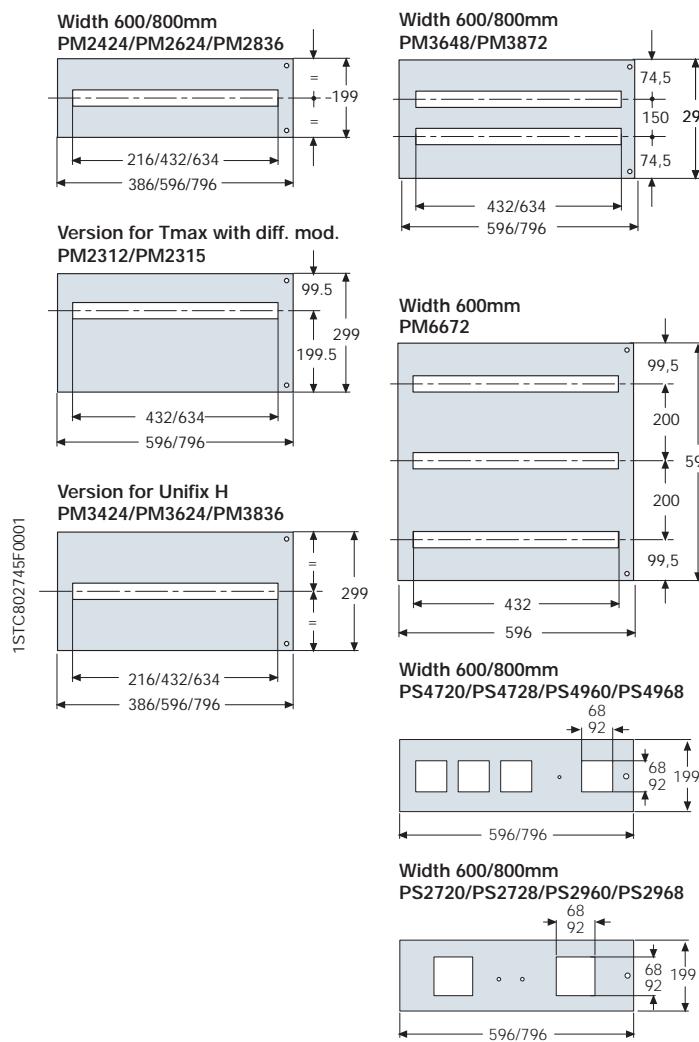


Panels for square measuring instruments

Code	Description	Dimensions HxW (mm)
24 DIN mod	36 DIN mod	
W=600mm	W=800mm	
PS2720	PS2728	Panel for 2 instruments 72x72mm 200x600
PS2960	PS2968	Panel for 2 instruments 96x96mm 200x600
PS4720	PS4728	Panel for 4 instruments 72x72mm 200x600
PS4960	PS4968	Panel for 4 instruments 96x96mm 200x600

Modular panel

Code	Description	Dimensions H (mm)
12 DIN mod	24 DIN mod	36 DIN mod
W=390mm	W=600mm	W=800mm
PM2424	PM1500	PM1536 Modular panel 1 DIN row 150
PM2624	PM2836	Modular panel 1 DIN row 200
PM2312	PM2315	Modular panel 1 DIN row - Tmax RC 300
PM3624	PM3836	Modular panel 1 DIN row only for Unifix H 300
PM3424	PM3648	PM3872 Modular panel 2 DIN rows 300
PM6672		Modular panel 3 DIN rows 600

1STC802720F0001

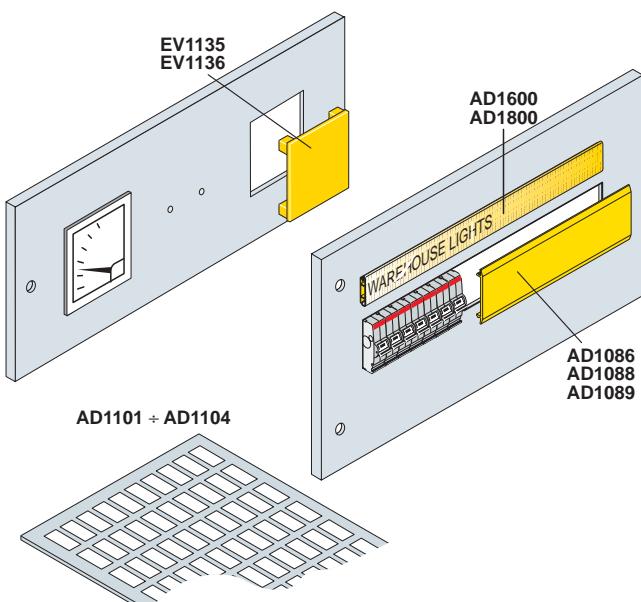


Accessories for panels

Code	Description
AD1086	N°10 holes covers W=2000mm grey RAL 7035 colour
AD1088	N°3 holes covers 36 Din modules grey RAL 7035 colour
AD1089	N°3 holes covers 36 Din modules grey RAL 7035 colour
EV1135	N°10 closing caps for instrument panel 72x72mm
EV1136	N°5 closing caps for instrument panel 96x96mm
AD1600	N°20 label-holders 24 DIN mod.
AD1800	N°20 label-holders 36 DIN mod.
AD1101 ⁽¹⁾	N°288 labels 1 mod. 15x17mm (HxW)
AD1102 ⁽¹⁾	N°192 labels 2 mod. 15x27mm (HxW)
AD1103 ⁽¹⁾	N°96 labels 3 mod. 15x50mm (HxW)
AD1104 ⁽¹⁾	N°96 labels 4 mod. 15x67mm (HxW)

⁽¹⁾ Labels can be written with Grafoplast compatible plotter system.

ArTu K (without segregation/segregated) Kits for apparatus

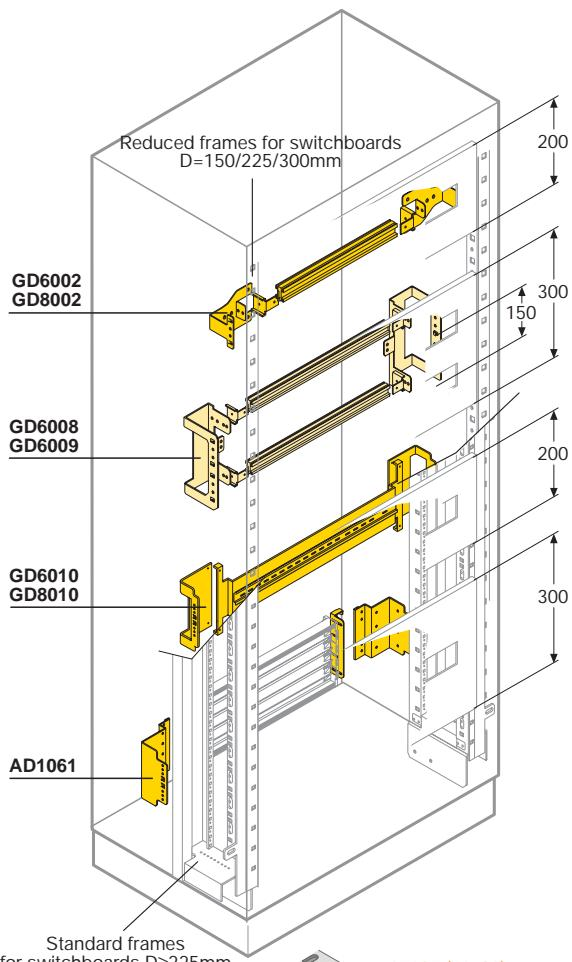

DIN rail kits for System Pro-M modular, Tmax T1-T2-T3, moulded-case circuit-breakers for Unifix H

Code	Description		
	12 DIN mod	24 DIN mod	36 DIN mod
GD4002	W=390mm	W=600mm	W=800mm
GD6002	GD6002	GD8002	DIN rail kit (aluminium)
GD6011	GD6008	GD6009	DIN rail kit interaxis 150mm (2 DIN rows)
	GC6002 ⁽¹⁾	GC8002 ⁽¹⁾	DIN rail kit with accessories
GD6010	GD6010	GD8010	DIN rail kit reinforced for Tmax RC

Supports for Unifix H


Code	Description	Dimensions W (mm)
AD1061	Fixing supports for Unifix H series for panel H=300mm	600/800

Depth adapter


Code	Description	Dimensions W (mm)
AP6001	N°1 depth adapter for Tmax T1-T2-T3	600

Supports for duct

Code	Description
AD1009	N°4 plastic supports for horizontal duct
AD1037	N°4 metal supports for horizontal duct

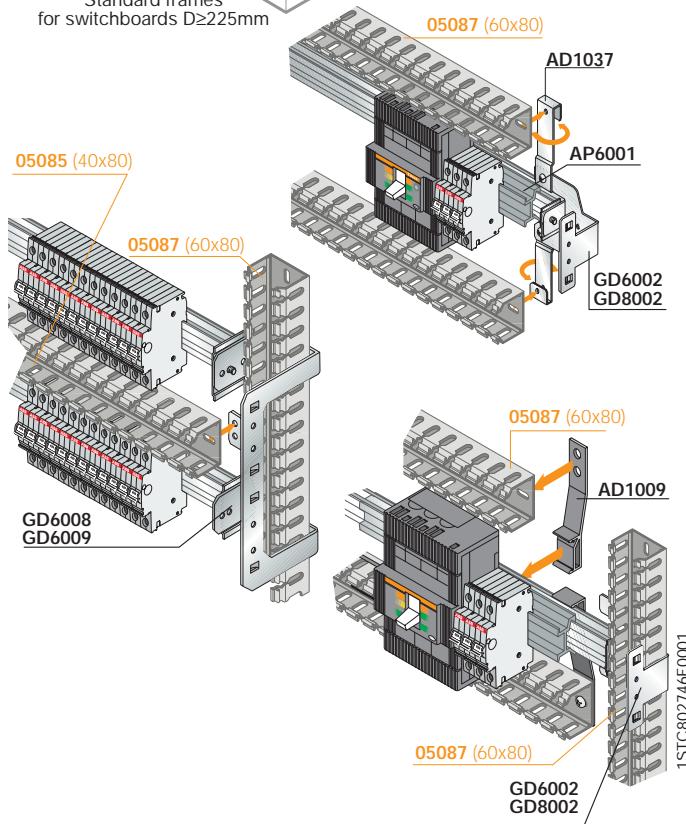

ArTu K (without segregation/segregated) Kits for apparatus

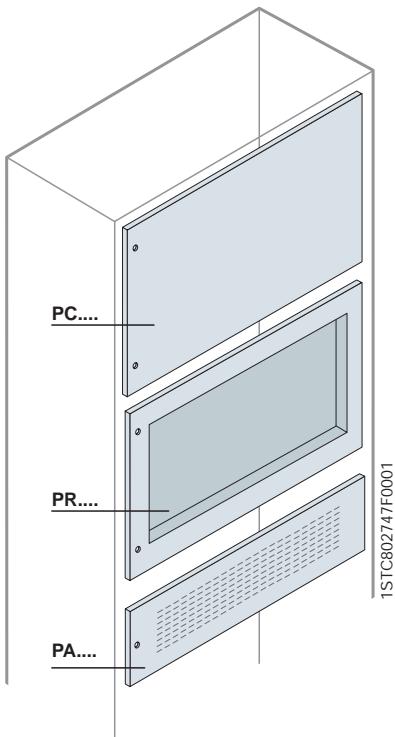


Blind, recessed and ventilated panels for general apparatus

Code	Description			Dimensions H (mm)
12 DIN mod	PC1400	PC1600	PC1800	Blind panel
W=390mm				100
24 DIN mod	PC2400	PC2600	PC2800	Blind panel
W=600mm				200
36 DIN mod	PC3400	PC3600	PC3800	Blind panel
W=800mm				300
	PC4400	PC4600	PC4800	Blind panel
	PC6400	PC6600	PC6800	Blind panel
	PC8600	PC8800		400
	PC1660	PC1680		600
	PC1840	PC1860	PC1880	Blind panel
	PC2040	PC2060	PC2080	Blind panel
				800
				1600
				1800
				2000
	PR2600	PR2800		Blind recessed panel
	PR4600	PR4800		400
	PR6600	PR6800		600
	PA1600			Ventilated panel
	PA2600			100
				200

ArTu K (without segregation)

Kit for switchgear with reduced frame D=150-225-300mm

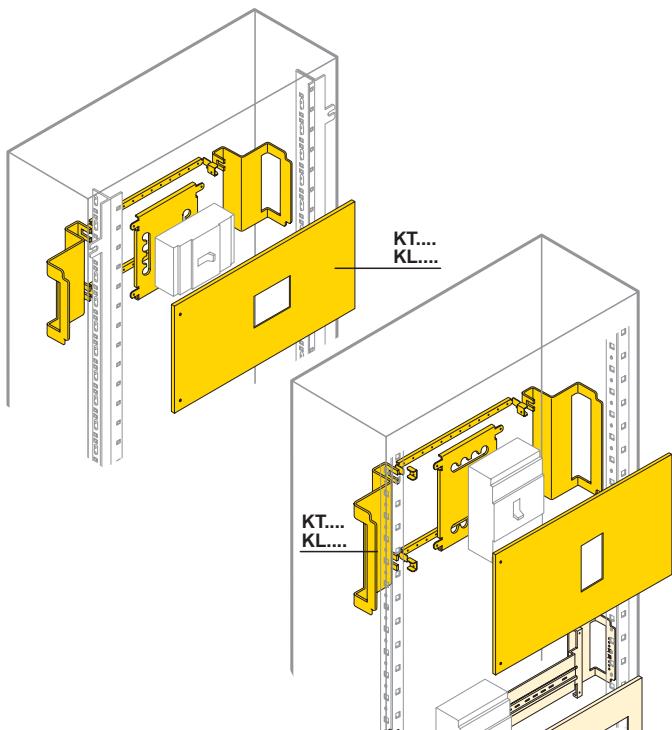

(1) see page 9/26

Kits for installing Tmax circuit-breakers front terminals
Horizontal installation (front terminals)

Code	Description	Dimensions H (mm)
24 DIN mod 36 DIN mod W=600mm W=800mm		
KT1117	Kit for T1 3-4 poles fixed	200
KT1102	Kit for T1 4 poles fixed + RC mod.	200
KT2117	Kit for T2 3-4 poles fixed	200
KT2102	KL2103 Kit for T2 4 poles fixed + RC mod.	200
KT3112	KL3113 Kit for T3 3-4 poles fixed	200
KT3102	KL3103 Kit for T3 4 poles fixed + RC mod.	300
KT4112	KL4115 Kit for T4 3-4 poles fixed	200
KT4110	KL4116 Kit for T4 4 poles fixed + RC mod.	200
KT5112	KL5114 Kit for T5 3-4 poles fixed	300
KT5110	KL5116 Kit for T5 4 poles fixed + RC mod.	300
KT6113	KL6113 Kit for T6 3-4 poles fixed	500

Vertical installation (front terminal)


Code	Description	Dimensions H (mm)
24 DIN mod 36 DIN mod W=600mm W=800mm		
GD... ⁽¹⁾	GD... ⁽¹⁾ Kit on DIN rail for T1-T2-T3 3-4 poles fixed/RC	200÷600
KT3212	Kit for T3 3-4 poles fixed	300
KT4212	Kit for T4 3-4 poles fixed	400
KT4102	Kit for T4 4 poles fixed + RC mod.	500
KT5212	KL5212 Kit for T5 3-4 poles fixed	400
KT5102	KL5102 Kit for T5 4 poles fixed + RC mod.	500
KT6213	KL6213 Kit for T6 3-4 poles fixed	500

For the Isomax kits see page 9/83.

Kit for OT

Code	Description	Dimensions H (mm)
24 DIN mod 36 DIN mod W=600mm W=800mm		
KO1201	Kit for OT200/250/315/400 - vertical installation	300
KO2260	KO2280 Kit for OT200/250/315/400 - horizontal installation	300
KO2261	KO2281 Kit for OT200/250/315/400 - vertical installation	300

Blind back plates for general apparatus

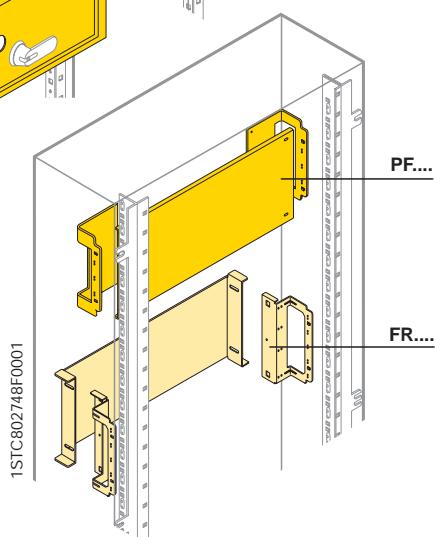


Code	Description	Dimensions H (mm)
24 DIN mod 36 DIN mod W=600mm W=800mm		
PF2610	PF2810 Blind back plate	200
PF4610	PF4810 Blind back plate	400
FR2601	FR2801 Blind recessed back plate	200
FR4601	FR4801 Blind recessed back plate	400

The panels must be ordered separately

ArTu K (without segregation)

Kit for switchgear with standard frame D≥225mm

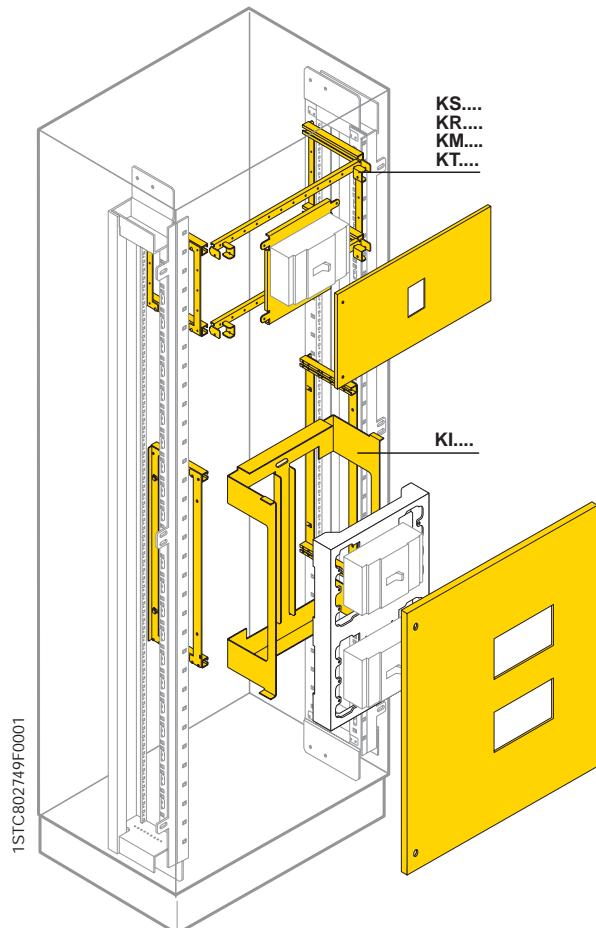

Kits for installing Tmax circuit-breakers
Horizontal installation (front or rear terminals)

Code	Description	Dimensions H (mm)	
12 DIN mod	24 DIN mod	36 DIN mod	
W=390mm	W=600mm	W=800mm	
KT1411(*)		200	
KT1111		Kit for T1 3-4 poles fixed (MO)	
KT1401(*)	KT1101(*)	KL1102(*)	Kit for T1 4 poles fixed + RC mod.
KT1112			200
KT1112			Kit for T1 3-4 poles fixed (DRH)
KT2411			200
KT2111			Kit for T2 3-4 poles fixed
KT2401(*)	KT2101(*)	KL2104(*)	Kit for T2 4 poles fixed + RC mod.
KT2421	KT2121		Kit for T2 3-4 poles plug-in
KT2112			200
KT2112			Kit for T2 3-4 poles fixed (DRH)
KT3419 (*)	KL3114		Kit for T3 4 poles fixed
KT3119			200
KT3131(**)			Kit for T3 3-4 poles fixed (I-IM)
KT3401 (*)	KT3101(*)	KL3104(*)	Kit for T3 4 poles fixed + RC mod.
KT3114			300
KT3421			Kit for T3 3-4 poles fixed (DRH)
KT3121			200
KT3116			Kit for T3 3-4 poles plug-in (MO)
KT4411			200
KT4111			Kit for T4 3-4 poles fixed (DRH)
KT4101			Kit for T4 4 poles fixed + RC mod.
KT4122			200
KT4127			Kit for T4 3-4 poles withdrawable (DRH)
KT4125			300
KI4114(**)			Kit for T4 3-4 poles fixed/plug-in (I-IM)
KI4115(**)			600
KT5411			Kit for T4 3-4 poles withdrawable (I-IM)
KT5111			600
KL5115			Kit for T5 3-4 poles fixed
KT5101	KL5101		Kit for T5 4 poles fixed + RC mod.
KT5120			300
KT5121			Kit for T5 (400A) 3-4 poles plug-in
KT5130			300
KT5131			Kit for T5 (400A) 3-4 poles withdrawable (DRH)
KT5134			300
KT5135			Kit for T5 (630A) 3-4 poles withdrawable (MO)
KI5114(**)			300
KI5115(**)			Kit for T5 3-4 poles fixed/plug-in (I-IM)
KT6111			600
KT6131			Kit for T5 3-4 poles withdrawable (I-IM)
KT6112			500
KT6115			Kit for T6 3-4 poles fixed (DRH)
KT6114			500
KT6116(**)			Kit for T6 3-4 poles fixed (MO)
KT6117(**)			500
KT6118(**)			Kit for T6 3-4 poles withdrawable (I)
KT6119(**)			800
KT7110			Kit for T6 3-4 poles withdrawable (IM)
KT7111	KL7112		800
KT7111	KL7112		Kit for T7 3-4 poles fixed
			400
			Kit for T7M 3-4 poles fixed (MO)
			400


(*) Only front terminals; (**) Only rear terminals.

For the Isomax kits see page 9/83.

(DRH) = Direct rotary handle; (MO) = Motor operator; (I) = Interlocked; (IM) = Interlocked motor operated.

ArTu K (without segregation)

Kit for switchgear with standard frame D≥225mm

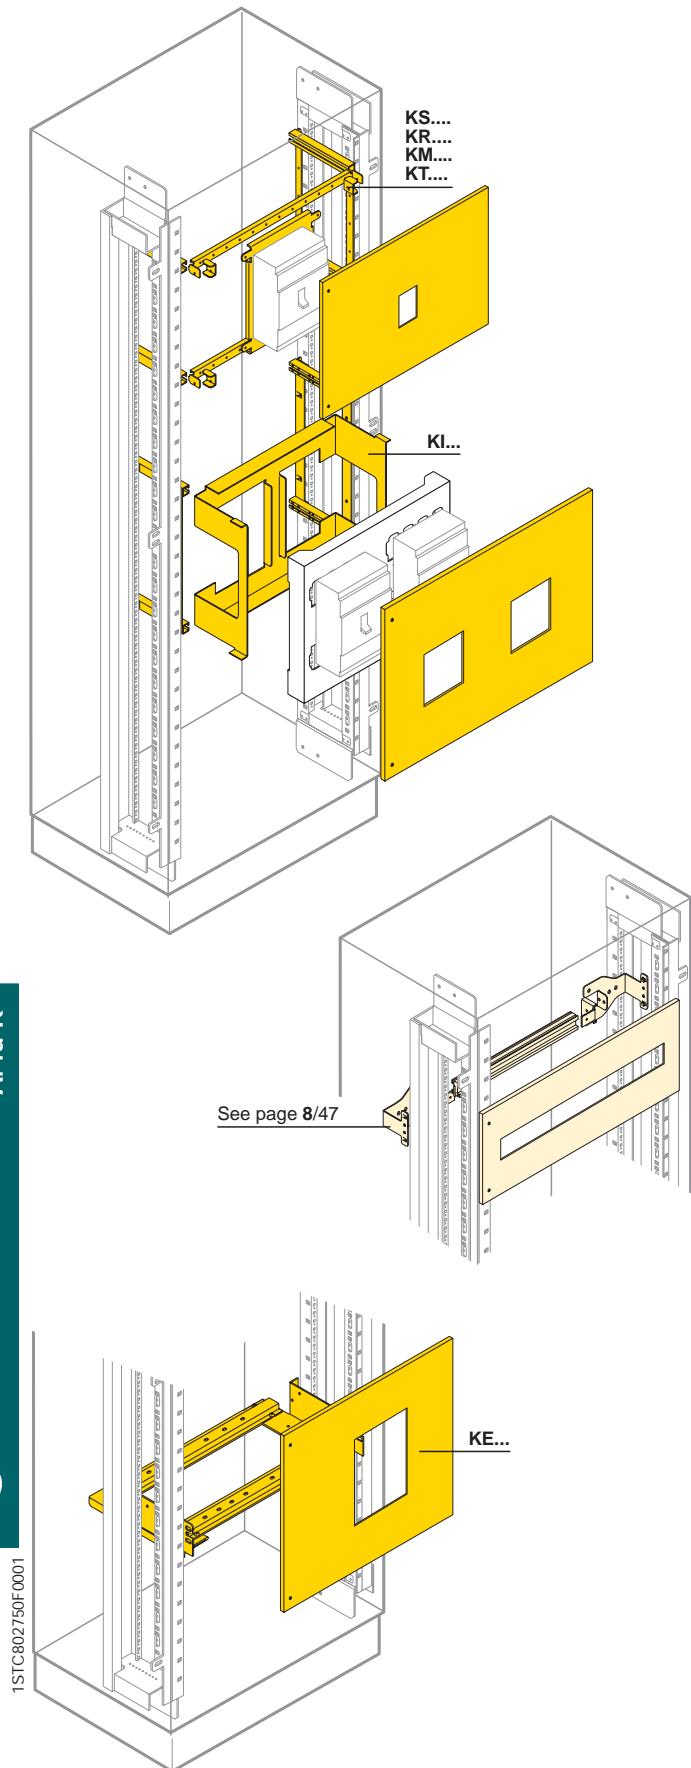

Kits for installing Tmax circuit-breakers
Vertical installation (front or rear terminals)

Code	Description			Dimensions H (mm)
	12 DIN mod	24 DIN mod	36 DIN mod	
W=390mm	W=600mm	W=800mm		
GD....(1)	GD....(1)	GD....(1)	Kit on DIN rail for T1 3-4 poles fixed	200÷600
KT3416	KT3211	KL3212	Kit for T3 3-4 poles fixed	300
KT3426	KT3221		Kit for T3 3-4 poles plug-in	400
KT4412			Kit for T4 3-4 poles fixed	400
	KT4211		Kit for T4 3-4 poles fixed (DRH-MO)	400
	KT4116		Kit for N°3 T4 3-4 poles fixed	400
		KL4118	Kit for N°4 T4 3-4 poles fixed	400
	KT4103		Kit for T4 4 poles fixed + RC mod.	500
	KT4221		Kit for T4 3-4 poles plug-in	400
	KT4231		Kit for T4 3-4 poles plug-in (DRH)	400
	KT4126		Kit for T4 3-4 poles withdrawable (MO)	400
KT5412		KL5213	Kit for T5 3-4 poles fixed	400
	KT5211		Kit for T5 3-4 poles fixed (MRD-CM)	400
KT5103	KL5103		Kit for T5 4 poles fixed + RC mod.	500
KT5214		KL5214	Kit for N°2 T5 3-4 poles fixed	400
		KL5214	Kit for N°3 T5 3-4 poles fixed	400
KT5117		KL5117	Kit for N°2 T5 4 poles fixed + RC mod.	500
		KL5117	Kit for N°3 T5 4 poles fixed + RC mod.	500
KT5222		KT5222	Kit for T5 (400A) 3-4 poles plug-in	400
KT5221		KT5221	Kit for T5 (630A) 3-4 poles plug-in	400
KT5232		KT5232	Kit for T5 (400A) 3-4 poles withdraw. (DRH)	400
KT5138		KT5138	Kit for T5 (400A) 3-4 poles withdraw. (MO)	400
KT5139		KT5139	Kit for T5 (630A) 3-4 poles withdraw. (MO)	500
KT5231		KT5231	Kit for T5 (630A) 3-4 poles withdraw. (DRH)	500
KT5401			Kit for T5 3-4 poles fixed + RC mod.	500
KT6211	KL6214	KT6211	Kit for T6 3-4 poles fixed	500
	KL6124		Kit for N°2 T6 3-4 poles fixed	500
KT6122		KT6122	Kit for T6 3-4 poles fixed (DRH)	500
KT6120		KT6120	Kit for T6 3-4 poles fixed (DRH)	500
KT6121		KT6121	Kit for T6 3-4 poles fixed (MO)	500
KT6123		KT6123	Kit for T6 3-4 poles withdrawable (MO)	500
KT7211	KL7212	KT7211	Kit for T7 3-4 poles fixed	500
		KL7212	Kit for T7M 3/4 poles fixed (CM-I-IM)	500
KT7231	KL7213	KT7231	Kit for T7 3-4 poles withdrawable	500
		KL7213	Kit for T7M 3/4 poles withdr. (CM-I-IM)	500
KS8211		KS8211	Kit for T8 3-4 poles fixed	900

(1) For selection of the installation kits, see the table on page 8/41.

(DRH) = Direct rotary handle; (MO) = Motor operator; (I) = Interlocked;
(IM) = Interlocked motor operated.

For the Isomax kits see page 9/83.

Kits for installing Emax circuit-breakers X1-E1-E2-E3-E4
Vertical installation


Code	Description			Dimensions H (mm)
	24 DIN mod	36 DIN mod		
W=600mm	W=800mm			
KT7211	KL7212		Kit for X1 3/4 poles fixed	500
KT7231	KL7213		Kit for X1 3/4 poles withdrawable	500
KE3215 ⁽¹⁾		KE3215 ⁽¹⁾	Kit for E1-E2-E3 3/4 poles fixed	600
KE3235 ⁽¹⁾		KE3235 ⁽¹⁾	Kit for E1-E2 -E3 3/4 poles withdr.	600
KE4215 ⁽²⁾		KE4215 ⁽²⁾	Kit for E3 3-4 poles fixed	600
KE4235 ⁽²⁾		KE4235 ⁽²⁾	Kit for E3 3-4 poles withdrawable	600
KE5215 ⁽²⁾		KE5215 ⁽²⁾	Kit for E4 3-4 poles fixed	600
KE5235 ⁽²⁾		KE5235 ⁽²⁾	Kit for E4 3-4 poles withdrawable	600

(1) Also for interlocked E1-E2.

(2) Also for interlocked version.

ArTu K (without segregation)

Kit for switchgear with standard frame D≥225mm

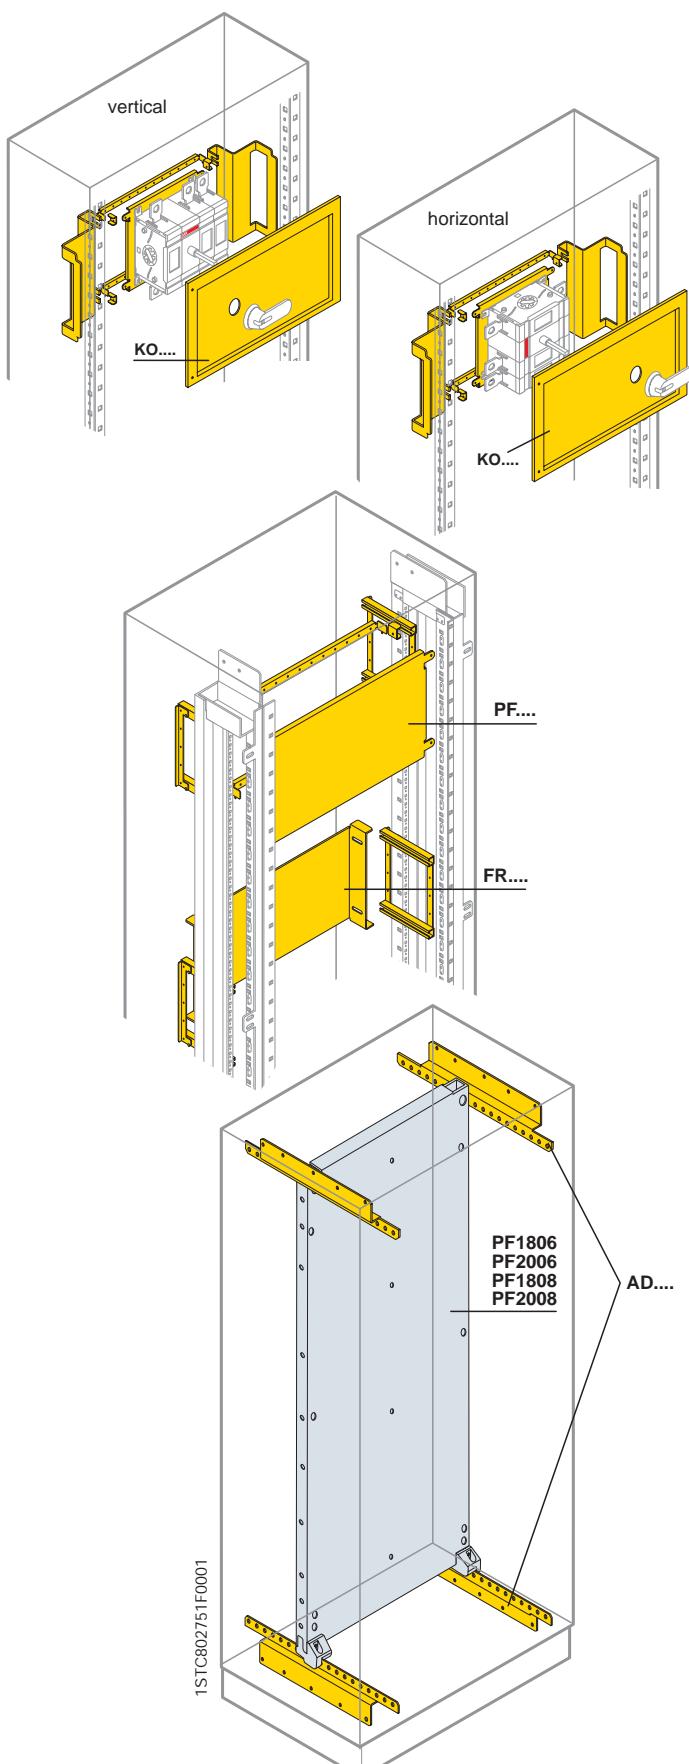

Kit for OT/OETL

Code	Description	Dimensions H (mm)
24 DIN mod W=600mm	36 DIN mod W=800mm	
KO1201	Kit for OT125/160 - vertical	300
KO2260	Kit for OT200/250/315/400 - vertical	300
KO2261	Kit for OT200/250/315/400 - horizontal	300
KO3660	Kit for OT630/800 - vertical	400
KO1251	Kit for OETL1000/1600	600

Blind back plates for general apparatus

Code	Description	Dimensions H (mm)
12 DIN mod W=390mm	24 DIN mod W=600mm	36 DIN mod W=800mm
PF2401	PF2601	PF2801
PF3403	PF3601	PF3801
PF4401	PF4601	PF4801
PF6401	PF6601	PF6801
FR2600	FR2800	Blind recessed back plate
FR4600	FR4800	Blind recessed back plate
FR6600	FR6800	Blind recessed back plate

Back plates


Code	Description	Dimensions H (mm)
24 DIN mod W=600mm	36 DIN mod W=800mm	
PF1806	PF1808	Galvanised sheet back plate
PF2006	PF2008	Galvanised sheet back plate

Tracks for back plate

Code	Description
AD1049	Pair of tracks + crosspieces for structures D=225mm
AD1050	Pair of tracks + crosspieces for structures D=500mm
AD1051	Pair of tracks + crosspieces for structures D=700mm

ArTu K (segregated)

Kit for switchgear with segregated frame D≥225mm

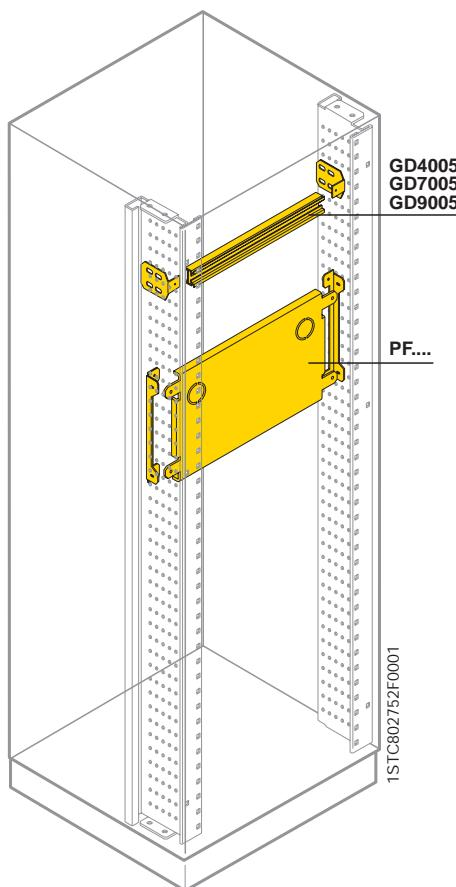

DIN rail kits for System Pro-M modular, Tmax T1-T2-T3, moulded-case circuit-breakers


Code	Description		
	12 DIN mod	24 DIN mod	36 DIN mod
W=390mm	W=600mm	W=800mm	
GD4005	GD7005	GD9005	DIN rail kit (aluminium)

Blind back plates for general apparatus

Code	Description			Dimensions H (mm)
	12 DIN mod	24 DIN mod	36 DIN mod	
W=390mm	W=600mm	W=800mm		
PF2405	PF2005	PF2805	Blind back plate	200
PF3405	PF3005	PF3805	Blind back plate	300
PF4405	PF4005	PF4805	Blind back plate	400
PF6405	PF6005	PF6805	Blind back plate	600
PF8005	PF8805		Blind back plate	800

ArTu K (segregated)

Kit for switchgear with segregated frame D≥500mm

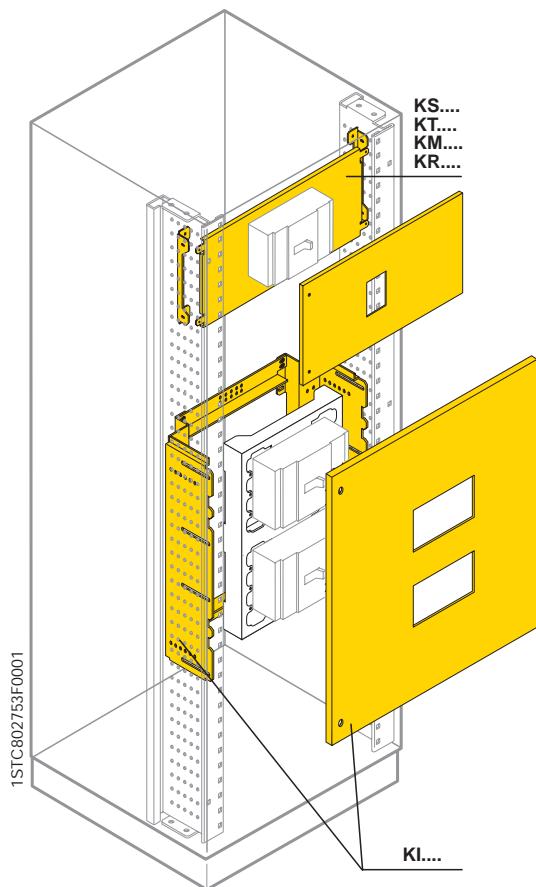

Kits for installing Tmax circuit-breakers
Horizontal installation (rear terminals)

Code	Description	Dimensions H (mm)
12 DIN mod	24 DIN mod	
W=390mm	W=600mm	
KT1410	KT1110 Kit for T1 3-4 poles fixed	200
	KT1100 Kit for T1 3-4 poles fixed + RC mod.	200
KT2410	KT2110 Kit for T2 3-4 poles fixed	200
	KT2210 Kit for T2 3-4 poles fixed (DRH)	200
KT2420	KT2120 Kit for T2 3-4 poles withdrawable	200
KT3410	KT3110 Kit for T3 3-4 poles fixed	200
	KT3115 Kit for T3 3-4 poles fixed (DRH)	200
KT3420	KT3120 Kit for T3 3-4 poles withdrawable	200
	KT3124 Kit for T3 3-4 poles withdrawable (DRH)	200
	KT3132 Kit for T3 3-4 poles fixed (I-M)	600
KT4120	Kit for T4 3-4 poles fixed	200
	KT4124 Kit for T4 3-4 poles fixed (DRH)	200
KT4310	Kit for T4 3-4 poles fixed (MO)	200
KT4113	Kit for T4 3-4 poles withdrawable	200
KI4116	Kit for T4 3-4 poles withdrawable (I-M)	600
KT4130	Kit for T4 3-4 poles withdrawable (DRH)	300
KT4320*	Kit for T4 3-4 poles withdrawable (MO)	300
KI4117	Kit for T4 3-4 poles withdrawable (I)	600
KI4118	Kit for T4 3-4 poles withdrawable (IM)	600
KT5122	Kit for T5 3-4 poles fixed	300
KT5136	Kit for T5 3-4 poles fixed (DRH)	300
KT5310	Kit for T5 3-4 poles fixed (MO)	300
KI5116	Kit for T5 3-4 poles fixed and plug-in (I-M)	600
KT5420	Kit for T5 (400A) 3-4 poles plug-in	300
KT5421	Kit for T5 (630A) 3-4 poles plug-in	300
KT5430	Kit for T5 (400A) 3-4 poles withdrawable (DRH)	300
KT5431	Kit for T5 (630A) 3-4 poles withdrawable (DRH)	300
KT5320*	Kit for T5 (400A) 3-4 poles withdrawable (MO)	300
KT5321*	Kit for T5 (630A) 3-4 poles withdrawable (MO)	300
KI5117	Kit for T5 3-4 poles withdrawable (I)	600
KI5118	Kit for T5 3-4 poles withdrawable (IM)	600
KT6110	Kit for T6 3-4 poles fixed	500
KT6220	Kit for T6 3-4 poles fixed (DRH)	500
KT6221	Kit for T6 3-4 poles fixed (MO)	500
KT6142	Kit for T6 3-4 poles fixed (I)	800
KT6143	Kit for T6 3-4 poles fixed (IM)	800
KT6130	Kit for T6 3-4 poles withdrawable	500
KT6134	Kit for T6 3-4 poles withdrawable (MO)	500
KT6144	Kit for T6 3-4 poles withdrawable (I)	800
KT6145	Kit for T6 3-4 poles withdrawable (IM)	800
KT7115	Kit for T7 3-4 poles fixed	400
	Kit for T7M 3-4 poles fixed (MO)	400



* Only segregation Form 2

For the Isomax kits see page 9/83.

(DRH) = Direct rotary handle; (MO) = Motor operator; (I) = Interlocked;
(IM)= Interlocked motor operated.

ArTu K (segregated)

Kit for switchgear with segregated frame D≥500mm

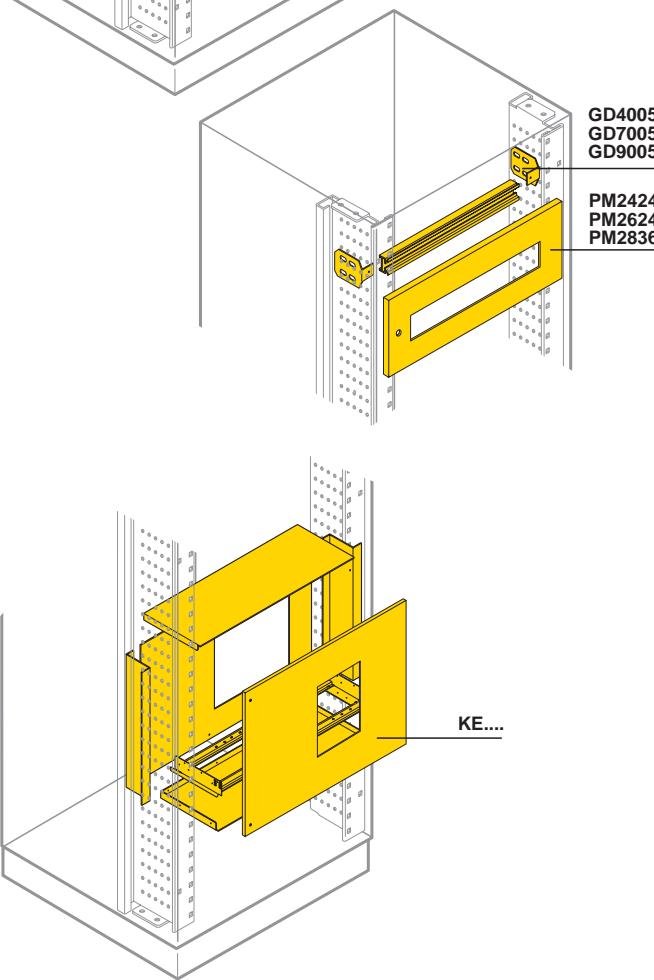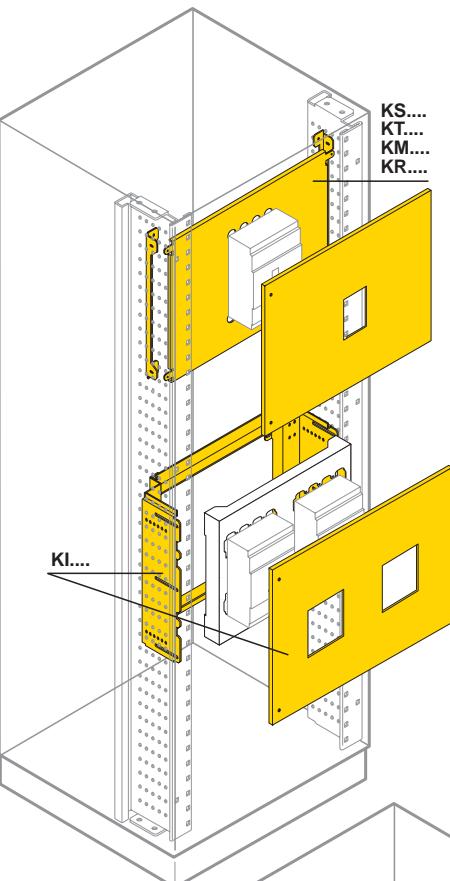

Kit for installation of Tmax circuit-breakers
Vertical installation (rear terminals)

Code	Description	Dimensions H (mm)
12 DIN mod	24 DIN mod	
W=390mm	W=600mm	
GD....(1)	GD....(1)	Kit for DIN T1-T2-T3, 3/4 poles fixed+RC mod.
KT4129	KT4121	Kit for T4 3/4 poles fixed
	KT4222	Kit for T4 3/4 poles plug-in
	KT4128	Kit for T4 3/4 poles withdrawable
KT5137	KT5128	Kit for T5 3/4 poles fixed
	KT5129	Kit for T5 (400A) 3/4 poles plug-in
KT5125	KT5123	Kit for T5 (630A) 3/4 poles plug-in
	KT5223	Kit for T5 (400A) 3/4 poles withdrawable
KT5126	KT5124	Kit for T5 (630A) 3/4 poles withdrawable
	KT6210	Kit for T6 3/4 poles fixed
	KT6230	Kit for T6 3/4 poles withdrawable (DRH)
	KT6132	Kit for T6 3/4 poles fixed (DRH)
	KT6133	Kit for T6 3/4 poles fixed (MO)
	KT6141	Kit for T6 3/4 poles withdrawable (MO)
KT7215	Kit for T7 3/4 poles fixed	500
	Kit for T7M 3/4 poles fixed (MO)	500
KT7230	Kit for T7 3/4 poles withdrawable	500
	Kit for T7M 3/4 poles withdrawable (CM-I-IM)	500
KS8210	Kit for S8 3/4 poles fixed	900

(DRH) = Direct rotary handle; (MO) = Motor operator; (I) = Interlocked;
(IM) = Interlocked motor operated.

For Isomax kits see page 9/83.


Kit for installation of Emax circuit-breakers
Vertical installation (rear terminals)

Code	Description	Dimensions H (mm)
24 DIN mod	36 DIN mod	
W=600mm	W=800mm	
KT7215	Kit for X1 3/4 poles fixed	500
KT7230	Kit for X1 3/4 poles withdrawable	500
KE2215	Kit for E1-E2 3/4 poles fixed	600
KE2235	Kit for E1-E2 3/4 poles withdrawable	600
KE3205	KE4214	Kit for E3 3/4 poles fixed
KE3236	KE4234	Kit for E3 3/4 poles withdrawable
	KE5214 (1)	Kit for E4 3/4 poles fixed (I)
	KE5234 (1)	Kit for E4 3/4 poles withdrawable (I)

(1) Also for interlocked version.

ArTu K (segregated)

Segregation

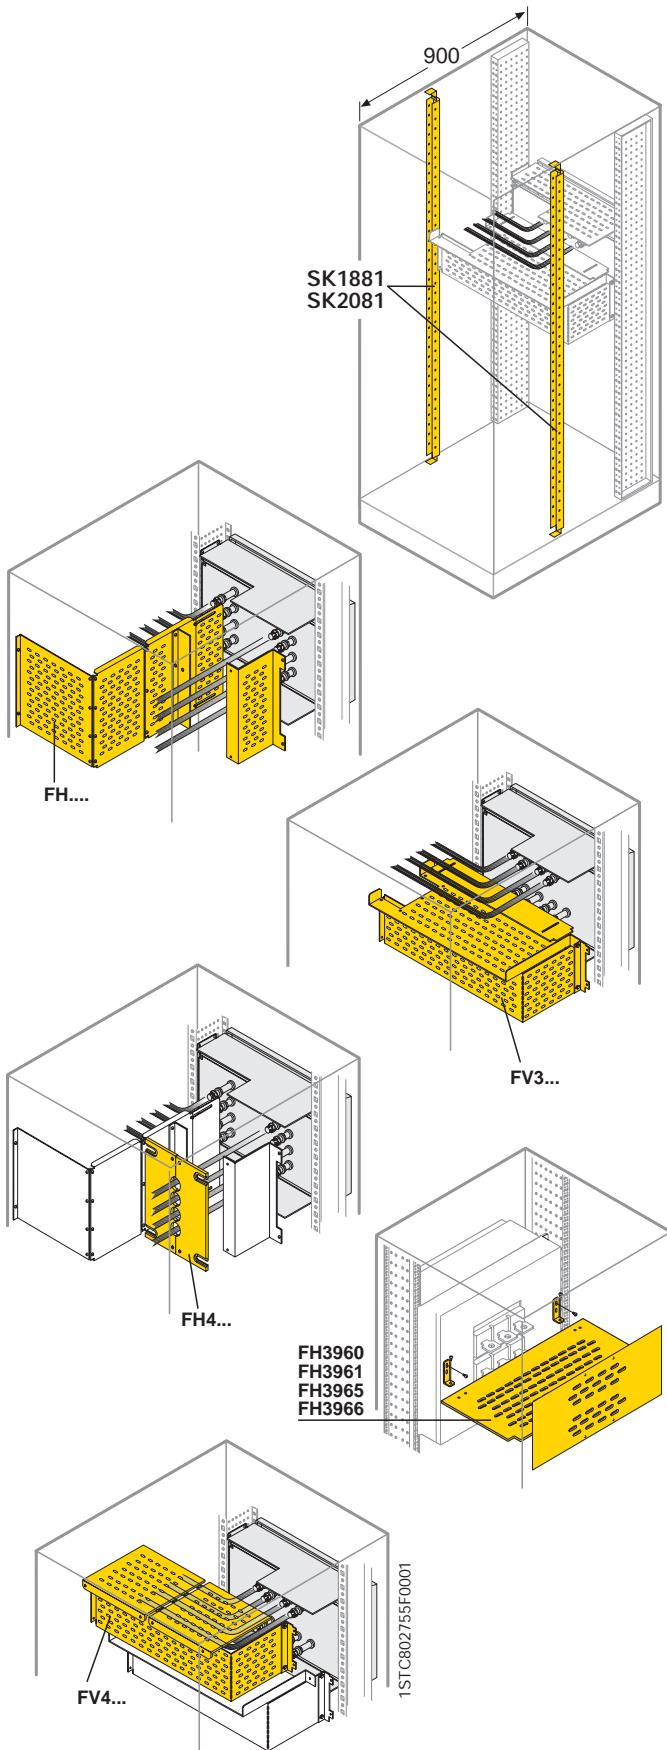

Intermediate upright for segregated structures D=900mm

Code	Description	Dimensions H (mm)
SK1881	SK1881 N°2 lateral intermediate uprights for switchgear D=900mm	1800
SK2081	SK2081 N°2 lateral intermediate uprights for switchgear D=900mm	2000

Segregation Horizontal segregation

Code	Description	Dimensions HxD (mm)
Form 3	Form 3	
12 DIN mod	24 DIN mod	
W=390mm	W=600mm	
FH3224	FH3220	+ FH4220 Segregation kit 200x500/700
FH3434	FH3430	+ FH4430 Segregation kit 300x500/700
FH3544	FH3540	+ FH4540 Segregation kit 400x500/700
FH3650		+ FH4650 Segregation kit 500x500/700
FH3680		+ FH4220 (1) Segregation kit 800x500/700
FH3764	FH3760	+ FH4760 Segregation kit 600x500/700
FH3780		+ FH4220 (1) Segregation kit 800x500/700
FH1020		+ FH4220 Segregation kit 200x900
FH1030		+ FH4430 Segregation kit 300x900
FH1040		+ FH4540 Segregation kit 400x900
FH1050		+ FH4650 Segregation kit 500x900
FH1060		+ FH4760 Segregation kit 600x900





(1) Order 4 pieces

Vertical segregation

Code	Description	Dimensions HxD (mm)
Form 3	Form 4	
FV3456	+	FV4456 Segregation kit 400x500
FV3458	+	FV4458 Segregation kit 400x700
FV3556	+	FV4556 Segregation kit 500x500
FV3558	+	FV4558 Segregation kit 500x700
FV3668	+	FV4668 Segregation kit 600x700
FV3788	+	FV4788 Segregation kit 800x700
FH3960		Segregation kit Emax E1-E2-E3 fixed 600x700
FH3961		Segregation kit Emax E1-E2-E3 withdrawable 600x700
FH3965		Segregation kit Emax E1-E2-E3 fixed 600x900
FH3966		Segregation kit Emax E1-E2-E3 withdrawable 600x900

ArTu K (segregated)

Segregation

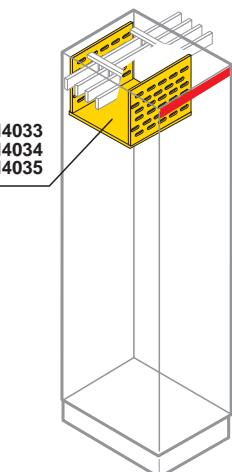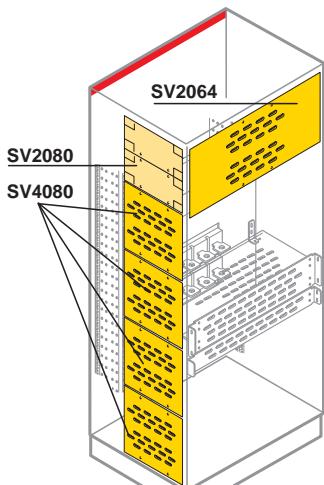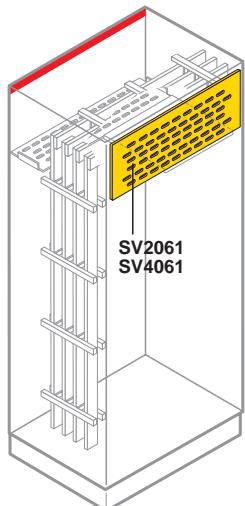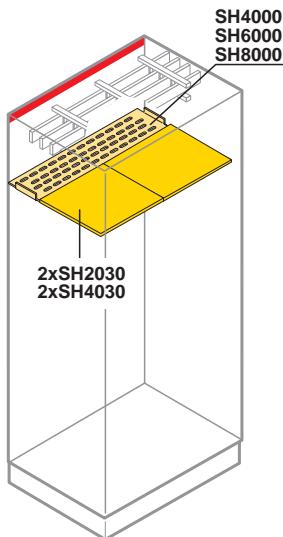

Segregation Universal shelf

Code	Description		
12 DIN mod	24 DIN mod	36 DIN mod	
W=390mm	W=600mm	W=800mm	
SH4000	SH6000	SH8000	Universal busbar segregation shelf

Busbar segregation

Code	Description			Dimensions D (mm)
12 DIN mod	24 DIN mod			
W=390mm	W=600mm			
SH4030	SH2030	Horizontal busbar segregation (down)	500/700	
SH1030		Horizontal busbar segregation (down)	900	

Code	Description			Dimensions H (mm)
12 DIN mod	24 DIN mod			
W=390mm	W=600mm			
SV4061	SV2061	Horizontal busbar segregation (rear)	200	

Code	Description			Dimensions D (mm)
H=1800mm	H=2000mm			
SV1860	SV2265	Horizontal busbar segregation (side)	500	
SV1880	SV2285	Horizontal busbar segregation (side)	700	
SV1815	SV2015	Horizontal busbar segregation (side)	900	

Code	Description	Dimensions HxD (mm)
SV2080	Vertical segregation Emax (side)	200x700
SV4080	N 4 Vertical segregation Emax (side)	400x700
Codice	Description	Dimensions HxW (mm)
SV2064	Vertical segregation Emax (rear)	400x600



Busbar segregation in the cable container

Code	Description	Dimensions LxD (mm)
SH4031	Horizontal busbar segregation in internal cable container	200x500/700
SH4033	Horizontal busbar segregation in additional cable container	300x500/700
SH4034	Horizontal busbar segregation in structure used as busbar container	400x500/700
SH4035	Horizontal busbar segregation in structure used as busbar container	600x500/700

Code	Description		
H=1800mm	H=2000mm		
AD1024	AD1025	Internal cable container rear segregation	



Accessories

Code	Description
AD1042	N°4 spacers for lateral segregation

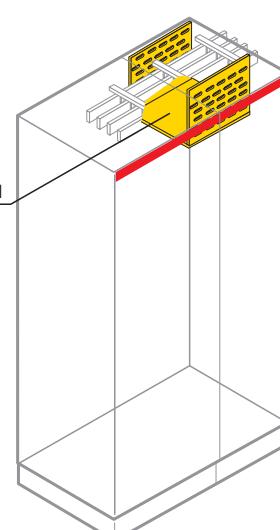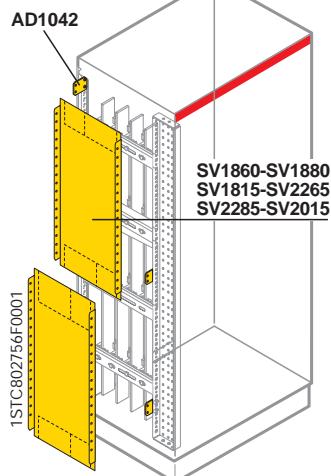

ArTu K

Distribution system

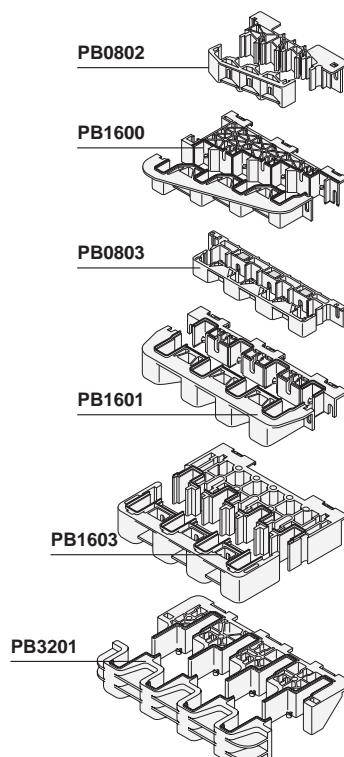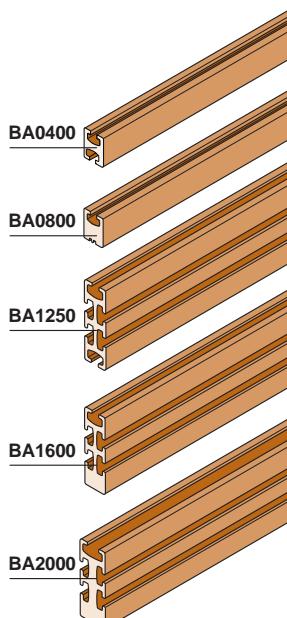


Distribution busbar with shaped section

Code	Description	Dimensions W (mm)
BA0400	Busbar In=400A	1730
BA0800	Busbar In=800A	1730
BA1250	Busbar In=1250A	1730
BA1600	Busbar In=1600A	1730
BA2000	Busbar In=2000A (1 busbar per phase) In = 3200A (2 busbars per phase)	1730

Busbar holder for shaped section

Code	Description
Scaled	
PB0802	Scaled busbar holder In=800A - 35kA
PB1600	Scaled busbar holder up to In=1600A - 75kA
Linear	
PB0803	Linear busbar holder In=800A - 35kA
PB1601	Linear busbar holder up to In=1600A - 75kA
PB1603	Linear busbar holder up to In=1600A - 65kA
PB3201	Linear busbar holder up to In=3200A - 100kA (1-2 busbars per phase)

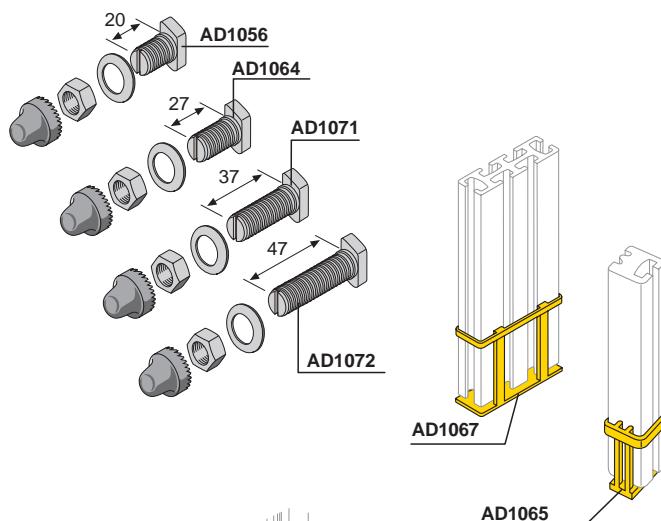


Hammer seal screws for busbars with shaped section

Code	Description
AD1056	N°12 M8 hammer screws W=20mm for cable terminal
AD1064	N°12 M8 screws-W=27mm for flat busbars up to 10mm, complete with screw-covering cap
AD1071	N°12 M8 screws-W=37mm for flat busbars up to 20mm, complete with screw-covering cap
AD1072	N°12 M8 screws-W=47mm for flat busbars up to 20mm, complete with screw-covering cap

Resting bases with shaped section

Code	Description
AD1065	N°4 resting bases for 400/800A busbars
AD1067	N°4 resting bases for 1250/1600A busbars


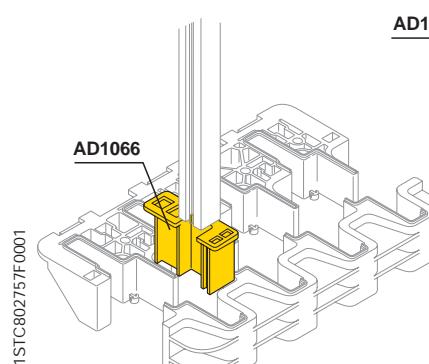


Adapters for busbars with shaped section

Code	Description
AD1066	N°4 adapters for In=400/800A busbars with busbar holder (PB1600-PB1601-PB1603)

ArTu K

Distribution system

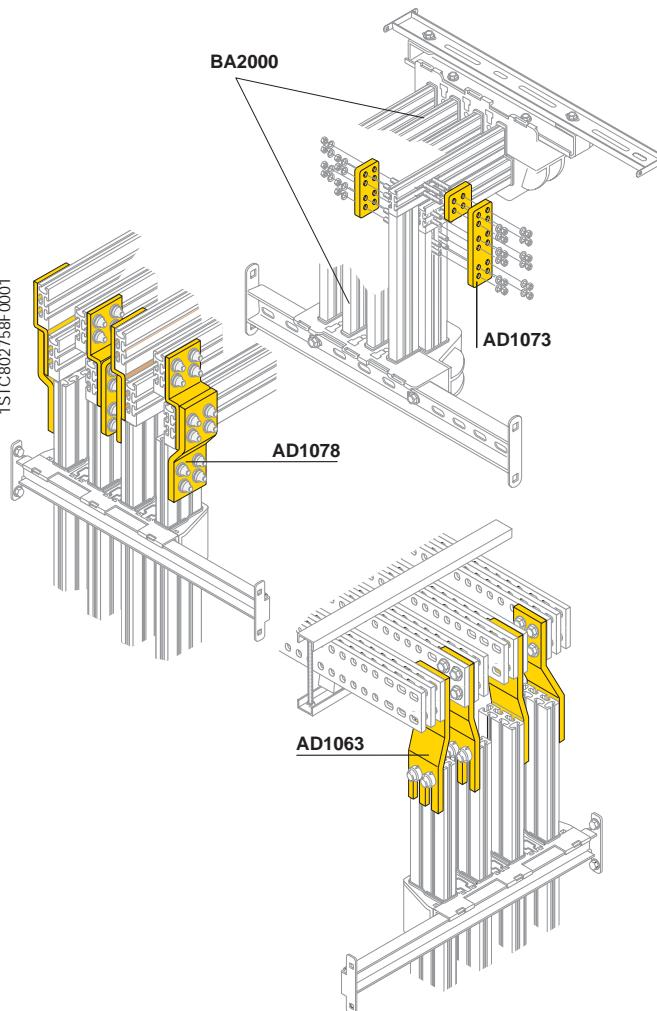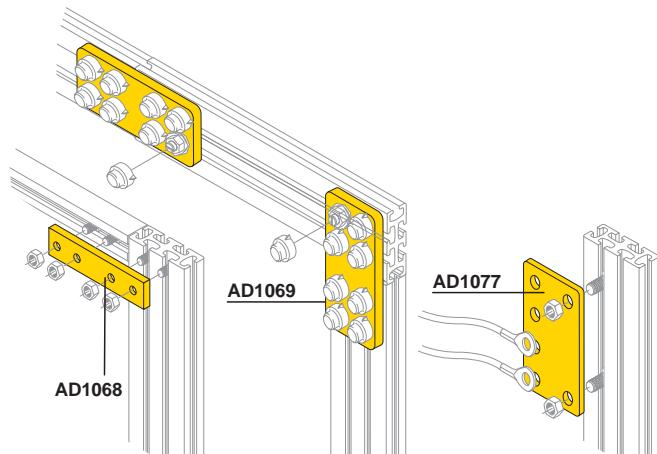

Joints for busbars with shaped section

Code	Description
AD1068	N°4 joints for 800A busbars with shaped section (with 800/1250/1600A busbars)
AD1069	N°4 joints for 1250/1600A busbars with shaped section (with 1250/1600A busbars)
AD1063	N°4 joints for connecting busbars with shaped section (with rectangular pre-drilled busbars pitch 25mm)
AD1078	N°4 joints complete with screws for connecting busbars with shaped section up to 3200A (with busbars with shaped section up to 1600A)
AD1073	N°4 joints complete with screws for connecting 3200A busbars with shaped section
AD1077	N°4 copper 400A branch joints

Selection of the connection joint and busbar holder compatibility

Horizontal busbars

Vertical busbars	Bars with shaped section		Flat busbars	
	Busbar holder	Code	Busbar holder	Code
BA2000	PB3201 (3200A)	2x AD1069 ⁽¹⁾ 1x AD1073 ⁽²⁾		
	PB1601 (1250/1600A)	AD1078	AD1069	AD1063
	PB1603 (1250/1600A)			AD1069
	PB1600 (1250/1600A)		AD1069	
	PB1601 (≤800A)	AD1078	AD1068	
	PB1603 (≤800A)			AD1068

Joints valid for "T" and "L" branches.


⁽¹⁾ Only "L" branch

⁽²⁾ Only "T" branch

ArTu K

Distribution system

Pic.1

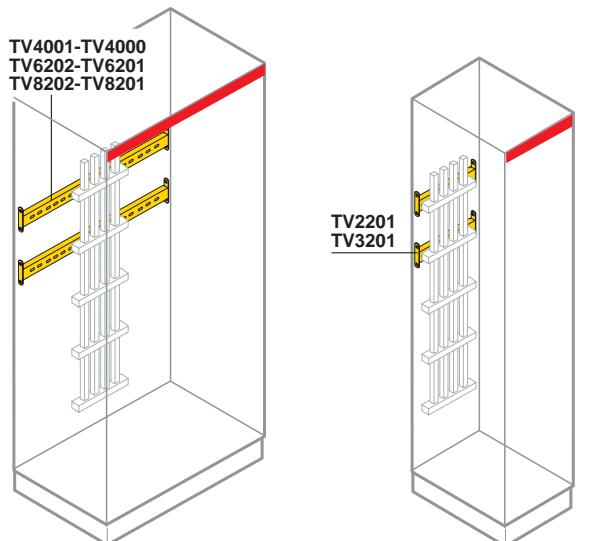

Fixing crosspieces for busbars with shaped section


Pic.1
Busbars vertically on back of structure

Code	Description
12 DIN mod W=390mm	24 DIN mod W=600mm
36 DIN mod W=800mm	
TV4001	N°2 crosspieces structure for PB0803/PB0802
TV6202	N°2 crosspieces structure for PB0803
TV4000	N°2 crosspieces structure for PB1600/PB1601/PB1603
TV6201	N°2 crosspieces structure for PB1601/PB1603
TV8201	

Busbars vertically on back of external cable container

Code	Description
W=200mm	W=300mm
TV2201	N°2 crosspieces for PB0802
TV3201	N°2 crosspieces for PB0802/PB1600

Pic.2

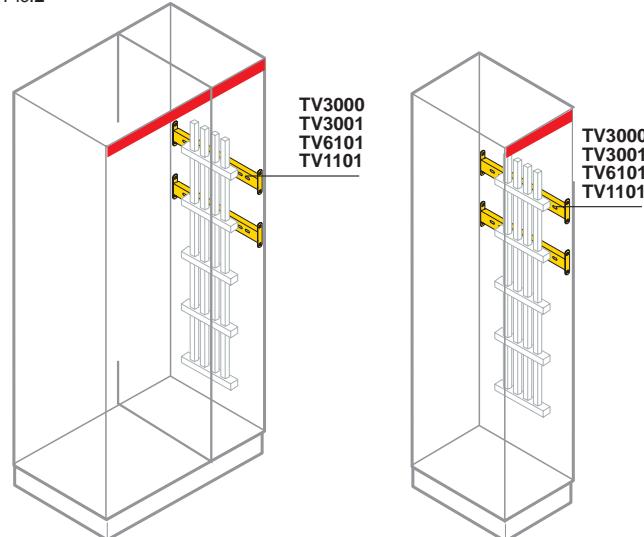


Pic.2
Busbars vertically on side of internal/additional cable container

Code	Description
D=150mm	D=225mm
D=300mm	D=500mm
D=700mm	D=900mm
TV3000	N°2 crosspieces internal cable container PB0802
TV3101	
TV5101	
TV6101 ⁽¹⁾	N°2 Internal/external cable container crosspieces for PB1600/PB1601/PB1603
TV8101	N°2 Internal/external cable container crosspieces for PB1600/PB1601/PB1603/PB3201
TV1101	PB3201

⁽¹⁾ With PB1600 only in the additional cable container.

Pic.3


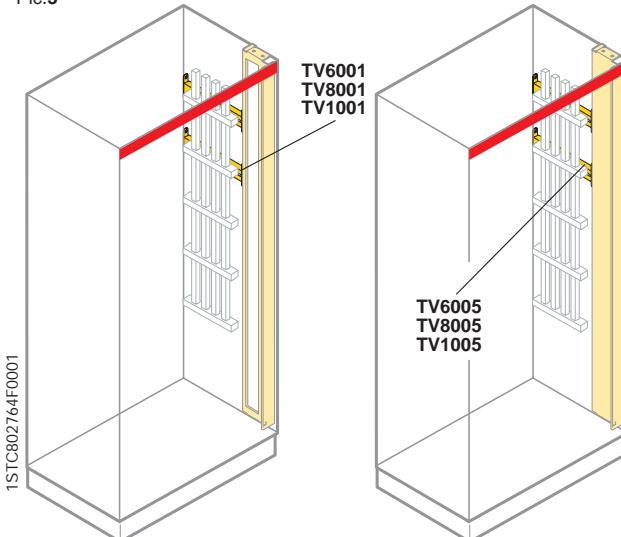


Pic.3
Busbars vertically on side of structure

Code	D=500mm open frame	D=700mm closed frame	D=900mm open frame	Description
TV6001	TV6005			N°2 crosspieces for PB01603
TV8001	TV8005			N°2 crosspieces for PB1600/PB1601/PB1603/PB3201
TV1001	TV1005			N°2 crosspieces for PB1600/PB1601/PB1603/PB3201

ArTu K

Distribution system

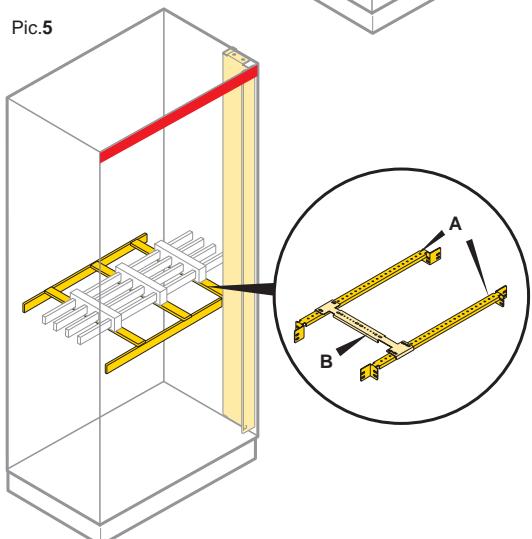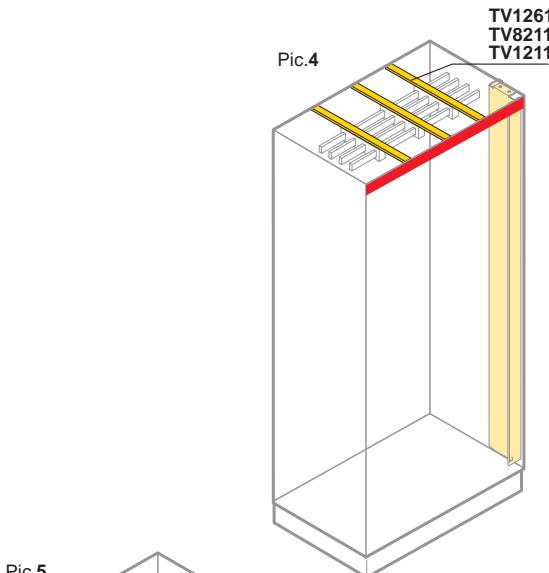

Pic.4
Top horizontal busbars under the roof

Code	Description
D=500mm D=700mm D=900mm	
TV1261	N°2 crosspieces for PB1603

TV8211	TV1211	N°2 crosspieces for PB1601/PB1603/PB3201
--------	--------	--




Pic.5
Busbar horizontal at any height

Code A	Description
12 DIN mod 24 DIN mod 36 DIN mod	
W=390mm W=600mm W=800mm	
TV4221⁽²⁾	N°2 crosspieces for PB1601/PB1603

TV6221 ⁽²⁾	TV8221 ⁽²⁾	N°2 crosspieces for PB1601/PB1603/PB3201
-----------------------	-----------------------	--

Code B	Description
D=500mm D=700mm D=900mm	
TV6011	N°2 crosspieces for PB1603
TV8011 TV1011	N°2 crosspieces for PB1601/PB1603/PB3201

⁽²⁾ With structures W=800mm with internal cable container, use a TV6221 crosspiece plus a TV8221 crosspiece as in Pic. 1 or two TV6221 crosspieces with the intermediate upright SK1880 or SK2080, as in Pic. 2.

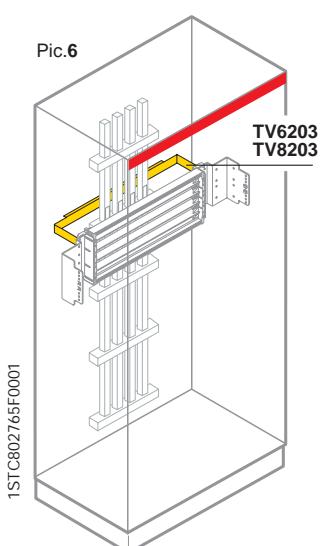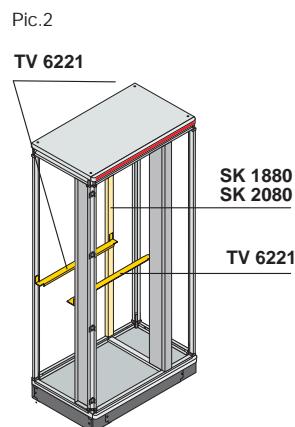
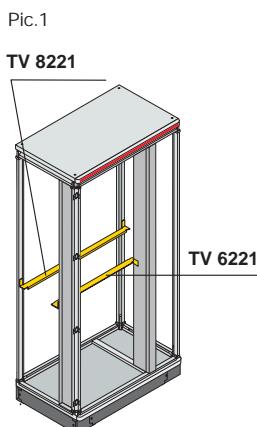


Pic.6
Connection to the Unifix H system

Code	Description
24 DIN mod 36 DIN mod	
W=600mm W=800mm	
TV6203 TV8203	N°2 crosspieces for PB0803

ArTu K

Distribution system

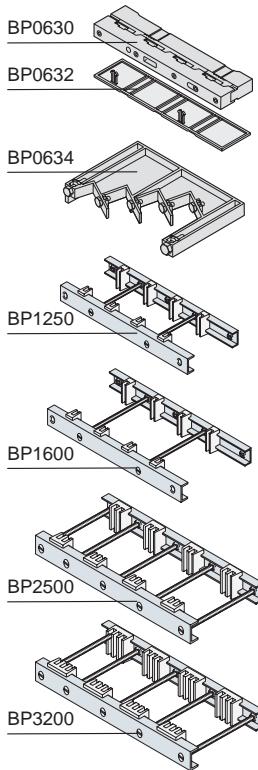
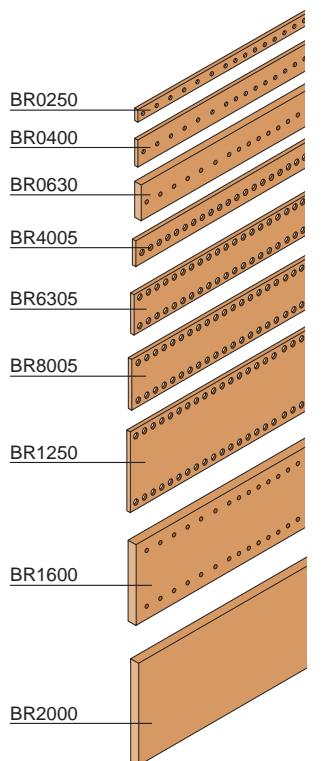


Flat busbars

Code	Description	Dimensions W (mm)
BR0250	N°2 busbars In=250A, section 15x5mm	1750
BR0400	N°2 busbars In=400A, section 25x5mm	1750
BR0630	N°2 busbars In=630A, section 30x10mm	1750
BR4005	N°2 busbars In=400A, section 32x5mm	1750
BR6305	N°2 busbars In=630A, section 50x5mm	1750
BR8005	N°2 busbars In=800A, section 63x5mm	1750
BR1250	N°2 busbars In=1250A, section 100x5mm	1750
BR1600	N°2 busbars In=1600A, section 100x10mm	1750
BR2000	N°2 busbars In=2000A, section 120x10mm	1750

Busbar holders

Code	Description
BP0630	N°2 linear busbar holders In=630A - 32kA
BP0632	N°2 terminal covers for linear busbar holders BP0630
BP0634	N°2 scaled busbar holders In=630A - 23kA
BP1250	N°2 busbar holders for busbars 5mm thick
BP1600	N°2 busbar holders for busbars 10mm thick
BP2500	N°2 busbar holders for 2 busbars per phase 10mm thick
BP3200	N°2 busbar holders for 3 busbars per phase 10mm thick



Flexible busbars

Code	Description	Dimensions W (mm)
BF1602	N°2 busbar In=250A section 20x3mm	2000
BF2502	N°2 busbar In=400A section 20x5mm	2000
BF4002	N°2 busbar In=630A section 24x6mm	2000
BF4012⁽²⁾	N°2 busbar In=400A section 32x5mm	2000
BF6302	N°2 busbar In=630A section 40x8mm	2000
BF8002	N°2 busbar In=800A section 50x10mm	2000

⁽²⁾ Only for circuit-breakers with front extended terminals or rear terminals.


Busbar clamps

Kit for tightening the flexible busbars onto the rigid busbars, without the need to drill the flexible busbars.

Code	Description
BS3250	N°4 busbar tightening plates for busbars H=40mm
BS5050	N°4 busbar tightening plates for busbars H=50mm
BS6350	N°4 busbar tightening plates for busbars H=63mm

ArTu K


Distribution system

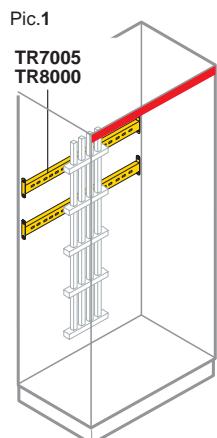

Fixing crosspieces for flat busbars

Pic.1
Busbars vertically on back of structure

Code	Description
24 DIN mod W=600mm	36 DIN mod W=800mm
TR7005	TR8000 N°2 crosspieces for BP1250/BP1600/BP2500/BP3200

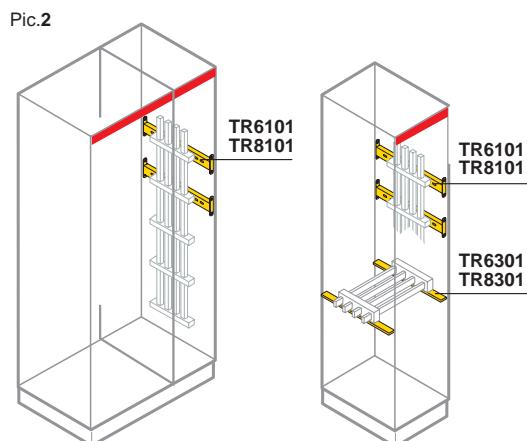


Pic.2
Busbars vertically on side of internal/additional cable container

Code	Description
D=500mm	D=700mm
TR6101	TR8101 N°2 crosspieces on side of cable container


Busbar in horizontally on external cable container

Code	Description
D=500mm	D=700mm
TR6301	TR8301 N°2 Crosspieces for horizontal busbars in the cable container

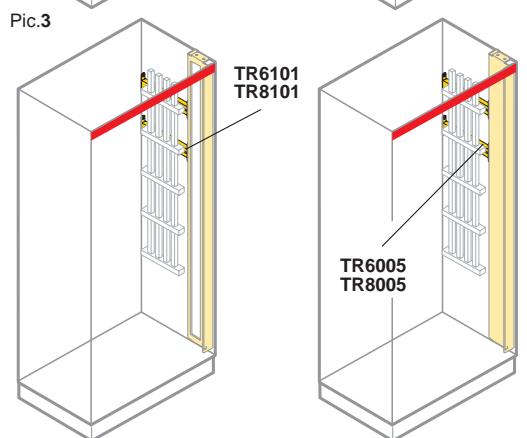

Pic.3
Busbars vertically on side of structure

Code	Description	
	D=500mm	D=700mm
open frame	closed frame	open frame closed frame
TR6001	TR6005	TR8001 TR8005 N°2 crosspieces on side of structure

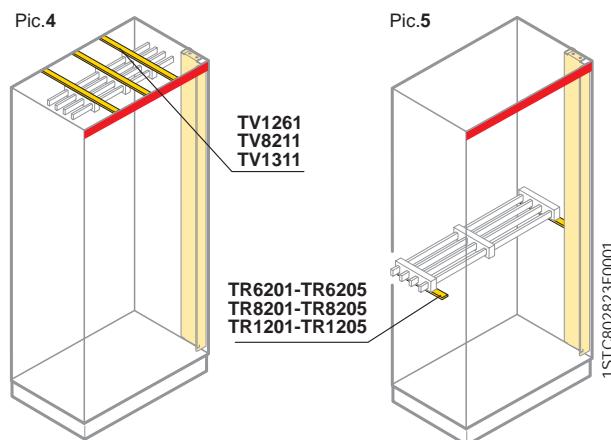

Pic.4
Busbars horizontally at top of structure


Code	Description		
	D=500mm	D=700mm	D=900mm
TV1261	TV8211	TV1311	N°2 horizontal crosspieces

Pic.5
Busbars horizontally at any height in the structure

Code	Description					
	D=500mm	D=700mm	D=900mm			
open frame	closed frame	open frame	closed frame	open frame	closed frame	
TR6201	TR6205					N°2 crosspieces for BP1250/BP1600
TR8201	TR8205					N°2 crosspieces for BP1250/BP1600
TR1201	TR1205					BP2500/BP3200

ArTu K

Distribution system

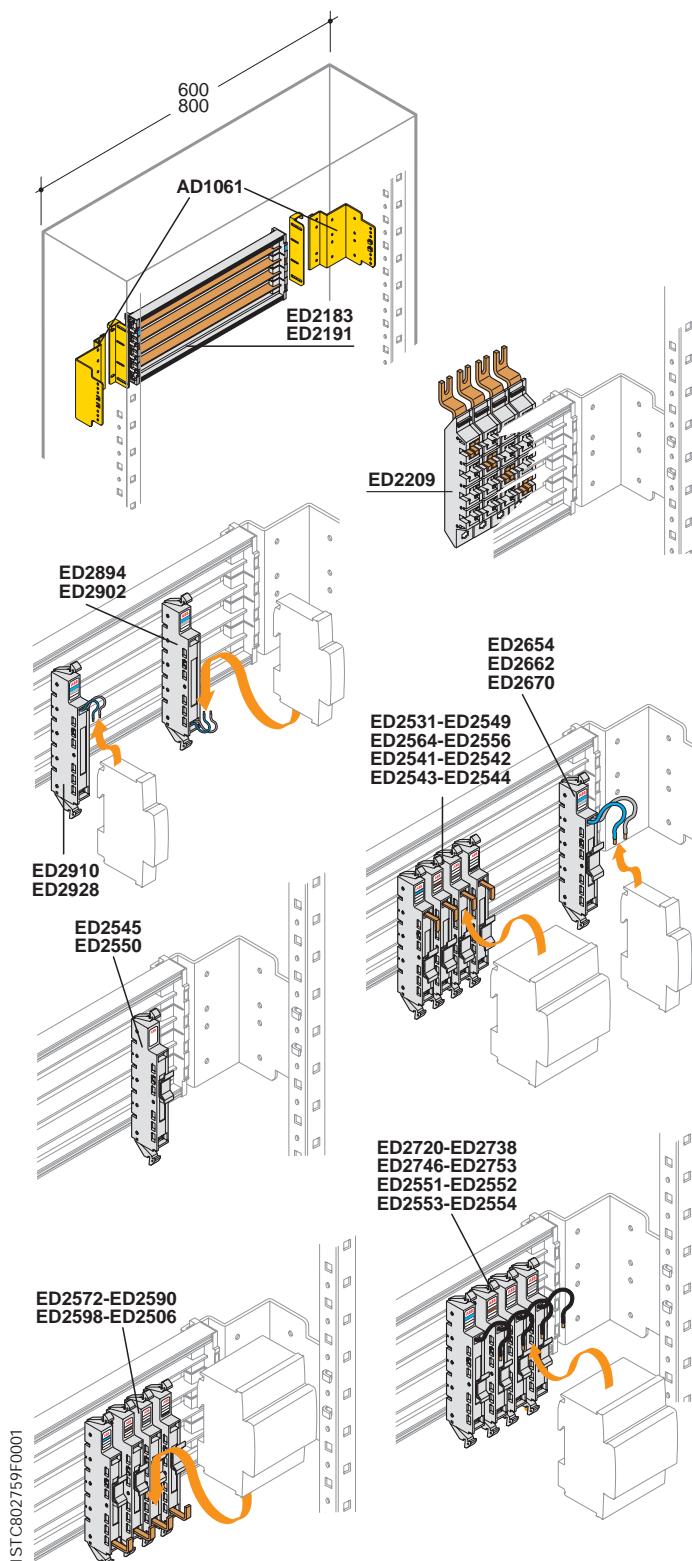

1STC802759F0001

Unifix H

Frames for Tmax

Code	Description	Dimensions W (mm)
ED2183	Frame with 24 DIN module busbars	600
ED2191	Frame with 36 DIN module busbars	800
AD1061	N°2 fixing brackets onto structure for ED2183 o ED2091	

Feeder modules

Code	Description
ED2209	4P 400A feeder module (for ED2183-ED2191)

Basic modules I_n 16A

Code	Description
ED2894	Basic module for auxiliary CBs DIN L1-N top 16A
ED2902	Basic module for auxiliary CBs DIN L1-L2 top 16A
ED2910	Basic module for auxiliary CBs DIN L1-N bottom 16A
ED2928	Basic module for auxiliary CBs DIN L1-L2 bottom 16A

Basic modules I_n 40A

Code	Description
ED2654	Basic module L1/Neutral top 40A
ED2662	Basic module L2/Neutral top 40A
ED2670	Basic module L3/Neutral top 40A

Basic modules I_n 63A

Code	Description
ED2531	Basic module L1 top 63A
ED2549	Basic module L2 top 63A
ED2556	Basic module L3 top 63A
ED2564	Basic module Neutral top 63A
ED2572	Basic module L1 top 63A
ED2590	Basic module L2 top 63A
ED2598	Basic module L3 top 63A
ED2606	Basic module Neutral top 63A

Basic modules I_n 100A

Code	Description
ED2720	Basic module with cable L1 top 100A
ED2738	Basic module with cable L2 top 100A
ED2746	Basic module with cable L3 top 100A
ED2753	Basic module with cable Neutral top 100A

Basic modules $\leq I_n$ 40A S800


Code	Description
ED2557	Basic module L1 top $\leq 40A$
ED2558	Basic module L2 top $\leq 40A$
ED2559	Basic module L3 top $\leq 40A$
ED2560	Basic module Neutral top $\leq 40A$

Basic modules I_n 125A S800

Code	Description
ED2551	Basic module L1 top 125A
ED2552	Basic module L2 top 125A
ED2553	Basic module L3 top 125A
ED2554	Basic module Neutral top 125A
ED2550	Basic module false pole W=27mm

ArTu K

Distribution system

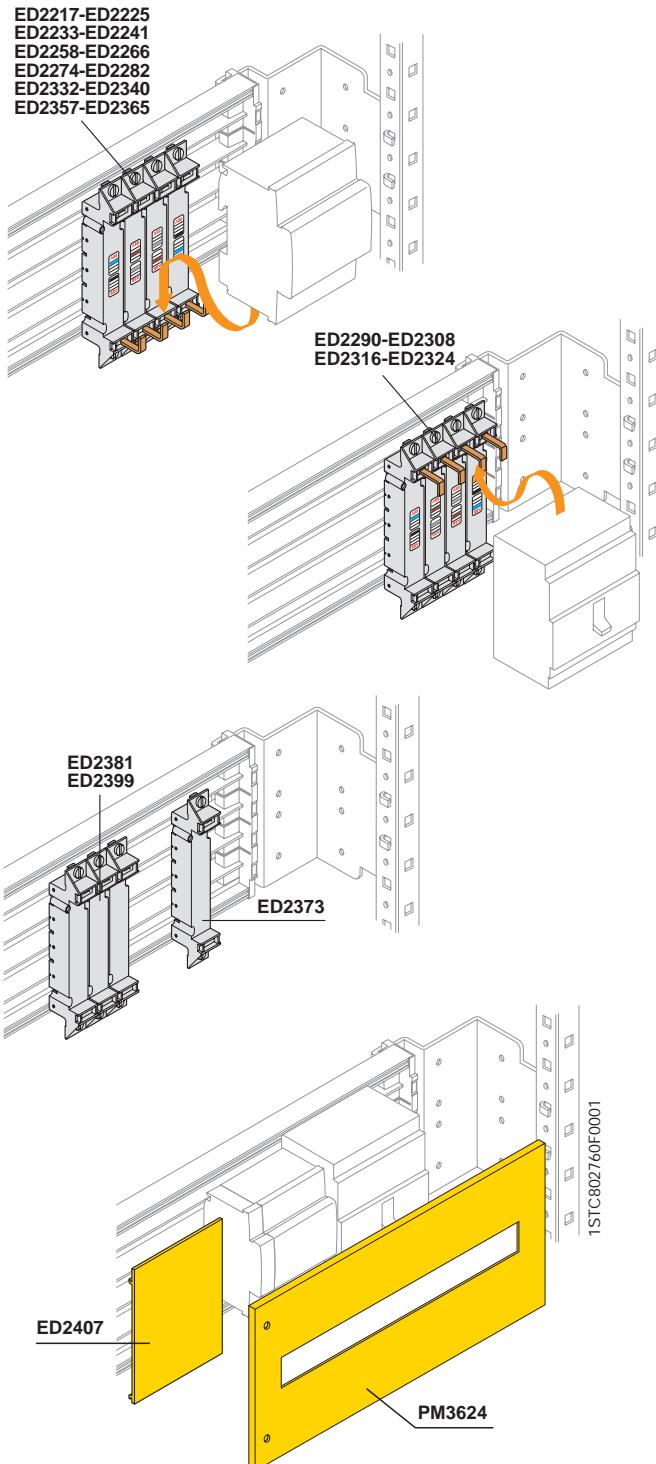

Unifix H

Basic modules I_n 160A Tmax T1

Code	Description
ED2217	Basic module L1 top L2 bottom
ED2225	Basic module L2 top L1 bottom
ED2233	Basic module L3 top Neutral bottom
ED2241	Basic module Neutral top L3 bottom
ED2373	Basic module false pole for residual current release RC221
ED2381	Basic module false pole for solenoid operator

Basic modules I_n 160A Tmax T2

Code	Description
ED2258	Basic module L1 top L2 bottom
ED2266	Basic module L2 top L1 bottom
ED2274	Basic module L3 top N bottom
ED2282	Basic module N top L3 bottom
ED2373	Basic module false pole for residual current release RC221
ED2399	Basic module false pole for solenoid operator

Basic modules I_n 250A Tmax T3

Code	Description
ED2290	Basic module L1 top
ED2308	Basic module L2 top
ED2316	Basic module L3 top
ED2324	Basic module N top
ED2332	Basic module L1 bottom
ED2340	Basic module L2 bottom
ED2357	Basic module L3 bottom
ED2365	Basic module N bottom
ED2373	Basic module false pole for residual current release RC221

Accessories


Code	Description
ED2845	Basic module false pole for DDA
ED2852	Basic module false pole for modular MDRC
ED2407	N°2 IP20 covers (for ED2183-ED2191) W=173mm (10 DIN modules)
ED2936	N°6 duct supports
PM3624	Modular front panel 300x600mm (hwx)
PM3836	Modular front panel 300x800mm (hwx)

Spare parts

Code	Description
ED0001	N°10 terminal covers T1
ED0002	N°10 terminal covers T2
ED0003	N°10 terminal covers T3
ED0004	N°10 terminal covers S200/F200

ArTu K

Distribution system

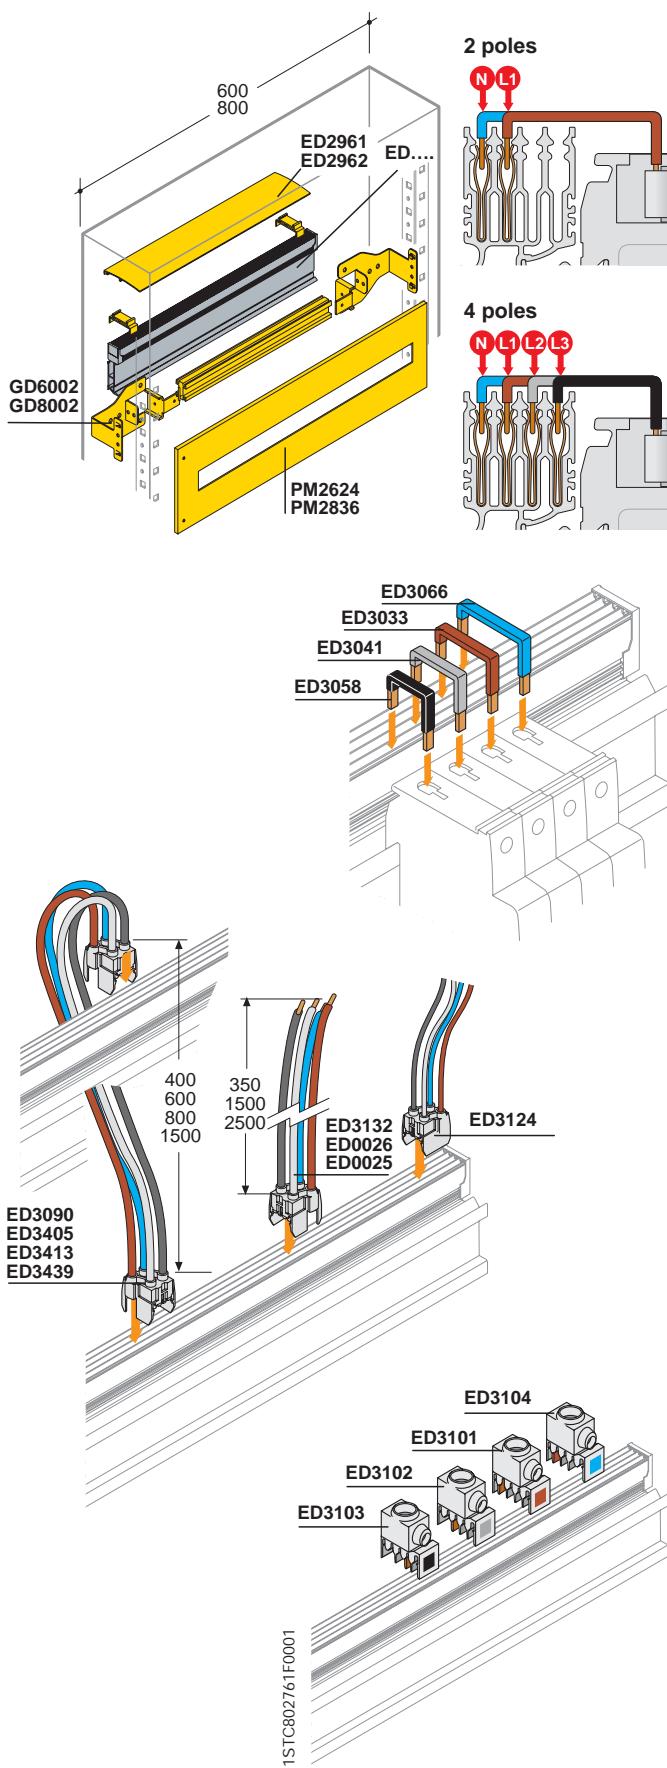

Unifix L

2-pole busbars

Code	Description	Dimensions w (mm)
ED2985	100A 2P 8 module busbar	200
ED2993	100A 2P 12 module busbar	400
ED3009	100A 2P 18 module busbar	450
ED3017	100A 2P 24 module busbar	600
ED3025	100A 2P 36 module busbar	800

4-pole busbars

Code	Description	Dimensions w (mm)
ED2944	100A 4P 12 module busbar	400
ED2951	100A 4P 18 module busbar	450
ED2969	100A 4P 24 module busbar	600
ED2977	100A 4P 36 module busbar	800

Connections for various apparatus

Code Description

ED3108	Connection with 2 conductors L/N 16A
ED3116	Connection with 3 conductors L1/L2/L3 16A
ED3124	Connection with 4 conductors L1/L2/L3/N 16A single phase
ED3355	Connection with 2 conductors L1/N 40A
ED3363	Connection with 3 conductors L1/L2/L3 40A
ED3371	Connection with 4 conductors L1/L2/L3/N 40A

Connections for apparatus

Code Description

ED3272	N°10 connections L1-N 40 A
ED3280	N°10 connections L2-N 40 A
ED3298	N°10 connections L3-N 40 A
ED3033	N°10 connections L 1 100A
ED3041	N°10 connections L 2 100A
ED3058	N°10 connections L 3 100A
ED3066	N°10 connections N 100A
ED3132	Feeder with 4P 100A cable (W=350mm)
ED0026	Feeder with 4P 100A cable (W=1500mm)
ED0025	Feeder with 4P 100A cable (W=1500mm)

Power supply modules with cable

Code Description

ED3082	Parallel module 2P 100A with cable
ED3405	Parallel module 4P 100A with cable
ED3090	Parallel module 4P 100A with cable
ED3413	Parallel module 4P 100A with cable
ED3439	Parallel module 4P 100A with cable

Power supply modules without cable In 100A

Code Description

ED3101	N°10 single-pole power supply terminals L1
ED3102	N°10 single-pole power supply terminals L2
ED3103	N°10 single-pole power supply terminals L3
ED3104	N°10 single-pole power supply terminals N


Accessories

Code Description

Code	Description	Dimensions W (mm)
ED2961	N°10 busbar covers	600
ED2962	N°2 busbar covers	800
GD1520	DIN rail Kit and supports	600
GD1530	DIN rail Kit and supports	800
PM2624	Modular front panel 200x600mm (hwx)	
PM2836	Modular front panel 200x800mm (hwx)	

ArTu K

Accessories

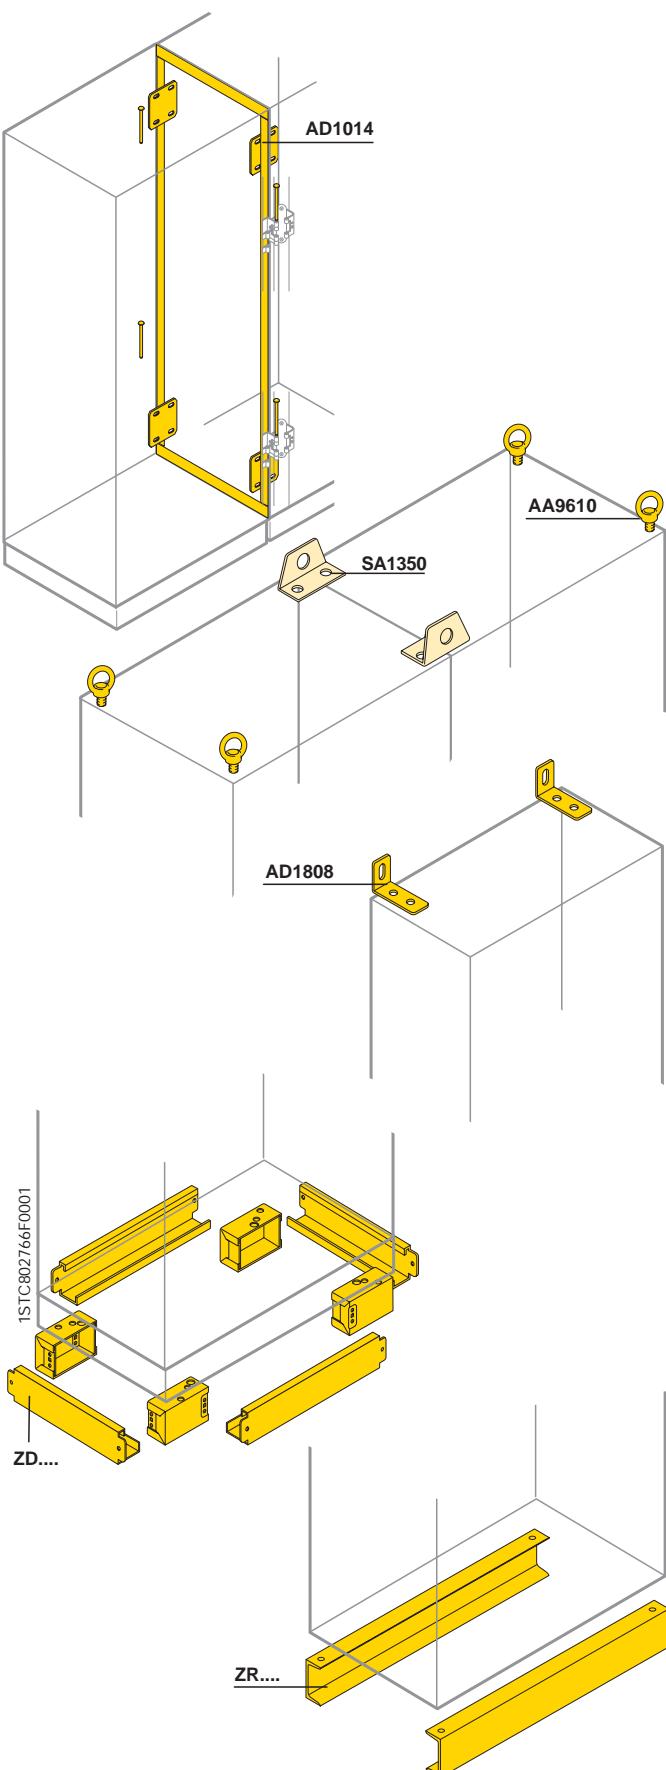

Structure side-by-side kit

Code	Description
AD1014	Kit for placing structures H=1600-1800-2000mm side by side laterally

The ArTu K switchgear can be placed side by side both laterally and at the rear. The IP65 side-by-side kit consists of a set of supports and a gasket for keeping the degree of protection. In the IP31 version, in addition to the AD1014 kit, order the double finishing section (see page 9/54).

Lifting eyebolts

Code	Description
AA9610	N° 4 steel M12 lifting eyebolts

These allow cabled switchgear to be lifted. They are made of steel treated with white passivated galvanisation.

Lifting reinforcements

Code	Description
SA1350	N° 2 lifting reinforcements for side-by-side structures

These allow handling of several ArTu K switchgear placed side by side.

Brackets for fixing to the wall

Code	Description
AD1808	N° 2 brackets for fixing to the wall

These allow ArTu K switchgear to be fixed to the wall.

Additional base strip H=100mm Base strip for structure

Code	Description	Dimensions D (mm)
12 DIN mod 24 DIN mod 36 DIN mod		
W=390mm	W=600mm	W=800mm
ZD2624	ZD2824	N°4 base strip + n°4 flanges
ZD2440	ZD2640	ZD2840 N°4 base strip + n°4 flanges
ZD2450	ZD2650	ZD2850 N°4 base strip + n°4 flanges
ZD2460	ZD2660	ZD2860 N°4 base strip + n°4 flanges
ZD2480	ZD2680	ZD2880 N°4 base strip + n°4 flanges
ZD4010	ZD6010	ZD8010 N°4 base strip + n°4 flanges
		150
		225
		300
		500
		700
		900

Base strip for cable container external

Code	Description	Dimensions D (mm)
W=200mm W=300mm		
ZD2324	N°4 base strip + n°4 flanges	150
ZD2240	ZD2340 N°4 base strip + n°4 flanges	225
ZD2350	N°4 base strip + n°4 flanges	300
ZD2260	ZD2361 N°4 base strip + n°4 flanges	500
ZD2280	ZD2381 N°4 base strip + n°4 flanges	700

Code Description

AZ4000	N°4 base strip angle pieces H=100mm
--------	-------------------------------------

To make a 200mm high base strip, order a H=100mm kit, which includes four additional angle pieces and four additional flanges.


Reinforced base strip H=100mm

Code	Description
12 DIN mod 24 DIN mod 36 DIN mod	
W=390mm	W=600mm
ZR4000	ZR6000 ZR8000 ZR3000 Front and rear profile


ArTu K

Accessories

Pic.1

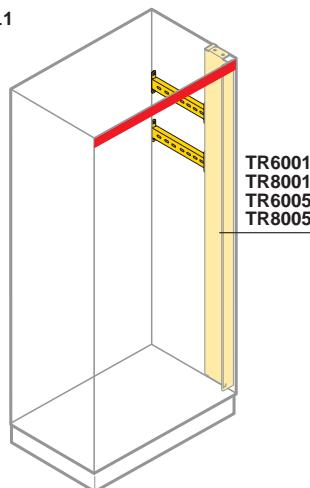

Pic.2

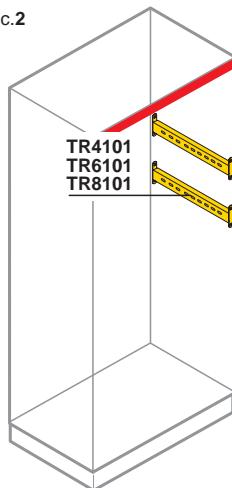

Code	Mounting Pic.	Description
D=500mm D=700mm TR6001 TR8001	1	N°2 side crosspieces

Segregated switchboards

Code	Mounting Pic.	Description
D=500mm D=700mm TR6005 TR8005	1	N°2 side crosspieces


Segregated/non segregated switchboards

Code	Mounting Pic.	Description
D=225mm D=300mm D=500mm D=700mm TR4101 TV5101 TR6101 TR8101	3	N°2 side crosspieces



Code	Mounting Pic.	Description
24 mod DIN 36 mod DIN W=600mm W=800mm TR7005 TR8000	4	N°2 rear crosspieces

Can be mounted on the structure to anchor cables or to mount accessories. The crosspieces for accessories can be mounted on the side, on the rear or in the cable container of the structure.

Pic.3

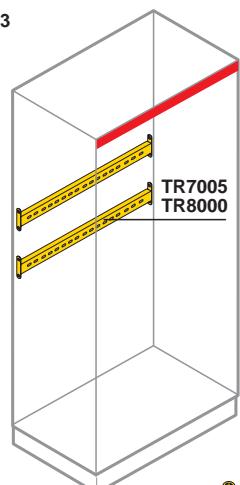

Pic.4

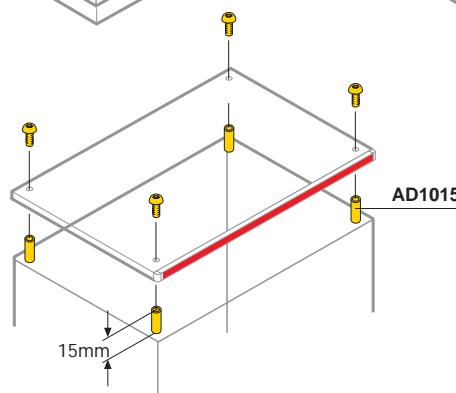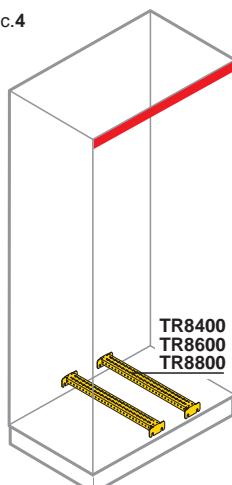

Reinforcement crosspieces

Code	Mounting Pic.	Description
D=225mm D=300mm D=500mm D=700mm D=900mm TR8400 TR8500 TR8600 TR8800 TR8900	4	N°2 Reinforcement crosspieces for structures

Recommended for installation of fuse bases or transformers.

ArTu K

9

Roof ventilation kit

Code	Description
AD1015	Roof ventilation kit

Allows the roof of the cabinet to be raised thereby increasing ventilation and therefore the power which can be dissipated. The degree of protection is IP20. The ventilation kit must not be mounted if the cabinet has to be lifted using the eyebolts. In this case, the kit must be mounted when installation has been completed.

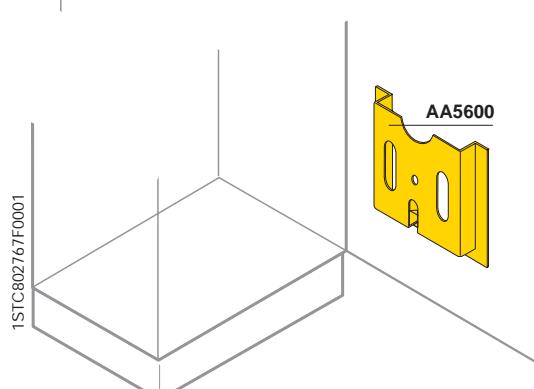



Diagram pocket holder

Code	Description
AA5600	Plastic diagram pocket holder

The diagram pocket holder (made of RAL 2004 colour plastic, dim. HxL 237x265mm type A4) is applied to the inside of doors/blind panels of suitable size using the adhesive provided.

ArTu K

Accessories

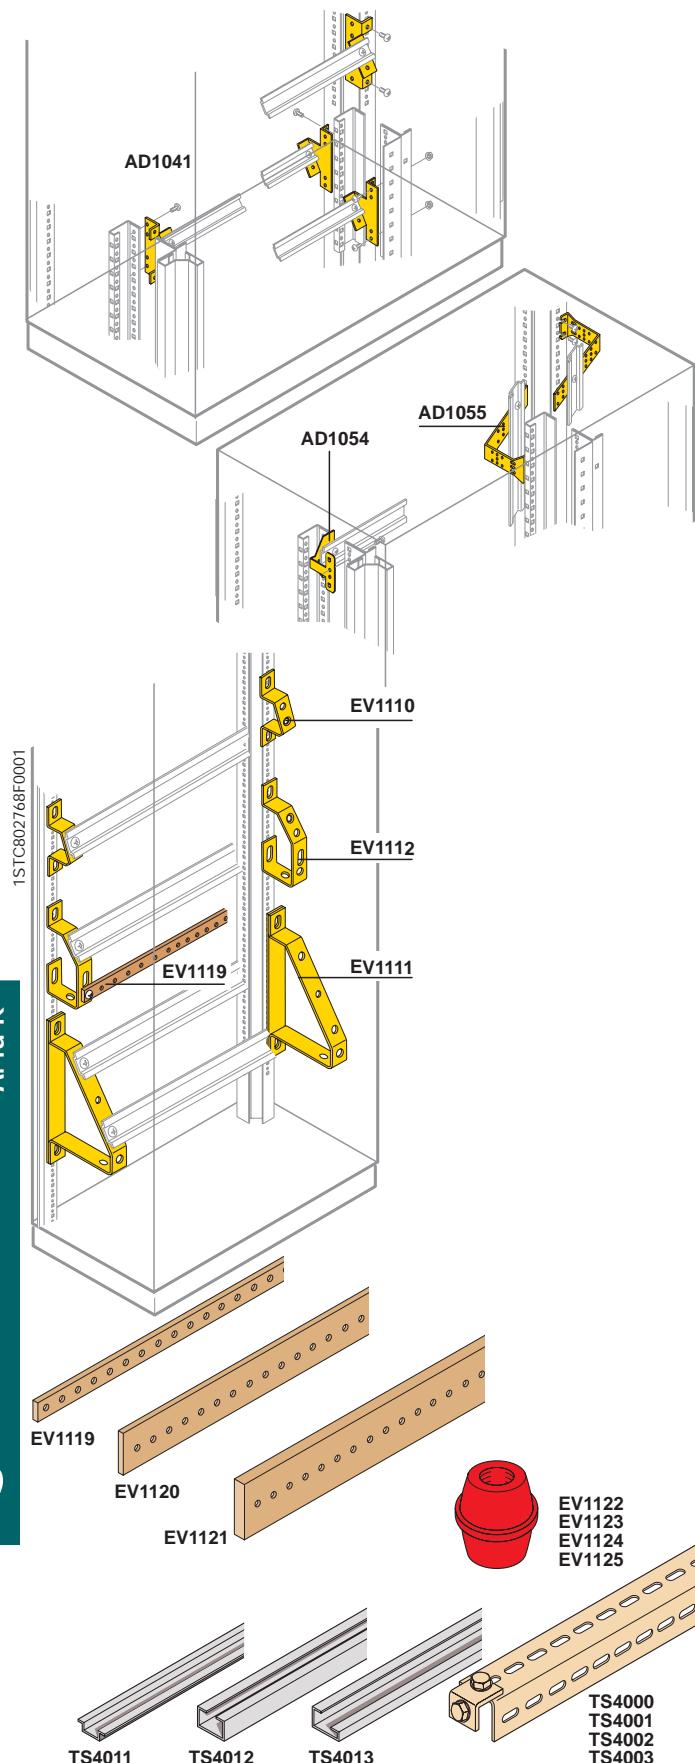

Supports for terminal boxes

Structure

Code	Description
AD1041	N° 2 supports for horizontal 45° angled terminal box for ArTu K
AD1054	N° 2 supports for horizontal terminal box for ArTu K

Additional cable container

Code	Description
AD1055	N° 4 supports for vertical terminal box in internal/additional ArTu K cable container

Angled supports for terminal boxes and earthing busbars

Code	Description
EV1110	N°50 angled supports 1 row of terminals
EV2110	N°10 angled supports 1 row of terminals
EV1111	N°10 angled supports double row of terminals
EV1112	N°50 angled supports 1 row of terminals + earth
EV2112	N°10 angled supports 1 row of terminals + earth

Insulators and copper busbars for neutral/earthing


Code	Description	Dimensions W (mm)
EV1119	N°2 busbars 20x5 mm drilled and threaded M6	2000
EV1120	N°2 busbars 25x5 mm drilled and threaded M6	2000
EV1121	N°2 busbars 50x5 mm drilled and threaded M6	2000
EV1122	N°50 hexagonal insulators 30x30mm M6	
EV1123	N°50 hexagonal insulators 30x30mm M8	
EV1124	N°50 hexagonal insulators 36x50mm M6	
EV1125	N°50 hexagonal insulators 36x50mm M8	

Sections for accessories

Code	Description	Dimensions W (mm)
TS4011	N°2 sections EN50024 C30	2000
TS4012	N°2 sections EN50035 G32	2000
TS4013	N°2 DIN sections EN50022	2000

ArTu K

Accessories

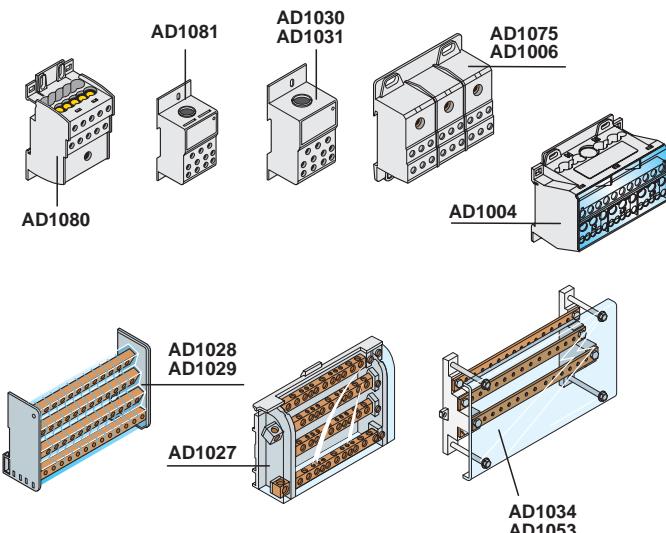


Dividers

Code	Description
Single-pole	Three-pole
AD1076 ⁽¹⁾	AD1075
AD1080 ⁽²⁾	AD1004 Modular 125A
	AD1028 Modular 125A-medium-89x93x48 (LxWxH)
	AD1029 Modular 125A-large-126x93x48 (LxWxH)
AD1007 ⁽¹⁾	Four-pole
AD1081 ⁽²⁾	AD1006 AD1027 Modular 160A
AD1030	Modular 250A
	AD1034 Horizontal 250A for structures W=600mm
	AD1053 Horizontal 250A for structures W=800mm
AD1031	Modular 400A

⁽¹⁾ 10 uscite
⁽²⁾ 6 uscite

Code	Description
AD1038	Supports for fixing to the structure for AD1034 and AD1053
AD1083	Connection accessory between two AD1080

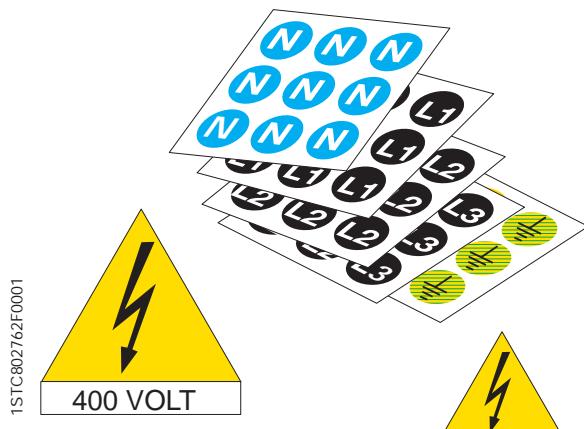


1STC802762F0001

1STC802763F0001

Marking

Code	Description
EV1150	N°490 adhesive labels ø12mm symbol N
EV1151	N°490 adhesive labels ø12mm symbol L1
EV1152	N°490 adhesive labels ø12mm symbol L2
EV1153	N°490 adhesive labels ø12mm symbol L3
EV1154	N°490 adhesive labels ø12mm symbol T
EV1155	N°10 triangular adhesive labels 125mm with 400V lightning arrow symbol
EV1156	N°100 triangular adhesive labels 50mm with lightning arrow symbol

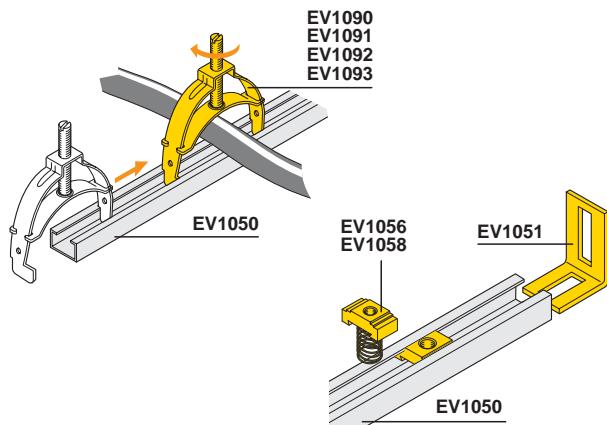

Brackets for anchoring cables

Adjustable cable blocking bracket can be mounted on sections with 10mm slot EV1050.

Code	Description
EV1090	N°10 cable blocking brackets min+max ø 9÷16mm
EV1091	N°10 cable blocking brackets min+max ø 16÷30mm
EV1092	N°5 cable blocking brackets min+max ø 30÷48mm
EV1093	N°5 cable blocking brackets min+max ø 48÷72mm

ArTu K

9

Aluminium sliding guides for universal uses

Code	Description
EV1050	N°10 aluminium supporting sections 30x15 - W=2000mm
EV1051	N°25 fixing brackets for EV1050
EV1056	N°100 aluminium M6 nuts for EV1050
EV1058	N°100 aluminium M8 nuts for EV1050

ArTu K

Accessories

Accessories

Code	Description
AD1058	Zn+Al+Mg alloy key with double tab
AA8004	Ronis type box (E739) for floor-mounted ArTu M and ArTu K
AA6100	Double tab insert
AA6200	Insert + key type Yale ArTu K
AA6120	Triangular iron insert
AA6140	Square insert
AA6160	FIAT type insert
AA6180	Hexagonal insert
AD1001	Internal finishing tape for IP31 Ral 7035 colour
AD1036	N°20 cage nuts
AD1033	N°50 three-lobed M6 spare screws
VB7035	RAL 7035 colour spray paint for touching up (400 ml spray can)
SK1880	Rear riser for internal cable container ArTu K H=1800
SK2080	ArTu K internal cable container rear upright H=2000

Spare parts

Code	Description
AD1090	N°10 hinges + screws for panels (spare part ACP468)
AD1091	N°10 plug + door key kits (spare part APT002)
AD1092	N°5 FP fixing accessories H=1800/2000mm (spare part A210)
CA1600	Chimes for door H=1600mm (spare part)
CA1800	Chimes for door H=1800mm (spare part)
CA2000	Chimes for door H=2000mm (spare part)
EV1008	Box for closing doors with double-tab insert
AD1047	N°2 DIN rail fixing brackets for open frame (switchgear without segregation)
AD1048	N°2 DIN rail fixing brackets for closed frame (segregated switchgear)
AD1057	*ArTu Survival Kit* - Accessories and small items for spare parts
AD1070	N°10 ArTu handle covers
AD1022	ArTu handle complete with lock and cover
AZ4000	N°4 base strip angle pieces H=100mm

ArTu L-M-K

Kits which can be managed at time of offer

Kit for Isomax S1

Code	Description
KL1101	Kit for S1 horiz. fixed RC mod. not segreg. l=800mm K
KR1111	Kit for S1 horiz. fixed not segreg. man. rot. K
KS1100	Kit for S1 horiz. fixed RC mod. segreg. K
KS1101	Kit for S1 horiz. fixed RC mod. not segreg. K
KS1102	Kit for S1 horiz. fixed RC mod. not segreg. M
KS1110	Kit for S1 horiz. fixed segreg. K
KS1111	Kit for S1 horiz. fixed not segreg. K
KS1112	Kit for S1 horiz. fixed not segreg. 3P M
KS1115	Kit for S1 horiz. fixed segreg. 3P K
KS1116	Kit for S1 horiz. fixed not segreg. 3P K
KS1117	Kit for S1 horiz. fixed not segreg. M
KS1120	Kit for S1 horiz. plug-in segreg. K
KS1121	Kit for S1 horiz. plug-in not segreg. K
KS1125	Kit for S1 horiz. plug-in segreg. 3P K
KS1126	Kit for S1 horiz. plug-in not segreg. 3P K
KS1410	Kit for S1 4P horiz. fixed segreg. 200x400mm (hxw) K
KS1411	Kit for S1 4P horiz. fixed 200x400mm (hxw) K
KS1415	Kit for S1 3P horiz. fixed segreg. 200x400mm (hxw) K
KS1416	Kit for S1 3P horiz. fixed 200x400mm (hxw) K
KS1420	Kit for S1 4P horiz. plug-in segreg. 200x400mm (hxw) K
KS1421	Kit for S1 4P horiz. plug-in 200x400mm (hxw) K
KS1425	Kit for S1 3P horiz. plug-in segreg. 200x400mm (hxw) K
KS1426	Kit for S1 3P horiz. plug-in 200x400mm (hxw) K

Kit for Isomax S2

Code	Description
KL2101	Kit for S2 horiz. fixed RC mod. not segreg. l=800mm K
KL2102	Kit for S2 horiz. fixed RC mod. not segreg. l=800mm M
KR2111	Kit for S2 horiz. fixed not segreg. man. rot. K
KS2100	Kit for S2 horiz. fixed RC mod. segreg. K
KS2101	Kit for S2 horiz. fixed RC mod. not segreg. K
KS2102	Kit for S2 horiz. fixed RC mod. not segreg. M
KS2110	Kit for S2 horiz. fixed segreg. K
KS2111	Kit for S2 horiz. fixed not segreg. K
KS2112	Kit for S2 horiz. fixed not segreg. 3P M
KS2115	Kit for S2 horiz. fixed segreg. 3P K
KS2116	Kit for S2 horiz. fixed not segreg. 3P K
KS2117	Kit for S2 horiz. fixed not segreg. M
KS2120	Kit for S2 horiz. plug-in segreg. K
KS2121	Kit for S2 horiz. plug-in not segreg. K
KS2125	Kit for S2 horiz. plug-in segreg. 3P K
KS2126	Kit for S2 horiz. plug-in not segreg. 3P K
KS2410	Kit for S2 4P horiz. fixed segreg. 200x400mm (hxw) K
KS2411	Kit for S2 4P horiz. fixed 200x400mm (hxw) K
KS2415	Kit for S2 3P horiz. fixed segreg. 200x400mm (hxw) K
KS2416	Kit for S2 3P horiz. fixed 200x400mm (hxw) K
KS2420	Kit for S2 4P horiz. plug-in segreg. 200x400mm (hxw) K
KS2421	Kit for S2 4P horiz. plug-in 200x400mm (hxw) K
KS2425	Kit for S2 3P horiz. plug-in segreg. 200x400mm (hxw) K
KS2426	Kit for S2 3P horiz. plug-in 200x400mm (hxw) K

ArTu L-M-K

Kits which can be managed at time of offer

Kit for Isomax S3

Code	Description
KI3110	Kit for S3 fixed segreg. interlocked K
KI3111	Kit for S3 fixed-plug-in not segr. interlocked + access. K
KI3122	Kit for S3 plug-in segreg. inter. mot. K
KI3130	Kit for S3 withdrawable segreg. interlocked K
KI3131	Kit for S3 withdr. not segr. interlocked + access. K
KI3132	Kit for S3 withdrawable segreg. interlocked mot. K
KL3101	Kit for S3 horiz. fixed RC mod. not segreg. l=800mm K
KL3102	Kit for S3 horiz. fixed RC mod. not segreg. l=800mm M
KL3111	Kit for S3 horiz. fixed not segreg. l=800mm K
KL3112	Kit for S3 horiz. fixed l=800mm M
KL3211	Kit for S3 vert. fixed not segreg. l=800 mm K
KM3110	Kit for S3 horiz. fixed segreg. mot K
KM3120	Kit for S3 horiz. plug-in segreg. mot. K
KM3121	Kit for S3 horiz. plug-in not segreg. mot. K
KS3100	Kit for S3 horiz. fixed RC mod. segreg. K
KS3101	Kit for S3 horiz. fixed RC mod. not segreg. K
KS3102	Kit for S3 horiz. fixed RC mod. not segreg. M
KS3110	Kit for S3 horiz. fixed segreg. K
KS3111	Kit for S3 horiz. fixed not segreg. K
KS3112	Kit for S3 horiz. fixed not segreg. M
KS3118	Kit for S3 3/4P horiz. fixed not segreg. M, K
KS3119	Kit for S3 horiz. fixed front term. not segreg. K
KS3120	Kit for S3 horiz. plug-in segreg. K
KS3121	Kit for S3 horiz. plug-in not segreg. K
KS3130	Kit for S3 horiz. withdrawable segreg. K
KS3131	Kit for S3 horiz. withdrawable not segreg. K
KS3211	Kit for S3 vert. fixed not segreg. K
KS3212	Kit for S3 vert. fixed not segreg. M
KS3221	Kit for S3 vert. plug-in not segreg. K
KS3231	Kit for S3 vert. withdr. not segreg. K
KS3410	Kit for S3 horiz. fixed segreg. 300x400mm (hxw) K
KS3411	Kit for S3 horiz. fixed 300x400mm (hxw) K
KS3416	Kit for S3 3/4P vert. fixed 400x400mm (hxw)
KS3419	Kit for S3 horiz. fixed ant. 200x400mm (hxw) K
KS3420	Kit for S3 horiz. plug-in segreg. 300x400mm (hxw) K
KS3421	Kit for S3 horiz. plug-in 300x400mm (hxw) K
KS3426	Kit for S3 3/4P vert. plug-in 400x400mm (hxw)
KS3430	Kit for S3 horiz. withdr. segreg. 300x400mm (hxw) K
KS3431	Kit for S3 horiz. withdr. 300x400mm (hxw) K
KS3436	Kit for S3 3/4P vert. withdr. 400x400mm (hxw)
LK4000	Kit for floor S3 horiz. 3/4P 200x600mm (hxw) W
LK4002	Kit for floor S3 vert. in cable cont. 400x300mm (hxw) W
PM2211	Kit for S3 front term. fixed vert. not segreg. K
PM2212	Kit for S3 front term. fixed vert. not segreg. M
PM2213	Kit for S3 front term. fixed vert. not segreg. l=800mm K
PM2214	Kit for S3 front term. fixed vert. not segreg. l=800mm M

ArTu L-M-K

Kits which can be managed at time of offer

Kit for Isomax S4

Code	Description
KI4111	Kit for S4 fixed not segreg. interlocked K
KI4112	Kit for S4 fixed segreg. interlocked mot. K
KI4122	Kit for S4 plug-in segreg. interlocked mot. K
KI4130	Kit for S4 withdrawable segreg. interlocked K
KI4131	Kit for S4 withdrawable not segreg. interlocked K
KI4132	Kit for S4 withdrawable segreg. interlocked mot. K
KL4111	Kit for S4 horiz. fixed not segreg. l=800mm K
KL4112	Kit for S4 horiz. fixed l=800mm M
KL4211	Kit for S4 vert. fixed not segreg. l=800mm K
KM4110	Kit for S4 horiz. fixed segreg. mot. K
KM4120	Kit for S4 horiz. plug-in segreg. mot. K
KM4121	Kit for S4 horiz. plug-in not segreg. mot. K
KS4110	Kit for S4 horiz. fixed segreg. K
KS4111	Kit for S4 horiz. fixed not segreg. K
KS4112	Kit for S4 horiz. fixed not segreg. M
KS4119	Kit for S4 horiz. fixed not segreg. K
KS4120	Kit for S4 horiz. plug-in segreg. K
KS4121	Kit for S4 horiz. plug-in not segreg. K
KS4130	Kit for S4 horiz. withdrawable segreg. K
KS4131	Kit for S4 horiz. withdrawable not segreg. K
KS4211	Kit for S4 vert. fixed not segreg. K
KS4212	Kit for S4 vert. fixed not segreg. M
KS4221	Kit for S4 vert. plug-in not segreg. K
KS4231	Kit for S4 vert. withdrawable not segreg. K
KS4410	Kit for S4 3/4P horiz. fixed segreg. 300x400mm (hxw) K
KS4411	Kit for S4 3/4P vert. fixed 400x400mm (hxw) K
KS4420	Kit for S4 3/4P horiz. plug-in segreg. 300x400mm (hxw) K
KS4421	Kit for S4 3/4P vert. plug-in 400x400mm (hxw) K
KS4430	Kit for S4 3/4P horiz. withdr. segreg. 300x400mm (hxw) K
KS4431	Kit for S4 3/4P vert. withdr. 400x400mm (hxw) K
LK4001	Kit for floor S4 vert. 3/4P W 400x600mm (hxw) W
LK4000	Kit for floor S4 horiz. 3/4P 200x600mm (hxw) W
LK4002	Kit for floor S4 vert. in cable cont. 400x300mm (hxw) W
PM2211	Kit for S4 front term. fixed vert. not segreg. K
PM2212	Kit for S4 front term. fixed vert. not segreg. M
PM2213	Kit for S4 front term. fixed vert. not segreg. l=800mm K
PM2214	Kit for S4 front term. fixed vert. not segreg. l=800mm M

ArTu L-M-K

Kits which can be managed at time of offer

Kit for Isomax S5

Code	Description
KI5110	Kit for S5 fixed segreg. interlocked K
KI5111	Kit for S5 fixed not segreg. interlocked K
KI5112	Kit for S5 fixed segreg. interlocked mot. K
KI5130	Kit for S5 withdrawable segreg. interlocked K
KI5131	Kit for S5 withdrawable not segreg. interlocked K
KL5111	Kit for S5 horiz. fixed not segreg. l=800mm K
KL5112	Kit for S5 horiz. fixed l=800mm M
KL5211	Kit for S5 fixed vert. not segreg. l=800mm K
KM5110	Kit for S5 horiz. fixed segreg. mot. K
KM5120	Kit for S5 horiz. plug-in segreg. mot. K
KM5121	Kit for S5 horiz. plug-in not segreg. mot. K
KM5210	Kit for S5 vert. fixed segreg. mot. K
KM5220	Kit for S5 vert. plug-in segreg. mot. K
KM5221	Kit for S5 vert. plug-in not segreg. mot. K
KS5110	Kit for S5 horiz. fixed segreg. K
KS5111	Kit for S5 horiz. fixed not segreg. K
KS5112	Kit for S5 horiz. fixed not segreg. M
KS5120	Kit for S5 horiz. plug-in segreg. K
KS5121	Kit for S5 horiz. plug-in not segreg. K
KS5130	Kit for S5 horiz. withdrawable segreg. K
KS5131	Kit for S5 horiz. withdrawable not segreg. K
KS5210	Kit for S5 vert. fixed segreg. K
KS5211	Kit for S5 fixed vert. not segreg. K
KS5212	Kit for S5 vert. fixed not segreg. M
KS5220	Kit for S5 vert. plug-in segreg. K
KS5221	Kit for S5 vert. plug-in not segreg. K
KS5230	Kit for S5 withdr. vert. segreg. K
KS5231	Kit for S5 vert. withdr. not segreg. K
KS5410	Kit for S5 3/4P horiz. fixed segreg. 400x400mm (hxw) K
KS5411	Kit for S5 3/4P vert. fixed 500x400mm (hxw) K
KS5420	Kit for S5 3/4P horiz. plug-in segreg. 400x400mm (hxw) K
KS5421	Kit for S5 3/4P vert. plug-in 500x400mm (hxw) K
KS5430	Kit for S5 3/4P horiz. withdr. segreg. 400x400mm (hxw) K
KS5431	Kit for S5 3/4P vert. withdr. 500x400mm (hxw) K
LK5000	Kit for floor S5 horiz. 3/4P 300x600mm (hxw) W
LK5001	Kit for floor S5 vert. 3/4P W 500x600mm (hxw) W
LK5002	Kit for floor S5 vert. in cable cont. W 500x300mm (hxw) W
PM2211	Kit for S5 front term. fixed vert. not segreg. K
PM2212	Kit for S5 front term. fixed vert. not segreg. M
PM2213	Kit for S5 front term. fixed vert. not segreg. l=800mm K
PM2214	Kit for S5 front term. fixed vert. not segreg. l=800mm M

ArTu L-M-K

Kits which can be managed at time of offer

Kit for Isomax S6

Code	Description
KI6210	Kit for S6 4 P fixed (I) 24 DIN modules W=600mm H=800mm
KI6211	Kit for S6 3/4 P fixed (I) 24 DIN modules W=600mm H=800mm
KI6212	Kit for S6 4 P fixed (IM) 24 DIN modules W=600mm H=800mm
KI6213	Kit for S6 3/4 P fixed (IM) 24 DIN modules W=600mm H=800mm
KI6230	Kit for S6 4 P withdrawable (I) 24 DIN modules W=600mm H=800mm
KI6231	Kit for S6 3/4 P withdrawable (I) 24 DIN modules W=600mm H=800mm
KI6232	Kit for S6 4 P withdrawable (IM) 24 DIN modules W=600mm H=800mm
KI6233	Kit for S6 3/4 P withdrawable (IM) 24 DIN modules W=600mm H=800mm
KL6112	Kit for S6 (400A) 3/4 P fixed 36 DIN modules W=800mm H=500mm
KL6211	Kit for S6 3/4 P fixed 36 DIN modules W=800mm H=500mm
KL6212	Kit for S6 3/4 P fixed 36 DIN modules W=800mm H=500mm
KM6110	Kit for S6 3/4 P fixed (MO) 24 DIN modules W=600mm H=500mm
KM6111	Kit for S6 3/4 P fixed (MO) 24 DIN modules W=600mm H=500mm
KM6130	Kit for S6 3/4 P withdrawable (MO) 24 DIN modules W=600mm H=500mm
KM6131	Kit for S6 3/4 P withdrawable (MO) 24 DIN modules W=600mm H=500mm
KM6210	Kit for S6 3/4 poles fixed (MO) 24 DIN modules W=600mm H=600mm
KM6211	Kit for S6 3/4 P fixed (MO) 24 DIN modules W=600mm H=500mm
KM6230	Kit for S6 3/4 poles withdrawable (MO) 24 DIN modules W=600mm H=600mm
KM6231	Kit for S6 3/4 P withdrawable (MO) 24 DIN modules W=600mm H=500mm
KR6110	Kit for S6 3/4 P fixed (DRH) 24 DIN modules W=600mm H=500mm
KR6111	Kit for S6 3/4 P fixed (DRH) 24 DIN modules W=600mm H=500mm
KR6210	Kit for S6 3/4 poles fixed (DRH) 24 DIN modules W=600mm H=600mm
KR6211	Kit for S6 3/4 P fixed (DRH) 24 DIN modules W=600mm H=500mm
KS6110	Kit for S6 3/4 P fixed 24 DIN modules W=600mm H=500mm
KS6111	Kit for S6 3/4 P fixed 24 DIN modules W=600mm H=500mm
KS6112	Kit for S6 (400A) 3/4 P fixed 24 DIN modules W=600mm H=500mm
KS6130	Kit for S6 3/4 P withdrawable (DRH) 24 DIN modules W=600mm H=500mm
KS6131	Kit for S6 3/4 P withdrawable (DRH) 24 DIN modules W=600mm H=500mm
KS6210	Kit for S6 3/4 poles fixed 24 DIN modules W=600mm H=600mm
KS6211	Kit for S6 3/4 P fixed 24 DIN modules W=600mm H=500mm
KS6212	Kit for S6 3/4 P fixed 24 DIN modules W=600mm H=500mm
KS6230	Kit for S6 3/4 poles withdrawable (DRH) 24 DIN modules W=600mm H=600mm
KS6231	Kit for S6 3/4 P withdrawable (DRH) 24 DIN modules W=600mm H=500mm
KS7110	Kit for S7 3/4 P fixed 24 DIN modules W=600mm H=600mm
KS7111	Kit for S7 3/4 P fixed 24 DIN modules W=600mm H=600mm
KS7210	Kit for S7 3/4 poles fixed 24 DIN modules W=600mm H=800mm
KS7211	Kit for S7 3/4 P fixed 24 DIN modules W=600mm H=700mm
KS7230	Kit for S7 4 poles withdrawable (DRH) 24 DIN modules W=600mm H=800mm

ArTu L-M-K

Kits which can be managed at time of offer

Kit for Isomax S7

Code	Description
KS7231	Kit for S7 3/4 P withdrawable (MRD-CM) 24 DIN modules W=600mm H=700mm
LK6001	Kit for S6 3/4 P fixed 24 DIN modules W=600mm H=500mm
LK6101	Kit for S6 3/4 P fixed 36 DIN modules W=800mm H=500mm
KI7210	Kit for S7 4 P fixed (I)24 DIN modules W=600mm H=800mm
KI7211	Kit for S7 3/4 P fixed (I) 24 DIN modules W=600mm H=800mm
KI7212	Kit for S7 4 P fixed (IM)24 DIN modules W=600mm H=800mm
KI7213	Kit for S7 3/4 P fixed/withdrawable (IM) 24 DIN modules W=600mm H=800mm
KI7230	Kit for S7 4 P withdrawable (I)24 DIN modules W=600mm H=800mm
KI7231	Kit for S7 3/4 P withdrawable (I) 24 DIN modules W=600mm H=800mm
KI7232	Kit for S7 4 P withdrawable (IM)24 DIN modules W=600mm H=800mm
KL7211	Kit for S7 3/4 P fixed 36 DIN modules W=800mm H=700mm
KM7110	Kit for S7 3/4 P fixed (MO)24 DIN modules W=600mm H=600mm
KM7111	Kit for S7 3/4 P fixed (MO) 24 DIN modules W=600mm H=600mm
KM7210	Kit for S7 4 poles fixed (MO) 24 DIN modules W=600mm H=800mm
KM7211	Kit for S7 3/4 P fixed (MO) 24 DIN modules W=600mm H=700mm
KM7230	Kit for S7 4 poles withdrawable (MO) 24 DIN modules W=600mm H=800mm
KM7231	Kit for S7 3/4 P withdrawable (MO) 24 DIN modules W=600mm H=700mm
KR7110	Kit for S7 3/4 P fixed (DRH)24 DIN modules W=600mm H=600mm
KR7111	Kit for S7 3/4 P fixed (DRH) 24 DIN modules W=600mm H=600mm
KR7210	Kit for S7 4 poles fixed (DRH) 24 DIN modules W=600mm H=800mm
KR7211	Kit for S7 3/4 P fixed (DRH) 24 DIN modules W=600mm H=700mm
KS7110	Kit for S7 3/4 P fixed 24 DIN modules W=600mm H=600mm
KS7111	Kit for S7 3/4 P fixed 24 DIN modules W=600mm H=600mm
KS7210	Kit for S7 3/4 poles fixed 24 DIN modules W=600mm H=800mm
KS7211	KS7211 Kit for S7 3/4 P fixed 24 DIN modules W=600mm H=700mm
KS7230	Kit for S7 4 poles withdrawable (DRH) 24 DIN modules W=600mm H=800mm
KS7231	Kit for S7 3/4 P withdrawable (MRD-CM) 24 DIN modules W=600mm H=700mm

List of codes

Code	Structure	Weight (Kg)	Page	Code	Structure	Weight (Kg)	Page	Code	Structure	Weight (Kg)	Page
05 270	Gemini		9/7	1SL0285A00	Gemini		9/4	1SL0388A00	Gemini		9/9
05 272	Gemini		9/7	1SL0286A00	Gemini		9/4	1SL0390A00	Gemini		9/9
05 274	Gemini		9/7	1SL0287A00	Gemini		9/4	1SL0413A00	Gemini		9/10
05 276	Gemini		9/7	1SL0290A00	Gemini		9/4	1SL0414A00	Gemini		9/10
05 278	Gemini		9/7	1SL0291A00	Gemini		9/4	1SL0415A00	Gemini		9/10
05 280	Gemini		9/7	1SL0292A00	Gemini		9/4	1SL0416A00	Gemini		9/10
05 282	Gemini		9/7	1SL0293A00	Gemini		9/4	1SL0423A00	Gemini		9/10
12 849	Gemini		9/11	1SL0296A00	Gemini		9/5	1SL0424A00	Gemini		9/10
12 851	Gemini		9/11	1SL0297A00	Gemini		9/5	1SL0425A00	Gemini		9/10
12 863	Gemini		9/11	1SL0298A00	Gemini		9/5	1SL0426A00	Gemini		9/10
1SL0201A00	Gemini		9/2	1SL0299A00	Gemini		9/5	1SL0433A00	Gemini		9/10
1SL0202A00	Gemini		9/2	1SL0302A00	Gemini		9/5	1SL0434A00	Gemini		9/10
1SL0203A00	Gemini		9/2	1SL0303A00	Gemini		9/5	1SL0435A00	Gemini		9/10
1SL0204A00	Gemini		9/2	1SL0304A00	Gemini		9/5	1SL0436A00	Gemini		9/10
1SL0205A00	Gemini		9/2	1SL0307A00	Gemini		9/4	AA1000	ArTuL	0,15	9/28
1SL0206A00	Gemini		9/2	1SL0308A00	Gemini		9/4	AA1001	ArTu L	0,15	9/28
1SL0211A00	Gemini		9/2	1SL0309A00	Gemini		9/4	AA1206	ArTu M	0,2	9/46
1SL0212A00	Gemini		9/2	1SL0310A00	Gemini		9/4	AA5600	ArTu L	0,2	9/29
1SL0213A00	Gemini		9/2	1SL0313A00	Gemini		9/4	AA5600	ArTu M	0,2	9/47
1SL0214A00	Gemini		9/2	1SL0314A00	Gemini		9/4	AA6100	ArTu L	0,01	9/31
1SL0215A00	Gemini		9/2	1SL0315A00	Gemini		9/4	AA6100	ArTu M	0,01	9/50
1SL0216A00	Gemini		9/2	1SL0318A00	Gemini		9/6	AA6100	ArTu K	0,01	9/82
1SL0221A00	Gemini		9/3	1SL0319A00	Gemini		9/6	AA6200	ArTu L	0,02	9/31
1SL0222A00	Gemini		9/3	1SL0320A00	Gemini		9/6	AA6200	ArTu K	0,02	9/82
1SL0223A00	Gemini		9/3	1SL0321A00	Gemini		9/6	AA8002	ArTu M	0,01	9/50
1SL0224A00	Gemini		9/3	1SL0324A00	Gemini		9/6	AA8004	ArTu M	0,01	9/50
1SL0225A00	Gemini		9/3	1SL0325A00	Gemini		9/6	AA8004	ArTu K	0,01	9/82
1SL0226A00	Gemini		9/3	1SL0326A00	Gemini		9/6	AA8005	ArTu M	0,01	9/50
1SL0231A00	Gemini		9/3	1SL0327A00	Gemini		9/6	AA9600	ArTu M	0,5	9/46
1SL0232A00	Gemini		9/3	1SL0330A00	Gemini		9/6	AA9610	ArTu K	0,7	9/78
1SL0233A00	Gemini		9/3	1SL0331A00	Gemini		9/6	AD1001	ArTu K	0,2	9/82
1SL0234A00	Gemini		9/3	1SL0332A00	Gemini		9/6	AD1004	ArTu M	0,55	9/48
1SL0235A00	Gemini		9/3	1SL0333A00	Gemini		9/6	AD1004	ArTu K	0,55	9/81
1SL0236A00	Gemini		9/3	1SL0336A00	Gemini		9/5	AD1005	ArTu L	0,425	9/28
1SL0241A00	Gemini		9/3	1SL0337A00	Gemini		9/5	AD1006	ArTu L	0,55	9/29
1SL0242A00	Gemini		9/3	1SL0338A00	Gemini		9/5	AD1006	ArTu M	0,55	9/48
1SL0243A00	Gemini		9/3	1SL0339A00	Gemini		9/9	AD1006	ArTu K	0,55	9/81
1SL0244A00	Gemini		9/3	1SL0340A00	Gemini		9/9	AD1007	ArTu L	0,25	9/29
1SL0245A00	Gemini		9/3	1SL0341A00	Gemini		9/9	AD1007	ArTu M	0,25	9/48
1SL0246A00	Gemini		9/3	1SL0342A00	Gemini		9/9	AD1007	ArTu K	0,25	9/81
1SL0251A00	Gemini		9/3	1SL0343A00	Gemini		9/9	AD1009	ArTu L	0,012	9/18
1SL0252A00	Gemini		9/3	1SL0344A00	Gemini		9/9	AD1009	ArTu M	0,012	9/37
1SL0253A00	Gemini		9/3	1SL0345A00	Gemini		9/9	AD1009	ArTu K	0,012	9/58
1SL0254A00	Gemini		9/3	1SL0346A00	Gemini		9/9	AD1012	ArTu M	0,2	9/46
1SL0255A00	Gemini		9/3	1SL0350A00	Gemini		9/11	AD1014	ArTu K	0,501	9/78
1SL0256A00	Gemini		9/3	1SL0351A00	Gemini		9/11	AD1015	ArTu K	0,2	9/79
1SL0259A00	Gemini		9/7	1SL0352A00	Gemini		9/9	AD1022	ArTu L	0,32	9/31
1SL0260A00	Gemini		9/7	1SL0353A00	Gemini		9/6	AD1022	ArTu M	0,32	9/50
1SL0261A00	Gemini		9/7	1SL0354A00	Gemini		9/6	AD1022	ArTu K	0,32	9/82
1SL0262A00	Gemini		9/7	1SL0355A00	Gemini		9/6	AD1024	ArTu K	5,5	9/68
1SL0263A00	Gemini		9/7	1SL0356A00	Gemini		9/6	AD1025	ArTu K	6	9/68
1SL0264A00	Gemini		9/7	1SL0360A00	Gemini		9/6	AD1027	ArTu M	0,25	9/48
1SL0267A00	Gemini		9/7	1SL0361A00	Gemini		9/6	AD1027	ArTu K	0,25	9/81
1SL0268A00	Gemini		9/7	1SL0362A00	Gemini		9/6	AD1028	ArTu M	0,5	9/48
1SL0269A00	Gemini		9/7	1SL0363A00	Gemini		9/6	AD1029	ArTu M	0,55	9/48
1SL0270A00	Gemini		9/7	1SL0370A00	Gemini		9/5	AD1029	ArTu K	0,55	9/81
1SL0271A00	Gemini		9/7	1SL0371A00	Gemini		9/5	AD1030	ArTu L	1,11	9/29
1SL0272A00	Gemini		9/7	1SL0372A00	Gemini		9/5	AD1030	ArTu M	1,11	9/48
1SL0275A00	Gemini		9/7	1SL0379A00	Gemini		9/11	AD1030	ArTu K	1,11	9/81
1SL0276A00	Gemini		9/7	1SL0380A00	Gemini		9/11	AD1031	ArTu L	1,25	9/29
1SL0277A00	Gemini		9/7	1SL0381A00	Gemini		9/11	AD1031	ArTu K	1,25	9/48
1SL0278A00	Gemini		9/7	1SL0382A00	Gemini		9/11	AD1031	ArTu M	1,25	9/81
1SL0279A00	Gemini		9/7	1SL0383A00	Gemini		9/7	AD1032	ArTu L	1,25	9/48
1SL0280A00	Gemini		9/7	1SL0385A00	Gemini		9/9	AD1032	ArTu K	1,25	9/81
1SL0283A00	Gemini		9/4	1SL0386A00	Gemini		9/9	AD1033	ArTu L	0,22	9/31
1SL0284A00	Gemini		9/4	1SL0387A00	Gemini		9/9	AD1033	ArTu M	0,22	9/50

List of codes

Code	Structure	Weight (Kg)	Page	Code	Structure	Weight (Kg)	Page	Code	Structure	Weight (Kg)	Page
AD1033	ArTu K	0,22	9/82	AD1077	ArTu K	1,053	9/69	BA1600	ArTu K	10,72	9/69
AD1034	ArTu M	2,3	9/48	AD1078	ArTu K	6,382	9/69	BA2000	ArTu K	15,7	9/69
AD1034	ArTu K	2,3	9/81	AD1080	ArTu L	0,25	9/29	BF1602	ArTu L	2,7	9/22
AD1035	ArTu M	0,12	9/48	AD1080	ArTu M	0,25	9/48	BF1602	ArTu L	2,7	9/24
AD1036	ArTu L	0,2	9/31	AD1080	ArTu K	0,25	9/81	BF1602	ArTu M	2,7	9/40
AD1036	ArTu M	0,2	9/50	AD1081	ArTu L	0,25	9/29	BF1602	ArTu K	2,7	9/42
AD1036	ArTu K	0,2	9/82	AD1081	ArTu M	0,25	9/48	BF1602	ArTu L	4,2	9/22
AD1037	ArTu M	0,342	9/37	AD1081	ArTu K	0,25	9/81	BF2502	ArTu L	4,2	9/24
AD1037	ArTu K	0,342	9/58	AD1083	ArTu L	0,25	9/29	BF2502	ArTu M	4,2	9/40
AD1038	ArTu L	0,147	9/29	AD1083	ArTu M	0,25	9/48	BF2502	ArTu M	4,2	9/42
AD1041	ArTu M	0,342	9/47	AD1086	ArTu L	6,54	9/19	BF2502	ArTu K	4,2	9/73
AD1041	ArTu K	0,342	9/80	AD1086	ArTu M	6,54	9/36	BF4002	ArTu L	3	9/22
AD1042	ArTu K	0,2	9/68	AD1086	ArTu K	6,54	9/57	BF4002	ArTu L	3	9/24
AD1044	ArTu M	0,991	9/47	AD1088	ArTu L	1,413	9/19	BF4002	ArTu M	3	9/40
AD1047	ArTu K	0,2	9/82	AD1088	ArTu M	1,413	9/36	BF4002	ArTu K	3	9/42
AD1048	ArTu K	0,2	9/82	AD1088	ArTu K	1,413	9/57	BF4002	ArTu L	6,5	9/73
AD1049	ArTu K	2,5	9/63	AD1089	ArTu L	2,082	9/19	BF4012	ArTu L	6,5	9/22
AD1050	ArTu K	2,5	9/63	AD1089	ArTu M	2,082	9/36	BF4012	ArTu L	6,5	9/24
AD1051	ArTu K	3	9/63	AD1089	ArTu K	2,082	9/57	BF4012	ArTu M	6,5	9/40
AD1053	ArTu M	10	9/48	AD1090	ArTu L	0,51	9/31	BF4012	ArTu M	6,5	9/42
AD1053	ArTu K	10	9/81	AD1090	ArTu M	0,51	9/50	BF4012	ArTu K	6,5	9/73
AD1054	ArTu M	0,9	9/47	AD1090	ArTu K	0,51	9/82	BF6302	ArTu K	12,5	9/73
AD1054	ArTu K	0,9	9/80	AD1091	ArTu L	0,33	9/31	BF8002	ArTu K	19,1	9/73
AD1055	ArTu M	1,7	9/47	AD1091	ArTu M	0,33	9/50	BP0630	ArTu L	0,4	9/24
AD1055	ArTu K	1,7	9/80	AD1091	ArTu K	0,33	9/82	BP0630	ArTu M	0,4	9/42
AD1056	ArTu L	0,3	9/22	AD1092	ArTu K	1,624	9/82	BP0630	ArTu K	0,4	9/73
AD1056	ArTu M	0,3	9/40	AD1096	ArTu L	0,147	9/18	BP0632	ArTu L	0,55	9/24
AD1056	ArTu K	0,3	9/70	AD1097	ArTu L	0,575	9/25	BP0632	ArTu M	0,55	9/42
AD1057	ArTu M	28	9/50	AD1098	ArTu L	0,96	9/18	BP0632	ArTu K	0,55	9/73
AD1057	ArTu K	28	9/82	AD1099	ArTu L	0,605	9/28	BP0634	ArTu L	0,45	9/24
AD1058	ArTu L	0,008	9/31	AD1101	ArTu L	0,045	9/19	BP0634	ArTu M	0,45	9/42
AD1058	ArTu M	0,008	9/50	AD1101	ArTu M	0,045	9/36	BP0634	ArTu K	0,45	9/73
AD1058	ArTu K	0,008	9/82	AD1101	ArTu K	0,045	9/57	BP1250	ArTu K	2,8	9/73
AD1061	ArTu M	0,9	9/37	AD1102	ArTu L	0,023	9/19	BP1600	ArTu K	2,6	9/73
AD1061	ArTu M	0,9	9/43	AD1102	ArTu K	0,023	9/57	BP2500	ArTu K	4,3	9/73
AD1061	ArTu K	0,9	9/44	AD1103	ArTu L	0,023	9/19	BP3200	ArTu K	4,4	9/73
AD1061	ArTu K	0,9	9/58	AD1103	ArTu M	0,023	9/36	BR0250	ArTu L	1,3	9/24
AD1061	ArTu K	0,9	9/75	AD1103	ArTu K	0,023	9/57	BR0250	ArTu M	1,3	9/42
AD1061	ArTu K	0,9	9/76	AD1104	ArTu L	0,023	9/19	BR0250	ArTu K	1,3	9/73
AD1063	ArTu K	4,164	9/69	AD1104	ArTu M	0,023	9/36	BR0400	ArTu L	2,8	9/24
AD1064	ArTu L	0,26	9/22	AD1104	ArTu K	0,023	9/57	BR0400	ArTu M	2,8	9/42
AD1064	ArTu M	0,26	9/40	AD1390	ArTu K	0,12	9/57	BR0400	ArTu K	2,8	9/73
AD1064	ArTu K	0,26	9/70	AD1600	ArTu L	0,24	9/19	BR0630	ArTu L	6,2	9/24
AD1065	ArTu L	0,2	9/22	AD1600	ArTu M	0,24	9/36	BR0630	ArTu M	6,2	9/42
AD1065	ArTu M	0,2	9/40	AD1600	ArTu K	0,24	9/57	BR0630	ArTu K	6,2	9/73
AD1065	ArTu K	0,2	9/70	AD1800	ArTu L	0,36	9/19	BR1250	ArTu K	14,5	9/73
AD1066	ArTu K	0,2	9/70	AD1800	ArTu M	0,36	9/36	BR1600	ArTu K	29	9/73
AD1068	ArTu L	1,068	9/22	AD1800	ArTu K	0,36	9/57	BR2000	ArTu K	34,8	9/73
AD1068	ArTu M	1,068	9/40	AD1808	ArTu K	0,18	9/78	BR4005	ArTu K	4,4	9/73
AD1068	ArTu K	1,068	9/69	AL1000	ArTu L	0,18	9/28	BR6305	ArTu K	6,5	9/73
AD1069	ArTu K	2,4	9/69	AL1001	ArTu L	1,35	9/28	BR8005	ArTu K	8,6	9/73
AD1070	ArTu L	0,03	9/31	AL2000	ArTu L	0,12	9/28	BS3250	ArTu K	1,5	9/73
AD1070	ArTu M	0,03	9/50	AP6000	ArTu L	0,01	9/18	BS5050	ArTu K	0,8	9/73
AD1070	ArTu K	0,03	9/82	AP6001	ArTu M	0,01	9/37	BS6350	ArTu K	0,95	9/73
AD1071	ArTu K	0,25	9/70	AP6001	ArTu K	0,01	9/58	CA1401	ArTu M		9/50
AD1072	ArTu K	0,32	9/70	AZ4000	ArTu M	3,5	9/50	CA1600	ArTu M		9/50
AD1073	ArTu K	6,552	9/69	AZ4000	ArTu K	3,5	9/78	CA1600	ArTu K		9/82
AD1075	ArTu L	0,55	9/29	AZ4000	ArTu K	3,5	9/82	CA1800	ArTu M	1,768	9/50
AD1075	ArTu M	0,55	9/48	BA0400	ArTu L	3,3	9/22	CA1800	ArTu K	1,768	9/82
AD1075	ArTu K	0,55	9/81	BA0400	ArTu M	3,3	9/40	CA2000	ArTu M	1,966	9/50
AD1076	ArTu L	0,25	9/29	BA0400	ArTu K	3,3	9/69	CA2000	ArTu K	1,966	9/82
AD1076	ArTu M	0,25	9/48	BA0800	ArTu L	4,5	9/22	ED0001	ArTu L	0,215	9/26
AD1076	ArTu K	0,25	9/81	BA0800	ArTu M	4,5	9/40	ED0001	ArTu M	0,215	9/44
AD1077	ArTu L	1,053	9/22	BA0800	ArTu K	4,5	9/69	ED0002	ArTu L	0,277	9/26
AD1077	ArTu M	1,053	9/40	BA1250	ArTu K	9,16	9/69	ED0002	ArTu M	0,277	9/44

List of codes

Code	Structure	Weight (Kg)	Page	Code	Structure	Weight (Kg)	Page	Code	Structure	Weight (Kg)	Page
ED0003	ArTu L	0,285	9/26	ED2365	ArTu L	0,27	9/26	ED2598	ArTu L	0,089	9/25
ED0003	ArTu M	0,285	9/44	ED2365	ArTu M	0,27	9/44	ED2598	ArTu M	0,089	9/43
ED0004	ArTu L	0,285	9/26	ED2365	ArTu K	0,27	9/76	ED2598	ArTu K	0,089	9/75
ED0004	ArTu M	0,285	9/44	ED2373	ArTu L	0,092	9/26	ED2606	ArTu L	0,087	9/25
ED0025	Gemini	1,908	9/8	ED2373	ArTu L	0,092	9/26	ED2606	ArTu M	0,087	9/43
ED0025	ArTu L	1,908	9/27	ED2373	ArTu M	0,092	9/44	ED2654	ArTu L	0,059	9/25
ED0025	ArTu M	1,908	9/45	ED2373	ArTu M	0,092	9/44	ED2654	ArTu M	0,059	9/43
ED0025	ArTu K	1,908	9/77	ED2373	ArTu M	0,092	9/44	ED2654	ArTu K	0,059	9/75
ED0026	Gemini	1,327	9/8	ED2373	ArTu M	0,092	9/44	ED2662	ArTu L	0,06	9/25
ED0026	ArTu L	1,327	9/27	ED2373	ArTu K	0,092	9/76	ED2662	ArTu M	0,06	9/43
ED0026	ArTu M	1,327	9/45	ED2373	ArTu K	0,092	9/76	ED2662	ArTu K	0,06	9/75
ED0026	ArTu K	1,327	9/77	ED2373	ArTu K	0,092	9/76	ED2670	ArTu L	0,081	9/25
ED2183	ArTu L	3,1	9/25	ED2381	ArTu L	0,256	9/26	ED2670	ArTu M	0,081	9/43
ED2183	ArTu M	3,1	9/43	ED2381	ArTu M	0,256	9/44	ED2670	ArTu K	0,081	9/75
ED2183	ArTu K	3,1	9/75	ED2381	ArTu K	0,256	9/76	ED2720	ArTu L	0,094	9/25
ED2191	ArTu L	4,1	9/25	ED2399	ArTu L	0,23	9/26	ED2720	ArTu M	0,094	9/43
ED2191	ArTu M	4,1	9/43	ED2399	ArTu M	0,23	9/44	ED2720	ArTu K	0,094	9/75
ED2191	ArTu K	4,1	9/75	ED2399	ArTu K	0,23	9/76	ED2738	ArTu L	0,094	9/25
ED2209	ArTu L	1,45	9/25	ED2407	ArTu L	0,26	9/26	ED2738	ArTu M	0,094	9/43
ED2209	ArTu M	1,45	9/43	ED2407	ArTu M	0,26	9/44	ED2738	ArTu K	0,094	9/75
ED2209	ArTu K	1,45	9/75	ED2407	ArTu K	0,26	9/76	ED2746	ArTu L	0,1	9/25
ED2217	ArTu L	0,148	9/26	ED2531	ArTu L	0,081	9/25	ED2746	ArTu M	0,1	9/43
ED2217	ArTu M	0,148	9/44	ED2531	ArTu M	0,081	9/43	ED2746	ArTu K	0,1	9/75
ED2217	ArTu K	0,148	9/76	ED2531	ArTu K	0,081	9/75	ED2753	ArTu L	0,09	9/25
ED2225	ArTu L	0,164	9/26	ED2549	ArTu L	0,081	9/25	ED2753	ArTu M	0,09	9/43
ED2225	ArTu M	0,164	9/44	ED2549	ArTu M	0,081	9/43	ED2753	ArTu K	0,09	9/75
ED2225	ArTu K	0,164	9/76	ED2549	ArTu K	0,081	9/75	ED2845	ArTu L	0,048	9/26
ED2233	ArTu L	0,18	9/26	ED2550	ArTu L	0,073	9/25	ED2845	ArTu M	0,048	9/44
ED2233	ArTu M	0,18	9/44	ED2550	ArTu M	0,073	9/43	ED2845	ArTu K	0,048	9/76
ED2233	ArTu K	0,18	9/76	ED2550	ArTu K	0,073	9/75	ED2852	ArTu L	0,048	9/26
ED2241	ArTu L	0,132	9/26	ED2551	ArTu L	0,125	9/25	ED2852	ArTu M	0,048	9/44
ED2241	ArTu M	0,132	9/44	ED2551	ArTu M	0,125	9/43	ED2852	ArTu K	0,048	9/76
ED2241	ArTu K	0,132	9/76	ED2551	ArTu K	0,125	9/75	ED2894	ArTu L	0,075	9/25
ED2258	ArTu L	0,2	9/26	ED2552	ArTu L	0,125	9/25	ED2894	ArTu M	0,075	9/43
ED2258	ArTu M	0,2	9/44	ED2552	ArTu M	0,125	9/43	ED2894	ArTu K	0,075	9/75
ED2258	ArTu K	0,2	9/76	ED2552	ArTu K	0,125	9/75	ED2902	ArTu L	0,061	9/25
ED2266	ArTu L	0,225	9/26	ED2553	ArTu L	0,125	9/25	ED2902	ArTu M	0,061	9/43
ED2266	ArTu M	0,225	9/44	ED2553	ArTu M	0,125	9/43	ED2902	ArTu K	0,061	9/75
ED2266	ArTu K	0,225	9/76	ED2553	ArTu K	0,125	9/75	ED2910	ArTu L	0,072	9/25
ED2274	ArTu L	0,225	9/26	ED2554	ArTu L	0,125	9/25	ED2910	ArTu M	0,072	9/43
ED2274	ArTu M	0,225	9/44	ED2554	ArTu M	0,125	9/43	ED2910	ArTu K	0,072	9/75
ED2274	ArTu K	0,225	9/76	ED2554	ArTu K	0,125	9/75	ED2928	ArTu L	0,076	9/25
ED2282	ArTu L	0,183	9/26	ED2556	ArTu L	0,077	9/25	ED2928	ArTu M	0,076	9/43
ED2282	ArTu M	0,183	9/44	ED2556	ArTu M	0,077	9/43	ED2928	ArTu K	0,076	9/75
ED2282	ArTu K	0,183	9/76	ED2556	ArTu K	0,077	9/75	ED2936	ArTu L	0,029	9/26
ED2290	ArTu L	0,25	9/26	ED2557	ArTu L	0,1	9/25	ED2936	ArTu M	0,029	9/44
ED2290	ArTu M	0,25	9/44	ED2557	ArTu M	0,1	9/43	ED2936	ArTu K	0,029	9/76
ED2308	ArTu L	0,265	9/26	ED2558	ArTu L	0,1	9/25	ED2944	Gemini	0,358	9/8
ED2308	ArTu M	0,265	9/44	ED2558	ArTu M	0,1	9/43	ED2944	ArTu L	0,358	9/27
ED2308	ArTu K	0,265	9/76	ED2558	ArTu K	0,1	9/75	ED2944	ArTu M	0,358	9/45
ED2316	ArTu L	0,29	9/26	ED2559	ArTu L	0,1	9/25	ED2944	ArTu K	0,358	9/77
ED2316	ArTu M	0,29	9/44	ED2559	ArTu M	0,1	9/43	ED2951	Gemini	0,556	9/8
ED2316	ArTu K	0,29	9/76	ED2559	ArTu K	0,1	9/75	ED2951	ArTu L	0,556	9/27
ED2324	ArTu L	0,23	9/26	ED2560	ArTu L	0,1	9/25	ED2951	ArTu M	0,556	9/45
ED2324	ArTu M	0,23	9/44	ED2560	ArTu M	0,1	9/43	ED2951	ArTu K	0,556	9/77
ED2324	ArTu K	0,23	9/76	ED2560	ArTu K	0,1	9/75	ED2961	ArTu L	0,4	9/27
ED2332	ArTu L	0,245	9/26	ED2564	ArTu L	0,079	9/25	ED2961	ArTu M	0,4	9/45
ED2332	ArTu M	0,245	9/44	ED2564	ArTu M	0,079	9/43	ED2961	ArTu K	0,4	9/77
ED2332	ArTu K	0,245	9/76	ED2564	ArTu K	0,079	9/75	ED2962	ArTu L	0,1	9/27
ED2340	ArTu L	0,22	9/26	ED2572	ArTu L	0,077	9/25	ED2962	ArTu M	0,1	9/45
ED2340	ArTu M	0,22	9/44	ED2572	ArTu M	0,077	9/43	ED2962	ArTu K	0,1	9/77
ED2340	ArTu K	0,22	9/76	ED2572	ArTu K	0,077	9/75	ED2969	Gemini	0,75	9/8
ED2357	ArTu L	0,202	9/26	ED2590	ArTu L	0,081	9/25	ED2969	ArTu L	0,75	9/27
ED2357	ArTu M	0,202	9/44	ED2590	ArTu M	0,081	9/43	ED2969	ArTu M	0,75	9/45
ED2357	ArTu K	0,202	9/76	ED2590	ArTu K	0,081	9/75	ED2969	ArTu K	0,75	9/77

List of codes

Code	Structure	Weight (Kg)	Page	Code	Structure	Weight (Kg)	Page	Code	Structure	Weight (Kg)	Page
ED2977	Gemini	1,086	9/8	ED3108	ArTu K	0,048	9/77	EV1090	ArTu L	0,88	9/30
ED2977	ArTu L	1,086	9/27	ED3116	Gemini	0,052	9/8	EV1090	ArTu L	0,88	9/30
ED2977	ArTu M	1,086	9/45	ED3116	ArTu L	0,052	9/27	EV1090	ArTu M	0,88	9/49
ED2977	ArTu K	1,086	9/77	ED3116	ArTu M	0,052	9/45	EV1090	ArTu M	0,88	9/49
ED2985	ArTu L	0,17	9/27	ED3116	ArTu K	0,052	9/77	EV1090	ArTu K	0,88	9/81
ED2985	ArTu M	0,17	9/45	ED3124	Gemini	0,083	9/8	EV1091	ArTu L	0,88	9/30
ED2985	ArTu K	0,17	9/77	ED3124	ArTu L	0,083	9/27	EV1091	ArTu L	0,88	9/30
ED2993	Gemini	0,256	9/8	ED3124	ArTu M	0,083	9/45	EV1091	ArTu M	0,88	9/49
ED2993	ArTu L	0,256	9/27	ED3124	ArTu K	0,083	9/77	EV1091	ArTu M	0,88	9/49
ED2993	ArTu M	0,256	9/45	ED3132	Gemini	0,329	9/8	EV1091	ArTu K	0,88	9/81
ED2993	ArTu K	0,256	9/77	ED3132	ArTu L	0,329	9/27	EV1092	ArTu L	0,55	9/30
ED3009	Gemini	0,386	9/8	ED3132	ArTu M	0,329	9/45	EV1092	ArTu L	0,55	9/30
ED3009	ArTu L	0,386	9/27	ED3132	ArTu K	0,329	9/77	EV1092	ArTu M	0,55	9/49
ED3009	ArTu M	0,386	9/45	ED3272	Gemini	0,101	9/8	EV1092	ArTu K	0,55	9/81
ED3009	ArTu K	0,386	9/77	ED3272	ArTu L	0,101	9/27	EV1093	ArTu L	0,55	9/30
ED3017	Gemini	0,467	9/8	ED3272	ArTu M	0,101	9/45	EV1093	ArTu L	0,55	9/30
ED3017	ArTu L	0,467	9/27	ED3272	ArTu K	0,101	9/77	EV1093	ArTu M	0,55	9/49
ED3017	ArTu M	0,467	9/45	ED3280	Gemini	0,101	9/8	EV1093	ArTu M	0,55	9/49
ED3017	ArTu K	0,467	9/77	ED3280	ArTu L	0,101	9/27	EV1093	ArTu K	0,55	9/81
ED3025	Gemini	0,67	9/8	ED3280	ArTu M	0,101	9/45	EV1110	ArTu L	2,74	9/28
ED3025	ArTu L	0,67	9/27	ED3280	ArTu K	0,101	9/77	EV1110	ArTu M	2,74	9/47
ED3025	ArTu M	0,67	9/45	ED3298	Gemini	0,095	9/8	EV1110	ArTu K	2,74	9/80
ED3025	ArTu K	0,67	9/77	ED3298	ArTu L	0,095	9/27	EV1111	ArTu K	0,68	9/80
ED3033	Gemini	0,085	9/8	ED3298	ArTu M	0,095	9/45	EV1112	ArTu L	2,74	9/28
ED3033	ArTu L	0,085	9/27	ED3298	ArTu K	0,095	9/77	EV1112	ArTu M	2,74	9/47
ED3033	ArTu M	0,085	9/45	ED3355	Gemini	0,066	9/8	EV1112	ArTu K	2,74	9/80
ED3033	ArTu K	0,085	9/77	ED3355	ArTu L	0,066	9/27	EV1119	ArTu L	3,6	9/22
ED3041	Gemini	0,069	9/8	ED3355	ArTu M	0,066	9/45	EV1119	ArTu L	3,6	9/24
ED3041	ArTu L	0,069	9/27	ED3355	ArTu K	0,066	9/77	EV1119	ArTu M	3,6	9/40
ED3041	ArTu M	0,069	9/45	ED3363	Gemini	0,08	9/8	EV1119	ArTu K	3,6	9/42
ED3041	ArTu K	0,069	9/77	ED3363	ArTu L	0,08	9/27	EV1119	ArTu M	3,6	9/80
ED3058	Gemini	0,064	9/8	ED3363	ArTu M	0,08	9/45	EV1120	ArTu L	4,5	9/22
ED3058	ArTu L	0,064	9/27	ED3363	ArTu K	0,08	9/77	EV1120	ArTu L	4,5	9/24
ED3058	ArTu M	0,064	9/45	ED3371	Gemini	0,095	9/8	EV1120	ArTu M	4,5	9/40
ED3058	ArTu K	0,064	9/77	ED3371	ArTu L	0,095	9/27	EV1120	ArTu M	4,5	9/42
ED3066	Gemini	0,083	9/8	ED3371	ArTu M	0,095	9/45	EV1120	ArTu K	4,5	9/80
ED3066	ArTu L	0,083	9/27	ED3371	ArTu K	0,095	9/77	EV1121	ArTu L	8,85	9/22
ED3066	ArTu M	0,083	9/45	ED3405	Gemini	0,586	9/8	EV1121	ArTu L	8,85	9/24
ED3066	ArTu K	0,083	9/77	ED3405	ArTu L	0,586	9/27	EV1121	ArTu M	8,85	9/40
ED3082	Gemini	0,245	9/8	ED3405	ArTu M	0,586	9/45	EV1121	ArTu M	8,85	9/42
ED3082	ArTu L	0,245	9/27	ED3405	ArTu K	0,586	9/77	EV1121	ArTu K	8,85	9/80
ED3082	ArTu M	0,245	9/45	ED3413	Gemini	0,8	9/8	EV1122	ArTu L	4,25	9/22
ED3082	ArTu K	0,245	9/77	ED3413	ArTu M	0,8	9/45	EV1122	ArTu L	4,25	9/24
ED3090	Gemini	0,56	9/8	ED3413	ArTu K	0,8	9/77	EV1122	ArTu M	4,25	9/40
ED3090	ArTu L	0,56	9/27	ED3439	Gemini	1,3	9/8	EV1122	ArTu M	4,25	9/42
ED3090	ArTu M	0,56	9/45	ED3439	ArTu L	1,3	9/27	EV1122	ArTu K	4,25	9/80
ED3090	ArTu K	0,56	9/77	ED3439	ArTu M	1,3	9/45	EV1123	ArTu L	4,25	9/22
ED3101	Gemini	0,3	9/8	ED3439	ArTu K	1,3	9/77	EV1123	ArTu L	4,25	9/24
ED3101	ArTu L	0,3	9/27	EV1008	ArTu L	0,038	9/31	EV1123	ArTu M	4,25	9/40
ED3101	ArTu M	0,3	9/45	EV1008	ArTu M	0,038	9/50	EV1123	ArTu M	4,25	9/42
ED3101	ArTu K	0,3	9/77	EV1008	ArTu K	0,038	9/82	EV1123	ArTu K	4,25	9/80
ED3102	Gemini	0,3	9/8	EV1036	ArTu L	0,035	9/31	EV1124	ArTu L	2,77	9/22
ED3102	ArTu L	0,3	9/27	EV1036	ArTu M	0,035	9/50	EV1124	ArTu L	2,77	9/24
ED3102	ArTu M	0,3	9/45	EV1050	ArTu L	16,956	9/30	EV1124	ArTu M	2,77	9/40
ED3102	ArTu K	0,3	9/77	EV1050	ArTu M	16,956	9/49	EV1124	ArTu K	2,77	9/80
ED3103	Gemini	0,3	9/8	EV1050	ArTu K	16,956	9/81	EV1125	ArTu L	2,77	9/22
ED3103	ArTu L	0,3	9/27	EV1051	ArTu L	0,981	9/30	EV1125	ArTu L	2,77	9/24
ED3103	ArTu M	0,3	9/45	EV1051	ArTu M	0,981	9/49	EV1125	ArTu M	2,77	9/40
ED3103	ArTu K	0,3	9/77	EV1051	ArTu K	0,981	9/81	EV1125	ArTu K	2,77	9/80
ED3104	Gemini	0,3	9/8	EV1056	ArTu L	1,2	9/30	EV1125	ArTu M	2,77	9/42
ED3104	ArTu L	0,3	9/27	EV1056	ArTu M	1,2	9/49	EV1125	ArTu K	2,77	9/80
ED3104	ArTu M	0,3	9/45	EV1056	ArTu K	1,2	9/81	EV1125	ArTu L	0,235	9/19
ED3104	ArTu K	0,3	9/77	EV1058	ArTu L	1,45	9/30	EV1135	ArTu M	0,235	9/36
ED3108	Gemini	0,048	9/8	EV1058	ArTu M	1,45	9/49	EV1135	ArTu K	0,235	9/57
ED3108	ArTu L	0,048	9/27	EV1058	ArTu K	1,45	9/81	EV1136	ArTu L	0,163	9/19

List of codes

Code	Structure	Weight (Kg)	Page	Code	Structure	Weight (Kg)	Page	Code	Structure	Weight (Kg)	Page
EV1136	ArTu M	0,163	9/36	FR6600	ArTu K	16	9/63	IP3020	ArTu K	0,7	9/54
EV1136	ArTu K	0,163	9/57	FR6800	ArTu K	17,5	9/63	IP3030	ArTu K	0,7	9/54
EV1150	ArTu L	0,095	9/30	FV3456	ArTu K	6,85	9/67	IP3031	ArTu M	0,7	9/35
EV1150	ArTu M	0,095	9/49	FV3458	ArTu K	7,94	9/67	IP3040	ArTu K	0,5	9/54
EV1150	ArTu K	0,095	9/81	FV3556	ArTu K	10	9/67	IP3060	ArTu K	0,62	9/54
EV1151	ArTu L	0,095	9/30	FV3558	ArTu K	12	9/67	IP3061	ArTu M	0,7	9/35
EV1151	ArTu M	0,095	9/49	FV3668	ArTu K	13	9/67	IP3080	ArTu K	0,7	9/54
EV1151	ArTu K	0,095	9/81	FV3788	ArTu K	15	9/67	IP3081	ArTu M	0,7	9/35
EV1152	ArTu L	0,095	9/30	FV4456	ArTu K	2,34	9/67	IP3140	ArTu M	0,7	9/35
EV1152	ArTu M	0,095	9/49	FV4458	ArTu K	3,276	9/67	IP3142	ArTu M	0,7	9/35
EV1152	ArTu K	0,095	9/81	FV4558	ArTu K	4,5	9/67	IP3160	ArTu M	0,7	9/35
EV1153	ArTu L	0,095	9/30	FV4668	ArTu K	5,5	9/67	IP3161	ArTu K	0,6	9/54
EV1153	ArTu M	0,095	9/49	FV4788	ArTu K	6,5	9/67	IP3162	ArTu M	0,7	9/35
EV1153	ArTu K	0,095	9/81	GC6002	ArTu M	1	9/37	IP3163	ArTu K	0,6	9/54
EV1154	ArTu L	0,095	9/30	GC6002	ArTu K	1	9/58	IP3180	ArTu K	0,7	9/54
EV1154	ArTu M	0,095	9/49	GC8002	ArTu M	1	9/37	IP3181	ArTu M	0,7	9/35
EV1154	ArTu K	0,095	9/81	GC8002	ArTu K	1	9/58	IP3182	ArTu K	0,7	9/54
EV1155	ArTu L	0,01	9/30	GD1520	ArTu L	0,8	9/18	IP3183	ArTu M	0,7	9/35
EV1155	ArTu M	0,01	9/49	GD1520	ArTu L	0,8	9/27	IP3200	ArTu K	0,78	9/54
EV1155	ArTu K	0,01	9/81	GD1530	ArTu L	1,785	9/18	IP3201	ArTu M	0,7	9/35
EV1156	ArTu L	0,066	9/30	GD1530	ArTu L	1,785	9/27	IP3202	ArTu K	0,7	9/54
EV1156	ArTu M	0,066	9/49	GD4002	ArTu K	0,8	9/58	IP3203	ArTu M	0,7	9/35
EV1156	ArTu K	0,066	9/81	GD4002	ArTu K	0,8	9/77	IP4140	ArTu K	0,9	9/54
EV2110	ArTu L	0,55	9/28	GD4005	ArTu K	0,8	9/64	IP4141	ArTu K	1,28	9/54
EV2110	ArTu M	0,55	9/47	GD6002	ArTu M	1	9/37	IP4160	ArTu K	1,35	9/54
EV2110	ArTu K	0,55	9/80	GD6002	ArTu M	1	9/45	IP4161	ArTu K	2,44	9/54
EV2112	ArTu L	0,55	9/28	GD6002	ArTu K	1	9/58	IP4180	ArTu K	1,8	9/54
EV2112	ArTu M	0,55	9/47	GD6002	ArTu K	1	9/77	IP4181	ArTu K	3,22	9/54
EV2112	ArTu K	0,55	9/80	GD6008	ArTu M	2,4	9/37	KB1001	ArTu L	0,5	9/23
FH1020	ArTu K	6,55	9/67	GD6008	ArTu K	2,4	9/58	KB1002	ArTu L	0,95	9/23
FH1030	ArTu K	8,4	9/67	GD6009	ArTu M	2,4	9/37	KB1006	ArTu L	0,75	9/23
FH1040	ArTu K	10,27	9/67	GD6009	ArTu K	2,4	9/58	KB1010	ArTu L	0,6	9/23
FH1050	ArTu K	12,21	9/67	GD6010	ArTu M	1,6	9/37	KB1014	ArTu L	0,756	9/23
FH1060	ArTu K	14,2	9/67	GD6010	ArTu K	1,6	9/58	KB1018	ArTu L	0,635	9/23
FH3220	ArTu K	6,5	9/67	GD6011	ArTu K	1,68	9/58	KB1019	ArTu L	3,592	9/23
FH3224	ArTu K	2,332	9/67	GD7005	ArTu K	0,9	9/64	KB1020	ArTu L	4,592	9/23
FH3430	ArTu K	8,3	9/67	GD8002	ArTu M	1	9/37	KB1021	ArTu L	5,252	9/23
FH3434	ArTu K	3,5	9/67	GD8002	ArTu M	1	9/45	KB1022	ArTu L	5,592	9/23
FH3540	ArTu K	9,5	9/67	GD8002	ArTu K	1	9/58	KB1024	ArTu L	6,592	9/23
FH3544	ArTu K	4,66	9/67	GD8002	ArTu K	1	9/77	KE2215	ArTu K	13	9/66
FH3650	ArTu K	11	9/67	GD8010	ArTu M	1,9	9/37	KE2235	ArTu K	18	9/66
FH3680	ArTu K	11	9/67	GD8010	ArTu K	1,9	9/58	KE3205	ArTu K	13	9/66
FH3760	ArTu K	13	9/67	GD9005	ArTu K	1,15	9/64	KE3215	ArTu K	13	9/62
FH3764	ArTu K	7,1	9/67	H70001	ArTu M	3,9	9/32	KE3235	ArTu K	13	9/62
FH3780	ArTu K	12	9/67	H70002	ArTu M	5,2	9/32	KE3236	ArTu K	18	9/66
FH3960	ArTu K	3,5	9/67	H70003	ArTu M	6,5	9/32	KE4214	ArTu K	13	9/66
FH3961	ArTu K	3,116	9/67	H70004	ArTu M	7,8	9/32	KE4215	ArTu K	13	9/62
FH3965	ArTu K	6,504	9/67	IP0600	ArTu L	0,425	9/17	KE4234	ArTu K	13	9/66
FH3966	ArTu K	6,219	9/67	IP0601	ArTu L	0,888	9/17	KE4235	ArTu K	13	9/62
FH4220	ArTu K	0,7	9/67	IP0602	ArTu L	0,444	9/17	KE5214	ArTu K	13,2	9/66
FH4430	ArTu K	0,9	9/67	IP0603	ArTu L	0,292	9/17	KE5215	ArTu K	13,2	9/62
FH4540	ArTu K	1,1	9/67	IP0604	ArTu L	1,254	9/17	KE5234	ArTu K	13,2	9/66
FH4650	ArTu K	1,3	9/67	IP0800	ArTu L	0,567	9/17	KE5235	ArTu K	13,2	9/62
FH4760	ArTu K	1,5	9/67	IP0801	ArTu L	0,39	9/17	KI4114	ArTu K	12,65	9/61
FR2600	ArTu K	5	9/63	IP1000	ArTu L	0,709	9/17	KI4115	ArTu K	12,65	9/61
FR2601	ArTu M	5	9/38	IP1001	ArTu L	0,487	9/17	KI4116	ArTu K	22,45	9/65
FR2601	ArTu K	5	9/60	IP1200	ArTu L	0,851	9/17	KI4117	ArTu K	25,68	9/65
FR2800	ArTu K	6	9/63	IP1201	ArTu L	0,584	9/17	KI4118	ArTu K	25,68	9/65
FR2801	ArTu M	6	9/38	IP1400	ArTu L	0,992	9/17	KI5114	ArTu K	12,65	9/61
FR2801	ArTu K	6	9/60	IP1401	ArTu L	0,682	9/17	KI5115	ArTu K	12,65	9/61
FR4600	ArTu K	10,5	9/63	IP1600	ArTu L	1,134	9/17	KI5116	ArTu K	22,45	9/65
FR4601	ArTu M	10,5	9/38	IP1601	ArTu L	0,779	9/17	KI5117	ArTu K	25,68	9/65
FR4601	ArTu K	10,5	9/60	IP1800	ArTu L	1,276	9/17	KI5118	ArTu K	25,68	9/65
FR4800	ArTu K	11,5	9/63	IP1801	ArTu L	0,876	9/17	KL1102	ArTu K	7,52	9/61
FR4801	ArTu M	11,5	9/38	IP2000	ArTu L	1,373	9/17	KL2103	ArTu M	5,1	9/39
FR4801	ArTu K	11,5	9/60	IP2001	ArTu L	0,96	9/17	KL2103	ArTu K	5,1	9/60

List of codes

Code	Structure	Weight (Kg)	Page	Code	Structure	Weight (Kg)	Page	Code	Structure	Weight (Kg)	Page
KL2104	ArTu K	7,2	9/61	KT1117	ArTu M	3,89	9/39	KT4128	ArTu K	8,439	9/66
KL3103	ArTu M	7,1	9/39	KT1117	ArTu K	3,89	9/60	KT4129	ArTu K	9,5	9/66
KL3103	ArTu K	7,1	9/60	KT1401	ArTu K	3,76	9/61	KT4130	ArTu K	4,74	9/65
KL3104	ArTu K	7,2	9/61	KT1410	ArTu K	2,593	9/65	KT4211	ArTu K	8,7	9/62
KL3113	ArTu M	4,95	9/39	KT1411	ArTu K	3,6	9/61	KT4212	ArTu M	9,25	9/39
KL3113	ArTu K	4,95	9/60	KT2101	ArTu K	5,4	9/61	KT4221	ArTu K	8,438	9/62
KL3114	ArTu K	7,76	9/61	KT2102	ArTu M	4	9/39	KT4222	ArTu K	11,2	9/66
KL3212	ArTu K	10,04	9/62	KT2102	ArTu K	4	9/60	KT4231	ArTu K	8,438	9/62
KL4115	ArTu M	6,55	9/39	KT2110	ArTu K	3,9	9/65	KT4310	ArTu K	9,844	9/65
KL4115	ArTu K	6,55	9/60	KT2111	ArTu K	3,89	9/61	KT4320	ArTu K	14,766	9/65
KL4116	ArTu M	3,93	9/39	KT2112	ArTu K	3,2	9/61	KT4411	ArTu K	2,95	9/61
KL4116	ArTu K	3,93	9/60	KT2117	ArTu M	3,89	9/39	KT4412	ArTu K	4,66	9/62
KL4118	ArTu K	10,44	9/62	KT2117	ArTu K	3,89	9/60	KT5101	ArTu K	4,74	9/61
KL5102	ArTu M	15,417	9/39	KT2120	ArTu K	3,9	9/65	KT5102	ArTu M	11,422	9/39
KL5102	ArTu K	15,417	9/60	KT2121	ArTu K	3,89	9/61	KT5102	ArTu K	11,422	9/60
KL5103	ArTu K	15,418	9/62	KT2210	ArTu K	3,89	9/65	KT5103	ArTu K	10,547	9/62
KL5114	ArTu M	9,22	9/39	KT2401	ArTu K	3,6	9/61	KT5110	ArTu M	4,425	9/39
KL5114	ArTu K	9,22	9/60	KT2410	ArTu K	2,8	9/65	KT5110	ArTu K	4,425	9/60
KL5116	ArTu M	5,895	9/39	KT2411	ArTu K	3,6	9/61	KT5111	ArTu K	6,45	9/61
KL5116	ArTu K	5,895	9/60	KT2420	ArTu K	2,7	9/65	KT5112	ArTu M	5,8	9/39
KL5117	ArTu K	13,25	9/62	KT2421	ArTu K	3,74	9/61	KT5112	ArTu K	5,8	9/60
KL5212	ArTu M	12,25	9/39	KT3101	ArTu K	5,4	9/61	KT5117	ArTu K	9,85	9/62
KL5212	ArTu K	12,25	9/60	KT3102	ArTu M	5,6	9/39	KT5120	ArTu K	4,74	9/61
KL5213	ArTu K	12,25	9/62	KT3102	ArTu K	5,6	9/60	KT5121	ArTu K	4,74	9/61
KL5214	ArTu K	11,65	9/62	KT3110	ArTu K	5,6	9/65	KT5122	ArTu K	2,68	9/65
KL6113	ArTu M	12,712	9/39	KT3112	ArTu M	3,9	9/39	KT5123	ArTu K	11,25	9/66
KL6113	ArTu K	12,712	9/60	KT3112	ArTu K	3,9	9/60	KT5124	ArTu K	8,439	9/66
KL6124	ArTu K	12,712	9/62	KT3114	ArTu K	5	9/61	KT5125	ArTu K	7,584	9/66
KL6213	ArTu M	12,712	9/39	KT3115	ArTu K	5,6	9/65	KT5126	ArTu K	5,626	9/66
KL6213	ArTu K	12,712	9/60	KT3116	ArTu K	4,5	9/61	KT5128	ArTu K	10,25	9/66
KL6214	ArTu K	12,712	9/62	KT3118	ArTu M	3,125	9/39	KT5129	ArTu K	8,439	9/66
KL7112	ArTu K	11	9/61	KT3119	ArTu K	3,89	9/61	KT5130	ArTu K	4,92	9/61
KL7212	ArTu K	12,31	9/62	KT3120	ArTu K	5,6	9/65	KT5131	ArTu K	4,92	9/61
KL7213	ArTu K	10,58	9/62	KT3121	ArTu K	5,82	9/61	KT5134	ArTu K	6,329	9/61
KO1201	ArTu M	7	9/39	KT3124	ArTu K	5,6	9/65	KT5135	ArTu K	6,329	9/61
KO1201	ArTu K	7	9/63	KT3131	ArTu K	11,413	9/61	KT5136	ArTu K	5,89	9/65
KO1201	ArTu K	7	9/60	KT3132	ArTu K		9/65	KT5137	ArTu K	9,5	9/66
KO1251	ArTu K	20,5	9/63	KT3211	ArTu K	7,53	9/62	KT5138	ArTu K	8,439	9/62
KO1260	ArTu L	4,777	9/20	KT3212	ArTu M	5,6	9/39	KT5139	ArTu K	10,548	9/62
KO1261	ArTu L	4,777	9/20	KT3212	ArTu K	5,6	9/60	KT5211	ArTu K	9,5	9/62
KO1262	ArTu L	3,078	9/20	KT3221	ArTu K	7,53	9/62	KT5212	ArTu M	8,25	9/39
KO1280	ArTu L	6,585	9/20	KT3401	ArTu K	3,6	9/61	KT5212	ArTu K	8,25	9/60
KO1281	ArTu L	6,585	9/20	KT3410	ArTu K	4	9/65	KT5214	ArTu K	9,85	9/62
KO2260	ArTu M	6,308	9/39	KT3416	ArTu K	5,02	9/62	KT5221	ArTu K	10,548	9/62
KO2260	ArTu K	6,308	9/63	KT3419	ArTu K	3,6	9/61	KT5222	ArTu K	8,438	9/62
KO2260	ArTu K	6,308	9/60	KT3420	ArTu K	4	9/65	KT5223	ArTu K	11,25	9/66
KO2261	ArTu M	6,308	9/39	KT3421	ArTu K	3,88	9/61	KT5231	ArTu K	10,548	9/62
KO2261	ArTu K	6,308	9/63	KT3426	ArTu K	5,02	9/62	KT5232	ArTu K	8,438	9/62
KO2261	ArTu K	6,308	9/60	KT4101	ArTu K	3,16	9/61	KT5310	ArTu K	14,766	9/65
KO2280	ArTu M	8,184	9/39	KT4102	ArTu M	11,563	9/39	KT5320	ArTu K	14,766	9/65
KO2280	ArTu K	8,184	9/63	KT4102	ArTu K	11,563	9/60	KT5321	ArTu K	14,766	9/65
KO2280	ArTu K	8,184	9/60	KT4103	ArTu K	11,16	9/62	KT5401	ArTu K	7,71	9/62
KO2281	ArTu M	8,184	9/39	KT4110	ArTu M	2,95	9/39	KT5411	ArTu K	2,65	9/61
KO2281	ArTu K	8,184	9/63	KT4110	ArTu K	2,95	9/60	KT5412	ArTu K	3,66	9/62
KO2281	ArTu K	8,184	9/60	KT4111	ArTu K	2,95	9/61	KT5420	ArTu K	4,89	9/65
KO3660	ArTu K	8,226	9/63	KT4112	ArTu M	2,8	9/39	KT5421	ArTu K	4,58	9/65
KO3680	ArTu K	10,826	9/63	KT4113	ArTu K	2,8	9/60	KT5430	ArTu K	4,92	9/65
KS8210	ArTu K	12,65	9/66	KT4116	ArTu K	7,83	9/62	KT5431	ArTu K	4,92	9/65
KS8211	ArTu K	11,39	9/62	KT4120	ArTu K	1,87	9/65	KT6110	ArTu K	9,525	9/65
KT1100	ArTu K	3,89	9/65	KT4121	ArTu K	11,365	9/66	KT6111	ArTu K	9,525	9/61
KT1101	ArTu K	5,64	9/61	KT4122	ArTu K	2,95	9/61	KT6112	ArTu K	10,254	9/61
KT1102	ArTu M	4	9/39	KT4124	ArTu K	2,35	9/65	KT6113	ArTu M	9,525	9/39
KT1102	ArTu K	4	9/60	KT4125	ArTu K	6,329	9/61	KT6113	ArTu K	9,525	9/60
KT1110	ArTu K	3,89	9/65	KT4126	ArTu K	8,438	9/62	KT6114	ArTu K	10,647	9/61
KT1111	ArTu K	3,89	9/61	KT4127	ArTu K	6,329	9/61	KT6115	ArTu K	9,525	9/61

List of codes

Code	Structure	Weight (Kg)	Page	Code	Structure	Weight (Kg)	Page	Code	Structure	Weight (Kg)	Page
KT6116	ArTu K	15,245	9/61	LI1880	ArTu K	33	9/52	MC2000	ArTu L	12,573	9/14
KT6117	ArTu K	15,245	9/61	LI2040	ArTu K	26	9/52	MI0600	ArTu L	1,705	9/12
KT6118	ArTu K	15,245	9/61	LI2060	ArTu K	30	9/52	MI0800	ArTu L	2,274	9/12
KT6119	ArTu K	15,245	9/61	LI2080	ArTu K	35	9/52	MI1000	ArTu L	2,842	9/12
KT6120	ArTu K	9,525	9/62	LK1000	ArTu L	3,462	9/21	MI1200	ArTu L	3,41	9/12
KT6121	ArTu K	9,525	9/62	LK1001	ArTu L	3,462	9/21	MI1400	ArTu L	3,979	9/13
KT6122	ArTu K	9,525	9/62	LK1002	ArTu L	2,694	9/21	MI1600	ArTu L	4,543	9/13
KT6123	ArTu K	9,525	9/62	LK1004	ArTu L	3,462	9/21	MI1800	ArTu L	5,118	9/13
KT6130	ArTu K	9,525	9/65	LK1008	ArTu L	4,108	9/21	MI2000	ArTu L	5,686	9/13
KT6131	ArTu K	9,525	9/61	LK1100	ArTu L	4,616	9/21	PA1600	ArTu L	2,6	9/20
KT6132	ArTu K	9,525	9/66	LK1101	ArTu L	4,616	9/21	PA1600	ArTu M	2,6	9/38
KT6133	ArTu K	9,525	9/66	LK1104	ArTu L	4,862	9/21	PA1600	ArTu K	2,6	9/59
KT6134	ArTu K	9,525	9/65	LK2000	ArTu L	3,507	9/21	PA2600	ArTu L	3	9/20
KT6141	ArTu K	9,525	9/66	LK2001	ArTu L	3,462	9/21	PA2600	ArTu M	3	9/38
KT6142	ArTu K	15,245	9/65	LK2002	ArTu L	2,694	9/21	PA2600	ArTu K	3	9/59
KT6143	ArTu K	15,245	9/65	LK2004	ArTu L	3,462	9/21	PB0802	ArTu L	0,656	9/22
KT6144	ArTu K	15,245	9/65	LK2008	ArTu L	4,108	9/21	PB0802	ArTu M	0,656	9/40
KT6145	ArTu K	15,245	9/65	LK2100	ArTu L	4,676	9/21	PB0802	ArTu K	0,656	9/69
KT6210	ArTu K	9,525	9/66	LK2101	ArTu L	4,616	9/21	PB0803	ArTu L	0,4	9/22
KT6211	ArTu K	9,525	9/62	LK2104	ArTu L	4,954	9/21	PB0803	ArTu M	0,4	9/40
KT6213	ArTu M	9,525	9/39	LK3000	ArTu L	3,519	9/21	PB0803	ArTu K	0,4	9/69
KT6213	ArTu K	9,525	9/60	LK3001	ArTu L	3,462	9/21	PB1600	ArTu K	1,546	9/69
KT6220	ArTu K	9,525	9/65	LK3002	ArTu L	3,344	9/21	PB1601	ArTu K	1,12	9/69
KT6221	ArTu K	9,525	9/65	LK3003	ArTu L	3,657	9/21	PB1603	ArTu K	1,11	9/69
KT6230	ArTu K	9,525	9/66	LK3004	ArTu L	5,193	9/21	PB3201	ArTu K	1,11	9/69
KT7110	ArTu K	5,78	9/61	LK3005	ArTu L	5,193	9/21	PC0300	ArTu L	1,518	9/20
KT7111	ArTu K	8,096	9/61	LK3008	ArTu L	1,854	9/21	PC0580	ArTu L	0,756	9/20
KT7115	ArTu K	10,406	9/65	LK3101	ArTu L	6,924	9/21	PC0600	ArTu L	3,27	9/20
KT7211	ArTu K	10,907	9/62	LK3102	ArTu L	9,232	9/21	PC0601	ArTu L	6,161	9/15
KT7211	ArTu K	10,907	9/62	LK3104	ArTu L	6,924	9/21	PC0602	ArTu L	3,444	9/15
KT7212	ArTu K		9/62	LK3105	ArTu L	9,232	9/21	PC0801	ArTu L	8,214	9/15
KT7213	ArTu K		9/62	LK3110	ArTu L	4,692	9/21	PC0802	ArTu L	4,592	9/15
KT7215	ArTu K	11,645	9/66	LK3111	ArTu L	4,676	9/21	PC1001	ArTu L	10,268	9/15
KT7230	ArTu K	20,916	9/66	LK3200	ArTu L	3,507	9/21	PC1002	ArTu L	5,741	9/15
KT7230	ArTu K	20,916	9/66	LK3300	ArTu L	4,66	9/21	PC1050	ArTu L	0,46	9/20
KT7231	ArTu K	8,98	9/62	LK3301	ArTu L	3,737	9/21	PC1150	ArTu L	1,127	9/20
KT7231	ArTu K	8,98	9/62	LK4003	ArTu L	3,346	9/21	PC1201	ArTu L	12,322	9/15
LA1810	ArTu K	52,5	9/52	LK4004	ArTu L	3,346	9/21	PC1202	ArTu L	7,176	9/15
LA1860	ArTu K	31	9/52	LK4005	ArTu L	6,56	9/21	PC1400	ArTu K	0,65	9/59
LA1880	ArTu K	42	9/52	LK4006	ArTu L	7,26	9/21	PC1401	ArTu L	14,376	9/15
LA2010	ArTu K	52	9/52	LK4007	ArTu L	4,195	9/21	PC1402	ArTu L	8,372	9/15
LA2060	ArTu K	44	9/52	LK4100	ArTu L	3,507	9/21	PC1403	ArTu L	0,391	9/20
LA2080	ArTu K	47	9/52	LK4103	ArTu L	4,461	9/21	PC1436	ArTu L	18,483	9/15
LF1400	ArTu L	10,373	9/14	LK4104	ArTu L	4,461	9/21	PC1580	ArTu L	2,268	9/20
LF1425	ArTu M	9,5	9/33	LK4105	ArTu L	8,747	9/21	PC1600	ArTu L	0,975	9/20
LF1600	ArTu L	11,845	9/14	LK4106	ArTu L	9,685	9/21	PC1600	ArTu M	0,975	9/38
LF1625	ArTu M	10,8	9/33	LK4108	ArTu L	4,676	9/21	PC1600	ArTu K	0,975	9/59
LF1626	ArTu K	12,1	9/52	LK5003	ArTu L	4,6	9/21	PC1601	ArTu L	16,32	9/15
LF1800	ArTu L	13,317	9/14	LK5004	ArTu L	4,6	9/21	PC1602	ArTu L	9,5	9/15
LF1810	ArTu K	55	9/52	LK5005	ArTu L	6,66	9/21	PC1636	ArTu L	20,983	9/15
LF1825	ArTu M	12	9/33	LK5006	ArTu L	7,26	9/21	PC1660	ArTu L	13,5	9/20
LF1826	ArTu K	13,5	9/52	LK5007	ArTu L	4,195	9/21	PC1660	ArTu M	13,5	9/38
LF1840	ArTu K	19	9/52	LK5008	ArTu L	3,544	9/21	PC1680	ArTu K	13,5	9/59
LF1850	ArTu K	22,304	9/52	LK5103	ArTu L	6,133	9/21	PC1680	ArTu L	18,3	9/20
LF1860	ArTu K	35	9/52	LK5104	ArTu L	5,876	9/21	PC1680	ArTu M	18,3	9/38
LF1880	ArTu K	44	9/52	LK5105	ArTu L	8,882	9/21	PC1800	ArTu L	1,3	9/20
LF2000	ArTu L	14,796	9/14	LK5106	ArTu L	9,685	9/21	PC1800	ArTu M	1,3	9/38
LF2010	ArTu K	52	9/52	LK6011	ArTu L	7,231	9/21	PC1800	ArTu K	1,3	9/59
LF2025	ArTu M	13,5	9/33	LK6012	ArTu L	9,642	9/21	PC1801	ArTu L	18,26	9/15
LF2026	ArTu K	15	9/52	MC0600	ArTu L	3,765	9/12	PC1802	ArTu L	10,638	9/15
LF2040	ArTu K	19,5	9/52	MC0800	ArTu L	5,021	9/12	PC1836	ArTu L	23,526	9/15
LF2050	ArTu K	24,782	9/52	MC1000	ArTu L	6,275	9/12	PC1840	ArTu K	10	9/59
LF2060	ArTu K	25	9/52	MC1200	ArTu L	7,531	9/12	PC1860	ArTu L	15	9/20
LF2080	ArTu K	47	9/52	MC1400	ArTu L	8,786	9/14	PC1860	ArTu M	15	9/38
LI1840	ArTu K	23	9/52	MC1600	ArTu L	10,051	9/14	PC1860	ArTu K	15	9/59
LI1860	ArTu K	28	9/52	MC1800	ArTu L	11,316	9/14	PC1880	ArTu L	19	9/20

List of codes

Code	Structure	Weight (Kg)	Page	Code	Structure	Weight (Kg)	Page	Code	Structure	Weight (Kg)	Page
PC1880	ArTu M	19	9/38	PF2008	ArTu K	36	9/63	PM3648	ArTu K	2,925	9/57
PC1880	ArTu K	19	9/59	PF2401	ArTu K	1,8	9/63	PM3836	ArTu L	3,9	9/19
PC2001	ArTu L	20,28	9/15	PF2405	ArTu K	1,8	9/64	PM3836	ArTu L	3,9	9/26
PC2002	ArTu L	11,82	9/15	PF2601	ArTu K	2,5	9/63	PM3836	ArTu M	3,9	9/36
PC2035	ArTu L	26,068	9/15	PF2610	ArTu M	2,5	9/38	PM3836	ArTu M	3,9	9/44
PC2040	ArTu K	11,5	9/59	PF2610	ArTu K	2,5	9/60	PM3836	ArTu K	3,9	9/57
PC2060	ArTu L	16	9/20	PF2801	ArTu K	3,6	9/63	PM3836	ArTu K	3,9	9/76
PC2060	ArTu M	16	9/38	PF2805	ArTu K	3,2	9/64	PM3872	ArTu L	3,9	9/19
PC2060	ArTu K	16	9/59	PF2810	ArTu M	3,6	9/38	PM3872	ArTu M	3,9	9/36
PC2080	ArTu L	21	9/20	PF2810	ArTu K	3,6	9/60	PM3872	ArTu K	3,9	9/57
PC2080	ArTu M	21	9/38	PF3005	ArTu K	4,6	9/64	PM6672	ArTu L	4,5	9/19
PC2080	ArTu K	21	9/59	PF3403	ArTu K	2,6	9/63	PM6672	ArTu M	4,5	9/36
PC2400	ArTu K	1,3	9/59	PF3405	ArTu K	2,9	9/64	PM6672	ArTu K	4,5	9/57
PC2401	ArTu L	0,621	9/20	PF3601	ArTu K	4,6	9/63	PO1060	ArTu M	12	9/34
PC2600	ArTu L	1	9/20	PF3801	ArTu K	6	9/63	PO1260	ArTu M	13	9/34
PC2600	ArTu M	1	9/38	PF3805	ArTu K	4,6	9/64	PO1431	ArTu L	6,015	9/15
PC2600	ArTu K	1	9/59	PF4005	ArTu K	5,6	9/64	PO1460	ArTu M	15,5	9/34
PC2800	ArTu L	2,6	9/20	PF4401	ArTu K	4,1	9/63	PO1630	ArTu M	14	9/34
PC2800	ArTu M	2,6	9/38	PF4405	ArTu K	3,6	9/64	PO1631	ArTu L	12	9/15
PC2800	ArTu K	2,6	9/59	PF4601	ArTu K	5,6	9/63	PO1631	ArTu M	12	9/33
PC3400	ArTu K	1,6	9/59	PF4610	ArTu M	4,5	9/38	PO1631	ArTu K	12	9/56
PC3401	ArTu L	1,058	9/20	PF4610	ArTu K	4,5	9/60	PO1633	ArTu K	14,6	9/56
PC3600	ArTu L	2	9/20	PF4801	ArTu K	9	9/63	PO1660	ArTu M	17,5	9/34
PC3600	ArTu M	2	9/38	PF4805	ArTu K	6,2	9/64	PO1661	ArTu K	18,63	9/53
PC3600	ArTu K	2	9/59	PF4810	ArTu M	7,5	9/38	PO1680	ArTu M	22	9/34
PC3800	ArTu L	3,3	9/20	PF4810	ArTu K	7,5	9/60	PO1681	ArTu K	23,6	9/53
PC3800	ArTu M	3,3	9/38	PF6005	ArTu K	8,25	9/64	PO1823	ArTu K	11	9/56
PC3800	ArTu K	3,3	9/59	PF6401	ArTu K	7	9/63	PO1824	ArTu K	6,5	9/56
PC4400	ArTu K	2,1	9/59	PF6405	ArTu K	5,9	9/64	PO1830	ArTu M	13	9/34
PC4401	ArTu L	1,392	9/20	PF6601	ArTu K	9,5	9/63	PO1831	ArTu L	8	9/15
PC4600	ArTu L	2,5	9/20	PF6801	ArTu K	11	9/63	PO1831	ArTu M	8	9/33
PC4600	ArTu M	2,5	9/38	PF6805	ArTu K	9,1	9/64	PO1831	ArTu K	8	9/56
PC4600	ArTu K	2,5	9/59	PF8005	ArTu K	12,5	9/64	PO1833	ArTu K	13	9/56
PC4800	ArTu L	4,5	9/20	PF8805	ArTu K	12,4	9/64	PO1841	ArTu K	15,2	9/53
PC4800	ArTu M	4,5	9/38	PM1500	ArTu L	1,127	9/19	PO1860	ArTu M	19	9/34
PC4800	ArTu K	4,5	9/59	PM1500	ArTu K	1,127	9/57	PO1861	ArTu K	20,5	9/53
PC6400	ArTu K	3,5	9/59	PM1536	ArTu L	1,503	9/19	PO1880	ArTu M	23	9/34
PC6401	ArTu L	2,047	9/20	PM1536	ArTu K	1,503	9/57	PO1881	ArTu K	24	9/53
PC6600	ArTu L	4,5	9/20	PM2312	ArTu L	2,925	9/19	PO2023	ArTu K	10,5	9/56
PC6600	ArTu M	4,5	9/38	PM2312	ArTu M	2,925	9/36	PO2024	ArTu K	6,5	9/56
PC6600	ArTu K	4,5	9/59	PM2312	ArTu K	2,925	9/57	PO2030	ArTu M	14	9/34
PC6800	ArTu L	6,5	9/20	PM2315	ArTu L	3,9	9/19	PO2031	ArTu L	9	9/15
PC6800	ArTu M	6,5	9/38	PM2315	ArTu M	3,9	9/36	PO2031	ArTu K	9	9/56
PC6800	ArTu K	6,5	9/59	PM2315	ArTu K	3,9	9/57	PO2033	ArTu K	9	9/56
PC6800	ArTu K	6,5	9/59	PM2424	ArTu K	1,7	9/57	PO2041	ArTu K	16,2	9/53
PC8401	ArTu L	2,725	9/20	PM2624	ArTu L	1,2	9/19	PO2060	ArTu M	22	9/34
PC8600	ArTu L	5,5	9/20	PM2624	ArTu L	1,2	9/27	PO2061	ArTu K	22	9/53
PC8600	ArTu M	5,5	9/38	PM2624	ArTu M	1,2	9/36	PO2080	ArTu M	26	9/34
PC8600	ArTu K	5,5	9/59	PM2624	ArTu M	1,2	9/45	PO2081	ArTu K	28	9/53
PC8800	ArTu L	8,75	9/20	PM2624	ArTu K	1,2	9/57	PO6060	ArTu M	7,5	9/34
PC8800	ArTu M	8,75	9/38	PM2624	ArTu K	1,2	9/77	PO6069	ArTu M	10	9/50
PC8800	ArTu K	8,75	9/59	PM2836	ArTu L	2	9/19	PO8060	ArTu M	10	9/34
PF1002	ArTu L	1,484	9/20	PM2836	ArTu L	2	9/27	PR2600	ArTu L	2	9/20
PF1003	ArTu L	2,277	9/20	PM2836	ArTu M	2	9/36	PR2600	ArTu M	2	9/38
PF1004	ArTu L	3,082	9/20	PM2836	ArTu M	2	9/45	PR2600	ArTu K	2	9/59
PF1006	ArTu L	4,67	9/20	PM2836	ArTu K	2	9/57	PR2800	ArTu L	2,8	9/20
PF1008	ArTu L	6,463	9/20	PM2836	ArTu K	2	9/77	PR2800	ArTu M	2,8	9/38
PF1102	ArTu L	1,978	9/20	PM3424	ArTu K	1,413	9/57	PR2800	ArTu K	2,8	9/59
PF1103	ArTu L	3,036	9/20	PM3624	ArTu L	2,925	9/19	PR2800	ArTu L	4	9/20
PF1104	ArTu L	4,109	9/20	PM3624	ArTu L	2,925	9/26	PR4401	ArTu L	1,614	9/20
PF1106	ArTu L	6,227	9/20	PM3624	ArTu M	2,925	9/36	PR4600	ArTu L	4	9/20
PF1108	ArTu L	8,617	9/20	PM3624	ArTu M	2,925	9/44	PR4600	ArTu K	4	9/59
PF1806	ArTu K	25	9/63	PM3624	ArTu K	2,925	9/57	PR4800	ArTu L	4,2	9/20
PF1808	ArTu K	32	9/63	PM3624	ArTu K	2,925	9/76	PR4800	ArTu M	4,2	9/38
PF2005	ArTu K	2,5	9/64	PM3648	ArTu L	2,925	9/19	PR4800	ArTu K	4,2	9/59
PF2006	ArTu K	35,5	9/63	PM3648	ArTu M	2,925	9/36				

List of codes

Code	Structure	Weight (Kg)	Page	Code	Structure	Weight (Kg)	Page	Code	Structure	Weight (Kg)	Page
PR6600	ArTu L	5,5	9/20	PV2061	ArTu K	21,5	9/53	SK4040	ArTu K	20,5	9/51
PR6600	ArTu M	5,5	9/38	PV2063	ArTu K	28,2	9/53	SK4050	ArTu K	28,85	9/51
PR6600	ArTu K	5,5	9/59	PV2080	ArTu M	27	9/34	SK4060	ArTu K	30,3	9/51
PR6800	ArTu L	7	9/20	PV2080	ArTu K	31	9/53	SK4080	ArTu K	36	9/51
PR6800	ArTu M	7	9/38	PV2082	ArTu K	32	9/53	SK6010	ArTu K	52,5	9/51
PR6800	ArTu K	7	9/59	PV2083	ArTu K	32	9/53	SK6025	ArTu K	23,8	9/51
PS2720	ArTu L	1,3	9/19	PV2088	ArTu M	38	9/34	SK6040	ArTu K	30,3	9/51
PS2720	ArTu M	1,3	9/36	PV4060	ArTu M	7	9/50	SK6050	ArTu K	36,54	9/51
PS2720	ArTu K	1,3	9/57	PV6060	ArTu M	7	9/34	SK6060	ArTu K	41,6	9/51
PS2728	ArTu L	2,5	9/19	PV8060	ArTu M	9	9/34	SK6080	ArTu K	46,5	9/51
PS2728	ArTu M	2,5	9/36	RC1000	ArTu L	14,7	9/17	SK6600	ArTu K	41,6	9/51
PS2728	ArTu K	2,5	9/57	RC2000	ArTu L	10,4	9/17	SK8010	ArTu K	62,5	9/51
PS2960	ArTu L	1,3	9/19	RF1630	ArTu K	10,8	9/56	SK8025	ArTu K	28,28	9/51
PS2960	ArTu M	1,3	9/36	RF1660	ArTu K	18,2	9/54	SK8040	ArTu K	36	9/51
PS2960	ArTu K	1,3	9/57	RF1680	ArTu K	23,2	9/54	SK8050	ArTu K	44,84	9/51
PS2968	ArTu L	2,5	9/19	RF1820	ArTu K	9	9/56	SK8060	ArTu K	49,5	9/51
PS2968	ArTu M	2,5	9/36	RF1830	ArTu K	10,5	9/56	SK8080	ArTu K	57,5	9/51
PS2968	ArTu K	2,5	9/57	RF1840	ArTu K	15,5	9/54	SK8800	ArTu K	57,5	9/51
PS4720	ArTu L	1,3	9/19	RF1860	ArTu K	20,5	9/54	SL0600	ArTu L	9,837	9/12
PS4720	ArTu M	1,3	9/36	RF1880	ArTu K	24	9/54	SL0800	ArTu L	13,116	9/12
PS4720	ArTu K	1,3	9/57	RF2020	ArTu K	11	9/56	SL1000	ArTu L	16,395	9/12
PS4728	ArTu L	2,5	9/19	RF2030	ArTu K	11,5	9/56	SL1200	ArTu L	19,674	9/12
PS4728	ArTu M	2,5	9/36	RF2040	ArTu K	16,8	9/54	SL1400	ArTu L	22,954	9/13
PS4728	ArTu K	2,5	9/57	RF2060	ArTu K	20,66	9/54	SL1408	ArTu L	29,512	9/13
PS4960	ArTu L	1,3	9/19	RF2080	ArTu K	26,56	9/54	SL1600	ArTu L	25,461	9/13
PS4960	ArTu M	1,3	9/36	SA1350	ArTu M	2,2	9/46	SL1608	ArTu L	33,728	9/13
PS4960	ArTu K	1,3	9/57	SA1350	ArTu K	2,2	9/78	SL1800	ArTu L	27,9	9/13
PS4968	ArTu L	2,5	9/19	SH0100	ArTu L	1,155	9/16	SL1808	ArTu L	37,944	9/13
PS4968	ArTu M	2,5	9/36	SH0200	ArTu L	1,419	9/16	SL2000	ArTu L	31,1	9/13
PS4968	ArTu K	2,5	9/57	SH0208	ArTu L	1,856	9/16	SL2008	ArTu L	42,161	9/13
PV0600	ArTu L	6,161	9/15	SH0600	ArTu L	0,516	9/16	SM1062	ArTu M	23,5	9/32
PV0800	ArTu L	8,214	9/15	SH0608	ArTu L	1,256	9/16	SM1069	ArTu M	31,5	9/32
PV1000	ArTu L	10,267	9/15	SH0700	ArTu L	0,456	9/16	SM1262	ArTu M	26,5	9/32
PV1060	ArTu M	10,5	9/34	SH0708	ArTu L	1,115	9/16	SM1462	ArTu M	41,8	9/33
PV1220	ArTu L		9/15	SH0800	ArTu L	0,689	9/16	SM1662	ArTu M	45,6	9/33
PV1260	ArTu M	12	9/34	SH0808	ArTu L	1,673	9/16	SM1862	ArTu M	49,5	9/33
PV1400	ArTu L	14,375	9/15	SH1030	ArTu K	3	9/68	SM2062	ArTu M	53,5	9/33
PV1424	ArTu L	19,483	9/15	SH2030	ArTu K	2,5	9/68	SM6061	ArTu M	15,3	9/32
PV1436	ArTu L	19,983	9/15	SH4000	ArTu K	2	9/68	SM8061	ArTu M	18,4	9/32
PV1460	ArTu M	15	9/34	SH4030	ArTu K	3,3	9/68	SM8062	ArTu M	20	9/32
PV1600	ArTu L	16,318	9/15	SH4031	ArTu K	3,15	9/68	SV0600	ArTu L	1,247	9/16
PV1624	ArTu L	22,17	9/15	SH4032	ArTu K	4,027	9/68	SV0800	ArTu L	1,662	9/16
PV1636	ArTu L	22,67	9/15	SH4033	ArTu K	5,313	9/68	SV1000	ArTu L	2,078	9/16
PV1660	ArTu M	17	9/34	SH4034	ArTu K	6,489	9/68	SV1200	ArTu L	2,494	9/16
PV1661	ArTu K	18,6	9/53	SH4035	ArTu K	9,229	9/68	SV1400	ArTu L	2,91	9/16
PV1680	ArTu M	21,5	9/34	SH6000	ArTu K	2,7	9/68	SV1600	ArTu L	3,325	9/16
PV1681	ArTu K	23	9/53	SH6001	ArTu M	2,7	9/47	SV1800	ArTu L	3,74	9/16
PV1682	ArTu K	23,6	9/53	SH8000	ArTu K	1,9	9/68	SV1815	ArTu K	14,625	9/68
PV1688	ArTu M	32	9/34	SH8001	ArTu M	3,7	9/47	SV1860	ArTu K	7,2	9/68
PV1800	ArTu L	18,262	9/15	SK1600	ArTu K	16,72	9/51	SV1880	ArTu K	11,5	9/68
PV1824	ArTu L	24,858	9/15	SK1604	ArTu K	6,75	9/52	SV2000	ArTu L	4,155	9/16
PV1836	ArTu L	25,358	9/15	SK1800	ArTu K	19	9/51	SV2015	ArTu K	16,25	9/68
PV1841	ArTu K	14,3	9/53	SK1802	ArTu K	15,5	9/52	SV2061	ArTu K	1,8	9/68
PV1860	ArTu M	19,5	9/34	SK1803	ArTu K	9,5	9/52	SV2080	ArTu K	1,26	9/68
PV1861	ArTu K	19,5	9/53	SK1804	ArTu K	8	9/52	SV2265	ArTu K	8	9/68
PV1863	ArTu K	24,2	9/53	SK1815	ArTu K	19,416	9/51	SV2285	ArTu K	13	9/68
PV1880	ArTu M	24,2	9/34	SK1880	ArTu K	4,5	9/82	SV4061	ArTu K	2,4	9/68
PV1881	ArTu K	34	9/53	SK1881	ArTu K	3,968	9/67	SV4080	ArTu K	10,1	9/68
PV1882	ArTu K	35	9/53	SK2000	ArTu K	20,8	9/51	TL1000	ArTu L	0,713	9/17
PV1883	ArTu K	28,2	9/53	SK2002	ArTu K	16,8	9/52	TL1000	ArTu L	0,713	9/23
PV1888	ArTu M	35	9/34	SK2003	ArTu K	10	9/52	TL1100	ArTu L	0,872	9/17
PV2000	ArTu L	20,29	9/15	SK2004	ArTu K	9,5	9/52	TL1100	ArTu L	0,872	9/23
PV2024	ArTu L	27,545	9/15	SK2015	ArTu K	21,7	9/51	TL1100	ArTu L	0,872	9/24
PV2036	ArTu L	28,045	9/15	SK2080	ArTu K	5,2	9/82	TL2000	ArTu L	0,69	9/17
PV2041	ArTu K	15,8	9/53	SK2081	ArTu K	4,348	9/67	TL2000	ArTu L	0,69	9/23
PV2060	ArTu M	21,5	9/34	SK4010	ArTu K	35	9/51				

List of codes

Code	Structure	Weight (Kg)	Page	Code	Structure	Weight (Kg)	Page	Code	Structure	Weight (Kg)	Page
TL2100	ArTu L	0,832	9/17	TV5101	ArTu K	1,176	9/71	ZD1025	ArTu K	1,717	9/51
TL2100	ArTu L	0,832	9/23	TV5101	ArTu K	1,176	9/79	ZD1030	ArTu K	2,185	9/51
TL3000	ArTu L	0,529	9/17	TV6001	ArTu K	0,46	9/71	ZD1050	ArTu K	3,381	9/51
TL3000	ArTu L	0,529	9/23	TV6005	ArTu K	0,5	9/71	ZD1070	ArTu K	4,568	9/51
TL3000	ArTu L	0,529	9/24	TV6011	ArTu K	0,74	9/72	ZD1090	ArTu K	5,754	9/51
TR1201	ArTu K	3,12	9/74	TV6101	ArTu K	0,85	9/71	ZD2240	ArTu K	3,8	9/78
TR1205	ArTu K	3,52	9/74	TV6200	ArTu M	0,47	9/41	ZD2260	ArTu K	3	9/78
TR2001	ArTu M	0,221	9/46	TV6200	ArTu M	0,47	9/41	ZD2280	ArTu K	3,8	9/78
TR3001	ArTu M	0,8	9/41	TV6200	ArTu M	0,47	9/42	ZD2324	ArTu K	3,8	9/78
TR3001	ArTu M	0,8	9/42	TV6201	ArTu K	0,95	9/71	ZD2325	ArTu M	3,8	9/50
TR3001	ArTu M	0,8	9/46	TV6202	ArTu K	2	9/71	ZD2340	ArTu K	3,8	9/78
TR4101	ArTu K	0,5	9/79	TV6203	ArTu K	0,44	9/72	ZD2350	ArTu K	6,142	9/78
TR6001	ArTu K	0,8	9/74	TV6221	ArTu K	1,1	9/72	ZD2361	ArTu K	4,2	9/78
TR6001	ArTu K	0,8	9/79	TV8001	ArTu K	0,76	9/71	ZD2381	ArTu K	4,5	9/78
TR6005	ArTu K	0,4	9/74	TV8005	ArTu K	0,8	9/71	ZD2440	ArTu K	6,7	9/78
TR6005	ArTu K	0,4	9/79	TV8011	ArTu K	1,1	9/72	ZD2450	ArTu K	6,97	9/78
TR6101	ArTu K	0,4	9/74	TV8101	ArTu K	1,15	9/71	ZD2460	ArTu K	8,1	9/78
TR6101	ArTu K	0,4	9/79	TV8200	ArTu M	0,77	9/41	ZD2480	ArTu K	11,5	9/78
TR6201	ArTu K	0,4	9/74	TV8200	ArTu M	0,77	9/41	ZD2624	ArTu K	11,4	9/78
TR6205	ArTu K	0,5	9/74	TV8200	ArTu M	0,77	9/42	ZD2625	ArTu M	8,5	9/50
TR6301	ArTu K	0,5	9/74	TV8201	ArTu K	1,24	9/71	ZD2640	ArTu K	9,2	9/78
TR7005	ArTu K	1,2	9/74	TV8202	ArTu K	2,66	9/71	ZD2650	ArTu K	10,556	9/78
TR7005	ArTu K	1,2	9/79	TV8203	ArTu K	0,59	9/72	ZD2660	ArTu K	11	9/78
TR8000	ArTu K	1	9/79	TV8211	ArTu K	1,24	9/72	ZD2680	ArTu K	12,61	9/78
TR8001	ArTu K	1	9/74	TV8211	ArTu K	1,24	9/74	ZD2824	ArTu K	15,2	9/78
TR8001	ArTu K	1	9/79	TV8221	ArTu K	1,42	9/72	ZD2825	ArTu M	10	9/50
TR8005	ArTu K	0,5	9/74	VB7035	ArTu L	0,6	9/31	ZD2840	ArTu K	10,9	9/78
TR8005	ArTu K	0,5	9/74	VB7035	ArTu M	0,6	9/50	ZD2850	ArTu K	12,754	9/78
TR8005	ArTu K	0,5	9/79	VB7035	ArTu M	0,6	9/50	ZD2860	ArTu K	13	9/78
TR8101	ArTu K	0,5	9/74	VB7035	ArTu K	0,6	9/82	ZD2880	ArTu K	17,33	9/78
TR8101	ArTu K	0,5	9/79	VC0600	ArTu L	5,855	9/12	ZD4010	ArTu K	14,375	9/78
TR8201	ArTu K	0,5	9/74	VC0800	ArTu L	7,806	9/12	ZD6010	ArTu K	15,866	9/78
TR8205	ArTu K	0,8	9/74	VC1000	ArTu L	9,758	9/12	ZD8010	ArTu K	17,522	9/78
TR8301	ArTu K	0,5	9/74	VC1200	ArTu L	11,71	9/12	ZL1000	ArTu L	2,484	9/14
TR8400	ArTu K	0,5	9/79	VC1400	ArTu L	13,662	9/13	ZL1001	ArTu L	1,1	9/14
TR8500	ArTu K	0,5	9/79	VC1425	ArTu L	7,671	9/13	ZL1101	ArTu L	1,438	9/14
TR8600	ArTu K	0,5	9/79	VC1600	ArTu L	14,962	9/13	ZL2001	ArTu L	0,66	9/14
TR8800	ArTu K	0,5	9/79	VC1622	ArTu M	15	9/33	ZL3000	ArTu L	1,45	9/14
TR8900	ArTu K	0,9	9/79	VC1624	ArTu K	17,5	9/55	ZR3000	ArTu K	12,874	9/78
TS4011	ArTu L	2	9/29	VC1625	ArTu L	8,767	9/13	ZR4000	ArTu K	15,7	9/78
TS4011	ArTu M	2	9/48	VC1632	ArTu M	21	9/33	ZR6000	ArTu K	22,608	9/78
TS4011	ArTu K	2	9/80	VC1800	ArTu L	16,226	9/13	ZR8000	ArTu K	28,976	9/78
TS4012	ArTu L	2	9/29	VC1820	ArTu K	28,5	9/55				
TS4012	ArTu M	2	9/48	VC1822	ArTu M	16	9/33				
TS4012	ArTu K	2	9/80	VC1823	ArTu K	26	9/55				
TS4013	ArTu L	2	9/29	VC1824	ArTu K	19,5	9/55				
TS4013	ArTu M	2	9/48	VC1825	ArTu L	9,863	9/13				
TS4013	ArTu K	2	9/80	VC1832	ArTu M	23	9/33				
TU8000	ArTu L	1,35	9/28	VC2000	ArTu L	18,02	9/13				
TV1001	ArTu K	1,56	9/71	VC2012	ArTu K	40,5	9/56				
TV1005	ArTu K	2,9	9/71	VC2020	ArTu K	31,5	9/55				
TV1011	ArTu K	1,82	9/72	VC2022	ArTu M	18	9/33				
TV1101	ArTu K	1,35	9/71	VC2023	ArTu K	30	9/55				
TV1211	ArTu K	6,42	9/72	VC2024	ArTu K	22,9	9/55				
TV1261	ArTu K	2,95	9/72	VC2025	ArTu L	10,959	9/13				
TV1261	ArTu K	2,95	9/74	VC2032	ArTu M	30	9/33				
TV1311	ArTu K	11,5	9/74	VC2040	ArTu K	20,8	9/56				
TV2000	ArTu M	0,48	9/41	VC2060	ArTu K	27	9/56				
TV2000	ArTu M	0,48	9/46	VC2080	ArTu K	32,4	9/56				
TV2201	ArTu K	0,48	9/71	VC3010	ArTu K	34,25	9/56				
TV3000	ArTu K	1	9/71	VC3025	ArTu K	19,25	9/56				
TV3101	ArTu K	0,51	9/71	VC3040	ArTu K	24,5	9/56				
TV3201	ArTu K	0,63	9/71	VC3050	ArTu K	26,545	9/56				
TV4000	ArTu K	1	9/71	VC3060	ArTu K	28	9/56				
TV4001	ArTu K	1	9/71	VC3080	ArTu K	29,5	9/56				
TV4221	ArTu K	1	9/72	ZD1015	ArTu K	1,302	9/51				



ABB SACE S.p.A.

An ABB Group Company

Automation and Distribution Boards

23846 Garbagnate Monastero (LC)

Tel.: ++39 031 3570 1 - Telefax: ++39 031 3570 228

<http://www.abb.com>

Certificate N°OHS-015



Certificate N°1612/98/S



Certificate N° EMS-051



Certificate N° SG1004



Due to possible developments of standards as well as of materials, the characteristics and dimensions specified in this document may only be considered binding after confirmation by ABB SACE.