

TECHNICAL DATA

## Smart Buildings

IS/S 8.1.1


IP Switch




### Description of product

The device is designed for the special requirements of building automation. The device is designed for installation in electrical distribution boards and small casings for rapid mounting on a 1.38 in (35 mm) mounting rail in accordance with EN 60715. The device meets the relevant industry standards, provides very high operational reliability, even under extreme conditions, and also longterm reliability and flexibility.

**Dimension drawing**

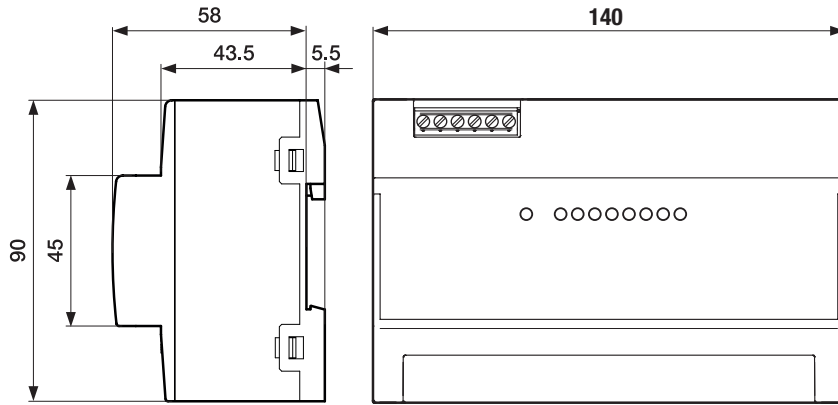

**Connection - Front view**

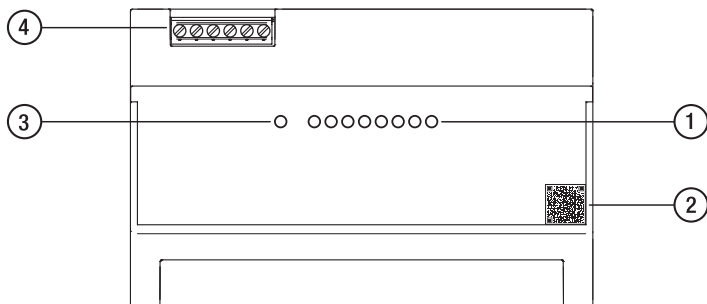

**LEGEND**

- 1 LED display elements for port status
- 2 Data matrix code
- 3 LED display element for device status
- 4 6-pin terminal block with screw lock


**NOTE**

The packaging and the front of the device are labeled with matrix codes (QR codes or data matrix codes). These codes are used for unique identification of the device and include the following information:

- Device serial number
- Link to the product page
- Order number

The matrix codes can be read using any mobile device with an appropriate app.

**Connection - View from below**

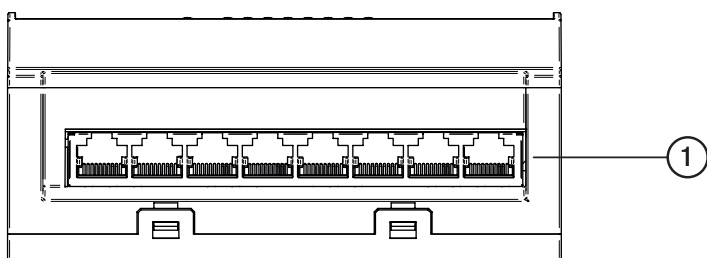

**LEGENDE**

- 1 8 × RJ45 socket for 10/100-Mbit/s Twisted Pair connections


## Operating and display elements

### Display elements

After the supply voltage is switched on, the device performs a self-test. During this process, various LEDs light up.

### Device state


This LED provides information on the status of the power supply.

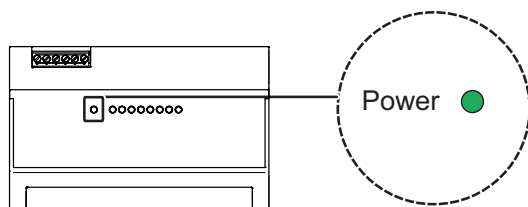

Color	Activity	Meaning
green	lights up	Supply voltage is on. Device is ready for operation
–	none	Supply voltage is too low. Device is not ready for operation

### Port-Status

These LEDs provide port-related information.

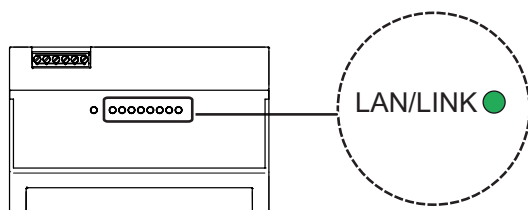

LAN/LINK (link status/data)	Color	Activity	Meaning
	green	lights up	Device detects a valid link
		flashing	Device is transmitting and/or receiving data
	–	none	Device detects an invalid or missing link

Technical data		
<b>Dimensions</b> W × H × D	IP Switch IS/S 8.1.1	See Dimension drawing on page 2
<b>Modular width</b>		8 MW
<b>Mounting Position</b>		Any
<b>Weight</b>		8.82 oz (250 g)
<b>Supply voltage</b>	1 voltage input	
	Rated voltage range	100 V AC ... 240 V AC, 50 Hz ... 60 Hz
	Voltage range incl. maximum tolerances	85 V AC ... 264 V AC, 47 Hz ... 63 Hz
	Power consumption/power output	max. power consumption 1.4 W
		Power output 4.8 Btu (IT)/h
	Connection type	6-pin terminal block with screw lock
		Tightening torque 4.4 lb-in ... 5.3 lb-in (0.5 Nm ... 0.6 Nm)
		min. conductor diameter 0.14 mm <sup>2</sup> (AWG26)
		max. conductor diameter 1.5 mm <sup>2</sup> (AWG16)
	Stripping length	6 mm
	Power loss buffer	10 ms bei 115 V AC 40 ms bei 230 V AC
	Peak inrush current	25 A at 115 V AC 45 A at 230 V AC
	Overvoltage category	III according to EN 60664-1
<b>Climatic conditions during operation</b>	Ambient air temperature <sup>1)</sup>	+23 °F ... +140 °F (-5 °C ... +60 °C)
	Humidity	20 % ... 90 % (non-condensing)
	Air pressure	Without derating • min. 795 hPa (+6562 ft; +2000 m) • max. 1060 hPa (-1312 ft; -400 m)
		With derating • min. 700 hPa (+9842 ft; +3000 m)
<b>Climatic conditions during storage</b>	Ambient air temperature <sup>1)</sup>	-40 °F ... +185 °F up to 3 months (-40 °C ... +85 °C)
		-40 °F ... +158 °F up to 1 year (-40 °C ... +70 °C)
		-40 °F ... +122 °F up to 2 years (-40 °C ... +50 °C)
		+32 °F ... +86 °F up to 10 years (0 °C ... +30 °C)
	Humidity	10 % ... 95 % (non-condensing)
	Air pressure	• min. 600 hPa (+13123 ft; +4000 m) • max. 1060 hPa (-1312 ft; -400 m)
<b>Pollution degree</b>		2 according to EN 60664-1
<b>Protection classes</b>	Degree of protection	IP20
<b>Fire classification</b>		Flammability V-0 as per UL 94

<sup>1)</sup> Temperature of the ambient air at a distance of 2 in (5 cm) from the device

<b>Ethernet Ports</b>	
<b>8 x 10/100-Mbit/s twisted pair port</b>	
according to the IEEE 802.3 10BASE-T/100BASE-TX standard	
Port RJ45 socket	
Port supports:	<ul style="list-style-type: none"><li>• Autonegotiation</li><li>• Autopolarity</li><li>• Autocrossing</li><li>• 100 Mbit/s half-duplex mode, 100 Mbit/s full duplex mode</li><li>• 10 Mbit/s half-duplex mode, 10 Mbit/s full duplex mode</li></ul>

<b>EMC and immunity</b>		
<b>EMC interference emission</b>		
<b>Radiated emission</b>		
FCC 47 CFR Part 15		Class A
EN 55032		Class A
EN 61000-3-2		Class A
EN 61000-6-4		Fulfilled
<b>Conducted emission</b>		
FCC 47 CFR Part 15		Class A
EN 55032		Class A
EN 61000-3-2		Class A
EN 61000-6-4		Fulfilled
<b>EMC interference immunity</b>		
<b>Electrostatic discharge</b>		
EN 61000-4-2 IEEE C37.90.3	Contact discharge	±4 kV
EN 61000-4-2 IEEE C37.90.3	Air discharge	±8 kV
<b>Electromagnetic field</b>		
EN 61000-4-3	80 MHz ... 1000 MHz 1000 MHz ... 6000 MHz	max. 10 V/m max. 3 V/m
<b>Fast transients (burst)</b>		
EN 61000-4-4	DC supply connection	2 kV
EN 61000-4-4	Data line	2 kV (U/UTP) 4 kV (SF/UTP)
<b>Voltage surges – DC supply connection</b>		
EN 61000-4-5	line/ground	2 kV Supply voltage
EN 61000-4-5	line/line	1 kV Supply voltage
<b>Voltage surges – data line</b>		
EN 61000-4-5	line/ground	1 kV (U/UTP, SF/UTP)
<b>Conducted disturbances</b>		
EN 61000-4-6	150 kHz ... 80 MHz	10 V
<b>Immunity</b>		
IEC 60068-2-6, test Fc	Vibration	5 Hz ... 8.4 Hz with 3,5 mm amplitude 8.4 Hz ... 150 Hz with 1 g
IEC 60068-2-27, test Ea	Shock	15 g at 11 ms

<b>Network range</b>	
<b>10/100-Mbit/s twisted pair port</b>	
Length of a twisted pair segment	max. 328 ft (100 m) (for Cat5e cable)

<b>Underlying technical standards</b>	
<b>Name</b>	
CSA C22.2 No. 142	Canadian National Standard(s) – Process Control Equipment – Industrial Products
EN 55032	Electromagnetic compatibility of multimedia equipment – Emission Requirements
EN 61000-6-2	Electromagnetic compatibility (EMC) – Part 6-2: Generic standards – Immunity for industrial environments
EN 61000-6-4	Electromagnetic compatibility (EMC) – Part 6-4: Generic standards – Emitted interference in industrial environments
EN 61000-3-2	Electromagnetic compatibility (EMC) – part 3-2: Threshold values – threshold values for harmonic currents (device input current $\leq$ 16 A per conductor)
EN 61000-3-3	Electromagnetic compatibility (EMC) – part 3-3: Threshold values – limitation of voltage changes, voltage fluctuations and flickering in public low power supply networks for devices with a rated current $\leq$ 16 A per conductor that are not subject to any special connection condition
EN IEC 61010-2-201	Safety requirements for electrical equipment for measurement, control, and laboratory use - Part 2-201: Particular requirements for control equipment
EN 61131-2	Programmable controllers – Part 2: Equipment requirements and tests
FCC 47 CFR Part 15	Code of Federal Regulations
UL/IEC 61010-1, UL/IEC 61010-2-201	Safety for Control Equipment

The device has an approval based on a specific standard exclusively if the approval indicator appears on the device casing.

The device generally fulfills the technical standards named in their current versions.



<b>Ordering details</b>					
<b>Device type</b>	<b>Product Name</b>	<b>Order No.</b>	<b>bbn 40 53546 EAN</b>	<b>Weight 1 pcs. [kg]</b>	<b>Packaging [pcs.]</b>
<b>IS/S 8.1.1</b>	IP Switch	2CDG120082R0011	04551 2	0.25	1

—  
**NOTE**

For a detailed description, please refer to the technical documentation for the device. It is available for download on the Internet at [www.abb.com](http://www.abb.com).



---

**ABB STOTZ-KONTAKT GmbH**  
Eppelheimer Straße 82  
69123 Heidelberg, Germany  
Telefon: +49 (0)6221 701 607  
Telefax: +49 (0)6221 701 724  
E-Mail: [knx.marketing@de.abb.com](mailto:knx.marketing@de.abb.com)

**Further Information and Local Contacts:**  
[www.abb.com/knx](http://www.abb.com/knx)

---

© Copyright 2021 ABB. We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB AG does not accept any responsibility whatsoever for potential errors or possible lack of information in this document. We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of this contents - in whole or in parts - is forbidden without prior written consent of ABB AG.