

## GEH3351 INSTALLATION INSTRUCTIONS

# Breakers in Enclosures

Type TQC

### DESCRIPTION

One, two or three-pole breakers may be installed in the enclosures.

### INSTALLATION

1. Remove cover (indoor) or shield (outdoor).
2. Loosen screw of movable hook strip and slide strip up, figure 1.

3. Place TQC Circuit Breaker on mounting base with load end slots fitted to hooks on mounting base, figure 1.
4. Slide movable hook strip down, so that hooks fit into slots on line end of circuit breaker.
5. Tighten screw of hook strip, figure 1.
6. Remove the same number of knockouts in the cover as circuit breaker poles installed.
7. Replace cover (or shield) after wiring, figure 2.

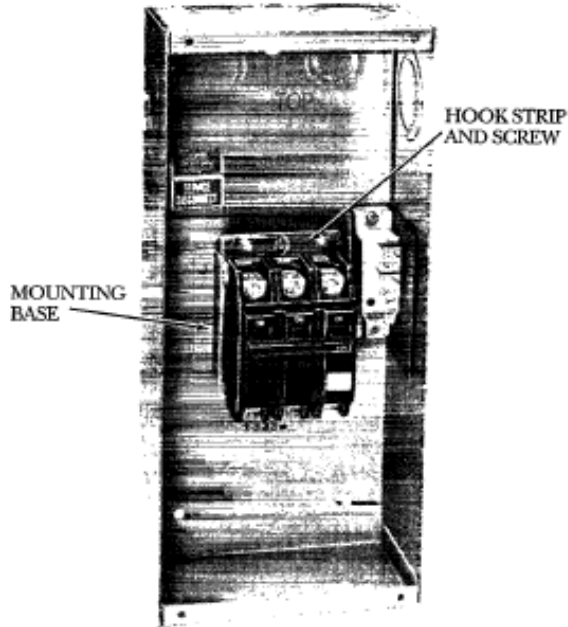


Figure 1

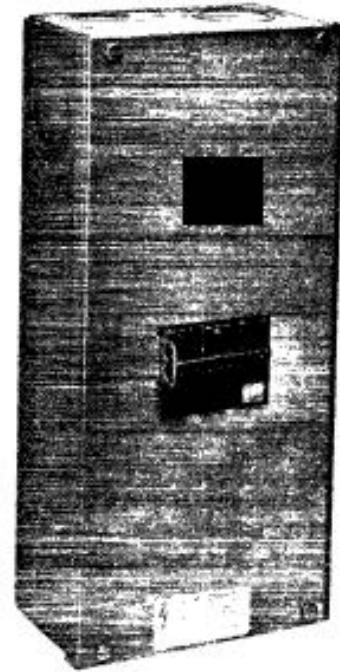


Figure 2

These instructions do not purport to cover all details or variations in equipment nor to provide for every possible contingency to be met in connection with installation operation or maintenance. Should further information be desired or should particular problems arise which are not covered sufficiently for the purchaser's purposes, the matter should be referred to the ABB Company.