

Data and signal protection

OVR Q series



The ABB OVR Q series data and signal surge protective devices are designed to protect sensitive equipment connected to data and telephone lines. These devices complement the OVR power SPD units for a complete and effective system protection solution against surges on data and power lines.

01

01 OVR Q series

Application

OVR Q series UL 497B listed surge protective devices (SPDs) are specifically designed for where installation space is at a premium and large numbers of lines require protection. For installations, connect in series with the signal or data line either near where it enters or leaves the building or close to the equipment being protected. Install in a cabinet/cubicle close to the system's ground star to protect against lightning flashover (typically the service entrance location) and internal transient voltage activity.

Technical specifications and standards

Key features	
Protection mode	Normal and common
Status indicator	No
Technology	Multi-stage hybrid
Installation	DIN rail

Electrical specification	OVR Q series
Nominal voltage ⁽¹⁾	30 V
Maximum working voltage U _c (RMS/DC) ⁽²⁾	26 V/ 37.8 V
Current rating (signal)	750 mA
In-line resistance (per line ±10%)	1.0 Ω
Bandwidth (-3 dB, 50 Ω system)	45 MHz
Transient specification	
Let-through voltage (all conductors) ⁽³⁾ Up	
C2 test 4 kV 1.2/50 μs, 2 kA 8/20 μs to EN/IEC 61643-21	53.0 V
C1 test 1 kV, 1.2/50 μs, 0.5 kA 8/20 μs to EN/IEC 61643-21	48.0 V
B2 test 4 kV 10/700 μs to EN/IEC 61643-21	43.5 V
5 kV, 10/700 μs ⁽⁴⁾	44.3 V

Maximum surge current	OVR Q series
D1 test 10/350 μ s to BS EN/EN/IEC 61643-21	- Per signal wire 2.5 kA - Per pair 5 kA
8/20 μ s to ITU-T K.45:2003, IEEE C62.41.2:2002:	- Per signal wire 10 kA - Per pair 20 kA

- (1) Nominal voltage (RMS/DC or AC peak) measured at $< 5 \mu$ A
- (2) Maximum working voltage (RMS/DC or AC peak) measured at < 5 mA leakage (OVR 30Q)
- (3) The maximum transient voltage let-through of the protector throughout the test ($\pm 10\%$), line to line and line to ground, both polarities. Response time < 10 ns
- (4) Test to IEC 61000-4-5:2006, ITU-T (formerly CCITT) K.20, K.21 and K.45, Telcordia GR-1089-CORE, Issue 2:2002, ANSI TIA/EIA/IS-968-A:2002 formerly FCC Part 68)

Mechanical specification	OVR Q series
Temperature range	-40 to +80 °C
Installation location	Connect in series with the signal or data line either near where it enters or leaves the building or close to the equipment being protected. Install in a cabinet/cubicle close to the system's ground star point.
Connection type	Pluggable 12-way screw terminal - maximum torque 0.6 Nm/ PT version: Pluggable 12-way screwless push terminal
Conductor size (stranded)	2.5 mm ²
Ground connection	Via DIN rail or M5 threaded hole in base of unit
Case material	FR polymer UL 94 V-0
Weight:	
- Unit	0.1 kg
- Packaged (each)	0.12 kg
Dimensions	See diagram below



Available configurations

Catalog number	Voltage	Description	Global ID
OVR30QUL	30 V	Data SPD for 4 pair signal w/ screw terminals	7TCA085400R0568
OVR30QPTUL	30 V	Data SPD for 4 Pair Signal w/ push terminals	7TCA085400R0575



OVR Q series has UL 497B approval under UL file QVGO:E240341

OVR RS485Q installed in series (in-line)

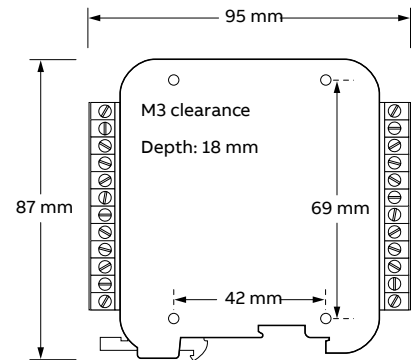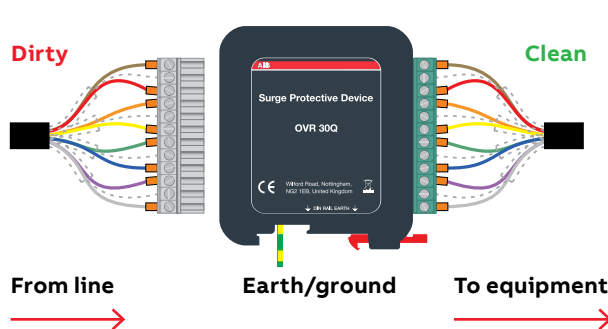

* Q/PT width is 106 mm

ABB Inc.
305 Gregson Drive
Cary, NC 27511

electrification.us.abb.com

ABB has made every attempt to ensure the accuracy and reliability of the contents of this document. However, all content is provided for general informational purposes only, and ABB makes no guaranty or warranty, express or implied, as to the accuracy of any technical content, or that the information contained in this publication will be error free and all such guarantees or warranties are expressly

disclaimed. ABB may change or modify the contents at any time, without prior notice. We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction or utilization of its contents — in whole or in parts — is forbidden without prior written consent of ABB. © 2023 ABB Inc. All rights reserved.