


On-load tap-changer type (V)UCGD./F, (V)UCLD./F, UCCD./F,
 23 tap positions, coarse/fine switching.
 Min. effective No. of turns in pos. 1.
 The tap-changer is delivered set in pos. 12,
 the preceding pos. was 11.

Lindningskopplare typ (V)UCGD./F, (V)UCLD./F, UCCD./F,
 23 lägen, grov/fin koppling.
 Min antal effektiva varv i läge 1.
 Lindningskopplaren levereras inställd i läge 12,
 föregående läge var 11.

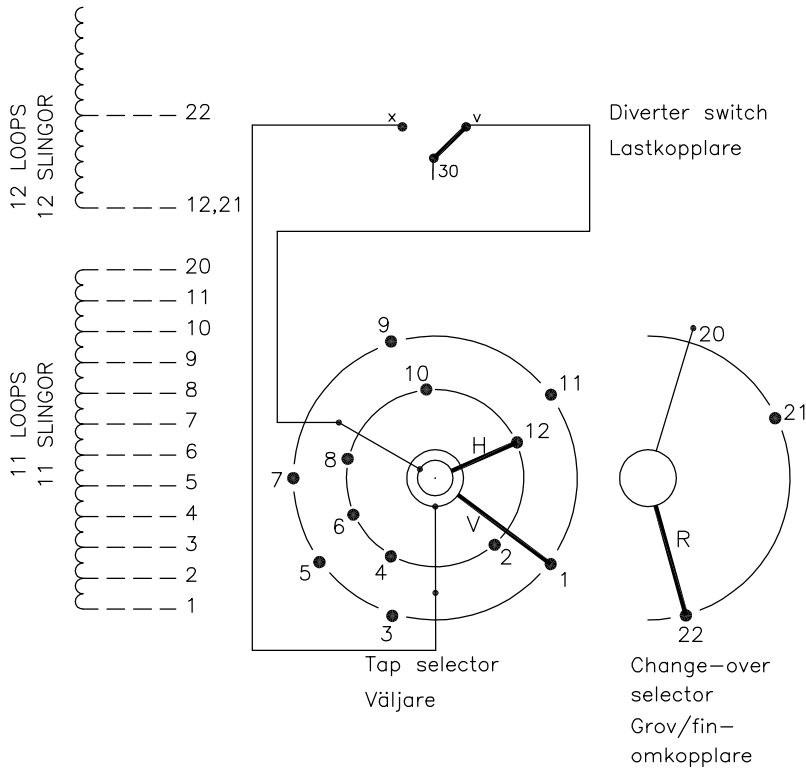

Pos. Läge	R connects in direction R förbinder i riktning	Tap selector and diverter switch connect Väljaren och lastkopplaren förbinder
1		11-V-x
2		10-H-v
3		9-V-x
4		8-H-v
5		7-V-x
6	20-22	6-H-v
7	20-22	5-V-x
8		4-H-v
9		3-V-x
10		2-H-v
11		1-V-x
12		12-H-v
13		11-V-x
14		10-H-v
15		9-V-x
16		8-H-v
17		7-V-x
18	20-21	6-H-v
19	20-21	5-V-x
20		4-H-v
21		3-V-x
22		2-H-v
23		1-V-x

The tap-changer is shown in pos. 12,
 the preceding pos. was 11.
 The tap selector and the change-over selector
 are seen from above.
 Contact arm V is located above contact arm H.

Lindningskopplaren visad i läge 12,
 föregående läge var 11.
 Väljaren och grov/fin-omkopplaren sedda uppifrån.
 Kontaktarm V ligger över kontaktarm H.

Continuous lines show leads included in the
 tap-changer. Dashed lines show leads belonging
 to the cleats and leads.

Heldragna linjer visar ledare som ingår i
 lindningskopplaren. Streckade linjer visar
 ledare som tillhör anslutningsdonet.

We reserve all rights in this document and in the information contained therein. Reproduction, use or disclosure to third parties without express authority is strictly forbidden. © ABB '19

Sheet	Cont					
	Year	Week				
Form No.	Dept					
	Rev Ind	Revision	Appd	Year	Week	
Drawn by	Accepted by qual control	Accepted for prod by		Description (English)		
	L.Oberg	M.Haggmar		CONNECTION DIAGRAM		
Design checked by	Design checked by	Drawn by	Description (own language)		File name	
	H.Sundberg	A.Wang	KOPPLINGSSHEMA		Lang	
Design checked by	Drawing checked by	Issued by Dept	Year	Week	Sheet	
	N.Gustavsson	CO/TK	14	02	1	
		1ZSC004312-AAH			Rev Ind	Cont
					-	-