


We reserve all rights in this document and in the information contained therein. Reproduction, use or disclosure to third parties without express authority is strictly forbidden.
© ABB '19

On-load tap-changer type UCGL./III, VUCGL./III, UCLL./III, VUCLL./III, UC DL./III,
13 tap positions, linear switching.
Min. effective No. of turns in pos. 1.
The tap-changer is delivered set in pos. 7,
the preceding pos. was 6.

Lindningskopplare typ UCGL./III, VUCGL./III, UCLL./III, VUCLL./III, UC DL./III,
13 lägen, linjär koppling.
Min antal effektiva varv i läge 1.
Lindningskopplaren levereras inställd i läge 7,
föregående läge var 6.

Pos. Läge	Tap selector and diverter switch connect	30
1	1-V-x	
2	2-H-v	
3	3-V-x	
4	4-H-v	
5	5-V-x	
6	6-H-v	
7	7-V-x	
8	8-H-v	
9	9-V-x	
10	10-H-v	
11	11-V-x	
12	12-H-v	
13	13-V-x	

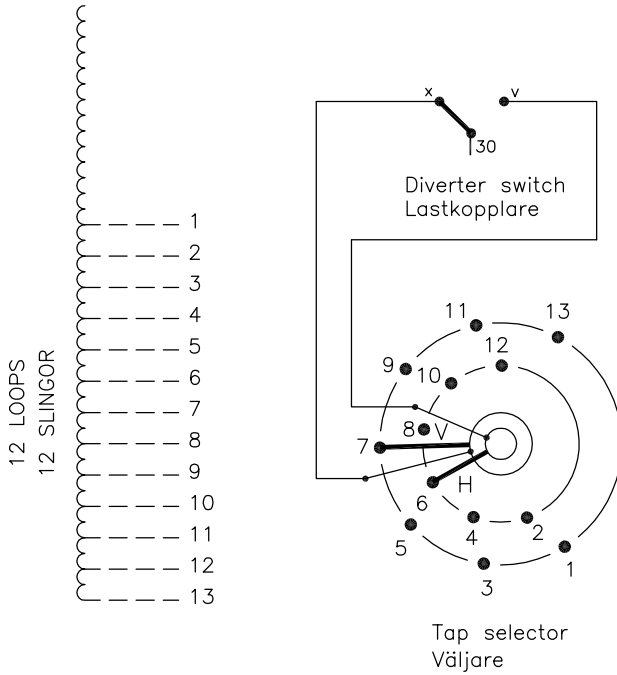

The tap-changer is shown in pos. 7,
the preceding pos. was 6.
The tap selector is seen from above.
Contact arm V is located above contact arm H.

Lindningskopplaren visad i läge 7,
föregående läge var 6.
Väljaren sedd uppifrån.
Kontaktarm V ligger över kontaktarm H.

Continuous lines show leads included in the
tap-changer. Dashed lines show leads belonging
to the cleats and leads.

Heldragna linjer visar ledare som ingår i
lindningskopplaren. Streckade linjer visar
ledare som tillhör anslutningsdonet.

3	Tap selector figure changed.	THLA	17	07
2	VUCL Added	CA	12	37
1	VUCG Added	CE	07	47
Rev Ind	Revision	Appd	Year	Week

Sheet	Year	Week	Cont	Dept		Rev Ind		Description (English)		DATA ORIGINAL
				Year	Week	Year	Week	Year	Week	Year
Accepted by qual control	Accepted for prod by		Description (English)		DATA ORIGINAL					
R.Yngvesson			CONNECTION DIAGRAM							
Design checked by	Drawn by	Description (own language)		File name						
B-O.Stenestam	L.Bergman	KOPPLINGSSCHEMA			0370-5					
Drawing checked by	Issued by	Year	Week	Lang	Sheet					
M.Hedlund	COM/TKO	97	17	1	1					
Rev Ind		Cont		-						



Asea Brown Boveri

5492 0370-5