


On-load tap-changer type UCGD./C, VUCGD./C, 27 tap positions, coarse/fine switching.  
 Max. effective No. of turns in pos. 1.  
 The tap-changer is delivered set in pos. 14, the preceding pos. was 13.

Lindningskopplare typ UCGD./C, VUCGD./C, 27 lägen, grov/fin koppling.  
 Max antal effektiva varv i läge 1.  
 Lindningskopplaren levereras inställd i läge 14, föregående läge var 13.

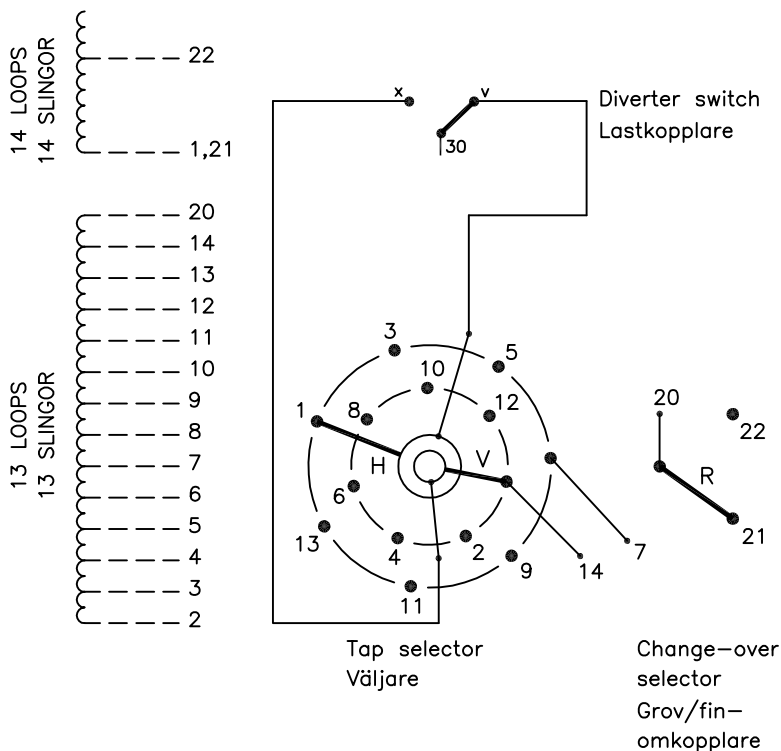

Pos. Läge	R connects in direction R förbinder i riktning	Tap selector and diverter switch connect Väljaren och lastkopplaren förbinder	
1	↓	2-V-x	
2		3-H-v	
3		4-V-x	
4		5-H-v	
5		6-V-x	
6		7-H-v	
7		20-21	8-V-x
8		20-21	9-H-v
9		↑	10-V-x
10			11-H-v
11			12-V-x
12			13-H-v
13			14-V-x
14			1-H-v
15	↑	2-V-x	
16		3-H-v	
17		4-V-x	
18		5-H-v	
19		6-V-x	
20		7-H-v	
21		20-22	8-V-x
22		20-22	9-H-v
23		↓	10-V-x
24			11-H-v
25			12-V-x
26			13-H-v
27			14-V-x

We reserve all rights in this document and in the information contained therein. Reproduction, use or disclosure to third parties without express authority is strictly forbidden. © ABB 19

The tap-changer is shown in pos. 14, the preceding pos. was 13.  
 The tap selector and the change-over selector are seen from above.  
 Contact arm H is located above contact arm V.

Lindningskopplaren visad i läge 14, föregående läge var 13.  
 Väljaren och grov/fin-omkopplaren sedda uppifrån.  
 Kontaktarm H ligger över kontaktarm V.

Continuous lines show leads included in the tap-changer. Dashed lines show leads belonging to the cleats and leads.

Heldragna linjer visar ledare som ingår i lindningskopplaren. Streckade linjer visar ledare som tillhör anslutningsdonet.

Sheet	Cont		
Year	Week		
Dept			
Rev Ind	Revision	Appd	Year Week
1	VUCG Added.	TOLA	07 47
Accepted by qual control	Accepted for prod by	Description (English)	
R.Yngvesson		CONNECTION DIAGRAM	
Design checked by	Drawn by	Description (own language)	
B-O.Stenestam	L.Bergman	KOPPLINGSSCHEMA	
Drawing checked by	Issued by Dept Year Week	Lang	Sheet
M.Hedlund	COM/TKO 97 17		1
		5492 0375-9	
Asea Brown Boveri		RevInd	Cont
			-