

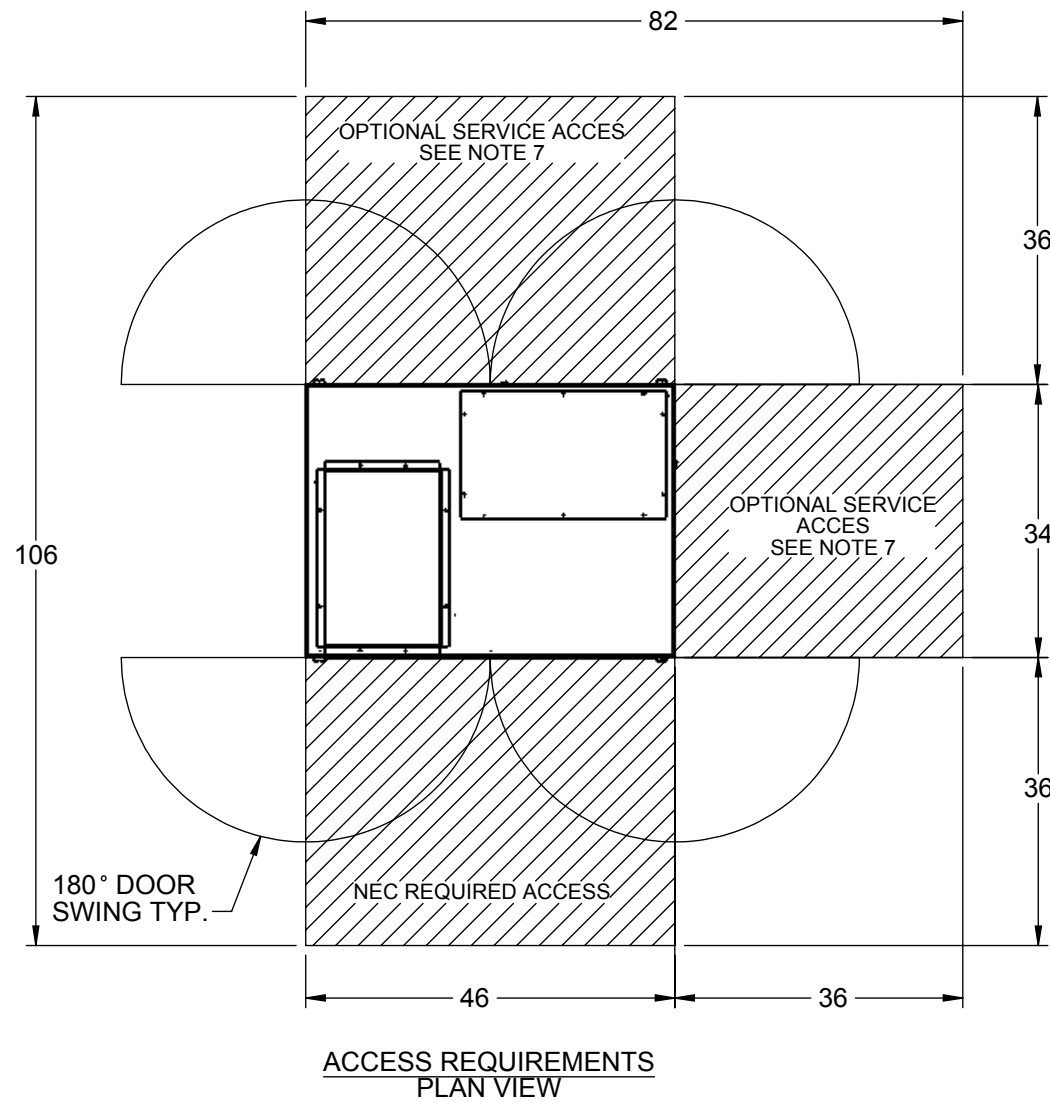
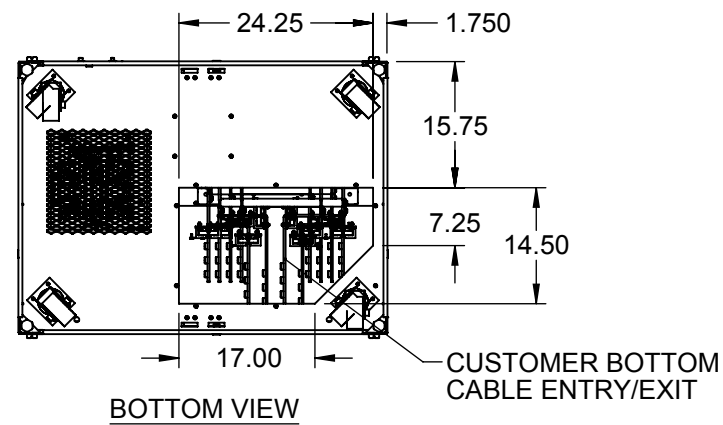
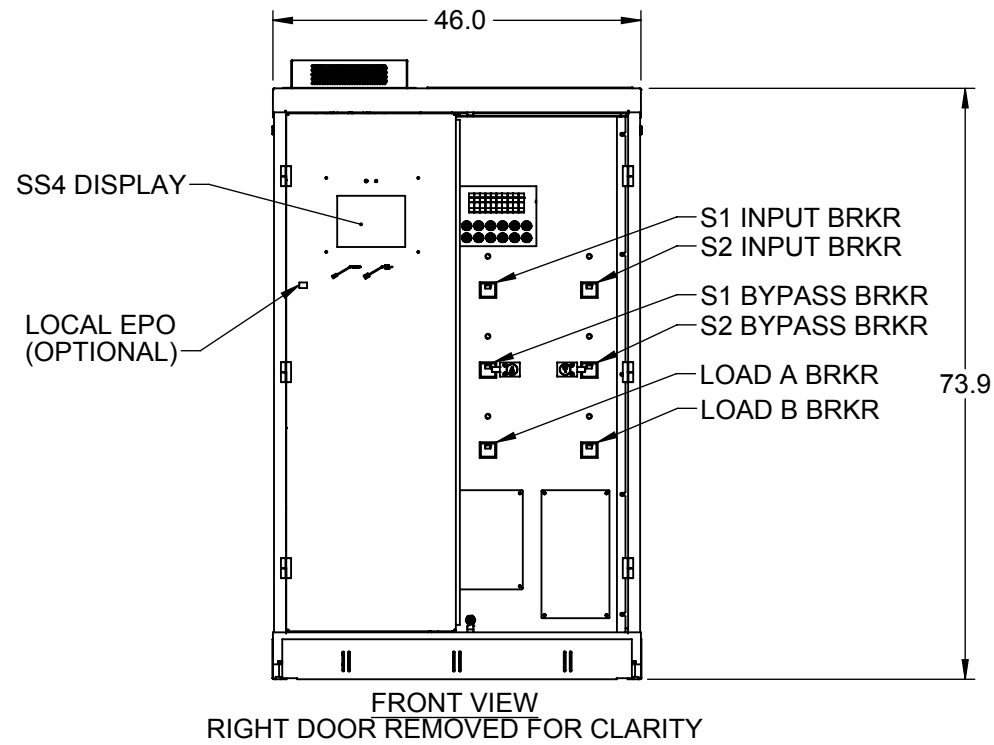


We reserve all rights in this document and in the information contained therein. Reproduction, use or disclosure to third parties without express authority is strictly forbidden. © Copyright 2014 ABB.

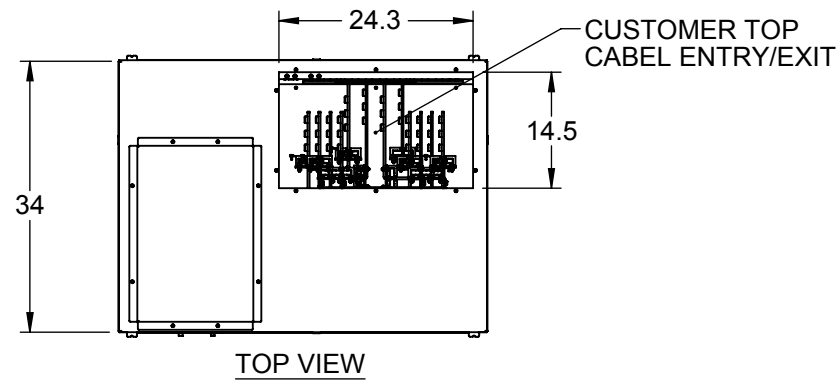


- NOTES:**
1. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES
 2. REFER TO PRODUCT DOCUMENTATION FOR ADDITIONAL DETAILS PRIOR TO SITE PREPERATION OR INSTALLATION.
 3. OPERATING TEMPERATURE RANGE: 0° TO 40°C.
 4. SYSTEM COOLING REQUIREMENTS: FORCED AIR COOLED.
 5. SYSTEM WEIGHT: 2000 LBS (908 kg).
 6. OPERATIONAL ACCESS VIA FRONT DOORS. MAINTENANCE AND CONNECTION ACCESS VIEW FRONT DOORS AND REMOVABLE SIDE PANEL OR REAR DOORS (DEPENDING ON ACCESS - SEE NOTE 7).
 7. RECOMMENDED MINIMUM CLEARANCES:
 FRONT = 36"
 REAR = 0.00" IF RIGHT SIDE ACCESS IS AVAILABLE
 = 36.00" IF NO RIGHT SIDE ACCESS IS AVAILABLE
 RIGHT = 0.00" IF REAR ACCESS AVAILABLE.
 = 36.00" IF NO REAR ACCESS AVAILABLE.
 TOP = 20.00"
 8. SYSTEM MUST HAVE ALL PANELS AND DOORS INSTALLED FOR PROPER OPERATION.
 9. FINISH: FRAME AND OUTER PANELS, POWDER COAT. INTERIOR, GALVANIZED ZINC ELECTROPLATE.
 10. CABLE ENTRY TOP OR BOTTOM, AS CONFIGURED PER CUSTOMER SPECIFICATION (BOTTOM ENTRY SHOWN)
 11. BUSBAR TERMINALS FURNISHED WITH NEMA 2-HOLE LANDING, 1.75" SPACING, 1/2-13 UNC THREAD. SEE SHEETS 2 AND 3 FOR DETAILS.
 12. DESIGNED FOR CABLE SIZES UP TO 4X 500MCM PER PHASE.

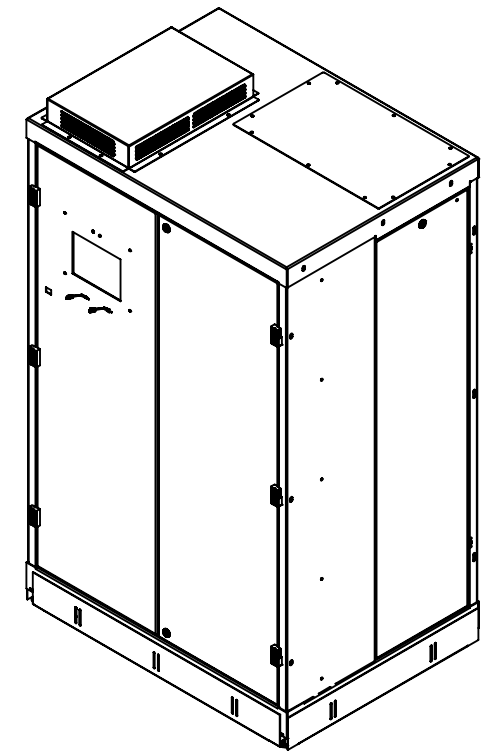


Material N/A	Finish N/A	Prepared PLH	Title OUTLINE DWG: 200A - 400A 4POLE SS4 RA
Tolerances X.XX = ±.03 X.XXX = ±.015	Unless Otherwise Specified: Inside bend radius .030 max. Remove all burrs and sharp edges. Part must comply with company document 94-10-000001. Interpret drawing in accordance with ASME Y14.5-2009.	Approved ZWS	ABB Document Kind Detail Drawing
Hole ϕ = ±.005 Angle = ±1/2°		Division/Dept. Power Protection	

A0	PLH	INITIAL RELEASE	11/06/2019
Rev. ECN#	Resp.	Description	Date
Revision Table			
Units Inch	Sheet Size B	Scale NTS	
Item ID SS 4 4P 200A-400A	Item Rev. A0	Date Drawn 11/06/2019	
Document ID 94-9200-00071798	Doc. Rev. A0	Page 1 / 3	


We reserve all rights in this document and in the information contained therein. Reproduction, use or disclosure to third parties without express authority is strictly forbidden. © Copyright 2014 ABB.

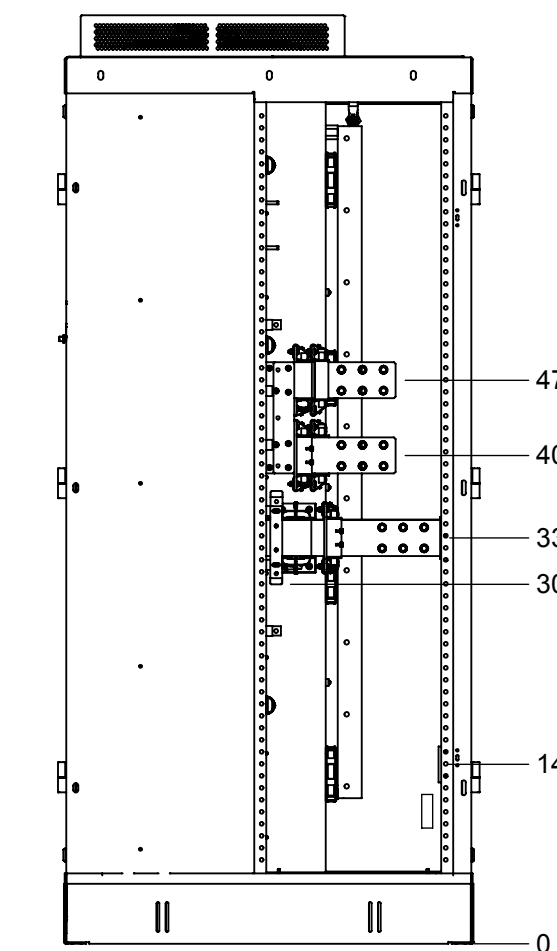

LEFT SIDE VIEW
RIGHT PANEL REMOVED FOR CLARITY

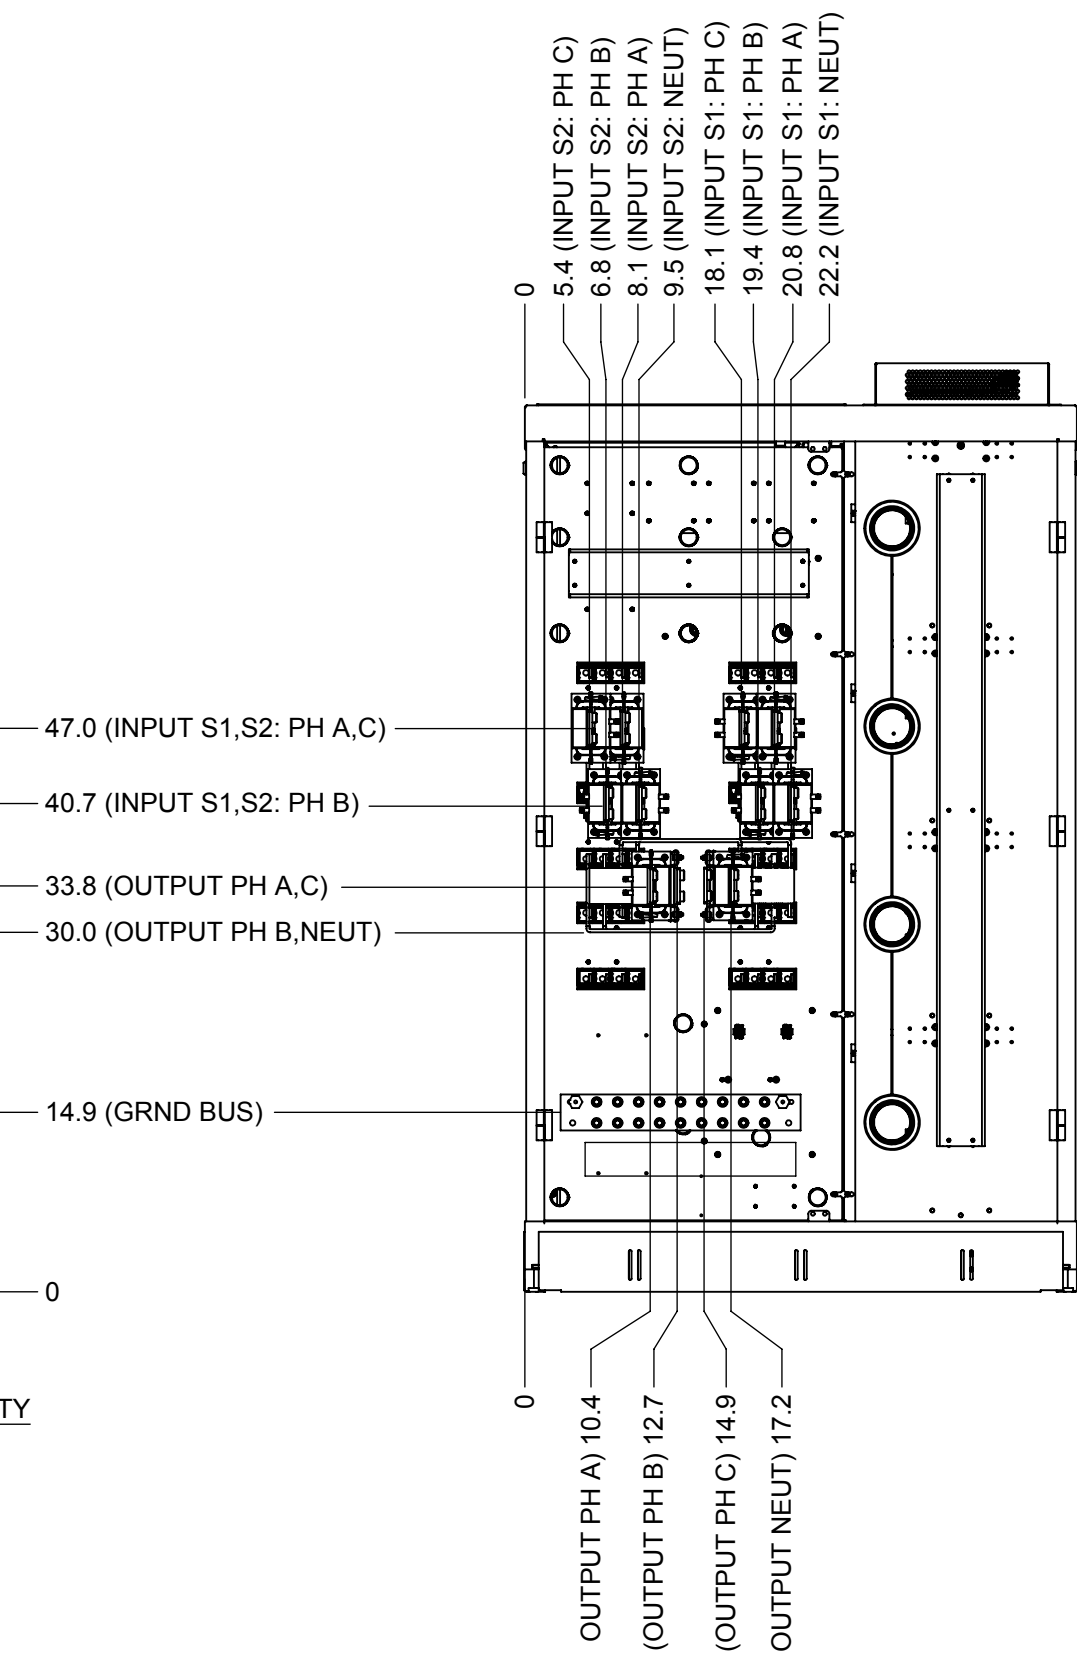

REAR VIEW
PANEL REMOVED FOR CLARITY

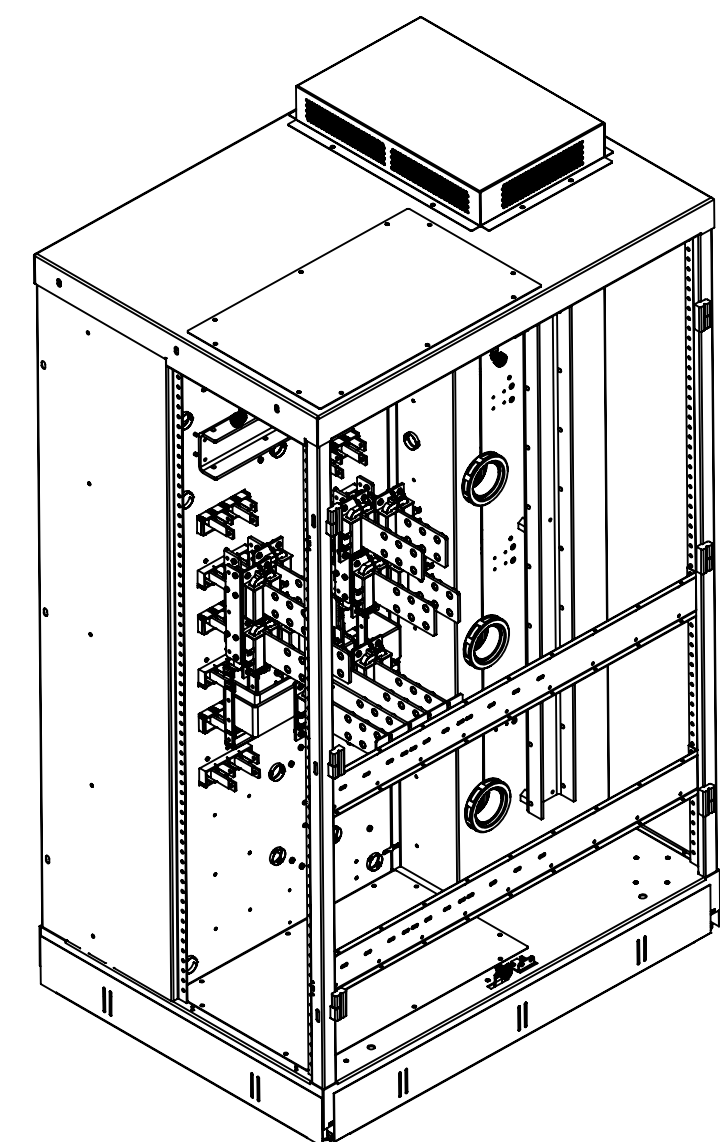


200A CONFIGURATION VIEW WITH RIGHT
AND REAR PANELS REMOVED


- NOTES:
1. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL STATE, AND LOCAL CODES.
 2. REFER TO PRODUCT DOCUMENTATION FOR ADDITIONAL DETAILS PRIOR TO SITE PREPARATION OR INSTALLATION.
 3. ALL CUSTOMER CONNECTIONS FOR INPUT & OUTPUT BUS ARE 2 HOLE NEMA 1/2-13UNC PEM NUTS ON 1.75 SPACINGS.

200A CONFIGURATION


We reserve all rights in this document and in the information contained therein. Reproduction, use or disclosure to third parties without express authority is strictly forbidden. © Copyright 2014 ABB

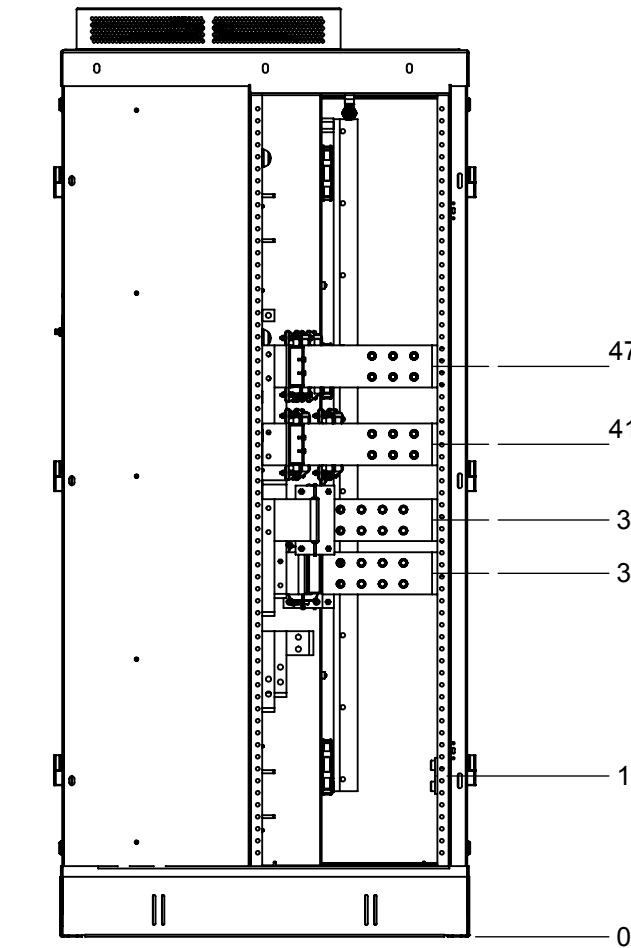

LEFT SIDE VIEW
RIGHT PANEL REMOVED FOR CLARITY

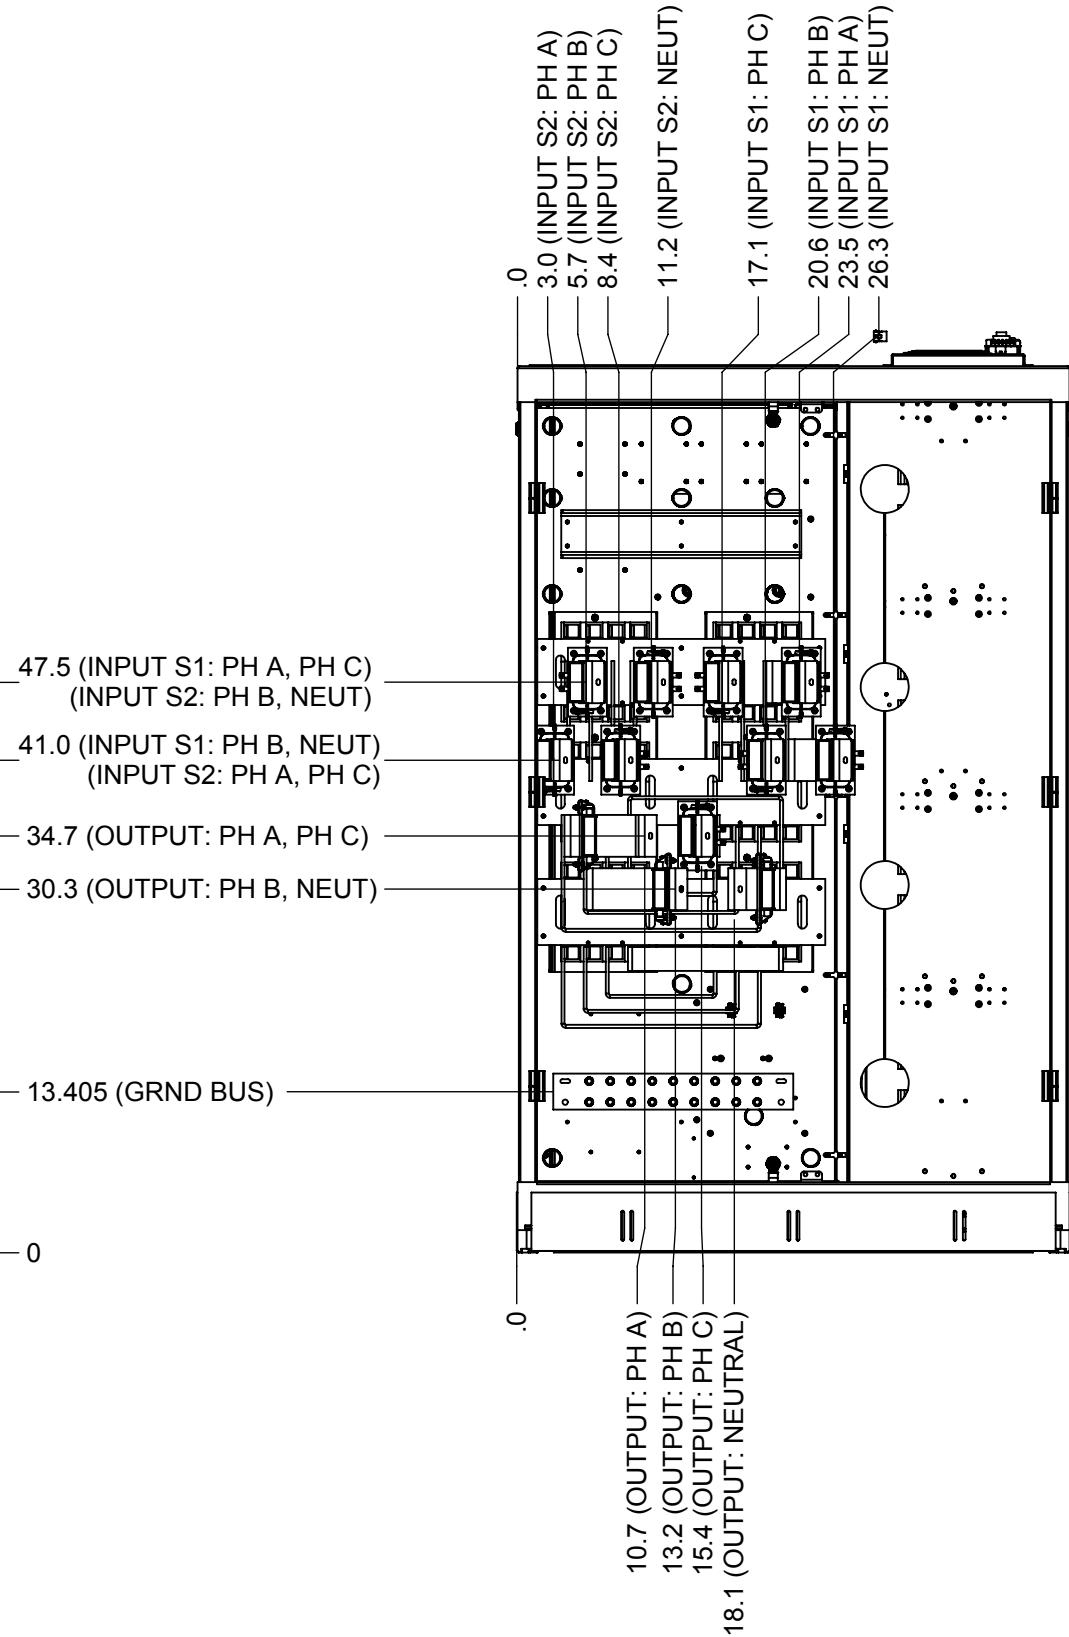

REAR VIEW
REAR PANELS REMOVED FOR CLARITY

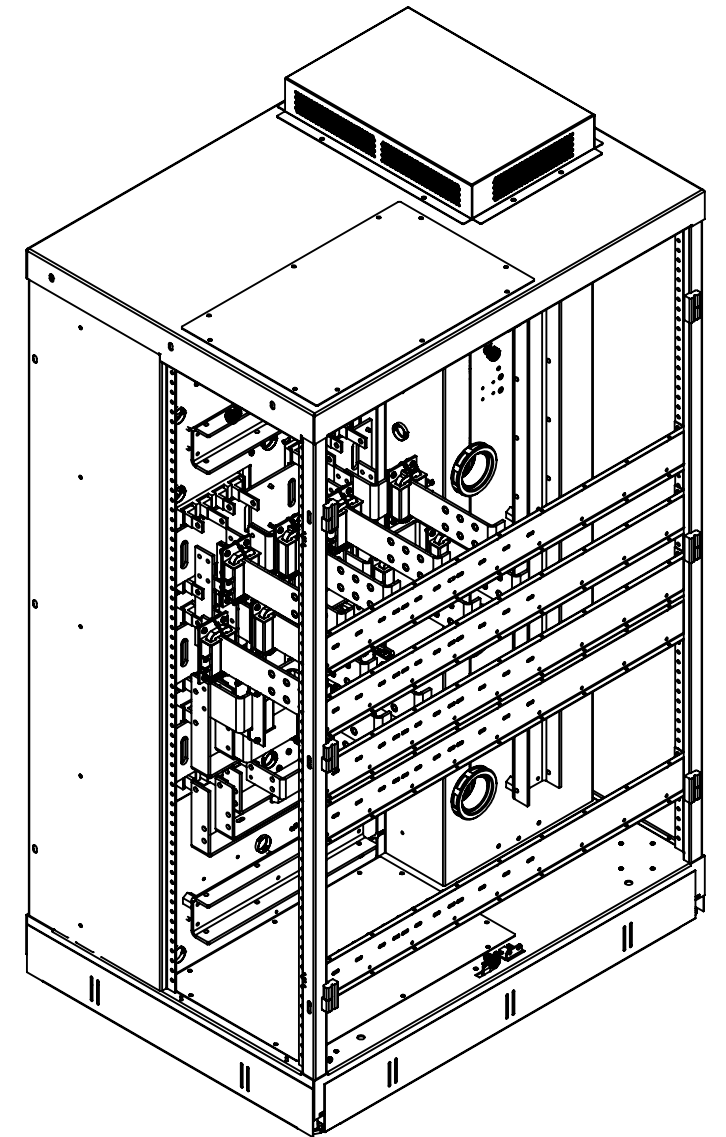

400A CONFIGURATION VIEW WITH RIGHT
AND REAR PANELS REMOVED

NOTES:

1. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL STATE, AND LOCAL CODES.
2. REFER TO PRODUCT DOCUMENTATION FOR ADDITIONAL DETAILS PRIOR TO SITE PREPARATION OR INSTALLATION.
3. ALL CUSTOMER CONNECTIONS FOR INPUT & OUTPUT BUS ARE 2 HOLE NEMA 1/2-13UNC PEM NUTS ON 1.75 SPACINGS.

400A CONFIGURATION