


PROCESS AUTOMATION

My Control System (web) Operation

User Manual

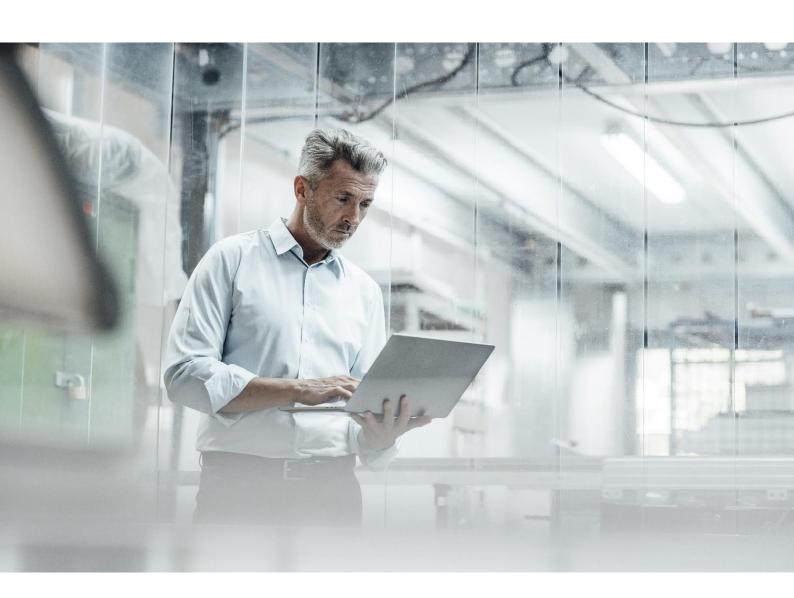

Notice

This document contains information about one or more ABB products and may include a description of or a reference to one or more standards that may be generally relevant to the ABB products. The presence of any such description of a standard or reference to a standard is not a representation that all of the ABB products referenced in this document support all of the features of the described or referenced standard. In order to determine the specific features supported by a particular ABB product, the reader should consult the product specifications for the particular ABB product.

ABB may have one or more patents or pending patent applications protecting the intellectual property in the ABB products described in this document.

The information in this document is subject to change without notice and should not be construed as a commitment by ABB. ABB assumes no responsibility for any errors that may appear in this document.

Products described or referenced in this document are designed to be connected and to communicate information and data through network interfaces, which should be connected to a secure network. It is the sole responsibility of the system/product owner to provide and continuously ensure a secure connection between the product and the system network and/or any other networks that may be connected.

The system/product owners must establish and maintain appropriate measures, including, but not limited to, the installation of firewalls, application of authentication measures, encryption of data, installation of antivirus programs, and so on, to protect these products, the network, its system, and interfaces against security breaches, unauthorized access, interference, intrusion, leakage, and/or theft of data or information.

ABB performs functionality testing on the products and updates that we release. However, system/product owners are ultimately responsible for ensuring that any product updates or other major system updates (to include but not limited to code changes, configuration file changes, third-party software updates or patches, hardware change out, and so on) are compatible with the security measures implemented. The system/product owners must verify that the system and associated products function as expected in the environment in which they are deployed.

In no event shall ABB be liable for direct, indirect, special, incidental or consequential damages of any nature or kind arising from the use of this document, nor shall ABB be liable for incidental or consequential damages arising from use of any software or hardware described in this document.

This document and parts thereof must not be reproduced or copied without written permission from ABB, and the contents thereof must not be imparted to a third party nor used for any unauthorized purpose.

The software or hardware described in this document is furnished under a license and may be used, copied, or disclosed only in accordance with the terms of such license.

This product meets the requirements specified in EMC Directive 2014/30/EU and in Low Voltage Directive 2014/35/EU.

Trademarks and copyright

System 800xA, Symphony, Symphony Plus and Freelance are registered or pending trademarks of ABB.

Ability is a trademark of ABB.

All rights to copyrights, registered trademarks, and trademarks reside with their respective owners.

Copyright © 2023 ABB. All rights reserved.

Release: April 2025

Document ID: 2PAA108749

Revision: AF

Table of contents

1.	int					
	1.1.	General	(Intro	duction & main functions)	1	
	1.2.	Used ice	ons		1	
	1.3.	Termino	ology		1	
	1.4.	Scope 8	Softw	vare versions	3	
2.	He	ina My C	ontro	l System	Δ	
	2.1.			f users		
	2.2.	•		s in My Control System		
	2.3.			g My Control System		
	2.4.	-		fications		
				ction		
	2.4			ration of auto-notifications		
	2.5.			ol System widget on the myABB dashboard		
	2.6.		w (general layout)			
	2.6	5.1. N	avigat	ion bar	7	
		2.6.1.1.	Acce	essing SIDs	9	
		2.6.1.2.	Adva	anced Search / adding favorites	9	
		2.6.1.3.	Man	aging favorites	10	
	2.6	5.2. Fi	ilter ar	ea	10	
	2.6	5.3. Fo	ooter a	area	12	
	2.6	5.4. Ta	ables i	n MCS	12	
	2.6		_	ies		
	2.6	5.6. G		Information		
		2.6.6.1.	-	em Status		
			5.1.1.			
			5.1.2.	System Update Service		
			5.1.3.			
			5.1.4.	Malware Protection, Security Updates and Backup		
		2.6.6	5.1.5. C:+a	Hardware LifecycleStatus		
		2.6.6.3.		t Status		
		2.6.6.4.		nses and Contacts		
			5.4.1.	Approving partner company		
				port Cases		
	2.6			w area		
		2.6.7.1.		ıps view		
		2.6.7.2.		view		
		2.6.7.3.		view		
		2.6.7.4.		parison view		
	2.6	5.8. K	PI deta	ils page	26	
		2.6.8.1.	KPI (details	27	
		2.6.8.2.	Add	itional information	30	
		2.6.8.3.	Deta	ils	31	
		2.6.8	3.3.1.	Suggested actions	31	
		2.6.8	3.3.2.	Manual check method	31	
		2.6.8	3.3.3.	Evaluation criteria	32	
	2.6	5.9. H				
		2.6.9.1.		ormance KPIs		
		2.6.9.2.	Soft	ware KPIs	33	

	2.6.9.3.	Event Load	33
	2.6.9.4.	Alerts and Notifications	36
	2.6.10. S	ecurity	37
	2.6.1		37
	2.6.1	.0.1.2. Security KPIs	38
	2.6.1	.0.1.3. System Update Service/Security Updates	
	2.6.1	.0.1.4. What is cyber security	40
	2.6.1	.0.1.5. Malware protection	
	2.6.1	.0.1.6. Backup	
	2.6.1		42
		.0.1.8. Security advisories	
	2.6.11. Ir	nventory	43
	2.6.11.1.	. Hardware Lifecycle	43
	2.6.11.2.	 	
	2.6.11.3.		
	2.6.11.4.		
	2.6.11.5.		
	2.6.12. D	Oocumentation	
	2.6.12.1.		
		dministration and Configuration Area	
	2.6.13.1.		
	2.6.13.2		
	2.6.1	.3.2.1. KPI	
		3.2.2. Inventory	
	2.6.13.3		
	2.6.13.4		
	2.6.13.5	<u> </u>	
		3.5.2. Application Credentials Management	
	2.6.13.6		
	2.6.13.7.		
	•	S	
		ccessing reports	
		Generating reports	
	2.7.2.1.		
	2.7.2.2.	Inventory Reports	70
3.	Additional	Information	71
		of Related Documents	
_	•		
4.		n History	
	4.1. Revision	n History	

1. Introduction

My Control System is a part of the Digital Services offering from ABB. This document is intended to provide assistance in the use of MCS.

This document does not describe the installation and operation of MCS (on-premise). For details on this topic please refer to document ref. [1] & [2].

This manual does not discuss the settings and process for collecting the necessary data with the My Control System - Data Collector (MCS-DC). For details on the collection process refer to document ref. [3].

1.1. General (Introduction & main functions)

My Control System is ABBs digitized service business platform, build to companion DCS customers throughout the entire control system life cycle. It offers plant managers, maintenance teams and IT departments with the necessary insights into the DCS.

My Control System provides the:

- Knowledge by acting as repository of information, documentation, and software downloads
- Awareness of overall system performance and lifecycle status of individual components
- Sustainability to ensure system health and cyber security

It uses data collected during scheduled and on demand analyses for comparison against best practices and standards to detect performance irregularities and provides the user with standardized views of Key Performance Indicators (KPIs).

This comparison quickly pinpoints issues, helping to improve system reliability, availability, and performance.

Depending on the available licenses different functionality is enabled within the platform.

1.2. Used icons



Warning/important notice

Indicates a warning or important notice that must <u>not</u> be ignored.



Informational notice

Indicates additional information which should be read by the user.

1.3. Terminology

Table 1: Terminology

Term	Description
CSM	Control System Monitoring
DCS	Distributed Control System

INTRODUCTION TERMINOLOGY

Term	Description
KPI	Key Performance Indicator This is a basic item or elementary function of the control system which is checked. It consists of one or more values to be measured and evaluated
MCS	My Control System This is a platform hosting ABB service applications in the ABB Cloud
MCS-DC	My Control System Data Collector Software, which collects data from an installed control system
MCS-FW	My Control System – Forwarder Software, which distributes data collections of MCS-DC to consuming applications like e.g., MCS-OP
MCS-OP MCS on-premise	My Control System (on-premise) application. This is the platform hosting MCS functionality on a customer site
RAP VSE	Remote Access Platform Virtual Security Engine
SDF	System Data File This file consists of relevant raw data collected on site, which is then used to generate data sets
SEPM	Symantec Endpoint Protection Manager
SID	System identifier This is a unique serial number of control systems used by the software license register (SoFa). The system identification number is always written close to the digits, e.g. SID1234
SoFa	Software Factory Global ABB database holding detailed information on ABB software li- censes
	McAfee VirusScan Enterprise

1.4. Scope & Software versions

The scope of the document is for operating MCS in combination with MCS-DC as per the supported software versions. In general, MCS supports all control system versions as supported by the MCS - DC. Refer to document ref. [3] for the complete list.

2. Using My Control System

2.1. Registration of users

MCS is available for all ABB control systems customers. For proper access management, all users must be assigned to their company and their installed base through a registration process. If you or your colleagues are not yet registered for MCS, please contact your local ABB representative, or fill in and submit a request via this URL:

https://new.abb.com/control-systems/service/offerings/my-control-system

2.2. Customer roles in My Control System

In MCS you are authorized to perform certain actions, depending on the role assigned to you. As a user you can take on the role of a Control System Administrator (primary customer responsible for the control system SID) or a Maintenance Engineer (working with maintenance/pro-active actions for the control system SID). This user manual will inform you where the views differ, and which actions your role is authorized to perform.

2.3. Accessing My Control System

To access MCS, please navigate to https://myportal.abb.com and login using the login dialog or log in via www.abb.com.

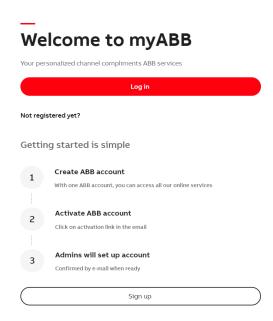


Figure 1: Login to myABB-portal

When logging in to the web portal for the first time, you will be informed about the MCS Terms and Conditions. To access MCS, you need to accept these Terms and Conditions. Once logged in, you can review the MCS Terms and Conditions, as well as the Privacy policy in the footer of the Dashboard.

2.4. Auto-notifications

2.4.1. Introduction

Auto-notifications must be set up by each user individually. You can set up the auto-notifications in the User Preferences menu available via the user icon in the top right corner.

Once the auto-notifications are set up, the notifications can be viewed online via the bell icon and/or as received email notifications.




Figure 2: User Preferences

2.4.2. Configuration of auto-notifications

In the Notifications tab, you can configure your personal auto-notification settings. In the section "General settings" you can choose if you want to get your auto-notifications sent via email and/or via the web site.

Online notification messages are updated continuously. Set the email frequency on how often you would like to receive your updates per email.

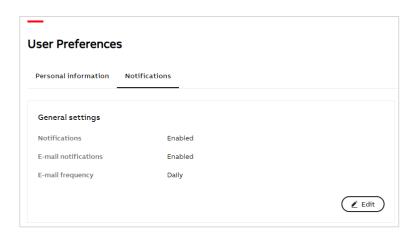


Figure 3: Notification settings

In section "My Control System" you can view your existing auto-notification configurations, edit them via the "Edit" option and add a new one by clicking "Configure a new notification".

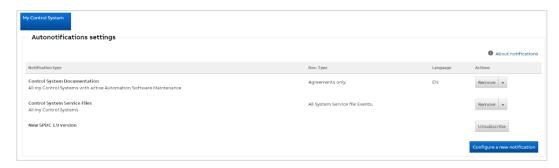


Figure 4: Auto-notifications

For Control System Documentation, the list of Control Systems available in the dropdown depends on the "Show only favorite SIDs" switch setting (see chapter 2.6.1.1). Additionally, this setting is checked before sending the notification.

2.5. The My Control System widget on the myABB dashboard

The MCS widget shows you a list of all systems that are connected to your user account. It shows their current Automation Software Maintenance status and the last time the system has been scanned with the MCS-DC.

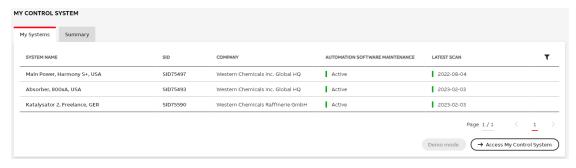


Figure 5: MCS widget on myABB

[i]

The mapping is done in our backend database, so in case you do not see a system that you expected to see, please contact your local ABB service contact.

The list of Control Systems available in this widget depends on the "Show only favorite SIDs" switch setting (see chapter 2.6.1.1).

Click on the system name to access the System Status page of the specific control system (see chapter 2.6.6.1).

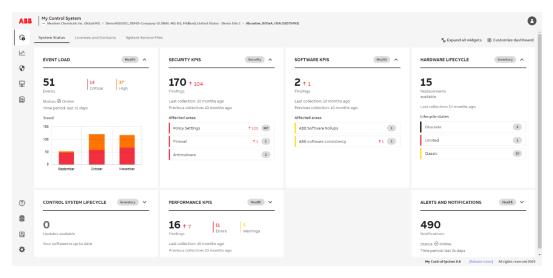


Figure 6: System Status page

Click on "Access My Control System" to access MCS without any preselection of the system. You will then be asked to select the system in the SID selector (see chapter 2.6.1.1).

If you want to make yourself familiar with MCS first, click on "Demo mode" in bottom right of the widget to explore MCS by yourself with 3 Demo systems.

2.6. Overview (general layout)

The MCS dashboard consists for 4 major areas:

- 1. Navigation bar (Chapter 2.6.1)
- 2. Filter area (Chapter 2.6.2)
- 3. Overview area (Chapter 2.6.7)
- 4. Footer area (Chapter 2.6.3)

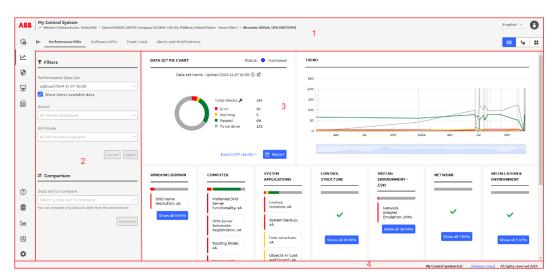


Figure 7: General layout

2.6.1. Navigation bar

The navigation bar consists of 3 different sections:

- 1. SID selector
- 2. Categories (Chapter 2.6.4 onwards)
- 3. Administration and configuration (Chapter 2.6.13)

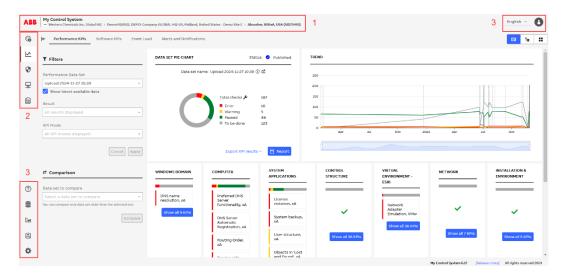


Figure 8: Navigation bar

Use the navigation bar to access the different areas (e.g. "Health"). Hover over the left menu to see the names of the sections.

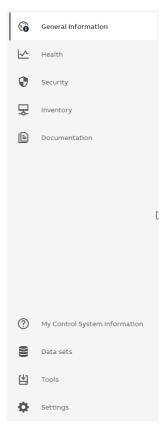


Figure 9: Left navigation bar

Once an area is selected a second level navigation bar will be displayed (if available for that area).



Figure 10: Second level navigation

2.6.1.1. Accessing SIDs

Click in the upper left corner on the ABB logo to open SID selector.

The SID selector contains your connected SIDs, grouped by company and sites. You can enter the SID name or number in the search bar at the top of the widget to filter the displayed data. Clicking on any of the SIDs will select it and refresh the page to display information about the selected SID.

Use the switch on the top of the selector to display only your favorite SIDs.

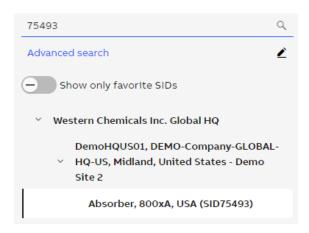


Figure 11: SID selector

The "show only favorite SID" switch setting affects not only the SID selector but also the number of SIDs listed in the following places:

- "System ID" filter on the Control System Documentation tab
- "Control System" dropdown in the notification configuration dialog (including "All my Control Systems with active Automation Software Maintenance" option)
- My Control System widget on the myABB dashboard

2.6.1.2. Advanced Search / adding favorites

In case where you would like to access information about an SID that is not in your favorites, click on the "Advanced search" button in the SID selector. It will open a popup that allows you to find SIDs using following search criteria:

- Hardware
- License ID
- Licensed option

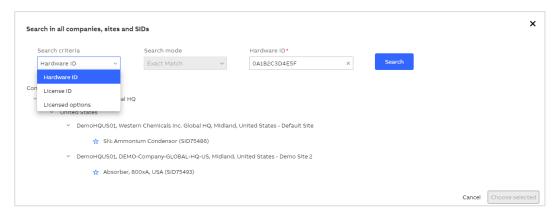



Figure 12: Advanced Search

The empty star indicates that the entry is not in your favorites, clicking it will add that entry to your favorites. You can either add a single SID, a SITE or a complete company to your favorites. Adding a site to your favorites will result in adding all SIDs from that site to your favorites. Adding a company will result in adding all sites (and as a result, all SIDs from those sites) from that company.

The blue star indicates that the entry is already in your favorites and clicking it will remove it from your favorites.

2.6.1.3. Managing favorites

To manage your favorites, click on the pencil icon that is displayed next to the "Advanced search" button in the SID selector. The SID selector will now display the star button before each entry where you can apply the necessary changes.

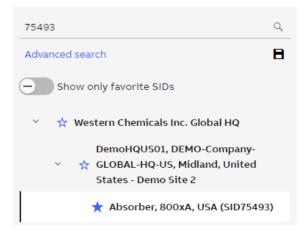

After any change is done, close the SID selector or click the save icon. A confirmation popup will be displayed if you close the SID selector without saving changes. Click on "Yes" to apply the changes and refresh the page.

2.6.2. Filter area

On the left side of the dashboard, you have a selection and filter area to narrow down / modify the results and content that is shown in the overview area.

By default, filter area is detached from the main view. Click on the "Show filters" icon to display it:





Figure 13: Show filter area

Click on the "Hide filters" icon to hide filter area:



Figure 14: Hide filter area

The visibility of the filter area will be remembered when browsing MCS.




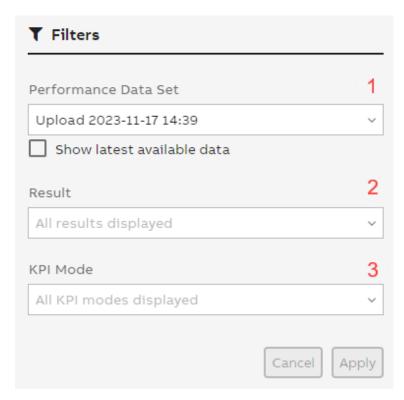


Figure 15: Filter area

 Data Set selector: Select the data set that you would like to inspect. Only one data set can be selected at any given time. By default, the option "Show latest available data" is enabled.

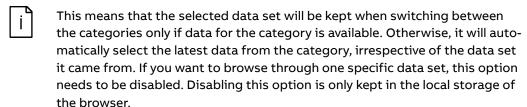

- 2. Result selector: Select specific KPI results to narrow down what will be displayed in the overview area. This selector allows multiple choice, e.g., you can select "Error" and "Warning" at the same time. If the selector is left empty, all KPIs and their results will be displayed.
- 3. KPI Mode: Select either automated or manual KPIs. If the selector is left empty, all KPIs will be displayed. This section only appears if you have an active System Assessment license and selected data set is of type "Automated and manual KPIs".

After you selected your filter, click "Apply". The page will refresh and display the data you have selected. You can also click "Cancel" to revert any selection you have made to the currently displayed view.

2.6.3. Footer area

Information about the current MCS version is provided in the footer area of the dashboard. In addition, the footer area provides a direct link to the online Release notes that are located in the documentation category (Chapter 2.6.12)



Figure 16: Footer area

2.6.4. Tables in MCS

Depending on the type of the tables in MCS, different functionalities are available directly in this component:

- Filters to narrow down displayed items. A filter icon indicates that this option is available:
 - · Click on the filter icon to expand or clear and hide filters
 - · Apply filters in each column to narrow down displayed items
 - · Click on "x" icon to clear all filters



Figure 17: Filters

- Possibility to sort ascending or descending by each column:
 - An arrow in grey (as next to the "device name" column) indicates the current sorting rule
 - An arrow in light grey (as next to the "data collector" column) is displayed on hover to
 indicate that it is possible to sort by this column. Click to activate this option. Items
 will be sorted in ascending order. Click for the second time to activate sorting in descending order.



Figure 18: Sorting in ascending order



Figure 19: Sorting in descending order

- Option to customize the width of the columns. A divider displayed on the right side of the column heading indicates it is applicable to this table. There are two ways of using this functionality:
 - · Manual adjustment hover over the divider and drag & drop it to the new position
 - Automatic adjustment hover over the divider and double click. The width of the column will adjust automatically to the width of the text. Note: The maximum width to which it will expand is 300px but it can be expanded further manually.



Figure 20: Adjusting column width



Not all tables in MCS have the above options.

2.6.5. Categories

MCS uses five different categories to structure all the information that is available for the control system.

- 1. General Information (Chapter 2.6.6)
- 2. Health (Chapter 2.6.9)
- 3. Security (Chapter 2.6.10)
- 4. Inventory (Chapter 2.6.11)
- 5. Documentation (Chapter 2.6.12)

Use the left navigation bar to access the different areas (e.g. "Health"). Once an area is selected a second level navigation bar will be displayed (if available for that area).




Figure 21: Second level navigation

2.6.6. General Information

The general information category consists of three tabs:

- 1. System, site or fleet status (high level overview about the system, site or fleet status of the installed control system)
- 2. Licenses and Contacts (general information about the installed control system, e.g. licenses and contacts)
- 3. System Service Files (a place to share files with ABB)
- 4. Support Cases (a place to check support cases related to the selected SID)

2.6.6.1. System Status

The System Status tab gives you a high-level overview about the status of the control system. The KPI analysis results from all categories (Health, Security and Inventory) as well as widgets from other functions are combined within this single dashboard. The dashboard consists of

different widgets representing the different categories / functions (e.g. Performance KPI, Security KPIs, ...).

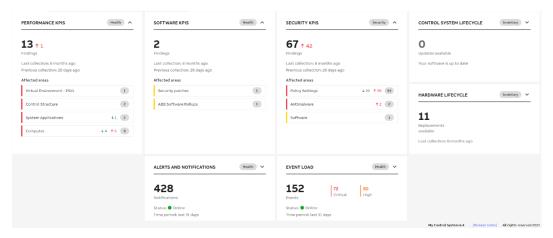


Figure 22: System Status

Each widget has two views (expanded / collapsed) showing a different level of detail. Use the toggle button to switch between the views or click on "Expand all widgets" in the upper right corner.

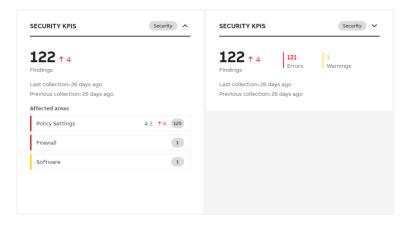


Figure 23: Expanded / collapsed view

Click either on the heading or on the number of findings, to jump to the corresponding KPI analysis of the category.

Click on one of the "Affected areas" (e.g. Firewall) to jump to the KPI analysis of the category using the "Tree view" where the affected area is automatically expanded.

Hover over the indicators in the "Affected areas" to get more information about the changes within this area.

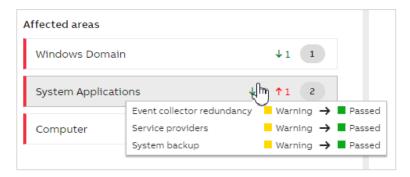


Figure 24: Changes in area

The appearance of the system status tab can be customized. Click on "Customize dashboard" in the upper right corner to start the customization. On the left side of the screen, you have an area where you can do the following adjustments:

- Dashboard Layout (3 or 4 column layout for different screen resolutions)
- Color Theme (Default or High-Performance color theme)
- Widgets (Enabling / Disabling / Expanding / Collapsing widgets)

In addition, the arrangement and order of the widgets can by changed by dragging & dropping the widget to another column or position.

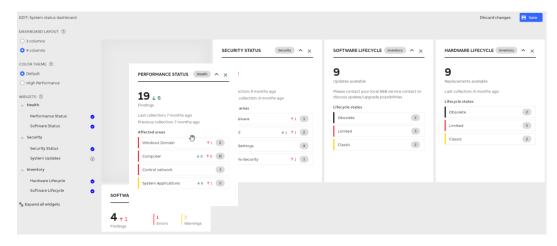


Figure 25: System status customization

If a widget is displayed only if some requirements are met, an info icon is displayed in the left pane next to the widget name. Hover over the icon to see the details.

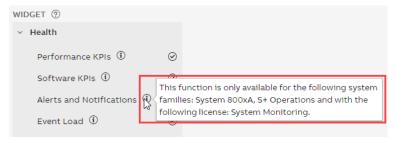


Figure 26: Requirements to display a system status widget

If there are some requirements to display a specific system status widget it is visualized in two ways:

- If for the selected SID, the requirements are not met, information about the needed conditions is displayed in the blue box.



Figure 27: Requirements for the selected SID are not met

 If for the selected SID, the requirements are met, blue icon is displayed in the widget. Click on the icon to check the details.




Figure 28: Requirements for the selected SID are met

2.6.6.1.1. Performance KPIs, Software KPIs and Security KPIs

[1] Performance KPIs, Software KPIs and Security KPIs widgets show the number of findings (errors or warnings) in the latest data set with the trend indicator and difference compared to the previous data set. Number of KPIs which have worsened and improved is presented in the tooltip.

[2] Information about the latest and previous collections is presented below with more details on hover.

[3] Red label next to the "Affected area" indicates there is at least 1 error whereas yellow one shows there are no errors but at least 1 warning in the specific KPI category. The number of all findings in each category is displayed in the grey label on the right side. Next to that, trend indicators and more details in the tooltip are shown.

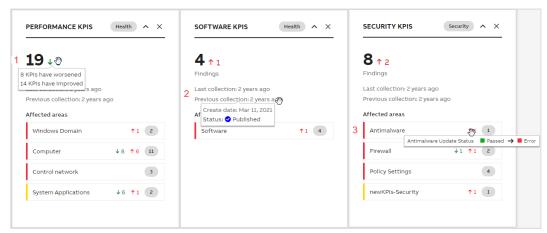


Figure 29: Performance KPIs, Software KPIs and Security KPIs widgets

2.6.6.1.2. System Update Service

System Update Service widget shows:

- [1] Sum of nodes with failed updates and nodes which need update or restart
- [2] Sync status with more details on hover
- [3] Red label indicates there are nodes for which updates failed, yellow label shows there are nodes with needed updates and orange inform about nodes with needed restart. Number of nodes in each status is presented as well.

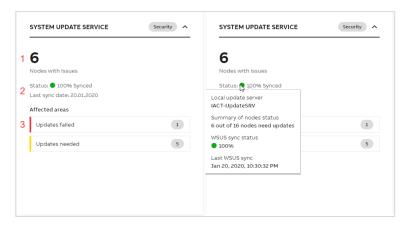


Figure 30: System Update Service widget

2.6.6.1.3. Event Load and Alerts and Notifications

Event Load as well as Alerts and Notifications widgets present CSM data.

- [1] Sum of critical and high events from last 31 days.
- [2] Number of critical or high events from last 31 days listed separately based on the severity.
- [3] Information of the time period for which data is presented.
- [4] Trend showing the number of critical (in red) and high (in orange) number of events from last 3 months
- [5] Sum of notifications with critical or high severity from last 31 days
- [6] List of "Affected areas" for which notification with critical (red label) or high (orange label) severity has been sent. The sum of notifications with critical or high severity in each category is displayed in the grey label on the right side.

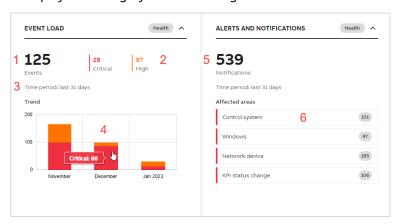


Figure 31: Event Load and Alerts and Notification widgets

2.6.6.1.4. Malware Protection, Security Updates and Backup

- [1] Malware Protection, Security Updates and Backup widgets show the number of nodes with issues (errors or warnings).
- [2] Information about the last MCS-DC collection information.
- [3] Red label indicates there is at least 1 error whereas yellow one shows there are no errors but at least 1 warning in the specific KPI category. The tooltip presents the description of the KPI category. The number of all findings in each category is displayed in the grey label on the right side.

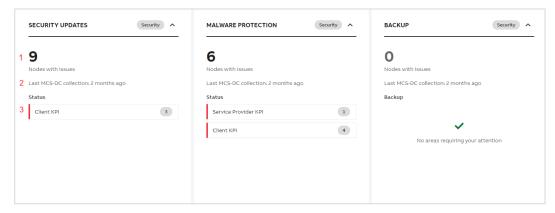


Figure 32: Malware Protection, Security Updates and Backup widgets

2.6.6.1.5. Hardware Lifecycle

- [1] Hardware Lifecycle widget show the sum of devices in Obsolete, Limited or Classic lifecycle phase with available replacement.
- [2] Information about the last collection is presented below with more details on hover.
- [3] "Lifecycle states" section indicates the number of devices with available replacements in each lifecycle phase.




Figure 33: Hardware Lifecycle widget

2.6.6.2. Site Status

The Site Status tab works in the similar way as System Status but gives you a high-level overview about the status of the whole site.

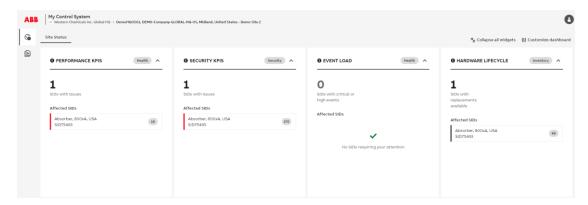


Figure 34: Site Status



Data in the widgets is shown based on your access rights.

Under "Affected SIDs" you will see the list of all SIDs which require your attention.

The color of the label matches the worst result for the listed SID but you can hover over the indicator with the total number of findings to check the details.

Click on one of the "Affected SIDs" (e.g. SID89385) to jump to the KPI tab of the widget's category.




Figure 35: Site status widget

The appearance of the site status tab can be customized independently of the customization of the system status tab.

2.6.6.3. Fleet Status

The Fleet Status tab works in the similar way as Site Status but gives you a high-level overview about the status of the whole fleet.

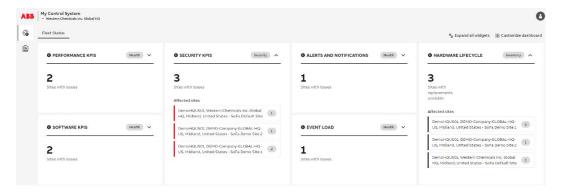


Figure 36: Fleet Status



Data in the widgets is shown based on your access rights.

Under "Affected sites" you will see the list of all sites which require your attention.

The color of the label matches the worst result for the listed site but you can hover over the indicator with the total number of findings to check the details.

Click on one of the "Affected sites" (e.g. "DemoHQUS01, DEMO-Company-GLOBAL-HQ-US, Midland, United States - SoFa Demo Site 2") to jump to the Site status tab.



Figure 37: Fleet status widget

2.6.6.4. Licenses and Contacts

The licenses and contacts tab and consists of three different areas:

- Automation Software Maintenance widget (gives information about the status of your service contract)
- Licenses widget (lists all licenses that are registered for your control system)
- Contact widgets (lists all relevant contacts for your control system)

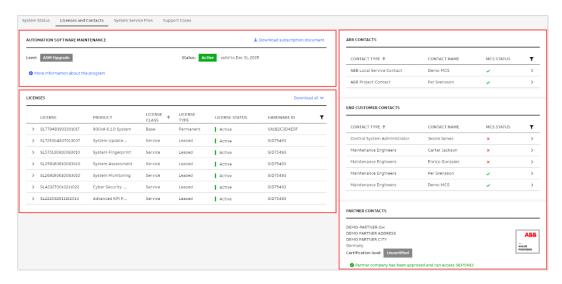


Figure 38: Licenses and Contacts

In the license widget you can expand the individual licenses to get additional information on the license details.

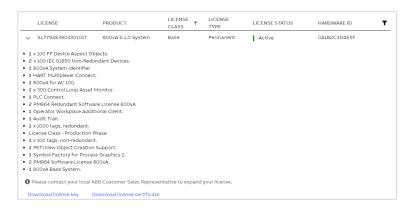


Figure 39: License details

Functionalities which depend on the base licenses work when the license is in either Active or Registered status.



Figure 40: Active license



Figure 41: Registered license

In case a license will expire in the next 90 days, it is displayed as Expiring.



Figure 42: Expiring status

Additionally, this information will be displayed in the banner on the top.



Figure 43: Banner with expiring licenses

On pages in site or fleet context, the banner is also displayed but it indicates which SIDs have at least one license which will expire in the next 90 days.



Figure 44: Banner with SIDs with expiring license(s)

Licenses in grace period are listed with an orange label. Additionally, there is a banner indicating how many days are left till the end of the grace period. During the grace period, the functionality is still working.

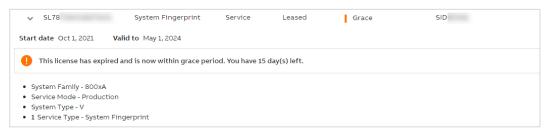


Figure 45: Grace period

Expired licenses are also listed in the widget with red label.

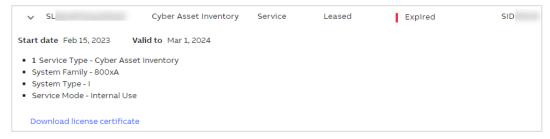


Figure 46: Expired license

All data in the Licenses and Contacts tab is taken from SoFa. In case something is not correct it needs to be changed in SoFa directly.

It is possible to download the license certificate and license key for all licenses from the selected SID. Click on the "Download all" button in the top right corner of the widget and use available options.



Figure 47: Download all license certificates and license keys

2.6.6.4.1. Approving partner company

In case your system is managed by an ABB Value Provider you first need to approve this partner company in My Control System, so that the partner users can access the system in MCS.

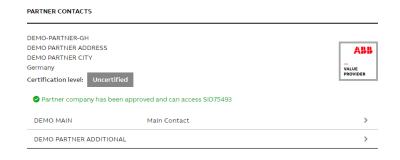


Figure 48: Approving partner company



This function is only available for the control system administrator of that SID

2.6.6.5. Support Cases

The Support Cases tab provides an overview of all support cases for the selected SID. By default items are sorted by the case number but clicking on any column name will sort item by other values as well (ascending or descending).

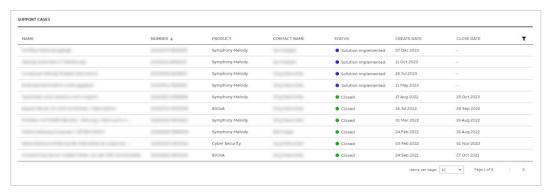


Figure 49: Support Cases widget

2.6.7. Overview area

The overview area gives you a quick impression about the analyzed data and the results for each category. The structure is nearly the same for all the categories. In this example the overview area for the category Security / Security KPIs is used.

Three different widgets are displayed in the overview area:

- 1. A pie chart in the top-left presenting all results from the selected data set in an easy and comprehensive manner. Click on the reports button to create/access reports from this category (not applicable for all categories). Use "Export KPI results" button to export the KPIs from the selected category or all KPIs.
- 2. A trend graph in the top-right giving you an overview how results changed over time. Hover over the vertical line to see the details of each data set.

3. KPIs at the bottom showing the results for the individual checks.

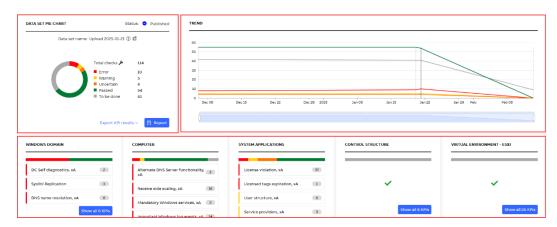


Figure 50: Overview area

The KPIs can be browsed using different views that will help you easily find the most relevant data. The different views will be described in the following chapters.

Switch between the views using the toggle button. Hover over the icon to check the tooltip with the view name.



Figure 51: Toggle button

You can also use the comparison view which is located in the filters area.



Figure 52: Comparison view

2.6.7.1. **Groups view**

The groups' view gives a quick basic overview about the KPIs with the worst result in the different groups. It is limited to 10 KPIs per group and displays only KPIs with the result "Error" or "Warning". Click on a KPI to access the details page (Chapter 2.6.8) of the corresponding KPI. If you want to see all KPIs of the specific group, click on the "Show all KPIs" button to view all KPIs in the Tree view.

Figure 53: Groups view

There are indicators displayed for the KPIs which are in error or warning. They show the number of devices which are impacted and indicate the highest severity. The number matches the information in the result viewer. In case a KPI was changed manually e.g. from error to warning, this indicator will still show the number of devices which are in error (as this is still the highest severity).

2.6.7.2. Tree view

The tree view shows all the KPIs, their status and the reported result in an expandable tree.

The KPIs are grouped into main sections (e.g. Security), subsections (e.g. Software, Antimalware) and the individual KPI (e.g. Windows OS version).

Click on the KPI name to access the details page (Chapter 2.6.8) of the corresponding KPI.

The KPI mode column indicates if this KPI is an "automated KPI" (collected with the MCS-DC) or an "manual KPI" (only available with a valid System Assessment license).

The status column indicates if the KPI is already collected (either automatic or manual) or if it still needs to be done. The status "to be done" is displayed if either the data is not yet imported, it was not possible to collect data for that specific KPI, or the manual performed KPI is not yet evaluated.

The result column shows the result of the analysis of the KPI. The result can be error, warning, uncertain, passed, info, to be done or skipped.

The user changes column allows you to filter for KPIs that either were edited, have attachments, or have user comments. All these are indicated by small icons on the KPI.

There are indicators displayed for the KPIs which are in error or warning. They show the number of devices which are impacted and indicate the highest severity. The number matches the information in the result viewer. In case a KPI was changed manually e.g. from error to warning, this indicator will still show the number of devices which are in error (as this is still the highest severity).



Figure 54: Tree view

2.6.7.3. Grid view

The grid view gives you an overview on the devices and their individual results. Here you can quickly check which device was causing the problem. Click on the squares to access the details page (Chapter 2.6.8) of the corresponding KPI.

Figure 55: Grid view

2.6.7.4. Comparison view

The comparison view gives you the possibility to check which KPIs changed their status between two data sets. To do so, at least 2 data sets need to be available.

Select a data set from the "data set to compare" dropdown to compare it to the dataset you are currently looking at.

The results are divided into four sections:

- 1. KPIs that became worse
- 2. KPIs which improved
- 3. KPIs which did not change their results
- 4. KPIs which are not comparable (e.g. they were not collected before)

You can expand each result to see details on which KPIs changed. Click on the result or KPI name to access the details page (Chapter 2.6.8) of the corresponding KPI.

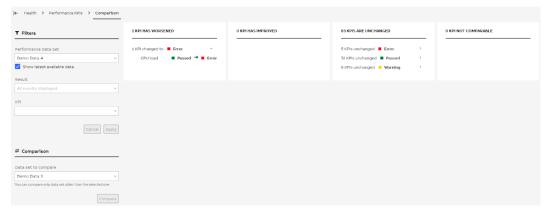


Figure 56: Comparison view

2.6.8. KPI details page

The KPI Details page shows you all relevant information concerning one specific KPI.

It consists of three different widgets:

- 1. KPI result with the description and the result viewer
- 2. Additional information
- 3. Details

For some KPIs additional information is available via the documentation icon next to the widget name.



Figure 57: KPI details page

To navigate between KPIs you can use the KPI selector that is displayed in the Filters section. Keep in mind that all applied filters do have an effect on the KPIs that are displayed in the selector (e.g. if you have result filters set to Passed, only KPIs with that result will be displayed).

To go back to the overview area, click on the second item in the breadcrumbs displayed above the filter area. Click on the first item to go the default tab on the first level of navigation.



Figure 58: Filter on KPI details page

2.6.8.1. KPI details

The KPI result widget shows the actual result of the analysis. The results can be:

- Error (red)
- Warning (yellow)
- Uncertain (orange)
- Passed (green)
- Info (blue)

- To be done (light grey)
- Skipped (dark grey)

The result "Uncertain" means that no data has been collected, although expected. Possible reasons are among others:

- Checks have been selected in MCS-DC for nonexistent devices, e.g. an AC 800M controller check, but no such controller exists
- Devices are not able to deliver the data which was requested by MCS-DC. For example, an AC 800M is not loaded; or has old firmware which does not support MCS-DC collection methods
- MCS-DC has gathered collections from a computer which is not collectable or partially not collectable
- Any kind of software failure

In such cases, the cause for the failure needs to be analyzed and fixed if possible. Afterwards the data collection with the MCS-DC should be repeated for the concerned KPI. If a fix is not possible set the KPI result to "Skipped" and enter an appropriate explanation in the text field.



Figure 59: KPI result

You have the possibility to edit the result manually. Click on the "pencil" icon next to the result and choose the new applicable result. You will be asked to leave a comment why the result was changed. The user, the time and the comment of the changed result will be shown on the KPI details page and in the report.

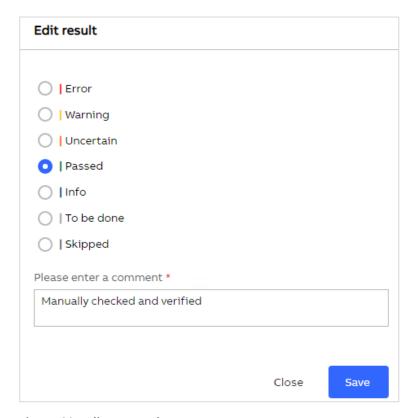


Figure 60: Edit KPI result

i	To be able to do any modification on the data set (e.g. renaming) or on the data within the data set (e.g. changing a KPI result) you need to be the owner of the data set. See chapter 2.6.13.1 for more information.
i	When editing a result only the overall KPI result is changed. The raw data will not be overwritten and still shows the original result (e.g. in the result viewer)

If you edited the result by mistake, use the "revert result" button to change the result back to its original value.

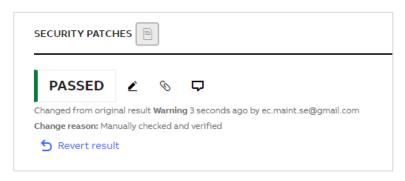


Figure 61: Revert KPI result

Additionally, you have the possibility to add multiple attachments and a comment to each KPI via the corresponding buttons. When adding an attachment, you can choose to include this in the report by enabling the respective checkmark.

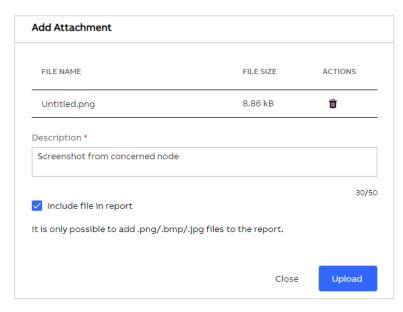


Figure 62: Add attachment

The Result viewer gives you the possibility to access the raw data of each device that was collected for the specific KPI. Use the filters to narrow down your results. In addition, you have the possibility to export this specific KPI, all KPI from that category or all KPIs from the collection to Excel for further investigations.

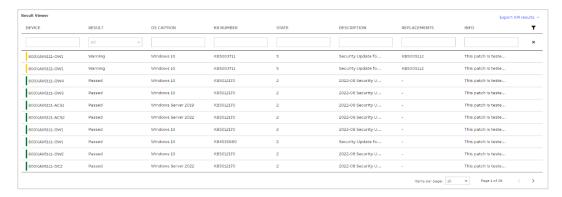


Figure 63: Result viewer



For systems without an active System Fingerprint license, data in the result viewer is restricted to the device name and result.

There is also a general description of the KPI.

2.6.8.2. Additional information

Depending on the KPI and the result, different additional text elements are available for troubleshooting the issue. These are:

- Finding (short information about the finding)
- Explanation (detailed explanation on the finding)
- Impact (information what could be the impact if this issue is not fixed)
- Recommendation (recommended actions to be taken)
- Reference (references to e.g., manuals or web pages with additional information around the KPI)



Explanation, Impact, Recommendation and Reference are only available with an active System Fingerprint license



Figure 64: Additional text elements

You have the possibility to edit the pre-defined text elements by clicking on the pencil icon. If you edited the text by mistake, use the "revert text" button to change the text back to the original.

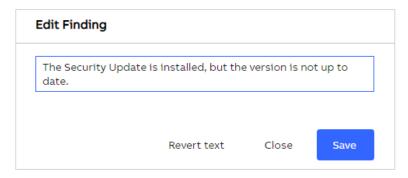


Figure 65: Edit text elements

2.6.8.3. Details

The details widget gives you information about the suggested actions, manual check method and evaluation criteria.

2.6.8.3.1. Suggested actions

The suggested actions widget gives you detailed information about the actions to take to resolve this issue.

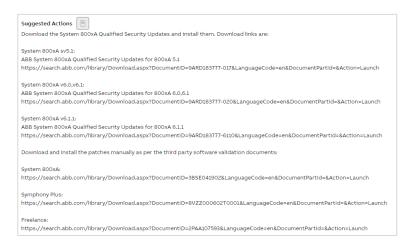


Figure 66: Suggested actions



The suggested actions widget is only available with an active System Fingerprint license

2.6.8.3.2. Manual check method

The manual check method widget explains how this KPI can be manually collected. This is either used when e.g., an issue was fixed and you do not want to run another MCS-DC scan. Or when performing a System Assessment where you need to collect some of the KPIs manually.



Figure 67: Manual check method



The manual check method widget is only available with an active System Fingerprint license

2.6.8.3.3. Evaluation criteria

The evaluation criteria widget gives you information about the evaluation criteria that were used to determine the result of the KPI.



Figure 68: Evaluation criteria

2.6.9. Health

The Health category consists of four tabs:

- 1. Performance KPIs (showing the results of the Performance KPI analysis)
- 2. Software KPIs (showing the results of the Software KPI analysis)
- 3. Event Load (showing the results of the System Monitoring analysis)
- 4. Alerts and Notifications (showing the results of the System Monitoring analysis)



Event Load and Alerts and Notifications tabs will be displayed only if a System Monitoring license is available and the service on site is correctly set up

2.6.9.1. Performance KPIs

As described in Chapter 2.6.7 three different widgets are displayed on the overview area:

- A pie chart in the top-left presenting all KPI results from the selected data set in an easy to comprehend manner. Click on the reports button to create/access reports from this category. Use "Export KPI results" button to export the KPIs from the selected category or all KPIs.
- A trend graph in the top-right giving you an overview how results changed over time.
- KPIs at the bottom showing the results for the individual checks.

For more information on navigation and the different views in the overview area, refer to Chapter 2.6.7.

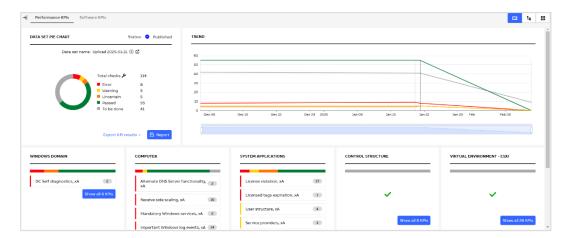


Figure 69: Performance KPIs

2.6.9.2. Software KPIs

As described in Chapter 2.6.7 three different widgets are displayed on the overview area:

- A pie chart in the top-left presenting all KPI results from the selected data set in an easy to comprehend manner. Click on the reports button to create/access reports from this category. Use "Export KPI results" button to export the KPIs from the selected category or all KPIs.
- A trend graph in the top-right giving you an overview how results changed over time.
- KPIs at the bottom showing the results for the individual checks.

For more information on navigation and the different views in the overview area, refer to Chapter 2.6.7.

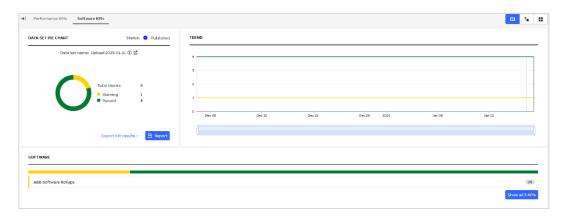


Figure 70: Software KPIs

2.6.9.3. Event Load

i

The Event Load tab is displayed only if System Monitoring license is available for the selected SID



Figure 71: Event Load

A filter area and three different widgets are displayed on Event Load tab.

The following filters are available:



Figure 72: Filter area

- 1. Category: Select the category you would like to analyze. By default, data from all categories is displayed.
- 2. Severity: Select the severity of the events. By default, data for all severities is displayed.
- 3. From/To: By default, "From" filter is set to 31 days back. Date earlier than 1 year ago cannot be selected.
- 4. Source: Select the specific source(s) to analyze data. By default, data from all sources is displayed.

After you selected your filter, click "Apply". The page will refresh and display the data you have selected. You can also click "Cancel" to revert any selection you have made to the currently displayed view.

The overview widget presents the total number of events (including not evaluated events) with detailed number for each severity:

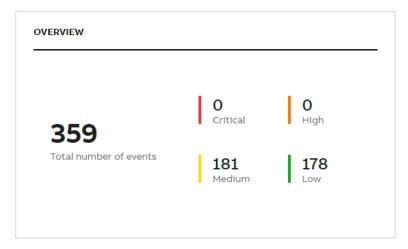


Figure 73: Overview

The trend widget shows the total number of events by the severity (color of the line matches the event severity) from the past year. Date range selected in the filter is indicated by white background and by default zoomed in. Other date range is indicated by grey background.

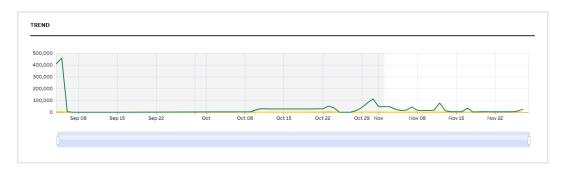


Figure 74: Trend

The Event Distribution widget presents the event distribution per category per day. For a wide range of dates a merging mechanism with the following rules has been implemented:

- If more than 31 days has been selected data per week is shown
- If more than 31 weeks has been selected data per month is shown

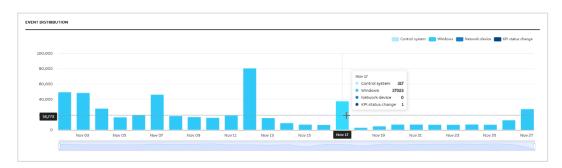


Figure 75: Event Distribution

Event data provision to MCS requires the installation and configuration of two additional software tools on customer site, namely the MCS-EC and the MCS-FW. In addition, it requires an ABB RAP connection from site to the ABB Cloud. For detailed information on how to setup event data provision please refer to document ref. [4] and [5].

2.6.9.4. Alerts and Notifications

i

The Alerts and Notifications tab is displayed only if System Monitoring license is available for the selected SID

Filter area and three different widgets are displayed on Alerts and Notifications tab:

- A trend graph giving you an overview how notifications changed over time
- Communication device details widget
- Notifications at the bottom grouped by the category. Notifications can be browsed using different views (Groups, Tree or Grid).

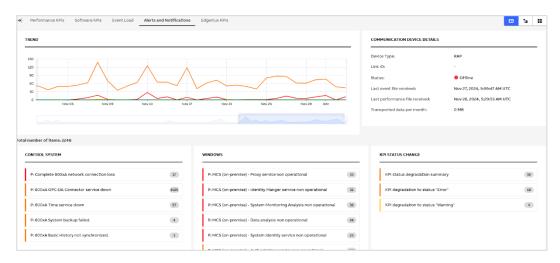


Figure 76: Alerts and Notifications

Selecting a specific notification in any of the views (Groups, Tree or Grid) directs to the notification details page which shows all relevant information concerning one specific notification.

The notification details page consists of:

- 1. Notification details
- 2. Frequency widget

To navigate between notifications, you can use the notification selector that is displayed in the Filters sections. Keep in mind that all applied filters do influence the notifications that are displayed in the selector.

For the selected notification a frequency widget is displayed on the right side. It presents how many times the selected notification was triggered for the selected source. If the notification comes from more than one source, by default data from all sources is displayed on the graph and a dropdown with available sources is displayed (in the top right corner of the frequency widget). You can see the data from the specific source by selecting it in the dropdown. By default, data from 1 month is presented but other time frames can be selected.

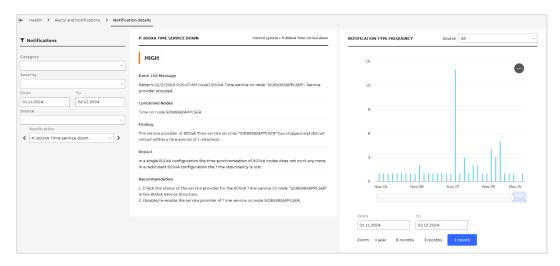


Figure 77: Notification details page

2.6.10. Security


The Security category consists of eight tabs:

- 1. System overview
- 2. Security KPIs
- 3. Security Update Service/Security Updates
- 4. What is cyber security
- 5. Malware protection
- 6. Backup
- 7. Third party software
- 8. Security advisories

2.6.10.1.1. System overview

The System Overview tab shows the summary status for the following tabs:

- Security KPIs
- Security Updates
- Malware Protection
- Backup

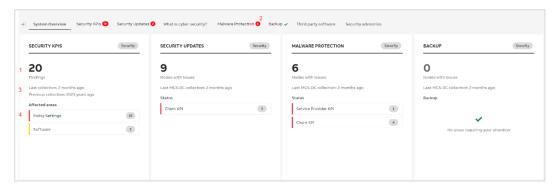

Depending on the tab, the widget will show the total number of findings (Security KPIs) or the number of nodes which are having issues (Security Updates, Malware Protection and

Backup) – see [1]. The number is always the total number, regardless of errors or warnings being present or not. Therefor the number on the tab, which is only showing the number of the most severe issue – see [2], could differ from the number shown on the summary widget.

Below the number of findings, there is an indicator – see [3] – on the "Last collection" date and "Previous collection" date for the Security Status and the collector "Service status" and the "MCS-DC collection" date for Security Updates, Malware Protection and Backup. This information helps to determine how reliable the data on the widgets is. Finally, the affected areas / status is shown [4]. This shows in which KPI area's the error(s) or warning(s) are.



The System overview tab is displayed only if Cyber Security Workplace license is available for the selected SID

2.6.10.1.2. Security KPIs

The Security KPIs page has the same build up as the Performance and Health KPI's pages. Three different sections are displayed:

- A pie chart in the top-left presenting all KPI results from the selected data set in an easy to comprehend manner. Click on the reports button to create/access reports from this category. Use "Export KPI results" button to export the KPIs from the selected category or all KPIs.
- A trend graph in the top-right giving an overview how results changed over time.
- KPI's at the bottom showing the results for the individual checks.

For more information on navigation and the different views on the KPI tabs, refer to chapter 2.6.7

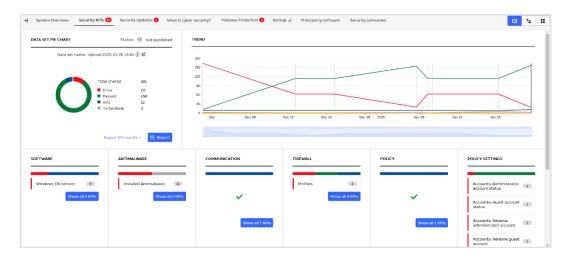


Figure 78: Security KPIs

2.6.10.1.3. System Update Service/Security Updates

The System Update Service tab is displayed only if a System Update Service license is available for the selected SID.

It gives you all information about the status of your local WSUS node and the connected nodes. It consists of three widgets:

A pie chart in the top-left presenting the total number of nodes and their update status as
 well as a link to the offline files

- The local WSUS details in the top-right giving a summary on the overall status of the service
- Patch installation status per node in the bottom where the details for every node are listed

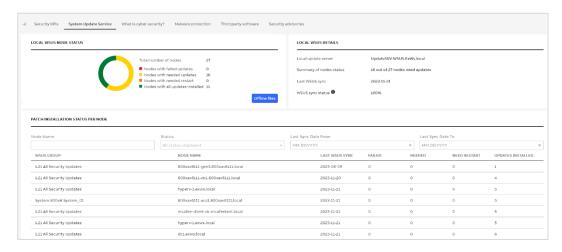


Figure 79: System Update Service



In case a valid System Update Service license is available but no connection to the ABB WSUS server is established the widgets will be empty. You can then use the offline files to update your system manually.

The Security Updates tab is displayed instead of the System Update Service tab for SIDs with Cyber Security Workplace license.



Opposed to the other views in MCS, this tab shows the donut chart and trend data Node oriented, not KPI oriented.

The following information is displayed:

- A pie chart on the top-left presenting the node status from the selected data set in an easy to comprehend manner. Use "Export KPI results" button to export the KPIs from the selected category or all KPIs.
- A trend graph in the top-right giving an overview how the status for the nodes changed over time.
- KPI's at the bottom showing the results for the individual checks.
- "Show documents" button in the top right corner to check the offline files

For more information on navigation and the different views on the KPI tabs, refer to chapter 2.6.7 Overview area.

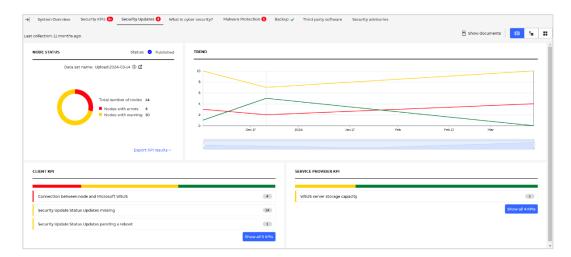


Figure 80: Security Updates tab

2.6.10.1.4. What is cyber security

In this tab all general cyber security related information and material is shown for your installed control system family.

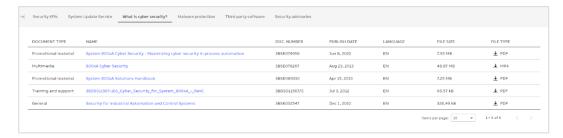


Figure 81: What is cyber security tab

2.6.10.1.5. Malware protection

The malware protection tab gives you the possibility to download the latest ABB certified antivirus update files from Symantec and McAfee for your control system.

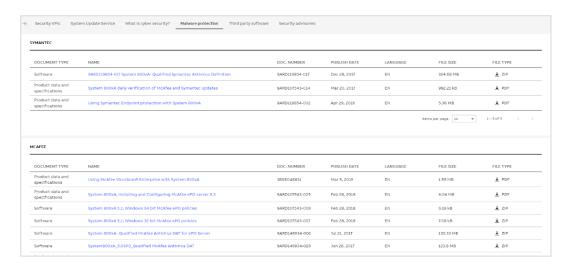


Figure 82: Malware protection tab

For systems with the Cyber Security Workplace license, the Malware protection tab presenting the node and KPI status is displayed.



Opposed to the other views in MCS, this tab shows the donut chart and trend data Node oriented, not KPI oriented.

The following information is displayed:

- A pie chart on the top-left presenting the node status from the selected data set in an easy to comprehend manner. Use "Export KPI results" button to export the KPIs from the selected category or all KPIs.
- A trend graph in the top-right giving an overview how the status for the nodes changed over time.
- KPI's at the bottom showing the results for the individual checks.
- "Show documents" button in the top right corner to check the offline files

For more information on navigation and the different views on the KPI tabs, refer to chapter 2.6.7 Overview area.

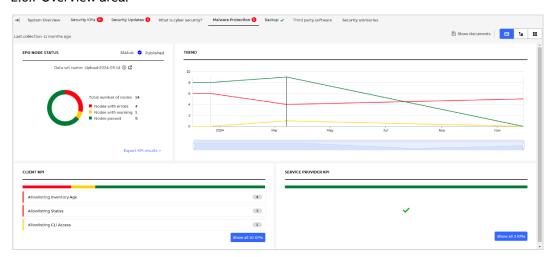


Figure 83: Malware Protection tab for systems with CSWP license

2.6.10.1.6. Backup



Opposed to the other views in MCS, this tab shows the donut chart and trend data Node oriented, not KPI oriented.

The following information is displayed:

- A pie chart on the top-left presenting the node status from the selected data set in an easy to comprehend manner. Use "Export KPI results" button to export the KPIs from the selected category or all KPIs.
- A trend graph in the top-right giving an overview how the status for the nodes changed over time.
- KPI's at the bottom showing the results for the individual checks.

For more information on navigation and the different views on the KPI tabs, refer to chapter 2.6.7 Overview area.

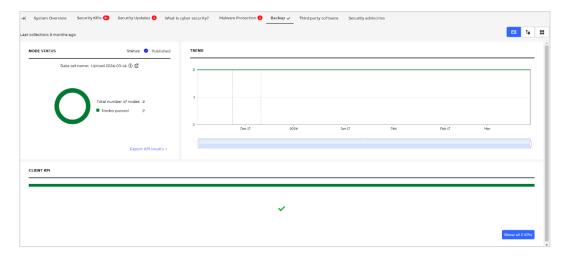


Figure 84: Backup tab



The Backup tab is displayed only if Cyber Security Workplace license is available for the selected SID

2.6.10.1.7. Third party software

The third party software tab shows you the latest Microsoft security updates qualified by ABB for the installed control system.



Figure 85: Third party software tab

2.6.10.1.8. Security advisories

In the security advisories tab all security related notifications from ABB concerning the installed system family are shown.

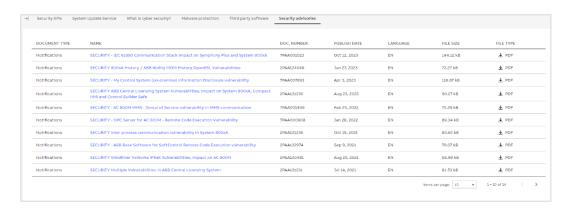


Figure 86: Security advisories tab

2.6.11. Inventory

The Inventory category consists of five tabs:

- 1. Hardware Lifecycle (showing the results of the Hardware lifecycle analysis)
- 2. Control System Lifecycle (showing the lifecycle of the installed control system version)
- 3. Assets (showing an overview about all assets with details and analysis results of the different categories)
- 4. Control Structure (showing and overview about controllers)
- 5. Software (showing all computers with installed ABB and third-party software)

2.6.11.1. Hardware Lifecycle

The Hardware Lifecycle tab shows all results of the lifecycle analysis.

The overview area consists of two different widgets:

- A pie chart in the top-left presenting all lifecycle phases from the latest inventory information in an easy to comprehend manner. Click on the reports button to create/access reports from this category.
- KPIs at the bottom showing the lifecycle phases for the individual components.

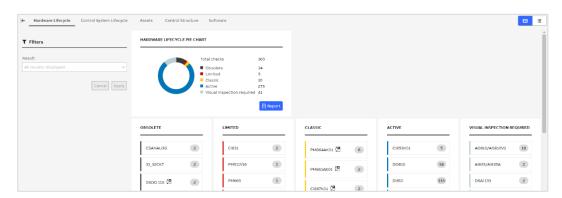


Figure 87: Hardware Lifecycle - groups view

The groups' view classifies the devices according to their current lifecycle status (Active, Classic, Limited, Obsolete). Devices that cannot be determined completely are classified as "visual inspection required". See chapter 2.6.11.4 for more information on how to set the device type for visual inspection required modules.

In every group the name of the device and the number of devices that were found is listed. In addition, indicators show you for which device a replacement is available.

In case the exact module version could not be identified but all module versions have the same lifecycle status, an indicator is displayed next to the device name with tooltip on hover.



Figure 88: Hardware Lifecycle tooltip

Click on the devices to open a pop-up with additional information.

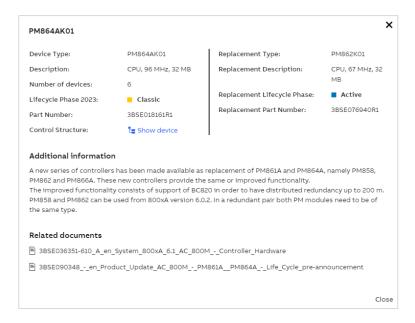


Figure 89: Hardware Lifecycle - Pop-up

The list view shows all devices and additional information in one combined list. The list is sorted descending with the device with the worst lifecycle status (Obsolete) and highest number of devices listed on top.

Click on the device name to open a pop-up with additional information.

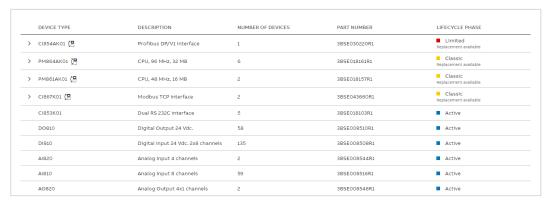


Figure 90: Hardware Lifecycle - list view

In case the asset inventory data does not match your current installation on site, clear inventory data and re-upload your latest collection file. Click on the banner displayed on the top of this tab or go directly do the Inventory data sets tab to initiate the process.



Figure 91: Banner for incorrect asset inventory data

2.6.11.2. Control System Lifecycle

The Control System Lifecycle tab indicates in the same way as the Hardware Lifecycle the results of the lifecycle analysis of the installed ABB Control System software.



Figure 92: Control System Lifecycle

2.6.11.3. Assets

The Assets tab gives you an overview about all found assets in the control system and their status in the different KPI categories (Performance, Software, Security). The overall result for each category is a sum of error and warnings with the label which matches the color of the worst result. To see the exact number of errors and warnings separately, hover over the number of findings. Only error and warnings are shown in this view. If there are no errors or warnings a green checkmark is displayed. Click on the number of findings to directly jump to the KPI analysis of the respective category and view the KPIs in the grid view.

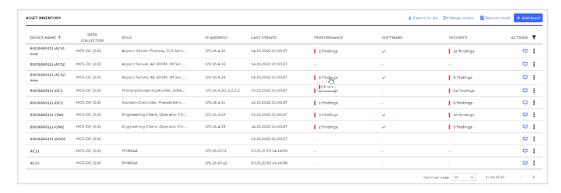


Figure 93: Asset Inventory widget



Some assets might be shown in the widget multiple times (due to changes that happened over time with them). In order to clean up the list, the following options are available:

- 1. Delete them individually
- 2. Use "Clear inventory data" function (Chapter Inventory2.6.13.2.2) to delete all assets

The following options are available under the additional menu for a single asset:

- Comment
- Edit asset details you will be redirected to the asset details view with edit mode enabled
- Merge with another asset this option is not available for assets added manually
- Edit merging this option is displayed for assets which have already been merged with another item
- Delete allows you to remove an asset from the system




Figure 94: Asset options

An empty comment icon indicates that there is a possibility to add a comment whereas a filled in icon shows that the comment has already been added. Hover over the icon to see the tooltip with the comment.




Figure 95: Asset comment

Click on the empty comment icon to add a comment.

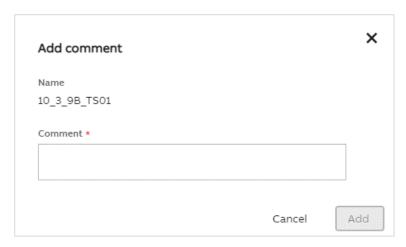


Figure 96: Add comment

Click on the filled in comment icon to check who and when updated the comment or to update it.

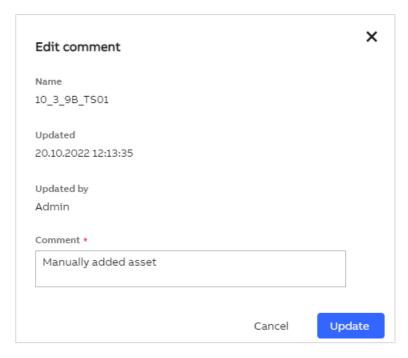


Figure 97: Edit comment

After choosing the "Merge with another asset" option, you will see the details of the selected asset and a dropdown with the lists of assets with which a merge can be done. Select an asset in the dropdown and click on "Merge". Selected asset will be displayed in the summary section. An asset which is a master is marked with the blue label displayed next to the asset's name.

Use "set as master" button if another asset should be set as a master. If MCS-DC asset(s) is among assets which should be merged, only this one can be set as a master.

Use "x" icon to remove an asset and not merge it.

Confirm your selection by clicking on "Save".

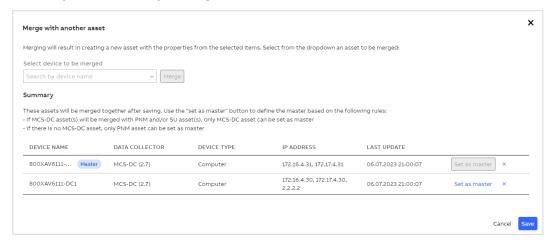


Figure 98: Merge with another asset

If assets have already been merged together, "Edit merging" option is displayed.




Figure 99: Edit merging

All options which are available for "Merge with another asset" are here as well. Additionally, it is possible to unmerge all assets using "unmerge all assets" button:

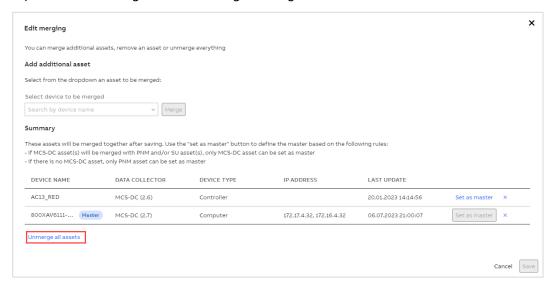


Figure 100: Edit merging dialog and unmerge all assets options

Additional options are available in the top right corner of the Asset Inventory widget:

- 1. Export to .xls
- 2. Merge asset
- 3. Restore asset
- 4. Add asset



Figure 101: Additional options

To export the list of all assets, click on "Export to .xls" button. A file containing all assets and their details will be generated.

Under "Merge assets" button, the list of merging suggestions are listed. This option is not displayed if "Perform automatic asset merging" is selected in the assets merging setting. If there are no suggestions, the button is disabled with a tooltip indicating the reason.

The table displays all merging suggestions. Expand the assets to see the details. Use check-boxes on the left side and "Accept selected" to accept only specific suggestions or "Accept all".

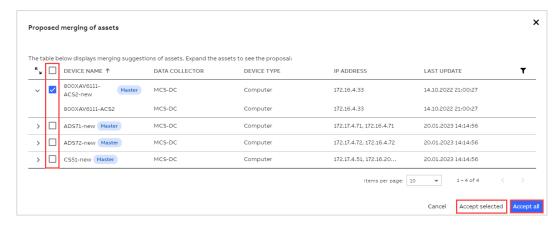


Figure 102: Proposed merging of assets

Each device which has not yet been permanently deleted can be restored using "Restore asset" button available in the top right corner of Asset Inventory widget. Click on the button to see the list of assets which can be restored.

Select assets which you would like to restore and click on "Restore selected".

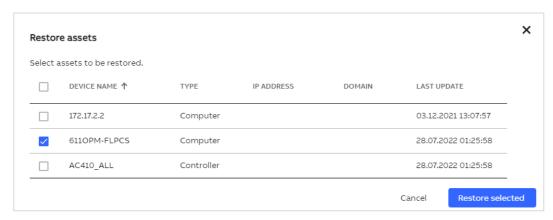


Figure 103: Restore selected

To add an asset manually, click on "Add asset" button and provide all required data. Click on "Add" button to confirm. Newly added asset will be listed on the Asset Inventory widget.



Figure 104: Add asset

Click on the device name in the Asset Inventory widget to jump to the overview of the selected asset. Items displayed in the menu on the left side, depends on the selected asset.

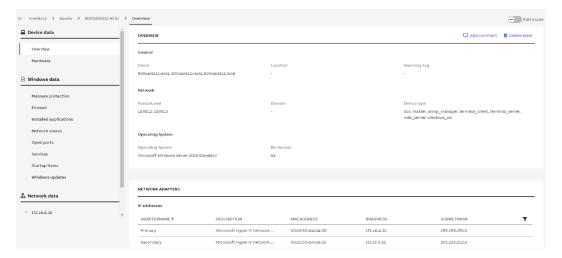


Figure 105: Asset details

To edit data, enable edit mode using the switch located in the top right corner of the asset details page. "Discard changes" and "Save changes" buttons will be enabled once you modify any field.

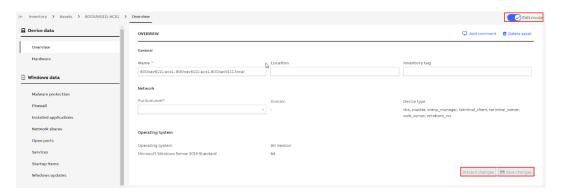


Figure 106: Edit mode

Options to add or update comment or delete asset are also available on asset overview tab.



Figure 107: Asset details - comment or delete asset

In case the asset inventory data does not match your current installation on site, clear inventory data and re-upload your latest collection file. Click on the banner displayed on the top of this tab or go directly do the Inventory data sets tab to initiate the process.



Figure 108: Banner for incorrect asset inventory data

2.6.11.4. Control Structure

The Control Structure tab gives an overview of all controllers in the control system, their device type, hardware and firmware revision as well as IP address, position and their lifecycle phase.

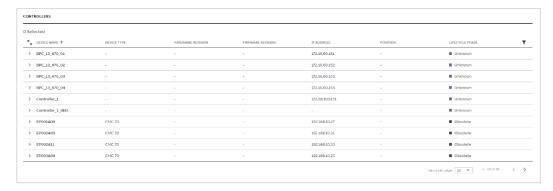


Figure 109: Control Structure widget

In case the device type could not be identified and an "visual inspection is required", use the edit icon displayed next to the lifecycle phase of the specific item or select checkbox(es) next to the device name and then click on "Specify device type" button on the top of the widget to specify the device type.



Figure 110: Specify device type for single item

When using the checkboxes, only items with the same device type can be selected.



Figure 111: Specify device type for one or multiple items

Select the device type in the dropdown and click "Save" to confirm.

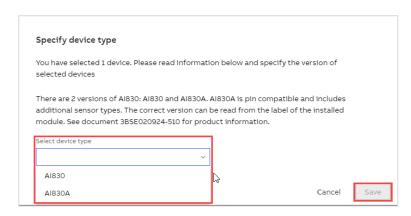


Figure 112: Specify device type dialog

If the device type has been selected manually, this action can be reverted. Click on the edit icon next to the lifecycle phase. Information what was the original device type as well as who and when modified it is displayed in the dialog. Click on "Revert changes" to bring back the original value.



Figure 113: Revert changes dialog

Click on the device name in the Controllers widget to jump to the overview of the selected item. The structure of the controller is displayed in the left pane to allow switching between the detail views of the devices.



Figure 114: Controller details

To edit data, enable the edit mode using the switch located in the top right corner of the controller details page. "Discard changes" and "Save changes" buttons will be enabled once you modify any field.

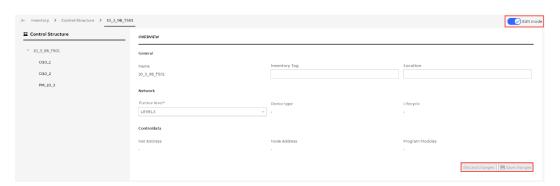


Figure 115: Edit mode

2.6.11.5. Software

The Software tab shows a list of all installed software.

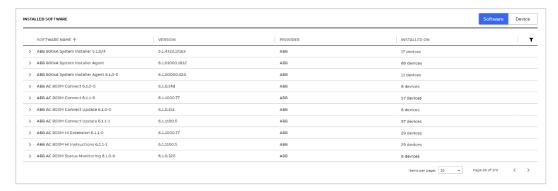


Figure 116: Installed software - software view

Click on the expand icon next to the software name to see all the computers where this software is installed on.



Figure 117: Installed on devices

Use the switch in the top right corner to see the list of all computers in the control system with software installed.



Figure 118: Software/Device view switch

Click on the expand icon next to the device name to see the software installed there.



Figure 119: Installed software - device view

On both software and device views, filters can be used to find out on which computer a specific software is installed.

2.6.12. Documentation

The documentation tab allows you to find all relevant documents for your control system in one place. It is divided into following sub-sections:

- Control System Documentation
- Industrial Documentation
- Service Documentation
- System Software
- MCS Release Notes

Documentation will be loaded with the default filters for as long as "Load data initially" toggle is switched to on. Given that there are thousands of documents available, consider switching this option off when your internet bandwidth is limited.

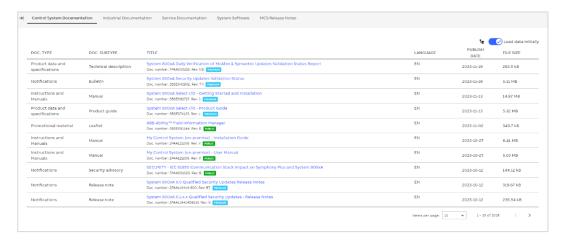


Figure 120: Control System Documentation

To find specific documents, you can use the filters displayed on the left-hand side of the screen. Keep in mind that some filters described here are available only on some of the documentation sub-sections. For the filters to take effect, click the "Apply" button found at the bottom of the filters section.

Text search - allows you to find a specific phrase in the document. You can search in full document text or document ID. In text search mode, you can look for documents containing any words entered in the "Search keyword" field. In document ID mode, you can search for either exact ID match or any document ID starting with entered phrase.

Document property - allows you to look for documents matching specific criteria, such as being of specific type or describing specific control families:

- Document type select any number of document types that you would like to find
- System family/version select this to find documents associated with specific system families or versions
- System ID select a specific SID to find documents relevant to that control system. The list
 of SIDs available in the dropdown depends on the "Show only favorite SIDs" switch setting
 (see chapter 2.6.1.1).
- Language select the language of the documents
- Industries select specific industry branches to find documentation relevant to them
- Services select specific services to find documentation relevant to them

Publish date - Select a date range to define the period in which the document was published.

In general, all documentation can be browsed using either a list view or tree view. To switch the view, click on the icon (either tree or list icon, depending on currently selected).

2.6.12.1. MCS Release Notes

You have the possibility to view the release notes information as part of the application for the respective released version.

The following three release notes information categories are published:

- What's new
- Fixed Issues
- Known Issues

The **What's new** section provides information about newly added, enhanced, or modified functionality. Under section **Fixed Issues**, we are listing solved product issues and the **Known Issues** section always contains the list of known issues for the particular version released.

The release notes information is accessible either using the quick link available in the footer section of the application called "[Release Notes]" (Chapter 2.6.3) or by direct navigation to the Documentation/MCS Release Notes section.

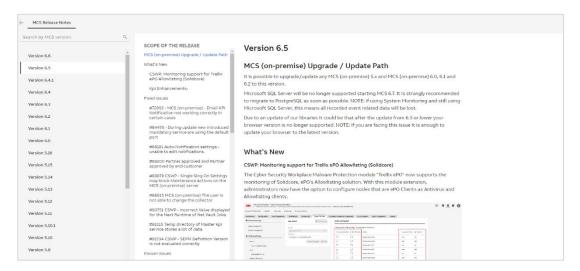


Figure 121: Release Notes Information

2.6.13. Administration and Configuration Area

The Administration and Configuration area of the MCS dashboard is divided into two sections (first in the lower left corner and second in the upper right corner) and consists of a couple of icons used to administrate MCS. These icons provide access to the functionalities described in the following chapters:

- 1. Information section: Please refer to chapter 2.6.13.1 for details
- 2. Data set management section: Please refer to chapter 2.6.13.2 for details
- 3. Power BI section: Please refer to chapter 2.6.13.3 for details
- 4. Tools section: Please refer to chapter 2.6.13.4 for details
- 5. Settings section: Please refer to chapter 2.6.13.5 for details

- 6. Language selector: Please refer to chapter 2.6.13.6 for details
- 7. User section: Please refer to chapter 2.6.13.7 for details



Figure 122: Icons of the Administration and Configuration area



Figure 123: Icons of the Administration and Configuration area

2.6.13.1. Information Section

In the information section you can find links to documentation and functions (e.g. manuals, take a tour function, release notes) that help you to understand the general functionality of MCS.

2.6.13.2. Data set management section

The data set management section of the Administration and Configuration area provides the needed functionality to manage previously collected data sets.



Figure 124: Data Sets Management section of Administration and Configuration area

Data sets management section consists of two tabs:

- KPI
- Inventory

2.6.13.2.1. KPI



To prevent any unauthorized data modification, a newly created data set is locked to the user or instance (e.g. MCS-OP) that created it. To be able to do any modification on the data set (e.g. renaming) or on the data within the data set (e.g. changing a KPI result) you need to take over the data set. Click on the "lock" icon next to the data set name to take over the data set. This is only possible if you are in the same company as the creator of the data set.

The main dashboard of this section displays all previously collected data sets with their details, namely:

- Data set name
- Creation date
- User who created the data set
- Collected KPI categories (Performance, Software, Security) with checkmark icon (published/not published)
- Project type (automated or automated/manual)
- Actions



Figure 125: Data set management

Depending on the source of the data, data sets with different content are created.



Actions and Options might vary between the different data set contents. E.g. Reports are not available for "SystemUtilities" data sets.

By selecting the Reports icon all already generated reports related to the selected data set can be displayed.

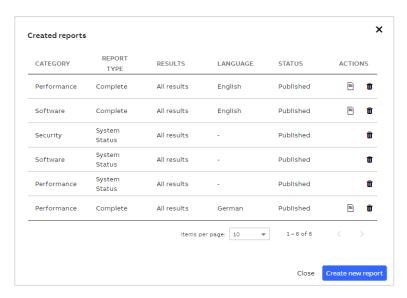


Figure 126: Created reports list

The Actions section provides all necessary functionalities to manage and edit your data sets. These functionalities are described in detail in the following chapters.




Figure 127: Actions section within Data set management

Furthermore, you can expand/collapse the selected data set to figure out the raw system data files the results displayed in the system data set are based on.



Figure 128: Expanded data set

Exporting KPI results

Use "Export KPI results" button and select one of the categories or all KPIs to export data.

Figure 129: Export KPI results

Adding a data set

Click on the "Add data set" button located in the upper right corner of the "Data Sets" widget. A pop-up window will be displayed where you can select option to create new data set or import an existing one.

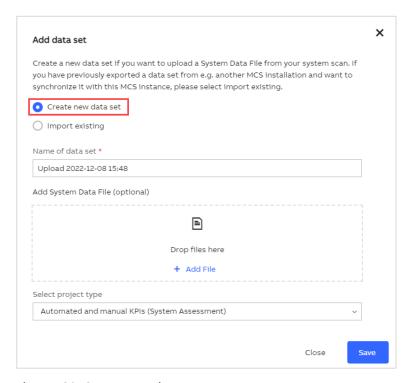


Figure 130: Create new data set

When creating new data set, in case you have the applicable System Assessment license you can choose the project type (Automated KPIs / Automated and manual KPIs) otherwise only Automated KPIs are available. Then click on the "Save" button. After that the new created data set is displayed in the "Data sets" widget.

To import a previously exported data please select the "Import Data Set" button located in the upper right corner of the "Data Sets" widget. The following pop-up window will show up:

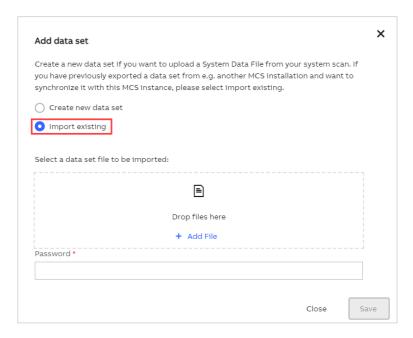


Figure 131: Import existing data set

Please select the Data Set you would like to (re-)import to MCS from the hard disk and place it in the respective drop field.

During the export process of the Data Set an initial password has been defined. This process is described in detail in this chapter. The same password needs to be used when (re-) importing this Data Set to MCS.

Adding a system data file

Once the new data set is saved you can manually upload the collected SDF by using the "Add File" button. A pop-up window will come up where you can select the data file. Please consider that the name of the uploaded file must begin with the SID number you want to upload to. After the file is selected, the system will automatically analyze the uploaded raw system data file. This might take some minutes to complete.

After the file has been analyzed a confirmation message stating that the pop-up window can be safely closed will be displayed. In case of issues during analysis like e.g., wrong file extension, relevant information will be displayed in the pop-up window.

Downloading a system data file

It is possible to download the SDF of a specific data set from the data set management. To do so, please expand a selected data set and then select the Download icon in the lower right corner next to the SDF name.



Figure 132: Possibility to download an SDF of a specific data set

Renaming a data set

You have the possibility to rename an existing data set. To do so, select the pencil icon in the Actions section and a pop-up window will be displayed where you can rename the selected data set.

Modifying the KPI list

To prevent specific sections or KPIs from being displayed in the analysis results of a specific data set you could modify its KPI list. The KPI list of a data set is created automatically based on your system configuration and the existing licenses.

To do so, please select the Filter icon from the Actions section to modify the KPI list. You can then use toggle buttons to select/deselect individual KPIs or KPI groups.

Deleting a data set

Select the trash icon from the Actions section to delete a selected data set. Please consider that all information associated with this data set, including reports, will be deleted. A pop-up window will ask you to confirm deletion.

Exporting a data set

To export a data set from MCS select the data set you would like to export and press the export icon in the Actions section on the right side. If data in at least one category is not published, this option is disabled.



Figure 133: Exporting a Data Set via export tool

According to ABB cyber security guidelines exported customer data has to be password protected. For this reason, a new pop-up window will appear where you must specify a password for the Data Set to be exported.

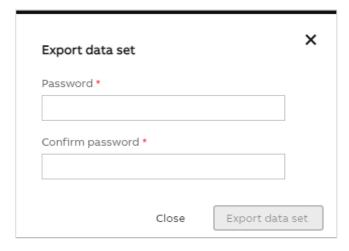


Figure 134: Specify password for exported Data Sets

The Data Set export is started by selecting the "Export Data Set" button inside this pop-up window. The Data Set export will then be stored on your local hard drive.

2.6.13.2.2. Inventory

The inventory tab is used to manage inventory reports, check data import history or clean inventory data.

In the "Inventory Reports" widget you can find the list of already generated inventory reports. Use "Create new report" button to generate new inventory or lifecycle reports.



Figure 135: Inventory Report widget

The "Data import history" widget shows information about the data collector, upload date and who uploaded the data. You can also use create a new data set or import previously exported data set from this widget.



Figure 136: Data Import History

To clear all inventory data, click on the button located in the top right corner of this tab.



Figure 137: Clear inventory data

2.6.13.3. Power BI section

The Power BI section is used to access the data lake for end users. This icon is available in each context which means that you can access it on the SID, site or company level.



Figure 138: Power BI section of Administration and Configuration area

2.6.13.4. Tools section

In the tools section you can download all necessary tools for the data collection and analysis process (e.g. MCS-DC).



Figure 139: Tools section of Administration and Configuration area

2.6.13.5. **Settings section**

The Settings section is used to manage and preconfigure the working environment of your MCS application.



Figure 140: Settings section of Administration and Configuration area

2.6.13.5.1. Assets tab

The Assets tab allows to manage and configure settings for assets. There are three widgets on this tab:

- Restore assets
- Assets merging
- Assets merging logic

"Restore assets" widget allows to configure the time before an asset is deleted permanently.



Figure 141: Restore assets

"Assets merging" widget is used to define whether automatic assets merging should be performed.

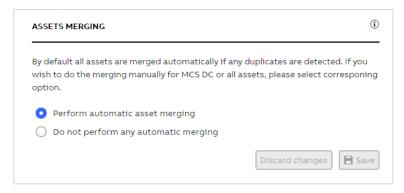


Figure 142: Assets merging

In the "Assets merging logic" widget you can define the criteria used for merging assets. At least one option must be selected.

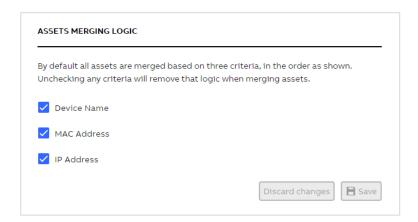


Figure 143: Assets merging logic

2.6.13.5.2. Application Credentials Management

The content of the Application Credentials Management tab is available on the company level and allows to initiate the connection between MCS on-premise and web.

Click on the "Add application" button to add new application to the widget.



Figure 144: Application Credentials Management

In the dialog box select application (for now only MCS On-Premise is available), provide a description and select one or more systems from your company. Click on "Add application" button.

Application*	
MCS On-Premise	~
Description*	
MCS OP - web connection	
Systems*	23/50
SID75493 X	×

Figure 145: Add application

Once the application has been configured, a dialog box with the credentials is displayed. Remember to store them securely as once the dialog is closed, it will not be possible to see them again. Use the "copy credentials" button to copy the content of the box.

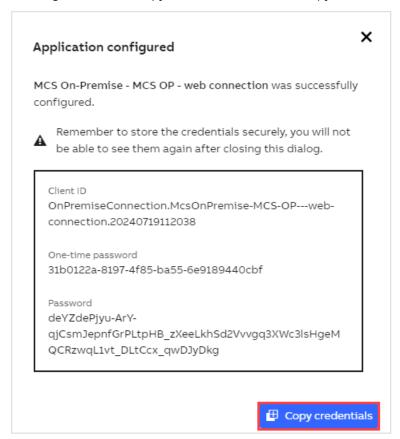


Figure 146: Credentials for the configured application

It is possible to reset credentials, edit the description or remove the connection using icons in the Actions column. These options are available only if user has access to all systems used for configuring the specific connection.



Figure 147: Modify connection

To finalize setting up the connection between MCS on-premise and web, configure your MCS on-premise instance. For details on this topic please refer to document ref. [1].

2.6.13.6. Language selector

The language selector located in the top right corner allows changing the language. After choosing a specific item from the list, the page will be refreshed to apply the changes.



Figure 148: Language selector

2.6.13.7. User section

The user section in the Administration and Configuration area displays information about the current user logged in to MCS.

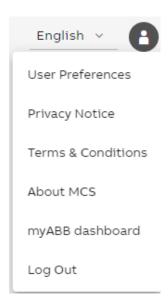


Figure 149: User section of Administration and Configuration area

It also provides links to edit the user preferences, view the privacy notice and terms & conditions, access the release notes ("about MCS"), jump back to the myABB dashboard and to log out the current user.

2.7. Reports

My Control System gives you the possibility to create and download all the analysis results and text elements via dedicated reports.

Following report types are available:

- Summary (provides a short overview about the overall KPI results)
- Reduced (provides a general overview about the individual KPI result of each collected device)
- Detailed (provides in-depth information about the individual KPI result of each collected device and descriptive text elements for each finding)
- Complete (provides in-depth information about the individual KPI result for each collected device, descriptive text elements for each finding and an appendix with all data points that were used for the analysis)
- Benchmark (legacy report type that is comparable to the new "Reduced Report" type)
- Fingerprint (legacy report type that is comparable to the new "Detailed Report" type)
- Assessment (legacy report type that is comparable to the new "Complete Report" type)



Report types Detailed, Complete and Fingerprint are only available with an active System Fingerprint license. Report type Assessment is only available with an active System Assessment license.

2.7.1. Accessing reports

Reports can be created/accessed in four different places:

On the navigation bar via the "Reports" option

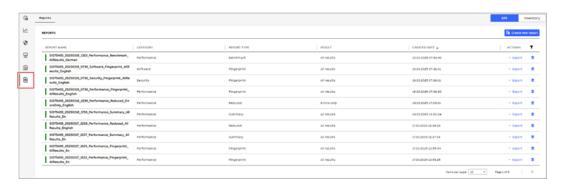


Figure 150: Reports Page from Navigation bar

In the reports page, already created reports can be downloaded using Export option in the Actions column. There is a provision of selecting PDF and WORD formats for download.

The summary of a report can be found by clicking on the report name in the list.



Figure 151: Summary of selected report

- On the data set management page (KPI tab) via the "Actions", where you can browse reports grouped by data set (see Chapter 2.6.13.1)
- On the data set management page (Inventory tab) via the "Inventory Reports" widget where you can browse Inventory and Lifecycle reports
- In the pie chart widget on the KPI analysis tab of each category, where you will find reports for specific category (see Chapter 2.6.7)

Either a popup is opened where you can see already created reports or create a new one

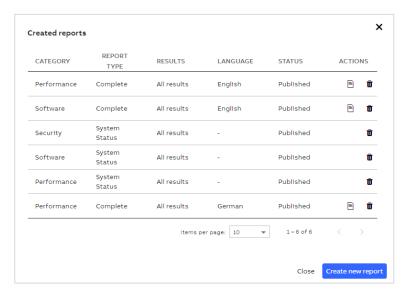


Figure 152: Created reports

or (as on Inventory tab under data set management) already created reports are listed directly in the widget.



Figure 153: Created inventory reports

For already created reports, there are two actions available:

- Open report (opens the PDF version of the report in a new browser tab)
- Delete (deletes the report)

2.7.2. Generating reports

New reports can be generated by clicking the "Create new report" button from the Reports page, available in navigation bar.

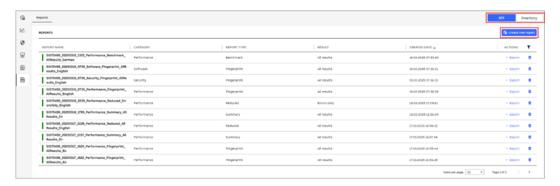


Figure 154: Generate reports

As highlighted in the image, there is a switch button in the Reports page that provides an option for user to select KPI (Data Set) or Inventory type of reports.

2.7.2.1. KPI Reports



Figure 155: Create KPI Report

Clicking the "Create new report" button with "KPI" option selected will open a wizard that will guide you through the process of KPI (Data Set) report generation.

The following steps need to be done in the wizard:

- Select the Data Set for which the report must be created
- Select the category
- Select the report type (keep in mind that some report types may be unavailable based on the selected category)
- Select the result filter (keep in mind that some filters may be unavailable based on the selected report type)
- Select the language

When all selections are made, the report name will be automatically generated with the provision of editing it. After clicking on the "Create report" button, the report will be displayed on top of the created reports list. For as long as the report is being generated, no actions will be available for that report.

The status of report generation can be monitored with the color of vertical bar beside the created report: Blue represents the report in generation, green represents the report is successfully created and red represents the report generation failed.

2.7.2.2. Inventory Reports

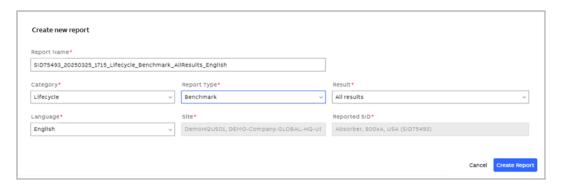


Figure 156: Create Inventory report

Clicking the "Create new report" button with "Inventory" option selected will open the wizard that will guide you through the process of Inventory report generation.

- Select the category
- Select the report type (keep in mind that some report types may be unavailable based on the selected category)
- Select the result filter (keep in mind that some filters may be unavailable based on the selected report type)
- Select the language

When all selections are made, the report name will be automatically generated with the provision of editing it. After clicking on the "Create report" button, the report will be displayed on top of the created reports list. For as long as the report is being generated, no actions will be available for that report.

The status of report generation can be monitored with the color of vertical bar beside the created report: Blue represents the report in generation, green represents the report is successfully created and red represents the report generation failed.

3. Additional Information

3.1. Listing of Related Documents

	Document Kind, Title	Document No.
1	My Control System (on-premise) - Installation and Configuration Manual	2PAA121208
2	My Control System (on-premise) - Operations Manual	2PAA121209
3	My Control System - Data Collector - User manual	2PAA120980-200
4	My Control System - Forwarder - User Manual	7PAA001522
5	My Control System Event Collector – User manual	7PAA001523
6	My Control System (on-premise) - Hardening Guide	7PAA002031

REVISIONS REVISION HISTORY

4. Revisions

4.1. Revision History

Rev.	MCS Version	Page (P) Chapt. (C)	Description	Date Dept./Init.
A-L		(P) all	Explaining changes in the widgets of an earlier version My Control System	Before June 2022
М	5.9	(P) all	Revision of complete document	2022-09, PA PCP
N	5.14	(P) all	Revision of complete document	2023-02-17 PA PCP
0	5.15	(C) 2.6.5.1.2 (C) 2.6.10.1 (C) 2.6.10.3	Added chapter 'System Update Service' Updated chapter 'Hardware Lifecycle' Updated chapter 'Assets'	2023-03-17 PA PCP
P	6.2	(C) 2.6.10.3 (C) 2.6.11 (C) 2.6.12.4.1	Updated chapter 'Assets' Updated chapter 'Documentation' Updated chapter 'Assets tab'	2023-08-11 PA PCP
Q	6.3	(C) 2.6.10.3 (C) 2.6.12.2.1	Updated chapter 'Assets' Updated chapter 'KPI'	2023-09-01 PA PCP
R	6.4	(C) 2.6.5.1	Updated chapter 'System Status'	2023-09-29 PA PCP
S	6.5	(C) 2.6.2 (C) 2.6.6.4	Updated chapter 'Filter area' Updated chapter 'Comparison view'	2023-10-27 PA PCP
Т	6.6	(P) all (C) 2.6.5 (C) 2.6.6 (C) 2.6.8.4	Updated used pictures Updated chapter 'General Information' Updated chapter 'Overview area' Updated chapter 'Alerts and Notifications'	2023-12-15 PA PCP
U	6.7	(C) 2.6.1 (C) 2.6.5 (C) 2.6.6 (C) 2.6.7 (C) 2.6.8 (C) 2.6.9 (C) 2.6.12.2.1	Updated chapter 'Navigation bar' Updated chapter 'General Information' Updated chapter 'Overview area' Updated chapter 'KPI details page' Updated chapter 'Health' Updated chapter 'Security' Updated chapter 'KPI'	2024-03-04 PA PCP
V	6.8	(C) 2.6.1 (C) 2.6.7.1	Updated chapter 'Navigation bar' Updated chapter 'KPI details'	2024-04-05 PA PCP
W	6.9	(C) 2.6.5.5	Added chapter 'Support cases'	2024-04-29 PA PCP
X	6.11	(C) 2.4.2 (C) 2.5	Updated chapter 'Configuration of auto- notifications' Updated chapter 'The My Control System widget on the myABB dashboard'	2024-07-03 PA PCP
		(C) 2.6.1.1 (C) 2.6.5.4 (C) 2.6.11	Updated chapter 'Accessing SIDs' Updated chapter 'Licenses and Contacts' Updated chapter 'Documentation'	

REVISIONS REVISION HISTORY

Rev.	MCS Version	Page (P) Chapt. (C)	Description	Date Dept./Init.
Υ	6.12	(C) 2.6.5.4 (C) 2.6.12.4.2	Updated chapter 'Licenses and Contacts' Added chapter 'Application Credentials Management'	2024-07-26 PA PCP
Z	6.14	(C) 2.4.2 (C) 2.6.4 (C) 2.6.5 (C) 2.6.11.3 (C) 2.6.12	Updated pictures in chapter 'Configuration of auto-notifications' Added chapter 'Tables in MCS' Updated chapter 'General Information' Updated chapter 'Assets' Updated chapter 'Administration and Configuration Area	2024-09-16 PA PCP
AA	6.15	(C) 2.6.6.4 (C) 2.6.13.2	Updated chapter 'Licenses and Contacts' Updated pictures in chapter 'Data set management section'	2024-10-14 PA PCP
AB	6.16	(C) 2.6	Updated chapter 'Overview (general layout)'	2024-11-12 PA PCP
AC	6.17	(P) all	Updated used pictures	2024-12-09 PA PCP
AD	25.01	(C) 2.6.11.5	Updated pictures in chapter 'Software'	2025-01-31 PA PCP
AE	25.02	(C) 2.6.7 (C) 2.6.9 (C) 2.6.10	Updated chapter 'Overview area' Updated pictures in chapter 'Health' Updated pictures in chapter 'Security'	2025-03-03 PA PCP
AF	25.03	(C) 2.7.1 (C) 2.7.2	Updated chapter 'Accessing reports' Updated chapter 'Generating reports'	2025-04-11 PA PCP

Visit us

www.abb.com/controlsystems