


On-load tap-changer type UCGL./C, VUCGL./C, 6 tap positions, linear switching.
 Min. effective No. of turns in pos. 1.
 The tap-changer is delivered set in pos. 3, the preceding pos. was 2.

Lindningskopplare typ UCGL./C, VUCGL./C, 6 lägen, linjär koppling.
 Min antal effektiva varv i läge 1.
 Lindningskopplaren levereras inställd i läge 3, föregående läge var 2.

Pos. Läge	Tap selector and diverter switch connect	30
1	1-V-x	
2	2-H-v	
3	3-V-x	
4	4-H-v	
5	5-V-x	
6	6-H-v	

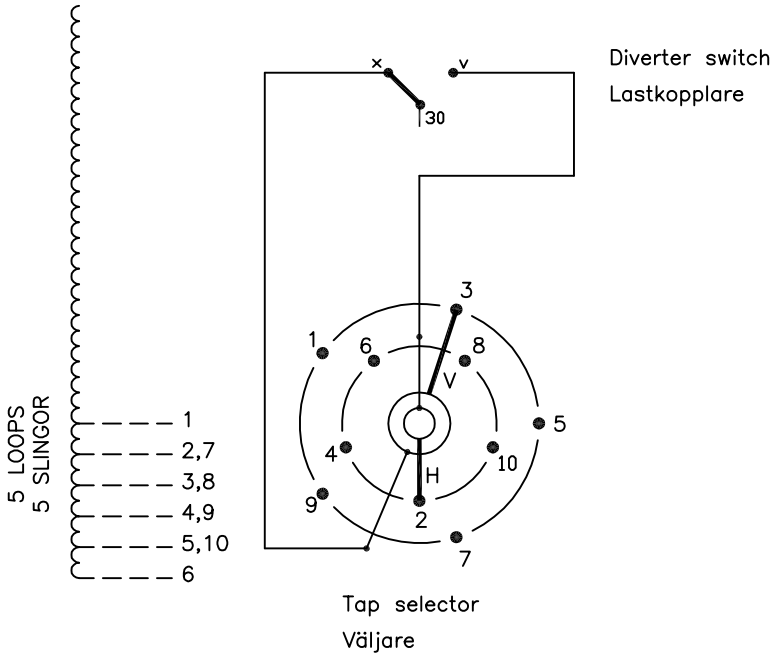

The tap-changer is shown in pos. 3, the preceding pos. was 2.
 The tap selector is seen from above.
 Contact arm V is located above contact arm H.

Lindningskopplaren visad i läge 3, föregående läge var 2.
 Väljaren sedd uppifrån.
 Kontaktarm V ligger över kontaktarm H.

Continuous lines show leads included in the tap-changer. Dashed lines show leads belonging to the cleats and leads.

Heldragna linjer visar ledare som ingår i lindningskopplaren. Streckade linjer visar ledare som tillhör anslutningsdonet.

1	VUCG Added.	SUKN	07	47
Rev Ind	Revision	Appd	Year	Week

Accepted by qual control R.Yngvesson	Accepted for prod by	Description (English) CONNECTION DIAGRAM	DATAORIGINAL
Design checked by B-O.Stenestam	Drawn by L.Bergman	Description (own language) KOPPLINGSSHEMA	File name 0376-2
Drawing checked by M.Hedlund	Issued by Dept Year Week COM/TKO 97 22	Lang Sheet 1	
Asea Brown Boveri		RevInd Cont -	

5492 0376-2

We reserve all rights in this document and in the information contained therein. Reproduction, use or disclosure to third parties without express authority is strictly forbidden.
 © ABB 19

Sheet	Cont
Year	Week
Dept	
RevInd	
Design checked by	
Drawn by	Form No.